


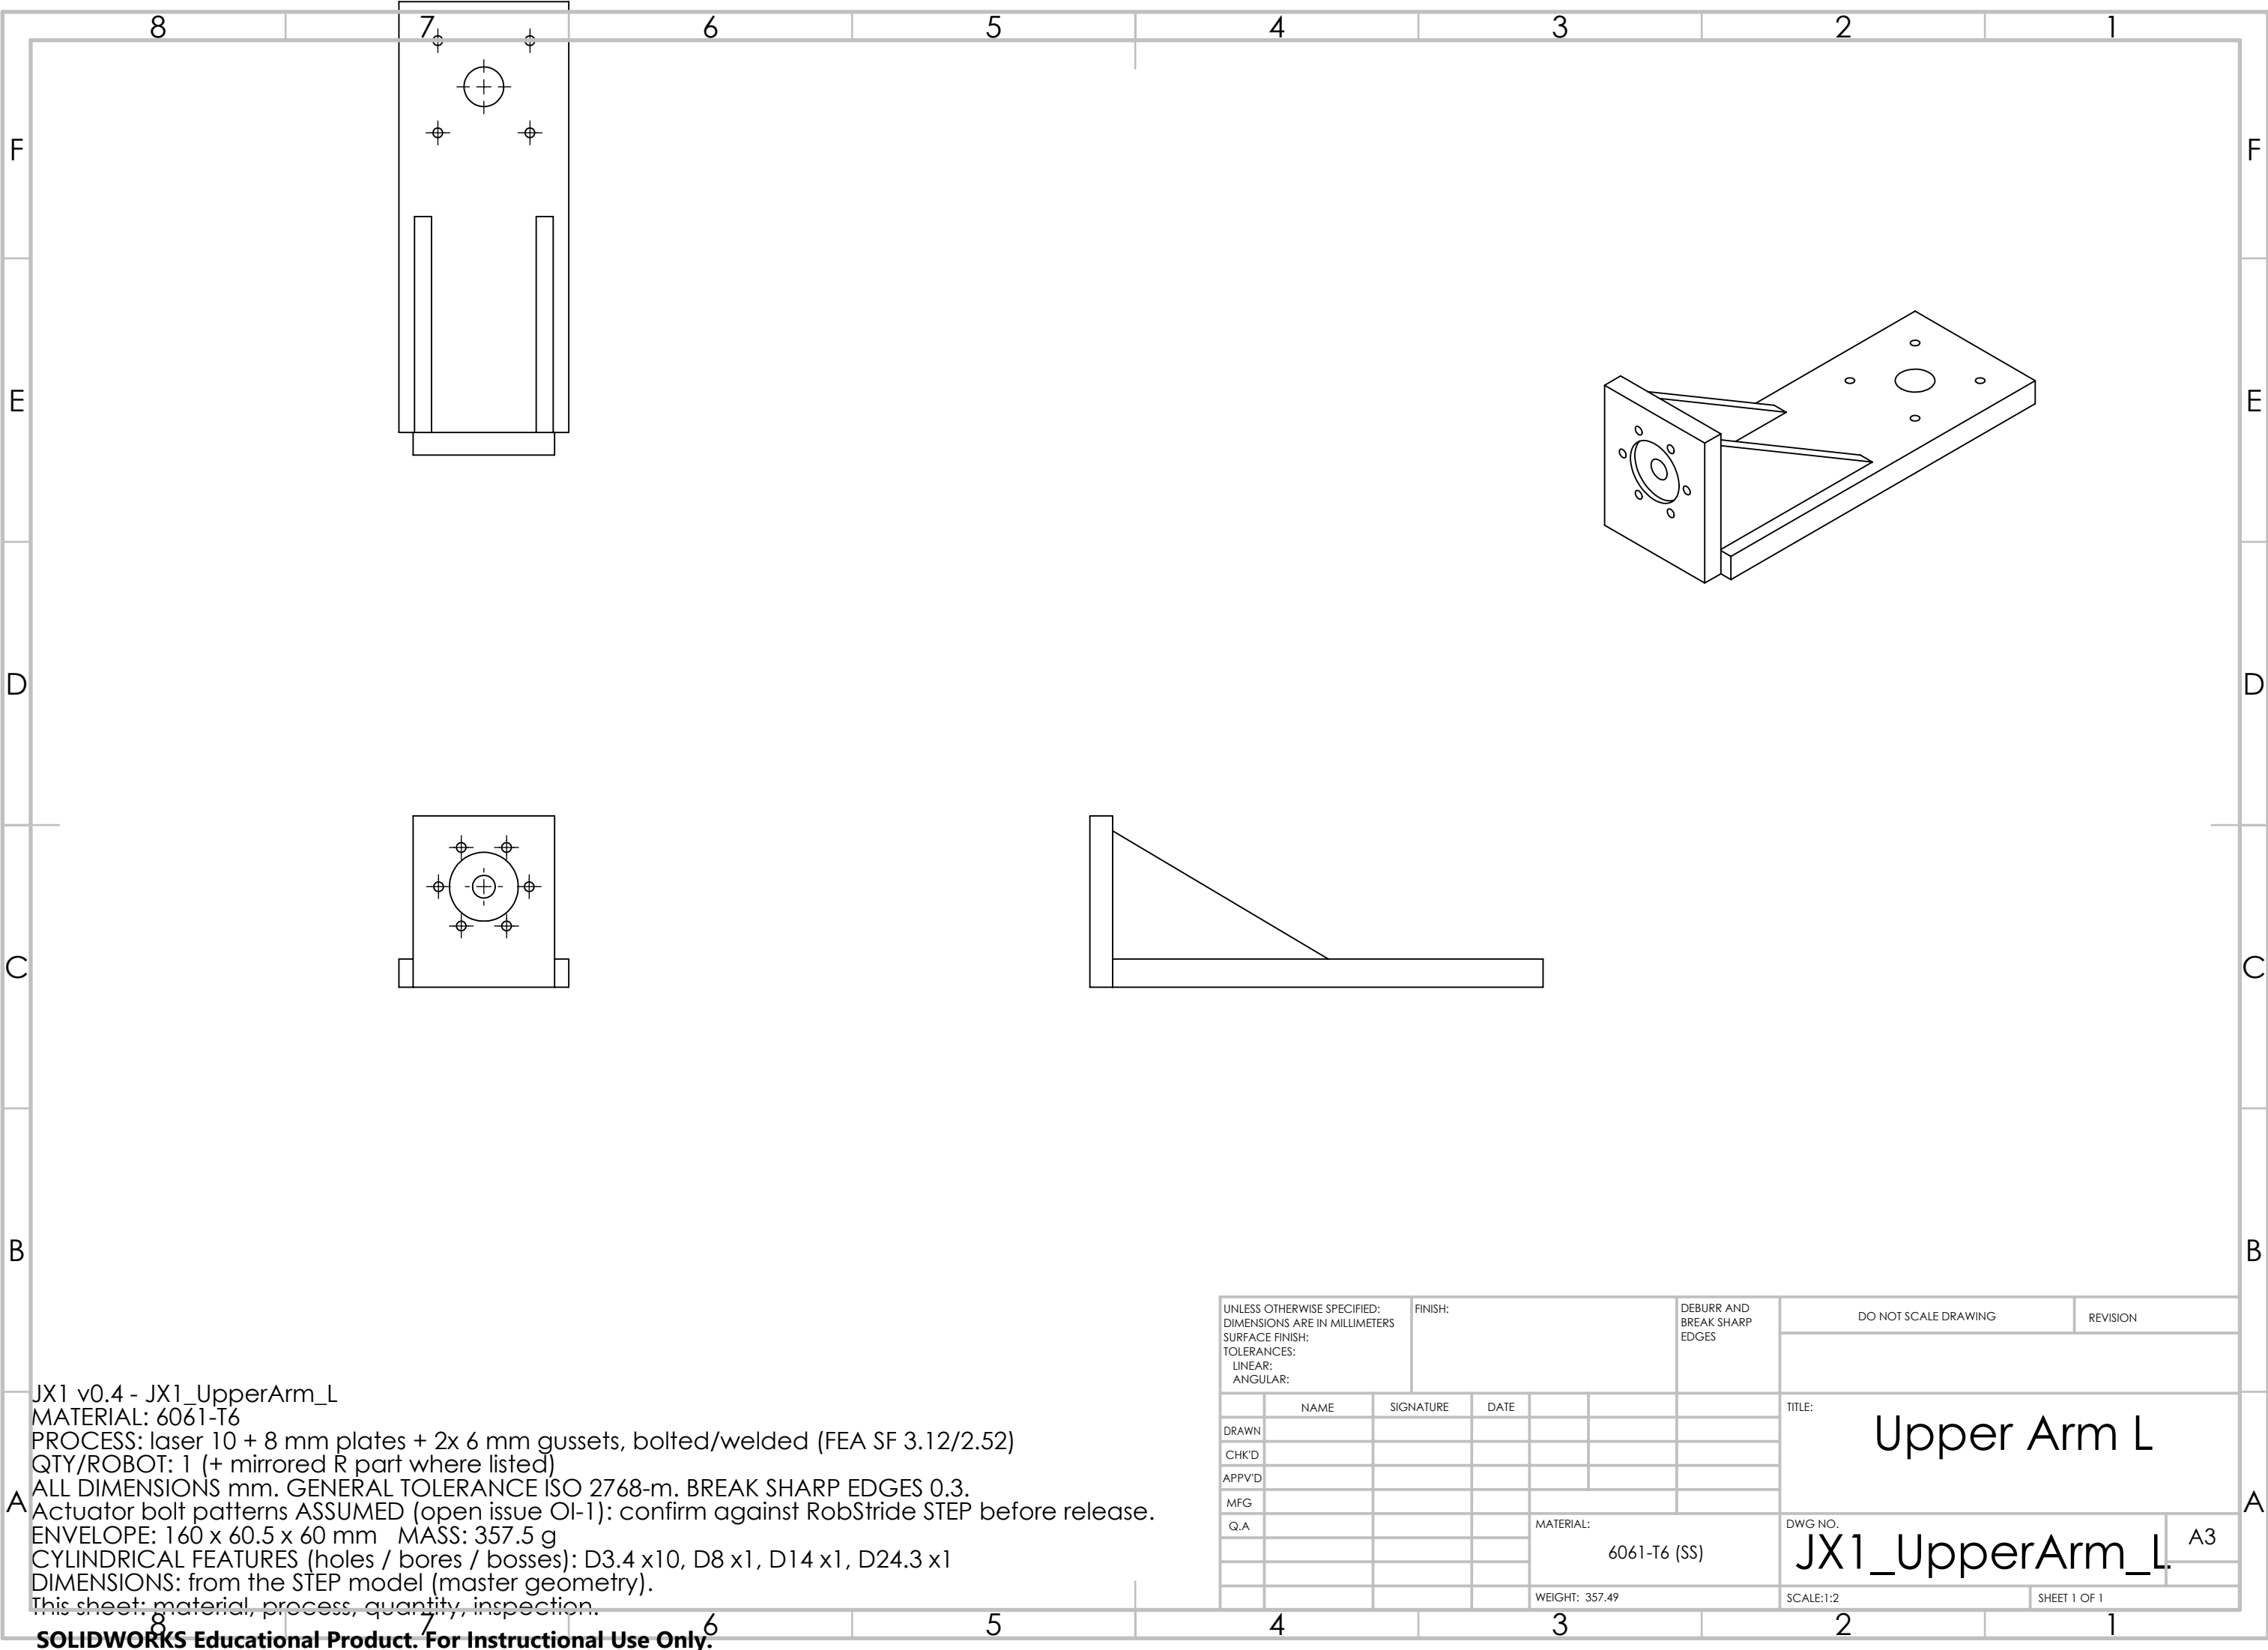

JX1 v0.4 - JX1_UpperArm_L
MATERIAL: 6061-T6
PROCESS: laser 10 + 8 mm plates + 2x 6 mm gussets, bolted/welded (FEA SF 3.12/2.52)
QTY/ROBOT: 1 (+ mirrored R part where listed)
ALL DIMENSIONS mm. GENERAL TOLERANCE ISO 2768-m. BREAK SHARP EDGES 0.3.
Actuator bolt patterns ASSUMED (open issue OI-1): confirm against RobStride STEP before release.
ENVELOPE: 160 x 60.5 x 60 mm MASS: 357.5 g
CYLINDRICAL FEATURES (holes / bores / bosses): D3.4 x10, D8 x1, D14 x1, D24.3 x1
DIMENSIONS: from the STEP model (master geometry).
This sheet: material, process, quantity, inspection.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
		NAME	SIGNATURE	DATE				TITLE: Upper Arm L			
DRAWN											
CHK'D											
APPV'D											
MFG											
Q.A											
						MATERIAL:		DWG NO.			
						6061-T6 (SS)		JX1_UpperArm_L. A3			
						WEIGHT: 357.49		SCALE:1:2		SHEET 1 OF 1	