

Dual-Axis Tilting Quadrotor Aircraft

An investigation into the overactuatedness thereof



Nicholas Von Klemperer

Department of Electrical Engineering
University of Cape Town
Rondebosch, Cape Town
South Africa

July 2016

MSc thesis submitted in fulfilment of the requirements for the degree of Masters of Science in the
Department of Electrical Engineering at the University of Cape Town

Keywords: Control, Allocation, Non-linear, Autopilot

Declaration

I, Nicholas Von Klemperer, hereby:

1. grant the University of Cape Town free license to reproduce the above thesis in whole or in part, for the purpose of research;
2. declare that:
 - (a) this thesis is my own unaided work, both in concept and execution, and apart from the normal guidance from my supervisor, I have received no assistance except as stated below:
 - (b) neither the substance nor any part of the above thesis has been submitted in the past, or is being, or is to be submitted for a degree at this University or at any other university, except as stated below.

Nicholas Von Klemperer
Department of Electrical Engineering
University of Cape Town
Thursday 7th July, 2016

Abstract

Dual-Axis Tilting Quadrotor Aircraft

Nicholas Von Klemperer

Thursday 7th July, 2016

The aim of this project is to design, simulate and control a novel quadrotor platform which can articulate all 6 Degrees of Freedom by vectoring its' propellers thrust. To achieve this the air-frames' structure needs to be able redirect those thrust vectors to any given orientation. This means it has to be able to dynamically change its structure during flight, rotating the thrust vectors whilst still maintaining stable attitude & position control in spite of the bodies relative motion. In sight of the required articulation of the thrust vectors, the proposal is 2 additional axes of actuation, introduced such that each lift propeller can be pitched or rolled. The implementation of such actuation, to what is otherwise a well understood and researched platform, results in an over-actuated control problem. The allocation of which is the primary contribution of this paper with novel elements of non-linear control treatment for UAV quadrotor airspace platforms.

The structure of the research first presents the design which the subsequent dynamics and control are derived with respect to. Thereafter the kinematics associated with rigid bodies are developed and the unique effects which apply to the design; gyroscopic, aerodynamic and the like, are investigated and incorporated into the dynamics. Hence control algorithms and a simulation environment are developed around that holistic model, which includes the implication of discretization on the system. The relative performance of the controllers are evaluated and standard performance metrics of attitude and position controllers are discussed. Finally the design is built and tested using readily available Radio-Control components and a conclusion is made thereon.

The purpose of the investigation is the practicality and feasibility of such a design, most importantly weather the added complexity of the mechanical system is a worthwhile compromise for the added degrees of control actuation. As a result the outcome of the build is weather its' both economically (cost and control effort) feasible and practical to build such a prototype. The design and control treatment presented here are by no means the most optimal or exhaustive solutions, focus is placed on the system as a whole and not just one aspect of it.

Acknowledgements

Contents

Declaration	i
Abstract	ii
Acknowledgements	iii
1 Introduction	1
1.1 Foreword	1
1.1.1 A Brief Background to the Study	1
1.1.2 Research Questions & Hypotheses	2
1.1.3 Significance of Study	2
1.1.4 Scope and Limitations	3
1.2 Literature Review	5
1.2.1 Existing & Related Work	5
1.2.2 Notable Quadrotor Control Implementations	8
2 Prototype Design	9
2.1 Conventions Used	9
2.1.1 Reference Frames Convention	9
2.1.2 Motor Axis Layout	9
2.2 Design	9
2.2.1 Gimbal Articulation	9
2.2.2 Inertial Matrix Function	9
2.2.3 Overall Aspects	9
2.3 System Layout	9
3 Kinematics & Dynamics	10

3.1	Rigid Body Dynamics	10
3.1.1	Lagrange Derivation	10
3.1.2	Rotation Matrix Peculiarities	10
3.1.3	Quaternion Dynamics	10
3.1.4	The Unwinding Problem	10
3.2	Non-linearities	10
3.2.1	Gyroscopic Torques	10
3.2.2	Coriolis Acceleration	10
3.2.3	Inertial Matrix	10
3.3	Aerodynamics	10
3.3.1	Thrust Forces & Propeller Torques	10
3.3.2	Drag	10
3.3.3	Conning & Flapping	10
3.3.4	Vortex Ring State	10
3.4	Consolidated Model	10
4	Control Treatment	11
4.1	Attitude Control	12
4.1.1	The Attitude Control Problem	12
4.1.2	Quaternion Based Controllers	12
4.1.3	Non-linear Controllers	12
4.2	Position Control	12
4.2.1	Backstepping Position Controller	12
4.3	Controller Allocation	12
4.3.1	Non-linear Plant Control Allocation	12
4.3.2	Pseudo Inverse Allocator	12
4.3.3	Weighted Pseudo Inverse Allocator	12
4.3.4	Priority Norm Inverse Allocator	12
4.3.5	Online Optimized Secondary Goal Allocator	12
5	Simulations & Results	13
5.1	Controller Tuning	13

5.1.1	Partical Swarm Based Optimization	13
5.1.2	Performance Metric	13
5.1.3	Global & Local Minima	13
5.1.4	Fmincon Differences	13
5.2	Simulation Block	13
5.3	Optimized Controller Comparisons	13
5.3.1	Allocator Performance	13
5.3.2	Attitude Control Results	13
5.3.3	Autopilot Outcome	13
A	Standard Quadrotor Dynamics	14

List of Figures

1.1	General Structure for Opposed Tilting Platform	5
1.2	DJI Inspire 1	6
1.3	7

List of Tables

Chapter 1

Introduction

1.1 Foreword

1.1.1 A Brief Background to the Study

Currently the most popular topic for control and automation research is the around quadrotor UAV, specifically its attitude control. A wide range of work has been done on quadrotors and their attitude control, mostly designing control systems around a stable trim point adjacent to the inertial frames origin, to which the control algorithm always tends to. The highly coupled non-linear dynamics for a rigid bodies linear and angular motions arise as a result of gyroscopic torques [3.2.1] and Coriolis accelerations [3.2.2]. Such affects are linearised around the origin when they can be approximated to $\approx \vec{0}$, thus decoupling the system and allowing for traditional SISO control design techniques to be applied.

As almost every quadrotor based research paper will mention, the current interest in them is as a result of the recent emergence in availability of MEMS systems and low-cost ARM microprocessors, allowing the on-board flight computer to perform complicated control calculations and state estimation in real time. As a result this led to development and expansion in the field and introduction of a large range of hobbyist solutions, from professionally made units to DIY kits; with large room for modification, depending on how much your wallet can spare. A rapidly growing enthusiast community was borne from this advancement, meaning the environment was no longer open only to those willing spend lots of money.

The avenues for potential applications of both fixed wing and VTOL UAVs is expansive and the quadrotor configuration provides a mechanically simple and low cost platform on which to test advanced aerospace control algorithms. Considering that commercial drone usage is such an emerging sector; especially in Southern Africa following the revision of aviation laws [41] which have legalized the use of UAVs for commercial application, any research into a non-trivial aspect of the field is extremely valuable.

Large scale quadrotor, hexrotor and even octorotor UAVs are a popular intermediate choice for aerial cinematography. Whilst still expensive, the cost of a commercial drone like the SteadiDrone Maverik [25] is far less exorbitant than the cost of chartering a helicopter to achieve the same panoramic aerial scenes or on-site inspections. Another interesting application for UAVs is in the agricultural sector, introducing crop dusting drones instead of the traditional bi-planes which perform the same job. One problem which hinders the progress of the commercial drone sector is that of inertia, specifically when scaling up any vehicle, its performance is adversely affected, due to the increased mass inertial effect.

1.1.2 Research Questions & Hypotheses

The difficulty with a quadrotors' control is that fundamentally it's unstable and under-actuated, having only 4 controllable inputs (each propellers rotational speed and hence net lift force) available to manipulate all 6 degrees of freedom (linear X-Y-Z position and angular Pitch, ϕ , Roll, θ and Yaw, ψ rotations). The resulting solution, whose derivation is explored in Appendix A, is to control the perpendicular heave thrust, \vec{T} , and angular torques about each axis, $[\tau_\phi \ \tau_\theta \ \tau_\psi]^T$. So the attitude control problem of a quadrotor is a zero set point problem as any other attempt to track attitude can't be achieved.

The aim of this project is to then implement dynamic set point tracking of a quadrotors' attitude and position by solving the problem of its inherent under-actuation. Inspired by Boeing/Bell Helicopters' V22 Osprey and the tilting articulation of its propellers, the prototype on which this paper is focused introduces two additional actuators for each of the four quadrotors' lift propellers. Specifically, adding rotations about the X and Y axes for each of the propellers. The resultant is a vectored thrust force which exists in 3-Dimensions with respect to the body frame, unlike a traditional quadrotor helicopter which has a bound perpendicular lift force. The control problem is then posed as the design of net forces, $\vec{F}_{net} = [F_x \ F_y \ F_z]^T$, and torques, $\vec{\tau}_{net} = [\tau_\phi \ \tau_\theta \ \tau_\psi]^T$, such that for any given trajectory, X_d , the error state, $X_e = X_d - X$, asymptotically tends to $\vec{0}$.

$$\lim_{t \rightarrow \infty} X_e = \vec{0} \ \forall X \in \mathbb{R}^n \quad (1.1)$$

Where n is the degrees of freedom. The over-actuation brings about the need for a control allocation scheme which distributes the 6 commanded system inputs (net torques and forces) among the actuator set (12 actuators) in order to optimize some objective function secondary to that of Eq:1.1.

Part of the control research question is the multivariate treatment of the system without making any simplifications to the non-linear dynamics involved in the quadrotors motion or making any assumptions about its operational conditions. The standard linearisations usually applied to the quadrotors control plant won't hold true for the more aggressive angular manoeuvres envisioned for this prototype. Inherent to this is the expansion and simulation of existing kinematic models describing an aerial body and applying them to a quadrotor vehicles' motion. Thereafter, design, development and control of this new actuator suite to be implemented on a quadrotor platform. The final key outcomes for the project are the simulation analysis and prototype construction of the proposed design.

Introducing relative motion within an unconstrained body is going to produce a lot of unwanted dynamics. The obvious consequences of which are the inertial and gyroscopic responses. Pitching a rotating propeller is going to react much like a Control Moment Gyroscope, [46]. A less trivial result is the aerodynamic torque produced from the propellers aerofoil profile. Such induced responses occur in obscure planes, normal to whatever the propellers thrust direction is. These aspects are normally cancelled out because a regular quadrotors' propellers all have the same plane of rotation. Because of these factors, a plant dependent control solution needs to be used to compensate for these dynamics, which if left unaccounted for would cause instability.

1.1.3 Significance of Study

Due to the huge popularity of quadrotor platforms as research tools, any work which expands on the general body of knowledge relating to UAVs' & quadrotors is going to be valuable to the community as a whole. With that being said, there already is a vast amount of existing research on linear and non-linear control techniques for regular quadrotor platforms. The attitude loop is the most common topic for control research, requiring an under-actuated solution and mostly linearised around the origin (See Appendix:A). Far less common is the application of optimal flight path and trajectory planning to quadrotor control. The uniqueness and difficulty of the quadrotors attitude control does not hold

true for its position control, so standard techniques can be used for way point planning and the like once the attitude control problem has been answered.

The most significant aspect of this project is the attitude control, discussed later in 4.1. The over-actuation of the proposed design and, more importantly, the manner in which the controllers' (virtual) output is distributed amongst those control effectors would appear to be the first of its kind. Otherwise known as control allocation, the requirements of the distribution algorithm(s) are outlined in Section: 4.3. Dynamic set point attitude control for aerospace vehicles is not a subject heavily researched outside the satellite attitude control field. Even papers which propose similarly complex mechanical over-actuation (expanded upon in Section:1.2) barely elude to the possibility of attitude set points away from $\vec{0}$.

Whilst the control plant (developed in Chapter:4) does indeed close both the position and attitudes control loops, there is no discussion of trajectory or flight path planning. Such topics are well discussed elsewhere in a far more concise and deliberate way than this project could ever hope to achieve. Once closed loop position and attitude controls have been achieved, the control algorithms can be adjusted to account for first and second order state derivative set point tracking to be used with nodal way point planning easily. The heuristics involved with flight path planning are well documented elsewhere and implementation of them is an academic task.

For the proposed systems' identification and control treatment (design and allocation), a generic and modular approach is adopted. The intention is that applicability here falls not only within the UAV and quadrotor realms but to any other aerospace and freely rotating bodies needing attitude control; such as orbital satellites or underwater vehicles. Hopefully the investigation here can be built upon with more research focusing on one of the system subsets without compromising the functionality of the remainder of the system. A possible improvement which the investigation could yield is a higher actuator bandwidth and thus a faster control response for larger aerospace bodies. A standard quadrotor uses differential thrust to develop a torque about its body which suffers a slow inertial deceleration when changes speeds. Prioritizing pitching the propellers principle plane of rotation away rather than changes the propellers speed could improve response. This depends on what or how the allocator block is prioritized (presented in Section:4.3).

1.1.4 Scope and Limitations

Scope

This project includes the conceptualized design and implementation of a novel actuation suite to be used on a quadrotor platform. The express purpose of which is to apply set point attitude tracking control to the body. Stemming from this is an investigation of the associated kinematics which are influenced by the design and its relative motions. In order to apply control theory to achieve the attitude tracking goal, a sound model of the plant dynamics is first needed so that the plants' response can be analysed.

Aspects of the mechanical design are covered in Section 2.2 but, beyond the cursory investigation, there is no scope for materials analysis or stress testing of the design. To the detriment of the project, the design will either produce an over-engineered or catastrophically under-engineered solution. The focus is rather on the control application and embedded systems design, not the structural integrity of a proposed frame. The only physical measurements made are ones which pertain to the critical kinematics like inertial measurements for the second order gyroscopic and inertial dynamic responses.

As mentioned in the antecedent , Section: 1.1.3, trajectory & flight path planning are not ubiquitous with this investigation. The kinematic derivation for a 6-DOF body is wholly applicable to any dynamic (rigid or otherwise) aerospace body, although some particular standards are used [sic ZYX

Euler Aerospace Sequence, 2.1]. Similarly the control treatment of the plant is that of a non-linear multivariate control, aided and justified by Lyapunov theorem. Whilst alternative solutions through Model Predictive Control or Quantitative Feedback Theory could provide a more refined or effective controller, they aren't presented and remain open to further investigation. The standard approach for quadrotor attitude control is feedback linearisation of the plant around a trim point to decouple the non-linear dynamics and apply SISO techniques. A derivation of such a linearisation is presented in A but there are no further discussions beyond that. Comparison between attitude set point tracking proposed here and normal zero-set point attitude control of fixed rotor quads' is difficult as the fundamental objectives are in stark contrast with each other.

Arguably the most important and indeed novel aspect of this project is the control allocation. Seeing as the system has 12 controllable inputs and 6 possible responses to that input, hence the system is classified as over-actuated. Ergo, there needs to be some logical process as to how those 12 inputs are articulated to achieve the desired 6 movements. Appropriate techniques are first investigated in Section:4.3 and compared before a final solution is implemented in Chapter:5. It is by no means a comprehensive investigation of every solution possible but rather an analysis of the sub-set of problems and design of what is regarded as a logical and pertinent approach.

With regards to the actual prototype design, in Section 2.2, it's assumed that certain aspects are a given certainty. Particularly the state estimation, updated through a 4-camera positioning system fused with a 6-axis IMU through Kalman Filtering, is assumed to be precise and readily disposable at a consistent 50 Hz. Hence state estimation is presented but is bereft of intricate detail, this is another topic which has been well documented elsewhere.

Limitations

By far the biggest constraint of the design is the net weight of the assembled frame. The lift required to keep the body aloft is obviously dependent on the all up weight. Thrust forces disposable to the controller then need to be such that there is clear headroom below actuator saturation during hover flight. The controller effort increases with the magnitude of change for desired state, so steady state actuation conditions must be just a fraction of the maximum actuator outputs. Conversely the all up weight is mostly dependent on the lift motors, being the heaviest part of the vehicle, and their associated power electronics. A trade-off between these two factors makes designing the prototype a balancing act of compromise; added actuation is needed to produce the desired thrust vectoring. That added actuation is going to increase the weight which then requires more thrust force to ensure the vehicle remains airborne. Bigger motors then need stronger actuators to effect the relative motion and overcome the bodies inertial response. It's a compromise between the weight of the body and the strength/quality of the actuation.

To forego the deliberation detailed above, a self imposed limitation applied to the design is to only make use of a particular predetermined motor, namely a set of four Turnigy DST-700 motors. The Department of Electrical Engineering at University of Cape Town has a surplus of these from previous projects so it saves on new motor costs. A direct consequence of this decision is that the net thrust disposable for actuation is limited to around 700g, ≈ 6.9 N, per motor (see Section: 3.3.1, later in Chapter 3). This means that all other aspects of the prototype need to adhere to this weight limitation. It is crucial to ensure the control algorithm doesn't induce over-saturation of the motor actuations, so the frame weight needs to be around 40-50% of the maximum available thrust. These saturation conditions are expanded upon later in Section: 4.3 in more detail.

Another aspect of the design limitations resulting from decisions taken, mainly to reduce the costs of construction and complexity, is the use of 180° rotatable servos. The servos are for the individual motors' pitch and roll actuation and act in lieu of continuous rotation DC (brushless or stepper) motors. Any rotation beyond 360° would require both closed loop position control of the actuator,

unlike a servo, and slip rings for power transmission so that no wiring would impede the bodies relative rotation. However the logistics of implementing such a design whilst maintaining an acceptable weight is almost impossible without dramatically scaling up the size of the prototype to accommodate for weight increases. Commercial camera stabilizing gimbals already make use of similar configurations but the I/O requirements from the flight controller μC already constricts the amount of expansion at hand.

Some of the discretionary elements for the whole system will limit performance but are mitigated where possible. For example analogue servos have an associated 1 ms deadband from their 20 Hz refresh rate which can be addressed by using faster, albeit more expensive, digital servos which sample at 333 Hz. The on-board flight control system, see 2.3, needs to apply PWM outputs to 12 different actuators as well as receiving command updates from a ground control station so the I/O capability of most embedded systems are going to be at capacity. Sub-systems will have to be divided and relative inter-communications adopted for various comms and on-board data logging. All of these things are addressed in the following Chapter 2.

1.2 Literature Review

1.2.1 Existing & Related Work

The field of transformable aerospace frames is not necessarily a new one, with many commercial examples having seen a lot of success over their operational life span. The most notable tilting-rotor application is that of the Boeing/Bell V22 Osprey aircraft. First introduced in the field in 2007, the Osprey has the ability to pitch its two lift propellers forward to aid in translational flight after a VTOL manoeuvre has been completed. In addition to this there have been a handful of papers published on similar tilting bi-rotor UAVs' (Fig: 1.1¹) for research purposes.



Figure 1.1: General Structure for Opposed Tilting Platform

Birotors

Research into birotor vehicles (Fig: 1.1) with ancilliary lift propeller actuation is often termed Opposed Active Tilting, *OAT*. Such a rotorcrafts' mechanical design applies either a single *oblique* 45° tilting axis relative to the body; [5,16,20], or a *lateral* tilting axis, adjacent to the body; [8,21,32,42]. Leading

¹Image used from G. Gress: [15]

research is currently focussed on applying doubly actuated tilting axes to birotor UAVs. Dual axis Opposed Active Tilting or *dOAT* introduces vectored thrust with propeller pitch and roll motions to further expand the actuation suite, [2, 15]. A birotor is sometimes considered preferable to the multirotor platform due to its reduced controller effort. However the controller plant abstraction often detracts from the quality and effectiveness of its treatment as a result of its' underactuation.

Birotor attitude control incorporates the typical plant independent PD [5] and PID [32] controller schemes but often more computationally expensive and plant dependent Ideal and Adaptive backstepping controllers are investigated, presented in [20, 42] and [21] respectively. The coupling of a birotor vehicles' attitude system is more prominent than a quadrotors', derived in Section: 3.2, and so feed-back linearisation is almost always used. In an interesting progression from the norm, Lee et al, [23], proposed a PID co-efficient selection algorithm using a Particle Swarm Optimization technique, similar to [48]. However their performance metric criterion was a basic ITAE term and not anything more unique involving effects specific to flight. *PSO* algorithms iteratively search for a globally optimized solution and offer independent, derivative free optimization. This project report exploits *PSO* optimization for non-linear controller coefficient selection, shown in Section:??.

Quadrotors

Expanding on multirotor vehicles, the quadrotor UAV is a popular and well covered research platform due to its relative mechanical simplicity. What would appear to be one of the first quadrotor research implementations, in 2002, is the X4-Flyer quadrotor helicopter, [18, 34]. Subsequently alternative iterations like the Microraptor, [36], and STARMAC, [19], quadcopters have been built and tested. A plethora of literature exists around basic quadrotor kinematics & control [3, 6, 10, 26, 35], however dedicated 6-DOF rigid body dynamic papers [28, 33] provide better insight into the appropriate kinematics. Often the dynamics are simplified around a trim point and thus assumed to decompose into 6 SISO plants for each degree of freedom, see Section: 3.1 and Appendix: A. More recent research projects have incorporated advanced aerodynamic effects like drag and propeller blade element theory into the dynamics; [7, 19, 38]. Although commonly neglected due to their inconsequence under standard operating conditions, the higher fidelity models are more precise without trim point linearisations & better modelled thrust calculations; [4, 19].

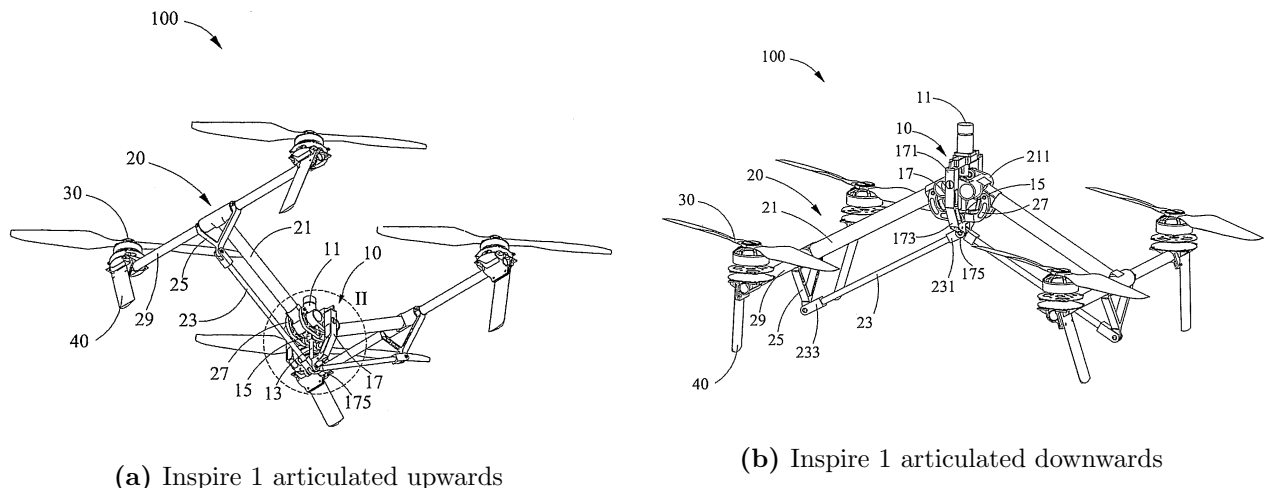



Figure 1.2: DJI Inspire 1

The only commercial example of a transforming quadrotor is the DJI Inspire1 [11], made by Shenzhen DJI Technologies (who are more commonly known for the popular DJI Phantom drone). The Inspire can articulate its supporting arms up and down as shown in Fig:1.2². The purpose of such movements


²Both images were sourced from the drones patent, held by SZ DJI Tech Co [47]

is to both alter the center of gravity and further expose a belly mounted camera gimbal to achieve panoramic sequences. This transformation changes the moment of inertia about the bodies center of gravity which then changes the inertial torque response induced by angular movements, an otherwise detrimental effect which makes research of transformable aerospace frames apprehensive. The range of "transformation" the frame can undergo is just limited to articulating the arms up and down.

In a similar fashion to the progression seen in birotor state-of-the-art, quadrotor research is broaching the topic of single and dual axis tilting articulation. The concept was first conceptualized and implemented on a prototype related to an ongoing project covered in two reports, [39, 40]. The authors M. Ryll et al.(2012, 2013) modified and tested a QuadroXL four rotor helicopter, propduced by MikroKopter [13], to actuate a single axis of tilt aligned with the frames arms (Fig:1.3a³). Their proposed control solution, discussed in detail next in Sub-section:1.2.2, assumes no nominal linearised conditions around hover flight unlike a similar single axis tilting quadrotor prototype only simulated, as yet untested, in [31].

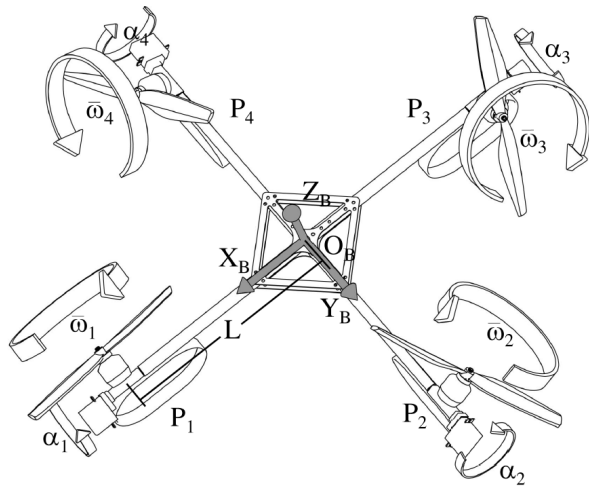

(a) Single rotation axis aligned with the frames arm

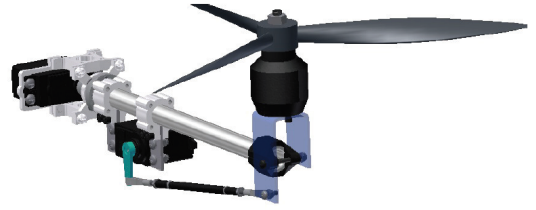

(b) Dual-axis tilt-rotor mechanism

Figure 1.3

Although the above single axis tilt based research papers are aimed at improved attitude control actuation, some focus has been placed on translational flight.

Finally, the most crucial research to mention is that of a project completed by Pau Segui Gasco [12], which was a dual presented MSc project with Yazan Al-Rihani [1]. At the time of writing, this would appear to be the only project published pertaining to *over-actuation* in aerospace bodies implemented on a quadrotor platform. The research was split between the two authors who completed the control/electronic design and the mechanical platform design for their respective dissertations. Shown in Fig:1.3b⁴, the dual-axis articulation is achieved using an RC helicopter tail bracket and push-rod mechanism; reducing the mass of the articulated component but limiting the range of actuation. Considering the spinning propellers and their induced gyroscopic torque as an actuator plant, the commanded virtual control is then distributed by weighted inversion amongst the actuator set. The whole projects justifies the extra actuation as redundancy but doesn't necessarily prove how the redundancy could be beneficial.

³Image sourced from [39]

⁴Development of a Dual Axis Tilt Rotorcraft UAV: Modelling, Simulation and Control [12]

1.2.2 Notable Quadrotor Control Implementations

Quadcopter Attitude Control

Attitude control of a 6-DOF body is a well understood topic, best described by *The Attitude Control Problem* [45], whereby a body currently has an attitude state E_s and a desired state E_d . The problem is to then find a torque control law:

$$\tau = f(E_s, E_d, \omega_s, \omega_d) \quad (1.2)$$

Such that $\lim_{t \rightarrow \infty} E_s \rightarrow E_d$ asymptotically as $t \rightarrow 0$ and $\omega_s \rightarrow \omega_d$ similarly. Depending on how the attitude is posed; with rotation matrices [22, 28, 33], quaternions [14, 17, 22] or otherwise (Direct Cosine Matrix etc ...) the dependent error state $E^5 = E_d - E_s$ could then differ. Simulation and modelling papers often rely on Euler angle based rotation matrices for attitude representation, [?, 6, 27, 30, 31, 37] without addressing the inherent singularity associated with such an attitude representation [sic Gimbal Lock, [43]]. The alternative quaternion attitude representation, first implemented with a quadrotor UAV in 2006 [44], often used in lieu of rotation matrices has its own caveat of *unwinding*, (Section:3.1.4), as a result of quaternions dual-coverage [29].

The majority of papers based on Quadrotor research, [35], [?], [?] all make the assumption that the coupled non-linear dynamics can be linearised. This assumption holds true as long as the angular rate, $\vec{\Omega}$ is small and the inertial matrix, \mathbb{I} is a diagonal matrix. As a consequence the gyroscopic term, (see ??) which manifests itself as: $\tau_{gyro} = \vec{\Omega} \times \mathbb{I} \vec{\Omega} \approx \vec{0}$. This decouples the angular equations of motion and similarly the coriolis acceleration term becomes negligible; $-\vec{a} \times \vec{\Omega} \approx \vec{0}$.

A PID structure for attitude controllers are the norm, with [?], [35], [40] all implementing standard PID controllers and even [31] using only a PD controller despite having an over-actuated platform. Even commercial hardware flight controllers like Arducopter [?] and OpenPilot [24] (whose firmware source code is available at [9]) all use PID structures with some manner of feedforward or feedback elements, [?].

Single & Dual Axis Allocation

Dual axis poop

Satellite Attitude Control

Unconstrained attitude set-point tracking, quaternion based or otherwise, is a topic well covered in the field of satellite attitude control; []. With advanced concepts

⁵ *The Attitude Control* [45] describes these conventionally different error states

Chapter 2

Prototype Design

2.1 Conventions Used

2.1.1 Reference Frames Convention

2.1.2 Motor Axis Layout

2.2 Design

2.2.1 Gimbal Articulation

2.2.2 Inertial Matrix Function

2.2.3 Overall Aspects

Vibration Damping

Duct

Landing Skids

Motors & ESCs

2.3 System Layout

Chapter 3

Kinematics & Dynamics

3.1 Rigid Body Dynamics

3.1.1 Lagrange Derivation

3.1.2 Rotation Matrix Peculiarities

3.1.3 Quaternion Dynamics

3.1.4 The Unwinding Problem

3.2 Non-linearities

3.2.1 Gyroscopic Torques

3.2.2 Coriolis Acceleration

3.2.3 Inertial Matrix

3.3 Aerodynamics

3.3.1 Thrust Forces & Propeller Torques

3.3.2 Drag

3.3.3 Coning & Flapping

3.3.4 Vortex Ring State

3.4 Consolidated Model

Chapter 4

Control Treatment

Control Plant & Discussion

Control Plant Inputs

Model Dependent & Independent Controllers

4.1 Attitude Control

4.1.1 The Attitude Control Problem

4.1.2 Quaternion Based Controllers

PD Controller

Auxilliary Plant Controller

PID Controller

4.1.3 Non-linear Controllers

Ideal Back-stepping Controller

Adaptive Back-stepping Controller

Lyupanov Derived Ideal Controller

4.2 Position Control

4.2.1 Backstepping Position Controller

4.3 Controller Allocation

4.3.1 Non-linear Plant Control Allocation

4.3.2 Pseudo Inverse Allocator

Chapter 5

Simulations & Results

5.1 Controller Tuning

5.1.1 Partical Swarm Based Optimization

5.1.2 Performance Metric

5.1.3 Global & Local Minima

5.1.4 Fmincon Differences

5.2 Simulation Block

5.3 Optimized Controller Comparisons

5.3.1 Allocator Performance

5.3.2 Attitude Control Results

5.3.3 Autopilot Outcome

Appendix A

Standard Quadrotor Dynamics

Bibliography

- [1] Yazan Al-Rihani. *Development of a dual axis tilt rotorcraft uav: Design, prototyping and control.*, volume 1. Cranfield University: School of Engineering, 2012.
- [2] N. Amiri, A. Ramirez-Serrano, and Davies R. Modelling of opposed lateral and longitudinal tilting dual-fan unmanned aerial vehicle. *International Federation of Automatic Control*, pages 2054–2059, September 2011.
- [3] E. Balasubramanian and R. Vasantharaj. Dynamic modelling and control of quadrotor. *International Journal of Engineering and Technology*, pages 63–39, February 2013.
- [4] M. Bangura and R. Mahony. Non-linear dynamic modelling for high performance control of a quadrotor. In *Australasian Conference on Robotics and Automation, Victoria University of Wellington*. Victoria University of Wellington, 12 2012. Published in Conference Proceedings.
- [5] Charles Blouin and Eric Lanteigne. Pitch control on an oblique active tilting bi-rotor. *International Conference on Unmanned Aircraft Systems*, pages 791–799, May 2014.
- [6] S. Bouabdallah and R. Siegwart. Full control of a quadrotor. *IEEE International Conference on Intelligent Robots and Systems*.
- [7] J. Brandt and M. Selig. Propeller performance data at low reynolds numbers. *American Institute of Aeronautics and Astronautics Sciences Meeting, 49th*, pages 1–18, January 2011.
- [8] Arindam B. Chowdhury, Anil Kulhare, and Guarav Raina. A generalized control method for tilt-rotor uav stabilization. *IEEE International Conference on Cyber Technology in Automation, Control and Intelligent Systems*, pages 309–314, May 2012.
- [9] OpenPilot Community. Openpilot source repo, 2016.
- [10] R.F. de Olivera, F.T. de Salvi, and E.M. Belo. Dynamic modelling, simulation and control of an autonomous quadcopter aircraft. *International Congress of Mechanical Engineering*, pages 1–9, November 2009.
- [11] DJI Drones. Dji inspire one, 2016.
- [12] Pau. S Gasco. *Development of a Dual Axis Tilt Rotorcraft UAV: Modelling, Simulation and Control*, volume 1. Cranfield University: School of Engineering, 2012.
- [13] HiSystems GmbH. Mikrokopter quadroxl, 2016.
- [14] Basile Graf. Quaternions and dynamics. Report, Mathematics - Dynamical Systems, 2007.
- [15] Gary R. Gress. Lift fans as gyroscopes for controlling compact vtol air vehicles: Overview and development status of oblique active tilting. *American Helicopter Society Forum Proceedings*, (63), May 2007.
- [16] Gary R. Gress. *Passive Stabilization of VTOL Aircraft Having Obliquely Tilting Propellers*. University of Calgary, Department of Mechanical Engineering, Calgary, Alberta, 2014.

- [17] Karsten Groekatthfer and Zizung Yoon. Introudction into quaternions for spacecraft attitude representation. *Technical University of Berlin: Department of Astronautics and Aeronatuics*, pages 1–16, May 2012.
- [18] N. Guenard, T. Hamel, and V. Moreau. Dynamic modelling and control strategy for an x4-flyer. *International Conference on Control and Automation*, pages 141–146, June 2005.
- [19] G. Hoffmann, H. Huang, S. Waslander, and C. Tomlin. Quadrotor helicopter flight dynamics and control: Theory and experiment. In *Guidance, Navigation and Control Conference and Exhibit*, pages 1–19, Hilton Head, South Carolina, 8 2010. American Institute of Aeronautics and Astronautics, American Institute of Aeronautics and Astronautics. Derivation of advanced aerodynamic affects on STARMAC Quadrotor Prototype.
- [20] Farid Kendoul, Isabelle Fantoni, and Rogelio Lozano. Modeling and control of a small autonomous aircraft having two tilting rotors. *IEEE Conference on Decision and COntrol*, pages 8144–8149, December 2005.
- [21] P. Krishnamurthy and F. Khorrami. Adaptive backstepping and theta-d based controllers for a tilt-rotor aircraft. *Mediterranean Conference on Control and Automation*, pages 540–545, June 2011.
- [22] Jack B. Kuipers. *Quaternions and Rotation Sequences: A Prier with Aplication to Orbital Aerospace and Virtual Reality*.
- [23] Jang-Ho Lee, Byoung-Mun Min, and Eung-Tai Kim. Autopilot design of tilt-rotor uav using particle swarm optimization method. *International COnference on Control, Automation and Systems*, pages 1629–1633, October 2007.
- [24] LibrePilot. Openpilot/librepilot wiki, 2016.
- [25] SteadiDrone PTY LTD. Steadidrone home, 2016.
- [26] Teppo Luukkonen. Modelling and control of a quadcopter. Master’s thesis, Aalto University: School of Science, Eepso, Finland, 8 2011. Independent research project in applied mathematics.
- [27] Tarek Madani and Abdelaziz Benallegue. Backstepping control for a quadrotor helicopter. *Inter-national COnference on Intelligent Robots and Systems*, pages 3255–3260, October 2006.
- [28] I. Mandre. Rigid body dynamics using euler’s equations, rungekutta and quaternions, 2 2006.
- [29] Christopher G. Mayhew, Ricardo G. Sanfelice, and Andrew R. Teel. On quaternion based attitude control and the unwinding phenomenon. *American Control Conference*, pages 299–304, June 2011.
- [30] N/A. Quadcopter dynamics, simulation and control. Report, N/A, N/A.
- [31] A. Nemati and M. Kumar. Modeling and control of a single axis tilting quadcopter. *American Control Conference*, pages 3077–3082, June 2014.
- [32] Christos Papachristos, Kostas Alexis, and Anthony Tzes. Design and experimental attitude control of an unmanned tilt-rotor aerial vehicle. *International Conference on Advanced Robotics*, pages 465–470, June 2011.
- [33] J. Peraire and S. Widnall. 3d rigid body dynamics: Euler angles. Lecture notes for Dynamics Course, 2009. Dynamics course notes, fall 2007.
- [34] P. Pounds, R. Mahony, P. Hynes, and J. Roberts. Design of a four-rotor aerial robot. *Australasian Conference on Robotics and Automation*, pages 145–150, November 2002.
- [35] Beard Randal. Quadrotor dynamics and control. Report, Brigham Young University, 2 2008. Part of the Electrical and Computer Engineering Commons.

- [36] O. Rawashdeh, H.C. Yang, R. AbouSleiman, and B. Sababha. Microraptor: A low cost autonomous quadrotor system. *International Design Engineering Technical Conferences & Computers and Information in Engineering Conference*, pages 1–8, August 2009.
- [37] Anastasia Razinkove, Igor Gaponov, and Hyun-Chan Cho. Adaptive control over quadcopter uav under disturbances. *International Conference on Control, Automation and Systems*, pages 386–390, October 2014.
- [38] M.K. Rwigema. Propeller blade element momentum theory with vortex wake deflection. *International Congress of the Aeronautical Sciences, 27th*, pages 1–9, January 2010.
- [39] M. Ryll, H. Bulthoff, and P. Robuffo Giordano. Modelling and control of a quadrotor uav with tilting propellers. *IEEE International Conference on Robotics and Automation*, pages 4606–4613, May 2012.
- [40] M. Ryll, H. Bulthoff, and P. Robuffo Giordano. Modelling and control of a quadrotor uav with tilting propellers. *IEEE International Conference on Robotics and Automation*, pages 295–302, May 2013.
- [41] safedrone.com. Safe drone: New drone regulations for south africa, 2016.
- [42] A. Sanchez, J. Escareo, O. Garcia, and R. Lozano. Autonomous hovering of a noncyclic tiltrotor uav: Modeling, control and implementation. *The International Federation of Automatic Control*, pages 803–808, July 2008.
- [43] Puneet Singla, Daniele Mortari, and John L. Junkins. How to avoid singularity when using euler angles? *Advances in the Astronautical Sciences*, pages 1409–1426, January 2005.
- [44] Abdelhamid Tayebi and Stephen McGilvray. Attitude stabilization of a vtol quadrotor aircraft. *IEEE Transactions on Control Systems Technology*, pages 562–571, May 2006.
- [45] John Ting-Yung Wen and Kenneth Kreutz-Delgado. The attitude control problem. *IEEE Transactions on Automatic Control*, pages 1148–1162, October 1991.
- [46] Ronny Votel and Doug Sinclair. Comparison of control moment gyros and reaction wheels for small earth-observing satellites. *Conference on Small Satellites, Annual AIAA/USU*, 26, 2013.
- [47] Tao Wang, Tao Zhao, Du Hao, and Mingxi Wang. Transformable aerial vehicle, 09 2014.
- [48] X. Xiaozhu, L. Zaozhen, and C. Weining. Intelligent adaptive backstepping controller design based on the adaptive particle swarm optimization. *Chinese Control and Decision Conference*, pages 13–17, September 2009.