

PERIODIC MOTION

- 14.1. IDENTIFY:** We want to relate the characteristics of various waves, such as the period, frequency, and angular frequency.

SET UP: The frequency f in Hz is the number of cycles per second. The angular frequency ω is $\omega = 2\pi f$ and has units of radians per second. The period T is the time for one cycle of the wave and has units of seconds. The period and frequency are related by $T = \frac{1}{f}$.

EXECUTE: (a) $T = \frac{1}{f} = \frac{1}{466 \text{ Hz}} = 2.15 \times 10^{-3} \text{ s}$.

$\omega = 2\pi f = 2\pi(466 \text{ Hz}) = 2.93 \times 10^3 \text{ rad/s}$.

(b) $f = \frac{1}{T} = \frac{1}{50.0 \times 10^{-6} \text{ s}} = 2.00 \times 10^4 \text{ Hz}$. $\omega = 2\pi f = 1.26 \times 10^5 \text{ rad/s}$.

(c) $f = \frac{\omega}{2\pi}$ so f ranges from $\frac{2.7 \times 10^{15} \text{ rad/s}}{2\pi \text{ rad}} = 4.3 \times 10^{14} \text{ Hz}$ to

$\frac{4.7 \times 10^{15} \text{ rad/s}}{2\pi \text{ rad}} = 7.5 \times 10^{14} \text{ Hz}$. $T = \frac{1}{f}$ so T ranges from

$\frac{1}{7.5 \times 10^{14} \text{ Hz}} = 1.3 \times 10^{-15} \text{ s}$ to $\frac{1}{4.3 \times 10^{14} \text{ Hz}} = 2.3 \times 10^{-15} \text{ s}$.

(d) $T = \frac{1}{f} = \frac{1}{5.0 \times 10^6 \text{ Hz}} = 2.0 \times 10^{-7} \text{ s}$ and $\omega = 2\pi f = 2\pi(5.0 \times 10^6 \text{ Hz}) = 3.1 \times 10^7 \text{ rad/s}$.

EVALUATE: Visible light has much higher frequency than either sounds we can hear or ultrasound. Ultrasound is sound with frequencies higher than what the ear can hear. Large f corresponds to small T .

- 14.2. IDENTIFY and SET UP:** The amplitude is the maximum displacement from equilibrium. In one period the object goes from $x = +A$ to $x = -A$ and returns.

EXECUTE: (a) $A = 0.120 \text{ m}$.

(b) $0.800 \text{ s} = T/2$ so the period is 1.60 s .

(c) $f = \frac{1}{T} = 0.625 \text{ Hz}$.

EVALUATE: Whenever the object is released from rest, its initial displacement equals the amplitude of its SHM.

- 14.3. IDENTIFY:** The period is the time for one vibration and $\omega = \frac{2\pi}{T}$.

SET UP: The units of angular frequency are rad/s.

EXECUTE: The period is $\frac{0.50 \text{ s}}{440} = 1.14 \times 10^{-3} \text{ s}$ and the angular frequency is $\omega = \frac{2\pi}{T} = 5.53 \times 10^3 \text{ rad/s}$.

EVALUATE: There are 880 vibrations in 1.0 s , so $f = 880 \text{ Hz}$. This is equal to $1/T$.

- 14.4. IDENTIFY:** The period is the time for one cycle and the amplitude is the maximum displacement from equilibrium. Both these values can be read from the graph.

SET UP: The maximum x is 10.0 cm. The time for one cycle is 16.0 s.

EXECUTE: (a) $T = 16.0 \text{ s}$ so $f = \frac{1}{T} = 0.0625 \text{ Hz}$.

(b) $A = 10.0 \text{ cm}$.

(c) $T = 16.0 \text{ s}$

(d) $\omega = 2\pi f = 0.393 \text{ rad/s}$

EVALUATE: After one cycle the motion repeats.

- 14.5. IDENTIFY:** This displacement is $\frac{1}{4}$ of a period.

SET UP: $T = 1/f = 0.250 \text{ s}$.

EXECUTE: $t = 0.0625 \text{ s}$

EVALUATE: The time is the same for $x = A$ to $x = 0$, for $x = 0$ to $x = -A$, for $x = -A$ to $x = 0$ and for $x = 0$ to $x = A$.

- 14.6. IDENTIFY and SET UP:** Note that 900 beats per minute is the frequency of the wing beat, which we will convert into hertz. We will use the relationship between frequency and period, and we will also use the relationship between frequency and angular frequency: $T = \frac{1}{f}$ and $\omega = 2\pi f$, respectively.

EXECUTE: (a) $T = \frac{1}{900 \text{ beats/min}} = 0.00111 \text{ min} = 0.067 \text{ s}$.

(b) $f = 900 \frac{\text{beats}}{\text{min}} \cdot \frac{1 \text{ min}}{60 \text{ s}} = 15 \text{ Hz}$.

(c) $\omega = 2\pi f = 94 \text{ rad/s}$

EVALUATE: We could have calculated the answer to part (b) first, and then used $T = \frac{1}{f}$ to find the period.

- 14.7. IDENTIFY and SET UP:** The period is the time for one cycle. A is the maximum value of x .

EXECUTE: (a) From the figure with the problem, $T = 0.800 \text{ s}$.

(b) $f = \frac{1}{T} = 1.25 \text{ Hz}$.

(c) $\omega = 2\pi f = 7.85 \text{ rad/s}$.

(d) From the figure with the problem, $A = 3.0 \text{ cm}$.

(e) $T = 2\pi\sqrt{\frac{m}{k}}$, so $k = m\left(\frac{2\pi}{T}\right)^2 = (2.40 \text{ kg})\left(\frac{2\pi}{0.800 \text{ s}}\right)^2 = 148 \text{ N/m}$.

EVALUATE: The amplitude shown on the graph does not change with time, so there must be little or no friction in this system.

- 14.8. IDENTIFY:** Apply $T = \frac{1}{f} = \frac{2\pi}{\omega} = 2\pi\sqrt{\frac{m}{k}}$.

SET UP: The period will be twice the interval between the times at which the glider is at the equilibrium position.

EXECUTE: $k = \omega^2 m = \left(\frac{2\pi}{T}\right)^2 m = \left(\frac{2\pi}{2(2.60 \text{ s})}\right)^2 (0.200 \text{ kg}) = 0.292 \text{ N/m}$.

EVALUATE: $1 \text{ N} = 1 \text{ kg} \cdot \text{m/s}^2$, so $1 \text{ N/m} = 1 \text{ kg/s}^2$.

- 14.9. IDENTIFY and SET UP:** Use $T = 1/f$ to calculate T , $\omega = 2\pi f$ to calculate ω , and $\omega = \sqrt{k/m}$ for m .

EXECUTE: (a) $T = 1/f = 1/6.00 \text{ Hz} = 0.167 \text{ s}$.

(b) $\omega = 2\pi f = 2\pi(6.00 \text{ Hz}) = 37.7 \text{ rad/s}$.

(c) $\omega = \sqrt{k/m}$ implies $m = k/\omega^2 = (120 \text{ N/m})/(37.7 \text{ rad/s})^2 = 0.0844 \text{ kg}$.

EVALUATE: We can verify that k/ω^2 has units of mass.

14.10. IDENTIFY: The mass and frequency are related by $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$.

SET UP: $f\sqrt{m} = \frac{\sqrt{k}}{2\pi} = \text{constant}$, so $f_1\sqrt{m_1} = f_2\sqrt{m_2}$.

EXECUTE: (a) $m_1 = 0.750 \text{ kg}$, $f_1 = 1.75 \text{ Hz}$ and $m_2 = 0.750 \text{ kg} + 0.220 \text{ kg} = 0.970 \text{ kg}$.

$$f_2 = f_1 \sqrt{\frac{m_1}{m_2}} = (1.75 \text{ Hz}) \sqrt{\frac{0.750 \text{ kg}}{0.970 \text{ kg}}} = 1.54 \text{ Hz}.$$

$$(b) m_2 = 0.750 \text{ kg} - 0.220 \text{ kg} = 0.530 \text{ kg}. f_2 = (1.75 \text{ Hz}) \sqrt{\frac{0.750 \text{ kg}}{0.530 \text{ kg}}} = 2.08 \text{ Hz}.$$

EVALUATE: When the mass increases the frequency decreases, and when the mass decreases the frequency increases.

14.11. IDENTIFY: For SHM the motion is sinusoidal.

SET UP: $x(t) = A \cos(\omega t)$.

EXECUTE: $x(t) = A \cos(\omega t)$, where $A = 0.320 \text{ m}$ and $\omega = \frac{2\pi}{T} = \frac{2\pi}{0.900 \text{ s}} = 6.981 \text{ rad/s}$.

(a) $x = 0.320 \text{ m}$ at $t_1 = 0$. Let t_2 be the instant when $x = 0.160 \text{ m}$. Then we have

$$0.160 \text{ m} = (0.320 \text{ m}) \cos(\omega t_2). \cos(\omega t_2) = 0.500. \omega t_2 = 1.047 \text{ rad}. t_2 = \frac{1.047 \text{ rad}}{6.981 \text{ rad/s}} = 0.150 \text{ s}. \text{ It takes } t_2 - t_1 = 0.150 \text{ s}.$$

$$(b) \text{ Let } t_3 \text{ be when } x = 0. \text{ Then we have } \cos(\omega t_3) = 0 \text{ and } \omega t_3 = 1.571 \text{ rad}. t_3 = \frac{1.571 \text{ rad}}{6.981 \text{ rad/s}} = 0.225 \text{ s}.$$

It takes $t_3 - t_2 = 0.225 \text{ s} - 0.150 \text{ s} = 0.0750 \text{ s}$.

EVALUATE: Note that it takes twice as long to go from $x = 0.320 \text{ m}$ to $x = 0.160 \text{ m}$ than to go from $x = 0.160 \text{ m}$ to $x = 0$, even though the two distances are the same, because the speeds are different over the two distances.

14.12. IDENTIFY: For SHM the restoring force is directly proportional to the displacement and the system obeys Newton's second law.

SET UP: $F_x = ma_x$ and $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$.

EXECUTE: $F_x = ma_x$ gives $a_x = -\frac{kx}{m}$, so $\frac{k}{m} = -\frac{a_x}{x} = -\frac{-5.30 \text{ m/s}^2}{0.280 \text{ m}} = 18.93 \text{ s}^{-2}$.

$$f = \frac{1}{2\pi} \sqrt{\frac{k}{m}} = \frac{1}{2\pi} \sqrt{18.93 \text{ s}^{-2}} = 0.692 \text{ Hz}$$

EVALUATE: The period is around 1.5 s, so this is a rather slow vibration.

14.13. IDENTIFY: Use $A = \sqrt{x_0^2 + \frac{v_{0x}^2}{\omega^2}}$ to calculate A . The initial position and velocity of the block determine

ϕ . $x(t)$ is given by $x = A \cos(\omega t + \phi)$.

SET UP: $\cos \theta$ is zero when $\theta = \pm \pi/2$ and $\sin(\pi/2) = 1$.

EXECUTE: (a) From $A = \sqrt{x_0^2 + \frac{v_{0x}^2}{\omega^2}}$, $A = \left| \frac{v_0}{\omega} \right| = \left| \frac{v_0}{\sqrt{k/m}} \right| = 0.98 \text{ m}$.

(b) Since $x(0) = 0$, $x = A \cos(\omega t + \phi)$ requires $\phi = \pm \frac{\pi}{2}$. Since the block is initially moving to the left,

$v_{0x} < 0$ and $v_{0x} = -\omega A \sin \phi$ requires that $\sin \phi > 0$, so $\phi = +\frac{\pi}{2}$.

(c) $\cos(\omega t + \pi/2) = -\sin \omega t$, so $x = (-0.98 \text{ m}) \sin[(12.2 \text{ rad/s})t]$.

EVALUATE: The $x(t)$ result in part (c) does give $x = 0$ at $t = 0$ and $x < 0$ for t slightly greater than zero.

14.14. IDENTIFY and SET UP: We are given k , m , x_0 , and v_0 . Use $A = \sqrt{x_0^2 + v_{0x}^2/\omega^2} = \sqrt{x_0^2 + mv_{0x}^2/k}$,

$\phi = \arctan(-v_{0x}/\omega x_0)$, and $x = A \cos(\omega t + \phi)$.

EXECUTE: (a) $A = \sqrt{x_0^2 + v_{0x}^2/\omega^2} = \sqrt{x_0^2 + mv_{0x}^2/k}$:

$$A = \sqrt{(0.200 \text{ m})^2 + (2.00 \text{ kg})(-4.00 \text{ m/s})^2/(300 \text{ N/m})} = 0.383 \text{ m}$$

(b) $\phi = \arctan(-v_{0x}/\omega x_0)$:

$$\omega = \sqrt{k/m} = \sqrt{(300 \text{ N/m})/2.00 \text{ kg}} = 12.25 \text{ rad/s}$$

$$\phi = \arctan\left(\frac{-(-4.00 \text{ m/s})}{(12.25 \text{ rad/s})(0.200 \text{ m})}\right) = \arctan(+1.633) = 58.5^\circ \text{ (or } 1.02 \text{ rad)}$$

(c) $x = A \cos(\omega t + \phi)$ gives $x = (0.383 \text{ m}) \cos[(12.2 \text{ rad/s})t + 1.02 \text{ rad}]$

EVALUATE: At $t = 0$ the block is displaced 0.200 m from equilibrium but is moving, so $A > 0.200 \text{ m}$.

Since $v_x = -\omega A \sin(\omega t + \phi)$, a phase angle ϕ in the range $0 < \phi < 90^\circ$ gives $v_{0x} < 0$.

14.15. IDENTIFY: For SHM, $a_x = -\omega^2 x = -(2\pi f)^2 x$. Apply $x = A \cos(\omega t + \phi)$, $v_x = -\omega A \sin(\omega t + \phi)$, and

$$a_x = -\omega^2 A \cos(\omega t + \phi), \text{ with } A \text{ and } \phi \text{ from } \phi = \arctan\left(-\frac{v_{0x}}{\omega x_0}\right) \text{ and } A = \sqrt{x_0^2 + \frac{v_{0x}^2}{\omega^2}}.$$

SET UP: $x = 1.1 \text{ cm}$, $v_{0x} = -15 \text{ cm/s}$. $\omega = 2\pi f$, with $f = 2.5 \text{ Hz}$.

EXECUTE: (a) $a_x = -(2\pi(2.5 \text{ Hz}))^2(1.1 \times 10^{-2} \text{ m}) = -2.71 \text{ m/s}^2$.

(b) From $A = \sqrt{x_0^2 + \frac{v_{0x}^2}{\omega^2}}$ the amplitude is 1.46 cm, and from $\phi = \arctan\left(-\frac{v_{0x}}{\omega x_0}\right)$ the phase angle is

0.715 rad. The angular frequency is $2\pi f = 15.7 \text{ rad/s}$, so $x = (1.46 \text{ cm}) \cos((15.7 \text{ rad/s})t + 0.715 \text{ rad})$,

$v_x = (-22.9 \text{ cm/s}) \sin((15.7 \text{ rad/s})t + 0.715 \text{ rad})$ and $a_x = (-359 \text{ cm/s}^2) \cos((15.7 \text{ rad/s})t + 0.715 \text{ rad})$.

EVALUATE: We can verify that our equations for x , v_x , and a_x give the specified values at $t = 0$.

14.16. IDENTIFY: The motion is SHM, and in each case the motion described is one-half of a complete cycle.

SET UP: For SHM, $x = A \cos(\omega t)$ and $\omega = \frac{2\pi}{T}$.

EXECUTE: (a) The time is half a period. The period is independent of the amplitude, so it still takes 2.70 s.

(b) $x = 0.090 \text{ m}$ at time t_1 . $T = 5.40 \text{ s}$ and $\omega = \frac{2\pi}{T} = 1.164 \text{ rad/s}$. $x_1 = A \cos(\omega t_1)$. $\cos(\omega t_1) = 0.500$.

$\omega t_1 = 1.047 \text{ rad}$ and $t_1 = 0.8997 \text{ s}$. $x = -0.090 \text{ m}$ at time t_2 . $\cos(\omega t_2) = -0.500$. $\omega t_2 = 2.094 \text{ rad}$ and $t_2 = 1.800 \text{ s}$. The elapsed time is $t_2 - t_1 = 1.800 \text{ s} - 0.8997 \text{ s} = 0.900 \text{ s}$.

EVALUATE: It takes less time to travel from $\pm 0.090 \text{ m}$ in (b) than it originally did because the block has larger speed at $\pm 0.090 \text{ m}$ with the increased amplitude.

14.17. IDENTIFY: Apply $T = 2\pi\sqrt{\frac{m}{k}}$. Use the information about the empty chair to calculate k .

SET UP: When $m = 42.5 \text{ kg}$, $T = 1.30 \text{ s}$.

EXECUTE: Empty chair: $T = 2\pi\sqrt{\frac{m}{k}}$. gives $k = \frac{4\pi^2 m}{T^2} = \frac{4\pi^2(42.5 \text{ kg})}{(1.30 \text{ s})^2} = 993 \text{ N/m}$.

With person in chair: $T = 2\pi\sqrt{\frac{m}{k}}$ gives $m = \frac{T^2 k}{4\pi^2} = \frac{(2.54 \text{ s})^2 (993 \text{ N/m})}{4\pi^2} = 162 \text{ kg}$ and

$$m_{\text{person}} = 162 \text{ kg} - 42.5 \text{ kg} = 120 \text{ kg}.$$

EVALUATE: For the same spring, when the mass increases, the period increases.

14.18. IDENTIFY and SET UP: Use $T = 2\pi\sqrt{\frac{m}{k}}$ for T and $a_x = -\frac{k}{m}x$ to relate a_x and k .

EXECUTE: $T = 2\pi\sqrt{\frac{m}{k}}$, $m = 0.400 \text{ kg}$

Use $a_x = -1.80 \text{ m/s}^2$ to calculate k : $-kx = ma_x$ gives

$$k = -\frac{ma_x}{x} = -\frac{(0.400 \text{ kg})(-1.80 \text{ m/s}^2)}{0.300 \text{ m}} = +2.40 \text{ N/m}, \text{ so } T = 2\pi\sqrt{\frac{m}{k}} = 2.57 \text{ s}.$$

EVALUATE: a_x is negative when x is positive. ma_x/x has units of N/m and $\sqrt{m/k}$ has units of seconds.

14.19. IDENTIFY: $T = 2\pi\sqrt{\frac{m}{k}}$. $a_x = -\frac{k}{m}x$ so $a_{\text{max}} = \frac{k}{m}A$. $F = -kx$.

SET UP: a_x is proportional to x so a_x goes through one cycle when the displacement goes through one cycle. From the graph, one cycle of a_x extends from $t = 0.10 \text{ s}$ to $t = 0.30 \text{ s}$, so the period is $T = 0.20 \text{ s}$.

$k = 2.50 \text{ N/cm} = 250 \text{ N/m}$. From the graph the maximum acceleration is 12.0 m/s^2 .

EXECUTE: (a) $T = 2\pi\sqrt{\frac{m}{k}}$ gives $m = k\left(\frac{T}{2\pi}\right)^2 = (250 \text{ N/m})\left(\frac{0.20 \text{ s}}{2\pi}\right)^2 = 0.253 \text{ kg}$

(b) $A = \frac{ma_{\text{max}}}{k} = \frac{(0.253 \text{ kg})(12.0 \text{ m/s}^2)}{250 \text{ N/m}} = 0.0121 \text{ m} = 1.21 \text{ cm}$

(c) $F_{\text{max}} = kA = (250 \text{ N/m})(0.0121 \text{ m}) = 3.03 \text{ N}$.

EVALUATE: We can also calculate the maximum force from the maximum acceleration:

$$F_{\text{max}} = ma_{\text{max}} = (0.253 \text{ kg})(12.0 \text{ m/s}^2) = 3.04 \text{ N}, \text{ which agrees with our previous results.}$$

14.20. IDENTIFY: The general expression for $v_x(t)$ is $v_x(t) = -\omega A \sin(\omega t + \phi)$. We can determine ω and A by comparing the equation in the problem to the general form.

SET UP: $\omega = 4.71 \text{ rad/s}$. $\omega A = 3.60 \text{ cm/s} = 0.0360 \text{ m/s}$.

EXECUTE: (a) $T = \frac{2\pi}{\omega} = \frac{2\pi \text{ rad}}{4.71 \text{ rad/s}} = 1.33 \text{ s}$

(b) $A = \frac{0.0360 \text{ m/s}}{\omega} = \frac{0.0360 \text{ m/s}}{4.71 \text{ rad/s}} = 7.64 \times 10^{-3} \text{ m} = 7.64 \text{ mm}$

(c) $a_{\text{max}} = \omega^2 A = (4.71 \text{ rad/s})^2 (7.64 \times 10^{-3} \text{ m}) = 0.169 \text{ m/s}^2$

(d) $\omega = \sqrt{\frac{k}{m}}$ so $k = m\omega^2 = (0.500 \text{ kg})(4.71 \text{ rad/s})^2 = 11.1 \text{ N/m}$.

EVALUATE: The overall negative sign in the expression for $v_x(t)$ and the factor of $-\pi/2$ both are related to the phase factor ϕ in the general expression.

14.21. IDENTIFY: Compare the specific $x(t)$ given in the problem to the general form $x = A \cos(\omega t + \phi)$.

SET UP: $A = 7.40 \text{ cm}$, $\omega = 4.16 \text{ rad/s}$, and $\phi = -2.42 \text{ rad}$.

EXECUTE: (a) $T = \frac{2\pi}{\omega} = \frac{2\pi}{4.16 \text{ rad/s}} = 1.51 \text{ s}$.

(b) $\omega = \sqrt{\frac{k}{m}}$ so $k = m\omega^2 = (1.50 \text{ kg})(4.16 \text{ rad/s})^2 = 26.0 \text{ N/m}$

(c) $v_{\text{max}} = \omega A = (4.16 \text{ rad/s})(7.40 \text{ cm}) = 30.8 \text{ cm/s}$

(d) $F_x = -kx$ so $F_{\text{max}} = kA = (26.0 \text{ N/m})(0.0740 \text{ m}) = 1.92 \text{ N}$.

(e) $x(t)$ evaluated at $t = 1.00$ s gives $x = -0.0125$ m. $v_x = -\omega A \sin(\omega t + \phi) = 30.4$ cm/s.

$$a_x = -kx/m = -\omega^2 x = +0.216 \text{ m/s}^2.$$

(f) $F_x = -kx = -(26.0 \text{ N/m})(-0.0125 \text{ m}) = +0.325 \text{ N}$

EVALUATE: The maximum speed occurs when $x = 0$ and the maximum force is when $x = \pm A$.

- 14.22. IDENTIFY:** The frequency of vibration of a spring depends on the mass attached to the spring. Differences in frequency are due to differences in mass, so by measuring the frequencies we can determine the mass of the virus, which is the target variable.

SET UP: The frequency of vibration is $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$.

EXECUTE: (a) The frequency without the virus is $f_s = \frac{1}{2\pi} \sqrt{\frac{k}{m_s}}$, and the frequency with the virus is

$$f_{s+v} = \frac{1}{2\pi} \sqrt{\frac{k}{m_s + m_v}}. \quad \frac{f_{s+v}}{f_s} = \left(\frac{1}{2\pi} \sqrt{\frac{k}{m_s + m_v}} \right) \left(2\pi \sqrt{\frac{m_s}{k}} \right) = \sqrt{\frac{m_s}{m_s + m_v}} = \frac{1}{\sqrt{1 + m_v/m_s}}.$$

(b) $\left(\frac{f_{s+v}}{f_s} \right)^2 = \frac{1}{1 + m_v/m_s}$. Solving for m_v gives

$$m_v = m_s \left(\left[\frac{f_s}{f_{s+v}} \right]^2 - 1 \right) = (2.10 \times 10^{-16} \text{ g}) \left(\left[\frac{2.00 \times 10^{15} \text{ Hz}}{2.87 \times 10^{14} \text{ Hz}} \right]^2 - 1 \right) = 9.99 \times 10^{-15} \text{ g, or}$$

$$m_v = 9.99 \text{ femtograms.}$$

EVALUATE: When the mass increases, the frequency of oscillation increases.

- 14.23. IDENTIFY and SET UP:** Use $x = A \cos(\omega t + \phi)$, $v_x = -\omega A \sin(\omega t + \phi)$, and $a_x = -\omega^2 A \cos \omega t$.

EXECUTE: $f = 440$ Hz, $A = 3.0$ mm, $\phi = 0$

(a) $x = A \cos(\omega t + \phi)$

$$\omega = 2\pi f = 2\pi(440 \text{ Hz}) = 2.76 \times 10^3 \text{ rad/s}$$

$$x = (3.0 \times 10^{-3} \text{ m}) \cos((2.76 \times 10^3 \text{ rad/s})t)$$

(b) $v_x = -\omega A \sin(\omega t + \phi)$

$$v_{\max} = \omega A = (2.76 \times 10^3 \text{ rad/s})(3.0 \times 10^{-3} \text{ m}) = 8.3 \text{ m/s (maximum magnitude of velocity)}$$

$$a_x = -\omega^2 A \cos(\omega t + \phi)$$

$$a_{\max} = \omega^2 A = (2.76 \times 10^3 \text{ rad/s})^2 (3.0 \times 10^{-3} \text{ m}) = 2.3 \times 10^4 \text{ m/s}^2 \text{ (maximum magnitude of acceleration)}$$

(c) $a_x = -\omega^2 A \cos \omega t$

$$da_x/dt = +\omega^3 A \sin \omega t = [2\pi(440 \text{ Hz})]^3 (3.0 \times 10^{-3} \text{ m}) \sin([2.76 \times 10^3 \text{ rad/s}]t) =$$

$$(6.3 \times 10^7 \text{ m/s}^3) \sin([2.76 \times 10^3 \text{ rad/s}]t)$$

Maximum magnitude of the jerk is $\omega^3 A = 6.3 \times 10^7 \text{ m/s}^3$

EVALUATE: The period of the motion is small, so the maximum acceleration and jerk are large.

- 14.24. IDENTIFY:** The mechanical energy of the system is conserved. The maximum acceleration occurs at the maximum displacement and the motion is SHM.

SET UP: Energy conservation gives $\frac{1}{2}mv_{\max}^2 = \frac{1}{2}kA^2$, $T = 2\pi\sqrt{\frac{m}{k}}$, and $a_{\max} = \frac{kA}{m}$.

EXECUTE: (a) From the graph, we read off $T = 16.0$ s and $A = 10.0$ cm = 0.100 m. $\frac{1}{2}mv_{\max}^2 = \frac{1}{2}kA^2$ gives

$$v_{\max} = A\sqrt{\frac{k}{m}}. \quad T = 2\pi\sqrt{\frac{m}{k}}, \text{ so } \sqrt{\frac{k}{m}} = \frac{2\pi}{T}. \quad \text{Therefore } v_{\max} = A\left(\frac{2\pi}{T}\right) = (0.100 \text{ m})\left(\frac{2\pi}{16.0 \text{ s}}\right) = 0.0393 \text{ m/s.}$$

$$(b) a_{\max} = \frac{kA}{m} = \left(\frac{2\pi}{T}\right)^2 A = \left(\frac{2\pi}{16.0 \text{ s}}\right)^2 (0.100 \text{ m}) = 0.0154 \text{ m/s}^2$$

EVALUATE: The acceleration is much less than g .

- 14.25. IDENTIFY:** The mechanical energy of the system is conserved. The maximum acceleration occurs at the maximum displacement and the motion is SHM.

SET UP: Energy conservation gives $\frac{1}{2}mv_{\max}^2 = \frac{1}{2}kA^2$ and $a_{\max} = \frac{kA}{m}$.

EXECUTE: $A = 0.165 \text{ m}$. $\frac{1}{2}mv_{\max}^2 = \frac{1}{2}kA^2$ gives $\frac{k}{m} = \left(\frac{v_{\max}}{A}\right)^2 = \left(\frac{3.90 \text{ m/s}}{0.165 \text{ m}}\right)^2 = 558.7 \text{ s}^{-2}$.

$$a_{\max} = \frac{kA}{m} = (558.7 \text{ s}^{-2})(0.165 \text{ m}) = 92.2 \text{ m/s}^2.$$

EVALUATE: The acceleration is much greater than g .

- 14.26. IDENTIFY:** The mechanical energy of the system is conserved, Newton's second law applies and the motion is SHM.

SET UP: Energy conservation gives $\frac{1}{2}mv_x^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$, $F_x = ma_x$, $F_x = -kx$, and the period is

$$T = 2\pi\sqrt{\frac{m}{k}}.$$

EXECUTE: Solving $\frac{1}{2}mv_x^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$ for v_x gives $v_x = \pm\sqrt{\frac{k}{m}\sqrt{A^2 - x^2}}$. $T = 2\pi\sqrt{\frac{m}{k}}$, so

$$\sqrt{\frac{k}{m}} = \frac{2\pi}{T} = \frac{2\pi}{3.20 \text{ s}} = 1.963 \text{ s}^{-1}. \quad v_x = \pm(1.963 \text{ s}^{-1})\sqrt{(0.250 \text{ m})^2 - (0.160 \text{ m})^2} = \pm 0.377 \text{ m/s}.$$

$$a_x = -\frac{kx}{m} = -(1.963 \text{ s}^{-1})^2 (0.160 \text{ m}) = -0.617 \text{ m/s}^2.$$

EVALUATE: The block is on the positive side of the equilibrium position ($x = 0$). If $v_x = +0.377 \text{ m/s}$, the block is moving in the positive direction and slowing down since the acceleration is in the negative direction. If $v_x = -0.377 \text{ m/s}$, the block is moving in the negative direction and speeding up.

- 14.27. IDENTIFY and SET UP:** Use $E = \frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$. $x = \pm A$ when $v_x = 0$ and $v_x = \pm v_{\max}$ when $x = 0$.

EXECUTE: (a) $E = \frac{1}{2}mv^2 + \frac{1}{2}kx^2$

$$E = \frac{1}{2}(0.150 \text{ kg})(0.400 \text{ m/s})^2 + \frac{1}{2}(300 \text{ N/m})(0.012 \text{ m})^2 = 0.0336 \text{ J}.$$

(b) $E = \frac{1}{2}kA^2$ so $A = \sqrt{2E/k} = \sqrt{2(0.0336 \text{ J})/(300 \text{ N/m})} = 0.0150 \text{ m}$

(c) $E = \frac{1}{2}mv_{\max}^2$ so $v_{\max} = \sqrt{2E/m} = \sqrt{2(0.0336 \text{ J})/(0.150 \text{ kg})} = 0.669 \text{ m/s}$.

EVALUATE: The total energy E is constant but is transferred between kinetic and potential energy during the motion.

- 14.28. IDENTIFY and SET UP:** Use $E = \frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$ to relate K and U . U depends on x and K depends on v_x .

EXECUTE: (a) $U + K = E$, so $U = K$ says that $2U = E$

$$2\left(\frac{1}{2}kx^2\right) = \frac{1}{2}kA^2 \text{ and } x = \pm A/\sqrt{2}; \text{ magnitude is } A/\sqrt{2}$$

But $U = K$ also implies that $2K = E$

$$2\left(\frac{1}{2}mv_x^2\right) = \frac{1}{2}kA^2 \text{ and } v_x = \pm\sqrt{k/m}A/\sqrt{2} = \pm\omega A/\sqrt{2}; \text{ magnitude is } \omega A/\sqrt{2}.$$

(b) In one cycle x goes from A to 0 to $-A$ to 0 to $+A$. Thus $x = +A/\sqrt{2}$ twice and $x = -A/\sqrt{2}$ twice in each cycle. Therefore, $U = K$ four times each cycle. The time between $U = K$ occurrences is the time Δt_a for $x_1 = +A/\sqrt{2}$ to $x_2 = -A/\sqrt{2}$, time Δt_b for $x_1 = -A/\sqrt{2}$ to $x_2 = +A/\sqrt{2}$, time Δt_c for $x_1 = +A/\sqrt{2}$ to $x_2 = +A/\sqrt{2}$, or the time Δt_d for $x_1 = -A/\sqrt{2}$ to $x_2 = -A/\sqrt{2}$, as shown in Figure 14.28.

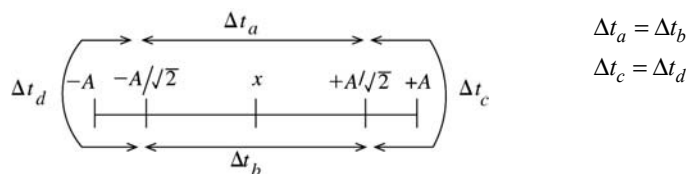


Figure 14.28

Calculation of Δt_a :

Specify x in $x = A \cos \omega t$ (choose $\phi = 0$ so $x = A$ at $t = 0$) and solve for t .

$$x_1 = +A/\sqrt{2} \text{ implies } A/\sqrt{2} = A \cos(\omega t_1)$$

$$\cos \omega t_1 = 1/\sqrt{2} \text{ so } \omega t_1 = \arccos(1/\sqrt{2}) = \pi/4 \text{ rad}$$

$$t_1 = \pi/4\omega$$

$$x_2 = -A/\sqrt{2} \text{ implies } -A/\sqrt{2} = A \cos(\omega t_2)$$

$$\cos \omega t_2 = -1/\sqrt{2} \text{ so } \omega t_2 = 3\pi/4 \text{ rad}$$

$$t_2 = 3\pi/4\omega$$

$$\Delta t_a = t_2 - t_1 = 3\pi/4\omega - \pi/4\omega = \pi/2\omega \text{ (Note that this is } T/4, \text{ one-fourth period.)}$$

Calculation of Δt_d :

$$x_1 = -A/\sqrt{2} \text{ implies } t_1 = 3\pi/4\omega$$

$$x_2 = -A/\sqrt{2}, \text{ } t_2 \text{ is the next time after } t_1 \text{ that gives } \cos \omega t_2 = -1/\sqrt{2}$$

$$\text{Thus } \omega t_2 = \omega t_1 + \pi/2 = 5\pi/4 \text{ and } t_2 = 5\pi/4\omega$$

$$\Delta t_d = t_2 - t_1 = 5\pi/4\omega - 3\pi/4\omega = \pi/2\omega, \text{ so is the same as } \Delta t_a.$$

Therefore the occurrences of $K = U$ are equally spaced in time, with a time interval between them of $\pi/2\omega$.

EVALUATE: This is one-fourth T , as it must be if there are 4 equally spaced occurrences each period.

(c) **EXECUTE:** $x = A/2$ and $U + K = E$

$$K = E - U = \frac{1}{2}kA^2 - \frac{1}{2}kx^2 = \frac{1}{2}kA^2 - \frac{1}{2}k(A/2)^2 = \frac{1}{2}kA^2 - \frac{1}{8}kA^2 = 3kA^2/8$$

$$\text{Then } \frac{K}{E} = \frac{3kA^2/8}{\frac{1}{2}kA^2} = \frac{3}{4} \text{ and } \frac{U}{E} = \frac{\frac{1}{8}kA^2}{\frac{1}{2}kA^2} = \frac{1}{4}$$

EVALUATE: At $x = 0$ all the energy is kinetic and at $x = \pm A$ all the energy is potential. But $K = U$ does not occur at $x = \pm A/2$, since U is not linear in x .

14.29. IDENTIFY: Velocity and position are related by $E = \frac{1}{2}kA^2 = \frac{1}{2}mv_x^2 + \frac{1}{2}kx^2$. Acceleration and position are related by $-kx = ma_x$.

SET UP: The maximum speed is at $x = 0$ and the maximum magnitude of acceleration is at $x = \pm A$.

$$\text{EXECUTE: (a) For } x = 0, \frac{1}{2}mv_{\max}^2 = \frac{1}{2}kA^2 \text{ and } v_{\max} = A\sqrt{\frac{k}{m}} = (0.040 \text{ m})\sqrt{\frac{450 \text{ N/m}}{0.500 \text{ kg}}} = 1.20 \text{ m/s}$$

$$\text{(b) } v_x = \pm \sqrt{\frac{k}{m}\sqrt{A^2 - x^2}} = \pm \sqrt{\frac{450 \text{ N/m}}{0.500 \text{ kg}}\sqrt{(0.040 \text{ m})^2 - (0.015 \text{ m})^2}} = \pm 1.11 \text{ m/s.}$$

The speed is $v = 1.11 \text{ m/s}$.

(c) For $x = \pm A$, $a_{\max} = \frac{k}{m} A = \left(\frac{450 \text{ N/m}}{0.500 \text{ kg}} \right) (0.040 \text{ m}) = 36 \text{ m/s}^2$

(d) $a_x = -\frac{kx}{m} = -\frac{(450 \text{ N/m})(-0.015 \text{ m})}{0.500 \text{ kg}} = +13.5 \text{ m/s}^2$

(e) $E = \frac{1}{2} k A^2 = \frac{1}{2} (450 \text{ N/m})(0.040 \text{ m})^2 = 0.360 \text{ J}$

EVALUATE: The speed and acceleration at $x = -0.015 \text{ m}$ are less than their maximum values.

14.30. IDENTIFY and SET UP: a_x is related to x by $a_x = -\frac{k}{m}x$ and v_x is related to x by

$E = \frac{1}{2} m v^2 + \frac{1}{2} k x^2 = \frac{1}{2} k A^2$. a_x is a maximum when $x = \pm A$ and v_x is a maximum when $x = 0$. t is related to x by $x = A \cos(\omega t + \phi)$.

EXECUTE: (a) $-kx = ma_x$ so $a_x = -(k/m)x$. But the maximum $|x|$ is A , so $a_{\max} = (k/m)A = \omega^2 A$.

$f = 0.850 \text{ Hz}$ implies $\omega = \sqrt{k/m} = 2\pi f = 2\pi(0.850 \text{ Hz}) = 5.34 \text{ rad/s}$.

$a_{\max} = \omega^2 A = (5.34 \text{ rad/s})^2 (0.180 \text{ m}) = 5.13 \text{ m/s}^2$.

$\frac{1}{2} m v_x^2 + \frac{1}{2} k x^2 = \frac{1}{2} k A^2$

$v_x = v_{\max}$ when $x = 0$ so $\frac{1}{2} m v_{\max}^2 = \frac{1}{2} k A^2$

$v_{\max} = \sqrt{k/m} A = \omega A = (5.34 \text{ rad/s})(0.180 \text{ m}) = 0.961 \text{ m/s}$

(b) $a_x = -(k/m)x = -\omega^2 x = -(5.34 \text{ rad/s})^2 (0.090 \text{ m}) = -2.57 \text{ m/s}^2$

$\frac{1}{2} m v_x^2 + \frac{1}{2} k x^2 = \frac{1}{2} k A^2$ says that $v_x = \pm \sqrt{k/m} \sqrt{A^2 - x^2} = \pm \omega \sqrt{A^2 - x^2}$

$v_x = \pm (5.34 \text{ rad/s}) \sqrt{(0.180 \text{ m})^2 - (0.090 \text{ m})^2} = \pm 0.832 \text{ m/s}$

The speed is 0.832 m/s .

(c) $x = A \cos(\omega t + \phi)$

Let $\phi = -\pi/2$ so that $x = 0$ at $t = 0$.

Then $x = A \cos(\omega t - \pi/2) = A \sin(\omega t)$ [Using the trig identity $\cos(a - \pi/2) = \sin a$]

Find the time t that gives $x = 0.120 \text{ m}$.

$0.120 \text{ m} = (0.180 \text{ m}) \sin(\omega t)$

$\sin \omega t = 0.6667$

$t = \arcsin(0.6667)/\omega = 0.7297 \text{ rad}/(5.34 \text{ rad/s}) = 0.137 \text{ s}$.

EVALUATE: It takes one-fourth of a period for the object to go from $x = 0$ to $x = A = 0.180 \text{ m}$. So the time we have calculated should be less than $T/4$. $T = 1/f = 1/0.850 \text{ Hz} = 1.18 \text{ s}$, $T/4 = 0.295 \text{ s}$, and the time we calculated is less than this. Note that the a_x and v_x we calculated in part (b) are smaller in magnitude than the maximum values we calculated in part (a).

(d) The conservation of energy equation relates v and x and $F = ma$ relates a and x . So the speed and acceleration can be found by energy methods but the time cannot.

Specifying x uniquely determines a_x but determines only the magnitude of v_x ; at a given x the object could be moving either in the $+x$ or $-x$ direction.

14.31. IDENTIFY and SET UP: Use the results of Example 14.5 and also that $E = \frac{1}{2} k A^2$.

EXECUTE: In the example, $A_2 = A_1 \sqrt{\frac{M}{M+m}}$ and now we want $A_2 = \frac{1}{2} A_1$. Therefore, $\frac{1}{2} = \sqrt{\frac{M}{M+m}}$, or

$m = 3M$. For the energy, $E_2 = \frac{1}{2} k A_2^2$, but since $A_2 = \frac{1}{2} A_1$, $E_2 = \frac{1}{4} E_1$, and $\frac{3}{4} E_1$ is lost to heat.

EVALUATE: The putty and the moving block undergo a totally inelastic collision and the mechanical energy of the system decreases.

14.32. IDENTIFY: Newton's second law applies to the system, and mechanical energy is conserved.

SET UP: $\Sigma F_x = ma_x$, $K_1 + U_1 = K_2 + U_2$, $U = \frac{1}{2}kx^2$, $F_{\text{spring}} = -kx$.

EXECUTE: (a) $\Sigma F_x = ma_x$ gives $ma_x = -kx$, which gives

$$(0.300 \text{ kg})(-12.0 \text{ m/s}^2) = -k(0.240 \text{ m}).$$

Solving for k gives $k = 15.0 \text{ N/m}$.

(b) Applying $K_1 + U_1 = K_2 + U_2$ gives $\frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$.

Putting in the numbers gives

$$(0.300 \text{ kg})(4.00 \text{ m/s})^2 + (15.0 \text{ N/m})(0.240 \text{ m})^2 = (15.0 \text{ N/m})A^2,$$

so $A = 0.61449 \text{ m}$, which rounds to 0.614 m .

(c) The kinetic energy is maximum when the potential energy is zero, which is when $x = 0$. Therefore

$$\frac{1}{2}kA^2 = \frac{1}{2}mv^2, \text{ which gives}$$

$$(15.0 \text{ N/m})(0.61449 \text{ m})^2 = (0.300 \text{ kg})v^2$$

$v = 4.345 \text{ m/s}$ which rounds to 4.35 m/s .

(d) The maximum force occurs when $x = A$, so Newton's second law gives $F_{\text{max}} = ma_{\text{max}} = kA$.

$$(15.0 \text{ N/m})(0.61449 \text{ m}) = (0.300 \text{ kg})a_{\text{max}}, \text{ which gives } a_{\text{max}} = 30.7 \text{ m/s}^2.$$

EVALUATE: It is frequently necessary to use a combination of energy conservation and Newton's laws.

14.33. IDENTIFY: Conservation of energy says $\frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$ and Newton's second law says $-kx = ma_x$.

SET UP: Let $+x$ be to the right. Let the mass of the object be m .

$$\text{EXECUTE: } k = -\frac{ma_x}{x} = -m\left(\frac{-8.40 \text{ m/s}^2}{0.600 \text{ m}}\right) = (14.0 \text{ s}^{-2})m.$$

$$A = \sqrt{x^2 + (m/k)v^2} = \sqrt{(0.600 \text{ m})^2 + \left(\frac{m}{(14.0 \text{ s}^{-2})m}\right)(2.20 \text{ m/s})^2} = 0.840 \text{ m}. \text{ The object will therefore travel}$$

$0.840 \text{ m} - 0.600 \text{ m} = 0.240 \text{ m}$ to the right before stopping at its maximum amplitude.

EVALUATE: The acceleration is not constant and we cannot use the constant acceleration kinematic equations.

14.34. IDENTIFY and SET UP: Energy conservation gives $\frac{1}{2}mv_x^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$. At $t = 0$, $x = 0$ and

$v_x = -12.0 \text{ m/s}$. Newton's second law also applies.

$$\text{EXECUTE: (a) } x = 0 \text{ gives } \frac{1}{2}mv_x^2 = \frac{1}{2}kA^2 \text{ and } A = -v_x\sqrt{\frac{m}{k}} = -(-12.0 \text{ m/s})\sqrt{\frac{2.00 \text{ kg}}{315 \text{ N/m}}} = 0.956 \text{ m}.$$

$$\text{(b) } a_x = -\frac{k}{m}x \text{ so } a_{\text{max}} = \frac{k}{m}A = \left(\frac{315 \text{ N/m}}{2.00 \text{ kg}}\right)(0.956 \text{ m}) = 151 \text{ m/s}^2.$$

$$\text{(c) } F_x = -kx \text{ so } F_{\text{max}} = kA = (315 \text{ N/m})(0.956 \text{ m}) = 301 \text{ N}.$$

EVALUATE: We can use $\Sigma F_x = ma_x$ to get $F_{\text{max}} = ma_{\text{max}} = (2.00 \text{ kg})(151 \text{ m/s}^2) = 302 \text{ N}$, the same result found in (c) apart from a small round-off effect.

14.35. IDENTIFY and SET UP: Velocity, position, and total energy are related by $E = \frac{1}{2}kA^2 = \frac{1}{2}mv_x^2 + \frac{1}{2}kx^2$.

Acceleration and position are related by $-kx = ma_x$. The maximum magnitude of acceleration is at $x = \pm A$.

$$\text{EXECUTE: (a) } E = \frac{1}{2}mv_x^2 + \frac{1}{2}kx^2 = \frac{1}{2}(2.00 \text{ kg})(-4.00 \text{ m/s})^2 + \frac{1}{2}(315 \text{ N/m})(+0.200 \text{ m})^2.$$

$$E = 16.0 \text{ J} + 6.3 \text{ J} = 22.3 \text{ J}. E = \frac{1}{2}kA^2 \text{ and}$$

$$A = \sqrt{\frac{2E}{k}} = \sqrt{\frac{2(22.3 \text{ J})}{315 \text{ N/m}}} = 0.376 \text{ m}.$$

$$(b) a_{\max} = \frac{k}{m}A = \left(\frac{315 \text{ N/m}}{2.00 \text{ kg}}\right)(0.376 \text{ m}) = 59.2 \text{ m/s}^2$$

$$(c) F_{\max} = ma_{\max} = (2.00 \text{ kg})(59.2 \text{ m/s}^2) = 118 \text{ N. Or, } F_x = -kx \text{ gives}$$

$$F_{\max} = kA = (315 \text{ N/m})(0.376 \text{ m}) = 118 \text{ N, which checks.}$$

EVALUATE: The maximum force and maximum acceleration occur when the displacement is maximum and the velocity is zero.

14.36. IDENTIFY: The mechanical energy (the sum of the kinetic energy and potential energy) is conserved.

$$\text{SET UP: } K + U = E, \text{ with } E = \frac{1}{2}kA^2 \text{ and } U = \frac{1}{2}kx^2$$

$$\text{EXECUTE: } U = K \text{ says } 2U = E. \text{ This gives } 2\left(\frac{1}{2}kx^2\right) = \frac{1}{2}kA^2, \text{ so } x = A/\sqrt{2}.$$

EVALUATE: When $x = A/2$ the kinetic energy is three times the elastic potential energy.

14.37. IDENTIFY: Initially part of the energy is kinetic energy and part is potential energy in the stretched spring. When $x = \pm A$ all the energy is potential energy and when the glider has its maximum speed all the energy is kinetic energy. The total energy of the system remains constant during the motion.

$$\text{SET UP: Initially } v_x = \pm 0.815 \text{ m/s and } x = \pm 0.0300 \text{ m.}$$

EXECUTE: (a) Initially the energy of the system is

$$E = \frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \frac{1}{2}(0.175 \text{ kg})(0.815 \text{ m/s})^2 + \frac{1}{2}(155 \text{ N/m})(0.0300 \text{ m})^2 = 0.128 \text{ J. } \frac{1}{2}kA^2 = E \text{ and}$$

$$A = \sqrt{\frac{2E}{k}} = \sqrt{\frac{2(0.128 \text{ J})}{155 \text{ N/m}}} = 0.0406 \text{ m} = 4.06 \text{ cm.}$$

$$(b) \frac{1}{2}mv_{\max}^2 = E \text{ and } v_{\max} = \sqrt{\frac{2E}{m}} = \sqrt{\frac{2(0.128 \text{ J})}{0.175 \text{ kg}}} = 1.21 \text{ m/s.}$$

$$(c) \omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{155 \text{ N/m}}{0.175 \text{ kg}}} = 29.8 \text{ rad/s.}$$

EVALUATE: The amplitude and the maximum speed depend on the total energy of the system but the angular frequency is independent of the amount of energy in the system and just depends on the force constant of the spring and the mass of the object.

14.38. IDENTIFY: Use the amount the spring is stretched by the weight of the fish to calculate the force constant k of the spring. $T = 2\pi\sqrt{m/k}$. $v_{\max} = \omega A = 2\pi fA$.

SET UP: When the fish hangs at rest the upward spring force $|F_x| = kx$ equals the weight mg of the fish. $f = 1/T$. The amplitude of the SHM is 0.0500 m.

$$\text{EXECUTE: (a) } mg = kx \text{ so } k = \frac{mg}{x} = \frac{(65.0 \text{ kg})(9.80 \text{ m/s}^2)}{0.180 \text{ m}} = 3.54 \times 10^3 \text{ N/m.}$$

$$(b) T = 2\pi\sqrt{\frac{m}{k}} = 2\pi\sqrt{\frac{65.0 \text{ kg}}{3.54 \times 10^3 \text{ N/m}}} = 0.8514 \text{ s which rounds to } 0.851 \text{ s.}$$

$$(c) v_{\max} = 2\pi fA = \frac{2\pi A}{T} = \frac{2\pi(0.0500 \text{ m})}{0.8514 \text{ s}} = 0.369 \text{ m/s.}$$

EVALUATE: Note that T depends only on m and k and is independent of the distance the fish is pulled down. But v_{\max} does depend on this distance.

14.39. IDENTIFY: $K = \frac{1}{2}mv^2$, $U_{\text{grav}} = mgy$ and $U_{\text{el}} = \frac{1}{2}kx^2$.

SET UP: At the lowest point of the motion, the spring is stretched an amount $2A$.

EXECUTE: (a) At the top of the motion, the spring is unstretched and so has no potential energy, the cat is not moving and so has no kinetic energy, and the gravitational potential energy relative to the bottom is $2mgA = 2(4.00 \text{ kg})(9.80 \text{ m/s}^2)(0.050 \text{ m}) = 3.92 \text{ J}$. This is the total energy, and is the same total for each part.

$$(b) U_{\text{grav}} = 0, K = 0, \text{ so } U_{\text{spring}} = 3.92 \text{ J.}$$

(c) At equilibrium the spring is stretched half as much as it was for part (a), and so

$$U_{\text{spring}} = \frac{1}{4}(3.92 \text{ J}) = 0.98 \text{ J}, \quad U_{\text{grav}} = \frac{1}{2}(3.92 \text{ J}) = 1.96 \text{ J}, \quad \text{and so } K = 0.98 \text{ J}.$$

EVALUATE: During the motion, work done by the forces transfers energy among the forms kinetic energy, gravitational potential energy and elastic potential energy.

14.40. IDENTIFY: The torsion constant κ is defined by $\tau_z = -\kappa\theta$. $f = \frac{1}{2\pi}\sqrt{\frac{\kappa}{I}}$ and $T = 1/f$.

$$\theta(t) = \Theta \cos(\omega t + \phi).$$

SET UP: For the disk, $I = \frac{1}{2}MR^2$. $\tau_z = -FR$. At $t = 0$, $\theta = \Theta = 3.34^\circ = 0.0583 \text{ rad}$, so $\phi = 0$.

$$\text{EXECUTE: (a) } \kappa = -\frac{\tau_z}{\theta} = -\frac{-FR}{0.0583 \text{ rad}} = +\frac{(4.23 \text{ N})(0.120 \text{ m})}{0.0583 \text{ rad}} = 8.71 \text{ N} \cdot \text{m/rad}$$

$$\text{(b) } f = \frac{1}{2\pi}\sqrt{\frac{\kappa}{I}} = \frac{1}{2\pi}\sqrt{\frac{2\kappa}{MR^2}} = \frac{1}{2\pi}\sqrt{\frac{2(8.71 \text{ N} \cdot \text{m/rad})}{(6.50 \text{ kg})(0.120 \text{ m})^2}} = 2.17 \text{ Hz}. \quad T = 1/f = 0.461 \text{ s}.$$

$$\text{(c) } \omega = 2\pi f = 13.6 \text{ rad/s}. \quad \theta(t) = (3.34^\circ)\cos([13.6 \text{ rad/s}]t).$$

EVALUATE: The frequency and period are independent of the initial angular displacement, so long as this displacement is small.

14.41. IDENTIFY and SET UP: The number of ticks per second tells us the period and therefore the frequency.

We can use a formula from Table 9.2 to calculate I . Then $f = \frac{1}{2\pi}\sqrt{\frac{\kappa}{I}}$ allows us to calculate the torsion constant κ .

EXECUTE: Ticks four times each second implies 0.25 s per tick. Each tick is half a period, so $T = 0.50 \text{ s}$ and $f = 1/T = 1/0.50 \text{ s} = 2.00 \text{ Hz}$.

$$\text{(a) Thin rim implies } I = MR^2 \text{ (from Table 9.2). } I = (0.900 \times 10^{-3} \text{ kg})(0.55 \times 10^{-2} \text{ m})^2 = 2.7 \times 10^{-8} \text{ kg} \cdot \text{m}^2$$

$$\text{(b) } T = 2\pi\sqrt{I/\kappa} \text{ so } \kappa = I(2\pi/T)^2 = (2.7 \times 10^{-8} \text{ kg} \cdot \text{m}^2)(2\pi/0.50 \text{ s})^2 = 4.3 \times 10^{-6} \text{ N} \cdot \text{m/rad}$$

EVALUATE: Both I and κ are small numbers.

14.42. IDENTIFY: $f = \frac{1}{2\pi}\sqrt{\frac{\kappa}{I}}$ and $T = 1/f$ says $T = 2\pi\sqrt{\frac{I}{\kappa}}$.

$$\text{SET UP: } I = \frac{1}{2}mR^2.$$

EXECUTE: Solving $f = \frac{1}{2\pi}\sqrt{\frac{\kappa}{I}}$ for κ in terms of the period,

$$\kappa = \left(\frac{2\pi}{T}\right)^2 I = \left(\frac{2\pi}{1.00 \text{ s}}\right)^2 \left[\frac{1}{2}(2.00 \times 10^{-3} \text{ kg})(2.20 \times 10^{-2} \text{ m})^2\right] = 1.91 \times 10^{-5} \text{ N} \cdot \text{m/rad}.$$

EVALUATE: The longer the period, the smaller the torsion constant.

14.43. IDENTIFY: $f = \frac{1}{2\pi}\sqrt{\frac{\kappa}{I}}$.

SET UP: $f = 165/(265 \text{ s})$, the number of oscillations per second.

$$\text{EXECUTE: } I = \frac{\kappa}{(2\pi f)^2} = \frac{0.450 \text{ N} \cdot \text{m/rad}}{[2\pi(165)/(265 \text{ s})]^2} = 0.0294 \text{ kg} \cdot \text{m}^2.$$

EVALUATE: For a larger I , f is smaller.

14.44. IDENTIFY: $\theta(t)$ is given by $\theta(t) = \Theta \cos(\omega t + \phi)$. Evaluate the derivatives specified in the problem.

$$\text{SET UP: } d(\cos \omega t)/dt = -\omega \sin \omega t. \quad d(\sin \omega t)/dt = \omega \cos \omega t. \quad \sin^2 \theta + \cos^2 \theta = 1$$

In this problem, $\phi = 0$.

$$\text{EXECUTE: (a) } \frac{d\theta}{dt} = -\omega \Theta \sin(\omega t) \text{ and } \alpha = \frac{d^2\theta}{dt^2} = -\omega^2 \Theta \cos(\omega t).$$

(b) When the angular displacement is Θ , $\Theta = \Theta \cos(\omega t)$. This occurs at $t = 0$, so $\omega = 0$. $\alpha = -\omega^2 \Theta$.

When the angular displacement is $\Theta/2$, $\frac{\Theta}{2} = \Theta \cos(\omega t)$, or $\frac{1}{2} = \cos(\omega t)$. $\frac{d\theta}{dt} = \frac{-\omega \Theta \sqrt{3}}{2}$ since

$$\sin(\omega t) = \frac{\sqrt{3}}{2}. \quad \alpha = \frac{-\omega^2 \Theta}{2}, \text{ since } \cos(\omega t) = 1/2.$$

EVALUATE: $\cos(\omega t) = \frac{1}{2}$ when $\omega t = \pi/3 \text{ rad} = 60^\circ$. At this t , $\cos(\omega t)$ is decreasing and θ is decreasing, as required. There are other, larger values of ωt for which $\theta = \Theta/2$, but θ is increasing.

14.45. IDENTIFY: $T = 2\pi\sqrt{L/g}$ is the time for one complete swing.

SET UP: The motion from the maximum displacement on either side of the vertical to the vertical position is one-fourth of a complete swing.

EXECUTE: (a) To the given precision, the small-angle approximation is valid. The highest speed is at the bottom of the arc, which occurs after a quarter period, $\frac{T}{4} = \frac{\pi}{2} \sqrt{\frac{L}{g}} = 0.25 \text{ s}$.

(b) The same as calculated in (a), 0.25 s. The period is independent of amplitude.

EVALUATE: For small amplitudes of swing, the period depends on L and g .

14.46. IDENTIFY: Since the rope is long compared to the height of a person, the system can be modeled as a simple pendulum. Since the amplitude is small, the period of the motion is $T = 2\pi\sqrt{\frac{L}{g}}$.

SET UP: From his initial position to his lowest point is one-fourth of a cycle. He returns to this lowest point in time $T/2$ from when he was previously there.

EXECUTE: (a) $T = 2\pi\sqrt{\frac{6.50 \text{ m}}{9.80 \text{ m/s}^2}} = 5.12 \text{ s}$. $t = T/4 = 1.28 \text{ s}$.

(b) $t = 3T/4 = 3.84 \text{ s}$.

EVALUATE: The period is independent of his mass.

14.47. IDENTIFY: Since the cord is much longer than the height of the object, the system can be modeled as a simple pendulum. We will assume the amplitude of swing is small, so that $T = 2\pi\sqrt{\frac{L}{g}}$.

SET UP: The number of swings per second is the frequency $f = \frac{1}{T} = \frac{1}{2\pi}\sqrt{\frac{g}{L}}$.

EXECUTE: $f = \frac{1}{2\pi}\sqrt{\frac{9.80 \text{ m/s}^2}{1.50 \text{ m}}} = 0.407 \text{ swings per second}$.

EVALUATE: The period and frequency are both independent of the mass of the object.

14.48. IDENTIFY: Use Eq. (14.34) to relate the period to g .

SET UP: Let the period on earth be $T_E = 2\pi\sqrt{L/g_E}$, where $g_E = 9.80 \text{ m/s}^2$, the value on earth.

Let the period on Mars be $T_M = 2\pi\sqrt{L/g_M}$, where $g_M = 3.71 \text{ m/s}^2$, the value on Mars.

We can eliminate L , which we don't know, by taking a ratio:

EXECUTE: $\frac{T_M}{T_E} = 2\pi\sqrt{\frac{L}{g_M}} \frac{1}{2\pi\sqrt{L}} \sqrt{g_E} = \sqrt{\frac{g_E}{g_M}}$.

$$T_M = T_E \sqrt{\frac{g_E}{g_M}} = (1.60 \text{ s}) \sqrt{\frac{9.80 \text{ m/s}^2}{3.71 \text{ m/s}^2}} = 2.60 \text{ s}.$$

EVALUATE: Gravity is weaker on Mars so the period of the pendulum is longer there.

14.49. IDENTIFY: Apply $T = 2\pi\sqrt{L/g}$

SET UP: The period of the pendulum is $T = (136 \text{ s})/100 = 1.36 \text{ s}$.

EXECUTE: $g = \frac{4\pi^2 L}{T^2} = \frac{4\pi^2 (0.500 \text{ m})}{(1.36 \text{ s})^2} = 10.7 \text{ m/s}^2.$

EVALUATE: The same pendulum on earth, where g is smaller, would have a larger period.

- 14.50. IDENTIFY and SET UP:** The period is for the time for one cycle. The angular amplitude is the maximum value of θ .

EXECUTE: (a) From the graph with the problem, $T = 1.60 \text{ s}$. $f = \frac{1}{T} = 0.625 \text{ Hz}$. $\omega = 2\pi f = 3.93 \text{ rad/s}$.

From the graph we also determine that the amplitude is 6 degrees.

(b) $T = 2\pi\sqrt{\frac{L}{g}}$ so $L = g\left(\frac{T}{2\pi}\right)^2 = (9.80 \text{ m/s}^2)\left(\frac{1.60 \text{ s}}{2\pi}\right)^2 = 0.635 \text{ m}$.

(c) No. The graph is unchanged if the mass of the bob is changed while the length of the pendulum and amplitude of swing are kept constant. The period is independent of the mass of the bob.

EVALUATE: The amplitude of the graph in the problem does not decrease over the time shown, so there must be little or no friction in this pendulum.

- 14.51. IDENTIFY:** If a small amplitude is assumed, $T = 2\pi\sqrt{\frac{L}{g}}$.

SET UP: The fourth term in Eq. (14.35) would be $\frac{1^2 \cdot 3^2 \cdot 5^2}{2^2 \cdot 4^2 \cdot 6^2} \sin^6 \frac{\Theta}{2}$.

EXECUTE: (a) $T = 2\pi\sqrt{\frac{2.00 \text{ m}}{9.80 \text{ m/s}^2}} = 2.84 \text{ s}$

(b) $T = (2.84 \text{ s})\left(1 + \frac{1}{4}\sin^2 15.0^\circ + \frac{9}{64}\sin^4 15.0^\circ + \frac{225}{2304}\sin^6 15.0^\circ\right) = 2.89 \text{ s}$

(c) Eq. (14.35) is more accurate. $T = 2\pi\sqrt{L/g}$ is in error by $\frac{2.84 \text{ s} - 2.89 \text{ s}}{2.89 \text{ s}} = -2\%$.

EVALUATE: As Figure 14.22 in Section 14.5 shows, the approximation $F_\theta = -mg\theta$ is larger in magnitude than the true value as θ increases. The equation $T = 2\pi\sqrt{L/g}$ therefore overestimates the restoring force and this results in a value of T that is smaller than the actual value.

- 14.52. IDENTIFY:** $a_{\tan} = L\alpha$, $a_{\text{rad}} = L\omega^2$ and $a = \sqrt{a_{\tan}^2 + a_{\text{rad}}^2}$. Apply conservation of energy to calculate the speed in part (c).

SET UP: Just after the sphere is released, $\omega = 0$ and $a_{\text{rad}} = 0$. When the rod is vertical, $a_{\tan} = 0$.

EXECUTE: (a) The forces and acceleration are shown in Figure 14.52a. $a_{\text{rad}} = 0$ and $a = a_{\tan} = g \sin \theta$.

(b) The forces and acceleration are shown in Figure 14.52b.

(c) The forces and acceleration are shown in Figure 14.52c. $U_i = K_f$ gives $mgL(1 - \cos \theta) = \frac{1}{2}mv^2$ and $v = \sqrt{2gL(1 - \cos \theta)}$.

EVALUATE: As the rod moves toward the vertical, v increases, a_{rad} increases and a_{\tan} decreases.

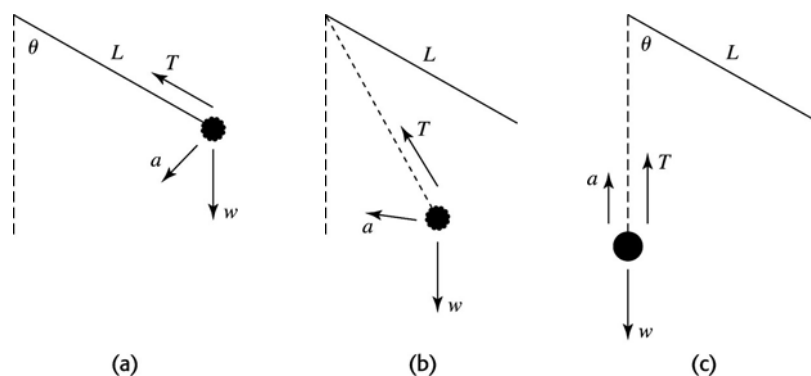


Figure 14.52

- 14.53. IDENTIFY:** Pendulum *A* can be treated as a simple pendulum. Pendulum *B* is a physical pendulum.

SET UP: For pendulum *B* the distance d from the axis to the center of gravity is $3L/4$. $I = \frac{1}{3}(m/2)L^2$ for a bar of mass $m/2$ and the axis at one end. For a small ball of mass $m/2$ at a distance L from the axis, $I_{\text{ball}} = (m/2)L^2$.

EXECUTE: Pendulum *A*: $T_A = 2\pi\sqrt{\frac{L}{g}}$.

Pendulum *B*: $I = I_{\text{bar}} + I_{\text{ball}} = \frac{1}{3}(m/2)L^2 + (m/2)L^2 = \frac{2}{3}mL^2$.

$T_B = 2\pi\sqrt{\frac{I}{mgd}} = 2\pi\sqrt{\frac{\frac{2}{3}mL^2}{mg(3L/4)}} = 2\pi\sqrt{\frac{L}{g} \cdot \frac{2}{3} \cdot \frac{4}{3}} = \sqrt{\frac{8}{9}} \left(2\pi\sqrt{\frac{L}{g}} \right) = 0.943T_A$. The period is longer for pendulum *A*.

EVALUATE: Example 14.9 shows that for the bar alone, $T = \sqrt{\frac{2}{3}}T_A = 0.816T_A$. Adding the ball of equal mass to the end of the rod increases the period compared to that for the rod alone.

- 14.54. IDENTIFY:** $T = 2\pi\sqrt{I/mgd}$

SET UP: From the parallel axis theorem, the moment of inertia of the hoop about the nail is

$$I = MR^2 + MR^2 = 2MR^2. \quad d = R.$$

EXECUTE: Solving for R , $R = gT^2/8\pi^2 = 0.496 \text{ m}$.

EVALUATE: A simple pendulum of length $L = R$ has period $T = 2\pi\sqrt{R/g}$. The hoop has a period that is larger by a factor of $\sqrt{2}$.

- 14.55. IDENTIFY:** $T = 2\pi\sqrt{I/mgd}$.

SET UP: $d = 0.200 \text{ m}$. $T = (120 \text{ s})/100$.

EXECUTE: $I = mgd \left(\frac{T}{2\pi} \right)^2 = (1.80 \text{ kg})(9.80 \text{ m/s}^2)(0.200 \text{ m}) \left(\frac{120 \text{ s}/100}{2\pi} \right)^2 = 0.129 \text{ kg}\cdot\text{m}^2$.

EVALUATE: If the rod were uniform, its center of gravity would be at its geometrical center and it would have length $l = 0.400 \text{ m}$. For a uniform rod with an axis at one end, $I = \frac{1}{3}ml^2 = 0.096 \text{ kg}\cdot\text{m}^2$. The value of I for the actual rod is about 34% larger than this value.

- 14.56. IDENTIFY:** Apply $T = 2\pi\sqrt{\frac{I}{mgd}}$ to calculate I and conservation of energy to calculate the maximum angular speed, Ω_{max} .

SET UP: $d = 0.250$ m. In part (b), $y_i = d(1 - \cos \Theta)$, with $\Theta = 0.400$ rad and $y_f = 0$.

EXECUTE: (a) Solving $T = 2\pi\sqrt{\frac{I}{mgd}}$ for I , we get

$$I = \left(\frac{T}{2\pi}\right)^2 mgd = \left(\frac{0.940 \text{ s}}{2\pi}\right)^2 (1.80 \text{ kg})(9.80 \text{ m/s}^2)(0.250 \text{ m}) = 0.0987 \text{ kg} \cdot \text{m}^2.$$

(b) The small-angle approximation will not give three-figure accuracy for $\Theta = 0.400$ rad. From energy considerations, $mgd(1 - \cos \Theta) = \frac{1}{2}I\Omega_{\max}^2$. Expressing Ω_{\max} in terms of the period of small-angle oscillations, this becomes

$$\Omega_{\max} = \sqrt{2\left(\frac{2\pi}{T}\right)^2 (1 - \cos \Theta)} = \sqrt{2\left(\frac{2\pi}{0.940 \text{ s}}\right)^2 [1 - \cos(0.400 \text{ rad})]} = 2.66 \text{ rad/s}.$$

EVALUATE: The time for the motion in part (b) is $t = T/4$, so $\Omega_{\text{av}} = \Delta\theta/\Delta t = (0.400 \text{ rad})/(0.235 \text{ s}) = 1.70 \text{ rad/s}$. Ω increases during the motion and the final Ω is larger than the average Ω .

- 14.57. IDENTIFY:** Pendulum *A* can be treated as a simple pendulum. Pendulum *B* is a physical pendulum. Use the parallel-axis theorem to find the moment of inertia of the ball in *B* for an axis at the top of the string.

SET UP: For pendulum *B* the center of gravity is at the center of the ball, so $d = L$. For a solid sphere with an axis through its center, $I_{\text{cm}} = \frac{2}{5}MR^2$. $R = L/2$ and $I_{\text{cm}} = \frac{1}{10}ML^2$.

EXECUTE: Pendulum *A*: $T_A = 2\pi\sqrt{\frac{L}{g}}$.

Pendulum *B*: The parallel-axis theorem says $I = I_{\text{cm}} + ML^2 = \frac{11}{10}ML^2$.

$T = 2\pi\sqrt{\frac{I}{mgd}} = 2\pi\sqrt{\frac{11ML^2}{10MgL}} = \sqrt{\frac{11}{10}}\left(2\pi\sqrt{\frac{L}{g}}\right) = \sqrt{\frac{11}{10}}T_A = 1.05T_A$. It takes pendulum *B* longer to complete a swing.

EVALUATE: The center of the ball is the same distance from the top of the string for both pendulums, but the mass is distributed differently and I is larger for pendulum *B*, even though the masses are the same.

- 14.58. IDENTIFY:** The ornament is a physical pendulum, so $T = 2\pi\sqrt{I/mgd}$. T is the target variable.

SET UP: $I = 5MR^2/3$, the moment of inertia about an axis at the edge of the sphere. d is the distance from the axis to the center of gravity, which is at the center of the sphere, so $d = R$.

EXECUTE: $T = 2\pi\sqrt{5/3}\sqrt{R/g} = 2\pi\sqrt{5/3}\sqrt{0.050 \text{ m}/(9.80 \text{ m/s}^2)} = 0.58 \text{ s}$.

EVALUATE: A simple pendulum of length $R = 0.050$ m has period 0.45 s; the period of the physical pendulum is longer.

- 14.59. IDENTIFY:** The decreasing amplitude means that the maximum stored elastic potential energy is decreasing, so the system is losing mechanical energy.

SET UP: The energy at maximum displacement is $E = \frac{1}{2}kA^2$.

EXECUTE: (a) $E_1 = \frac{1}{2}kA_1^2 = \frac{1}{2}(2.50 \times 10^2 \text{ N/m})(0.060 \text{ m})^2 = 0.45 \text{ J}$

$E_2 = \frac{1}{2}kA_2^2 = \frac{1}{2}(2.50 \times 10^2 \text{ N/m})(0.035 \text{ m})^2 = 0.15 \text{ J}$

The mechanical energy lost is $E_1 - E_2 = 0.30 \text{ J}$.

(b) The mechanical energy has been converted to other forms of energy by air resistance and by dissipative forces within the spring.

EVALUATE: During 8 cycles, the system has lost 0.30 J, which is 2/3 of its initial energy, so the damping forces are not insignificant.

- 14.60. IDENTIFY:** From Eq. (14.42), $A_2 = A_1e^{-(b/2m)t}$.

SET UP: $\ln(e^{-x}) = -x$

EXECUTE: $b = \frac{2m}{t} \ln\left(\frac{A_1}{A_2}\right) = \frac{2(0.050 \text{ kg})}{(5.00 \text{ s})} \ln\left(\frac{0.300 \text{ m}}{0.100 \text{ m}}\right) = 0.0220 \text{ kg/s}.$

EVALUATE: As a check, note that the oscillation frequency is the same as the undamped frequency to $4.8 \times 10^{-3}\%$, so Eq. (14.42) is valid.

14.61. IDENTIFY and SET UP: Use $\omega' = \sqrt{(k/m) - (b^2/4m^2)}$ to calculate ω' , and then $f' = \omega'/2\pi$.

(a) EXECUTE: $\omega' = \sqrt{(k/m) - (b^2/4m^2)} = \sqrt{\frac{2.50 \text{ N/m}}{0.300 \text{ kg}} - \frac{(0.900 \text{ kg/s})^2}{4(0.300 \text{ kg})^2}} = 2.47 \text{ rad/s}$

$f' = \omega'/2\pi = (2.47 \text{ rad/s})/2\pi = 0.393 \text{ Hz}$

(b) IDENTIFY and SET UP: The condition for critical damping is $b = 2\sqrt{km}$.

EXECUTE: $b = 2\sqrt{(2.50 \text{ N/m})(0.300 \text{ kg})} = 1.73 \text{ kg/s}$

EVALUATE: The value of b in part (a) is less than the critical damping value found in part (b). With no damping, the frequency is $f = 0.459 \text{ Hz}$; the damping reduces the oscillation frequency.

14.62. IDENTIFY: The graph shows that the amplitude of vibration is decreasing, so the system must be losing mechanical energy.

SET UP: The mechanical energy is $E = \frac{1}{2}mv_x^2 + \frac{1}{2}kx^2$.

EXECUTE: (a) When $|x|$ is a maximum and the tangent to the curve is horizontal the speed of the mass is zero. This occurs at $t = 0$, $t = 1.0 \text{ s}$, $t = 2.0 \text{ s}$, $t = 3.0 \text{ s}$ and $t = 4.0 \text{ s}$.

(b) At $t = 0$, $v_x = 0$ and $x = 7.0 \text{ cm}$ so $E_0 = \frac{1}{2}kx^2 = \frac{1}{2}(225 \text{ N/m})(0.070 \text{ m})^2 = 0.55 \text{ J}.$

(c) At $t = 1.0 \text{ s}$, $v_x = 0$ and $x = -6.0 \text{ cm}$ so $E_1 = \frac{1}{2}kx^2 = \frac{1}{2}(225 \text{ N/m})(-0.060 \text{ m})^2 = 0.405 \text{ J}.$

At $t = 4.0 \text{ s}$, $v_x = 0$ and $x = 3.0 \text{ cm}$ so $E_4 = \frac{1}{2}kx^2 = \frac{1}{2}(225 \text{ N/m})(0.030 \text{ m})^2 = 0.101 \text{ J}.$ The mechanical energy “lost” is $E_1 - E_4 = 0.30 \text{ J}.$ The mechanical energy lost was converted to other forms of energy by nonconservative forces, such as friction, air resistance, and other dissipative forces.

EVALUATE: After a while the mass will come to rest and then all its initial mechanical energy will have been “lost” because it will have been converted to other forms of energy by nonconservative forces.

14.63. IDENTIFY: Apply Eq. (14.46).

SET UP: $\omega_d = \sqrt{k/m}$ corresponds to resonance, and in this case Eq. (14.46) reduces to $A = F_{\max}/b\omega_d$.

EXECUTE: (a) $A_1/3$

(b) $2A_1$

EVALUATE: Note that the resonance frequency is independent of the value of b . (See Figure 14.28 in the textbook).

14.64. IDENTIFY: Apply $x(t) = A\cos(\omega t + \phi)$

SET UP: $x = A$ at $t = 0$, so $\phi = 0$. $A = 6.00 \text{ cm}$. $\omega = \frac{2\pi}{T} = \frac{2\pi}{0.300 \text{ s}} = 20.9 \text{ rad/s}$, so

$x(t) = (6.00 \text{ cm})\cos[(20.9 \text{ rad/s})t].$

EXECUTE: $t = 0$ at $x = 6.00 \text{ cm}$. $x = -1.50 \text{ cm}$ when $-1.50 \text{ cm} = (6.00 \text{ cm})\cos((20.9 \text{ rad/s})t).$

$t = \left(\frac{1}{20.9 \text{ rad/s}}\right)\arccos\left(\frac{-1.50 \text{ cm}}{6.00 \text{ cm}}\right) = 0.0872 \text{ s}.$ It takes $0.0872 \text{ s}.$

EVALUATE: It takes $t = T/4 = 0.075 \text{ s}$ to go from $x = 6.00 \text{ cm}$ to $x = 0$ and 0.150 s to go from $x = +6.00 \text{ cm}$ to $x = -6.00 \text{ cm}$. Our result is between these values, as it should be.

14.65. IDENTIFY and SET UP: Calculate x using $x = A\cos(\omega t + \phi)$. Use T to calculate ω and x_0 to calculate ϕ .

EXECUTE: At $t = 0$, $x = 0$ and the object is traveling in the $-x$ -direction, so $\phi = \pi/2 \text{ rad}.$

Thus $x = A\cos(\omega t + \pi/2).$

$T = 2\pi/\omega$ so $\omega = 2\pi/T = 2\pi/1.20 \text{ s} = 5.236 \text{ rad/s}$

$x = (0.600 \text{ m})\cos[(5.236 \text{ rad/s})(0.480 \text{ s}) + \pi/2] = -0.353 \text{ m}.$

The distance of the object from the equilibrium position is 0.353 m.

EVALUATE: It takes the object time $t = T/2 = 0.600$ s to return to $x = 0$, so at $t = 0.480$ s it is still at negative x .

- 14.66. IDENTIFY:** $T = 2\pi\sqrt{\frac{m}{k}}$. The period changes when the mass changes.

SET UP: M is the mass of the empty car and the mass of the loaded car is $M + 250$ kg.

EXECUTE: The period of the empty car is $T_E = 2\pi\sqrt{\frac{M}{k}}$. The period of the loaded car is

$$T_L = 2\pi\sqrt{\frac{M + 250 \text{ kg}}{k}}. \quad k = \frac{(250 \text{ kg})(9.80 \text{ m/s}^2)}{4.00 \times 10^{-2} \text{ m}} = 6.125 \times 10^4 \text{ N/m}$$

$$M = \left(\frac{T_L}{2\pi}\right)^2 k - 250 \text{ kg} = \left(\frac{1.92 \text{ s}}{2\pi}\right)^2 (6.125 \times 10^4 \text{ N/m}) - 250 \text{ kg} = 5.469 \times 10^3 \text{ kg}.$$

$$T_E = 2\pi\sqrt{\frac{5.469 \times 10^3 \text{ kg}}{6.125 \times 10^4 \text{ N/m}}} = 1.88 \text{ s}.$$

EVALUATE: When the mass decreases, the period decreases.

- 14.67. IDENTIFY and SET UP:** For SHM, we know that $v_{\max} = \omega A$ and $a_{\max} = \omega^2 A$.

EXECUTE: (a) Just as the sleigh hits the spring, its speed has its maximum value. So $v_{\max} = \omega A = (2\pi f)A = 2\pi(0.225 \text{ Hz})(0.950 \text{ m}) = 1.34 \text{ m/s}$.

$$(b) a_{\max} = \omega^2 A = (2\pi f)^2 A = [2\pi(0.225 \text{ Hz})]^2 (0.950 \text{ m}) = 1.90 \text{ m/s}^2.$$

EVALUATE: As a check, in part (a) we could use $\omega = \sqrt{k/m}$ to find k and then use energy conservation to find v . The method employed, however, is simpler.

- 14.68. IDENTIFY:** In SHM, $a_{\max} = \frac{k}{m_{\text{tot}}} A$. Apply $\sum \vec{F} = m\vec{a}$ to the top block.

SET UP: The maximum acceleration of the lower block can't exceed the maximum acceleration that can be given to the other block by the friction force.

EXECUTE: For block m , the maximum friction force is $f_s = \mu_s n = \mu_s mg$. $\sum F_x = ma_x$ gives $\mu_s mg = ma$ and $a = \mu_s g$. Then treat both blocks together and consider their simple harmonic motion.

$$a_{\max} = \left(\frac{k}{M + m}\right) A. \text{ Set } a_{\max} = a \text{ and solve for } A: \mu_s g = \left(\frac{k}{M + m}\right) A \text{ and } A = \frac{\mu_s g (M + m)}{k}.$$

EVALUATE: If A is larger than this the spring gives the block with mass M a larger acceleration than friction can give the other block, and the first block accelerates out from underneath the other block.

- 14.69. IDENTIFY:** The largest downward acceleration the ball can have is g whereas the downward acceleration of the tray depends on the spring force. When the downward acceleration of the tray is greater than g , then the ball leaves the tray. $y(t) = A \cos(\omega t + \phi)$.

SET UP: The downward force exerted by the spring is $F = kd$, where d is the distance of the object above the equilibrium point. The downward acceleration of the tray has magnitude $\frac{F}{m} = \frac{kd}{m}$, where m is the total mass of the ball and tray. $x = A$ at $t = 0$, so the phase angle ϕ is zero and $+x$ is downward.

EXECUTE: (a) $\frac{kd}{m} = g$ gives $d = \frac{mg}{k} = \frac{(1.775 \text{ kg})(9.80 \text{ m/s}^2)}{185 \text{ N/m}} = 9.40 \text{ cm}$. This point is 9.40 cm above the equilibrium point so is 9.40 cm + 15.0 cm = 24.4 cm above point A .

(b) $\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{185 \text{ N/m}}{1.775 \text{ kg}}} = 10.2 \text{ rad/s}$. The point in (a) is above the equilibrium point so $x = -9.40 \text{ cm}$.

$x = A \cos(\omega t)$ gives $\omega t = \arccos\left(\frac{x}{A}\right) = \arccos\left(\frac{-9.40 \text{ cm}}{15.0 \text{ cm}}\right) = 2.25 \text{ rad}$. $t = \frac{2.25 \text{ rad}}{10.2 \text{ rad/s}} = 0.221 \text{ s}$.

(c) $\frac{1}{2} kx^2 + \frac{1}{2} mv^2 = \frac{1}{2} kA^2$ gives $v = \sqrt{\frac{k}{m}(A^2 - x^2)} = \sqrt{\frac{185 \text{ N/m}}{1.775 \text{ kg}}([0.150 \text{ m}]^2 - [-0.0940 \text{ m}]^2)} = 1.19 \text{ m/s}$.

EVALUATE: The period is $T = 2\pi\sqrt{\frac{m}{k}} = 0.615 \text{ s}$. To go from the lowest point to the highest point takes time $T/2 = 0.308 \text{ s}$. The time in (b) is less than this, as it should be.

14.70. IDENTIFY: Apply conservation of linear momentum to the collision and conservation of energy to the motion after the collision. $f = \frac{1}{2\pi}\sqrt{\frac{k}{m}}$ and $T = \frac{1}{f}$.

SET UP: The object returns to the equilibrium position in time $T/2$.

EXECUTE: (a) Momentum conservation during the collision: $mv_0 = (2m)V$.

$$V = \frac{1}{2}v_0 = \frac{1}{2}(2.00 \text{ m/s}) = 1.00 \text{ m/s}.$$

Energy conservation after the collision: $\frac{1}{2}MV^2 = \frac{1}{2}kx^2$.

$$x = \sqrt{\frac{MV^2}{k}} = \sqrt{\frac{(20.0 \text{ kg})(1.00 \text{ m/s})^2}{170.0 \text{ N/m}}} = 0.343 \text{ m (amplitude)}$$

$$\omega = 2\pi f = \sqrt{k/M}. \quad f = \frac{1}{2\pi}\sqrt{k/M} = \frac{1}{2\pi}\sqrt{\frac{170.0 \text{ N/m}}{20.0 \text{ kg}}} = 0.464 \text{ Hz}. \quad T = \frac{1}{f} = \frac{1}{0.464 \text{ Hz}} = 2.16 \text{ s}.$$

(b) It takes $1/2$ period to first return: $\frac{1}{2}(2.16 \text{ s}) = 1.08 \text{ s}$.

EVALUATE: The total mechanical energy of the system determines the amplitude. The frequency and period depend only on the force constant of the spring and the mass that is attached to the spring.

14.71. IDENTIFY and SET UP: The bounce frequency is given by $f = \frac{1}{2\pi}\sqrt{\frac{k}{m}}$ and the pendulum frequency by

$f = \frac{1}{2\pi}\sqrt{\frac{g}{L}}$. Use the relation between these two frequencies that is specified in the problem to calculate the equilibrium length L of the spring, when the apple hangs at rest on the end of the spring.

EXECUTE: Vertical SHM: $f_b = \frac{1}{2\pi}\sqrt{\frac{k}{m}}$

Pendulum motion (small amplitude): $f_p = \frac{1}{2\pi}\sqrt{\frac{g}{L}}$

The problem specifies that $f_p = \frac{1}{2}f_b$.


$$\frac{1}{2\pi}\sqrt{\frac{g}{L}} = \frac{1}{2} \frac{1}{2\pi}\sqrt{\frac{k}{m}}$$

$$g/L = k/4m \text{ so } L = 4gm/k = 4w/k = 4(1.00 \text{ N})/1.50 \text{ N/m} = 2.67 \text{ m}$$

EVALUATE: This is the *stretched* length of the spring, its length when the apple is hanging from it. (Note: Small angle of swing means v is small as the apple passes through the lowest point, so a_{rad} is small and the component of mg perpendicular to the spring is small. Thus the amount the spring is stretched changes very little as the apple swings back and forth.)

IDENTIFY: Use Newton's second law to calculate the distance the spring is stretched from its unstretched length when the apple hangs from it.

SET UP: The free-body diagram for the apple hanging at rest on the end of the spring is given in Figure 14.71.



EXECUTE: $\sum F_y = ma_y$

$$k\Delta L - mg = 0$$

$$\Delta L = mg/k = w/k = 1.00 \text{ N}/1.50 \text{ N/m} = 0.667 \text{ m.}$$

Thus the unstretched length of the spring is

$$2.67 \text{ m} - 0.67 \text{ m} = 2.00 \text{ m.}$$

Figure 14.71

EVALUATE: The spring shortens to its unstretched length when the apple is removed.

- 14.72. IDENTIFY:** The vertical forces on the floating object must sum to zero. The buoyant force B applied to the object by the liquid is given by Archimedes's principle. The motion is SHM if the net force on the object is of the form $F_y = -ky$ and then $T = 2\pi\sqrt{m/k}$.

SET UP: Take $+y$ to be downward.

EXECUTE: (a) $V_{\text{submerged}} = LA$, where L is the vertical distance from the surface of the liquid to the bottom of the object. Archimedes's principle states $\rho g LA = Mg$, so $L = \frac{M}{\rho A}$.

(b) The buoyant force is $\rho g A(L + y) = Mg + F$, where y is the additional distance the object moves downward. Using the result of part (a) and solving for y gives $y = \frac{F}{\rho g A}$.

(c) The net force is $F_{\text{net}} = Mg - \rho g A(L + y) = -\rho g Ay$. $k = \rho g A$, and the period of oscillation is

$$T = 2\pi\sqrt{\frac{M}{k}} = 2\pi\sqrt{\frac{M}{\rho g A}}.$$

EVALUATE: The force F determines the amplitude of the motion but the period does not depend on how much force was applied.

- 14.73. IDENTIFY:** The object oscillates as a physical pendulum, so $f = \frac{1}{2\pi}\sqrt{\frac{m_{\text{object}}gd}{I}}$. Use the parallel-axis

theorem, $I = I_{\text{cm}} + Md^2$, to find the moment of inertia of each stick about an axis at the hook.

SET UP: The center of mass of the square object is at its geometrical center, so its distance from the hook is $L \cos 45^\circ = L/\sqrt{2}$. The center of mass of each stick is at its geometrical center. For each stick,

$$I_{\text{cm}} = \frac{1}{12}mL^2.$$

EXECUTE: The parallel-axis theorem gives I for each stick for an axis at the center of the square to be $\frac{1}{12}mL^2 + m(L/2)^2 = \frac{1}{3}mL^2$ and the total I for this axis is $\frac{4}{3}mL^2$. For the entire object and an axis at the hook, applying the parallel-axis theorem again to the object of mass $4m$ gives

$$I = \frac{4}{3}mL^2 + 4m(L/\sqrt{2})^2 = \frac{10}{3}mL^2.$$

$$f = \frac{1}{2\pi}\sqrt{\frac{m_{\text{object}}gd}{I}} = \frac{1}{2\pi}\sqrt{\frac{4m_{\text{object}}gL/\sqrt{2}}{\frac{10}{3}m_{\text{object}}L^2}} = \sqrt{\frac{6}{5\sqrt{2}}}\left(\frac{1}{2\pi}\sqrt{\frac{g}{L}}\right) = 0.921\left(\frac{1}{2\pi}\sqrt{\frac{g}{L}}\right).$$

EVALUATE: Just as for a simple pendulum, the frequency is independent of the mass. A simple pendulum of length L has frequency $f = \frac{1}{2\pi}\sqrt{\frac{g}{L}}$ and this object has a frequency that is slightly less than this.

14.74. IDENTIFY: Conservation of energy says $K + U = E$.

SET UP: $U = \frac{1}{2}kx^2$ and $E = U_{\max} = \frac{1}{2}kA^2$.

EXECUTE: (a) The graph is given in Figure 14.74. The following answers are found algebraically, to be used as a check on the graphical method.

(b) $A = \sqrt{\frac{2E}{k}} = \sqrt{\frac{2(0.200 \text{ J})}{(10.0 \text{ N/m})}} = 0.200 \text{ m}.$

(c) $\frac{E}{4} = 0.050 \text{ J}.$

(d) $U = \frac{1}{2}E. \quad x = \frac{A}{\sqrt{2}} = 0.141 \text{ m}.$

(e) From Eq. (14.18), using $v_0 = \sqrt{\frac{2K_0}{m}}$ and $x_0 = -\sqrt{\frac{2U_0}{k}}$, $-\frac{v_0}{\omega x_0} = \frac{\sqrt{(2K_0/m)}}{\sqrt{(k/m)}\sqrt{(2U_0/k)}} = \sqrt{\frac{K_0}{U_0}} = \sqrt{0.429}$

and $\phi = \arctan(\sqrt{0.429}) = 3.72 \text{ rad}.$

EVALUATE: The dependence of U on x is not linear and $U = \frac{1}{2}U_{\max}$ does not occur at $x = \frac{1}{2}x_{\max}.$

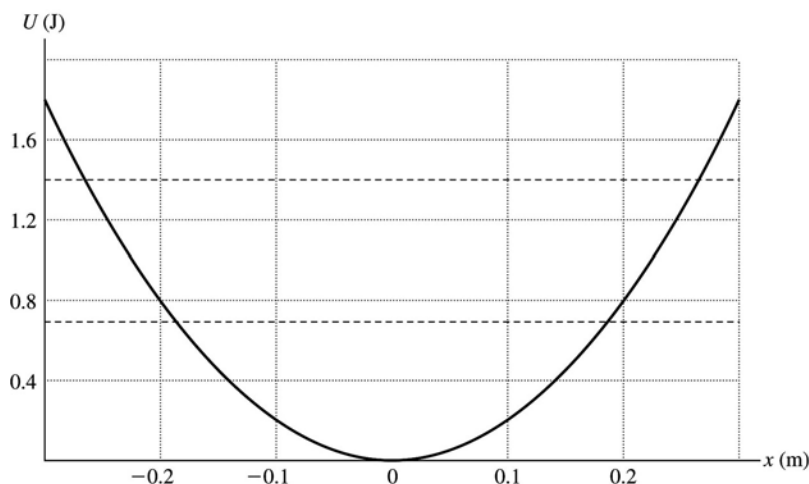


Figure 14.74

14.75. IDENTIFY: $T = 2\pi\sqrt{\frac{m}{k}}$ so the period changes because the mass changes.

SET UP: $\frac{dm}{dt} = -2.00 \times 10^{-3} \text{ kg/s}.$ The rate of change of the period is $\frac{dT}{dt}.$

EXECUTE: (a) When the bucket is half full, $m = 7.00 \text{ kg}.$ $T = 2\pi\sqrt{\frac{7.00 \text{ kg}}{450 \text{ N/m}}} = 0.784 \text{ s}.$

(b) $\frac{dT}{dt} = \frac{2\pi}{\sqrt{k}} \frac{d}{dt}(m^{1/2}) = \frac{2\pi}{\sqrt{k}} \frac{1}{2} m^{-1/2} \frac{dm}{dt} = \frac{\pi}{\sqrt{mk}} \frac{dm}{dt}.$

$\frac{dT}{dt} = \frac{\pi}{\sqrt{(7.00 \text{ kg})(450 \text{ N/m})}} (-2.00 \times 10^{-3} \text{ kg/s}) = -1.12 \times 10^{-4} \text{ s per s}.$ $\frac{dT}{dt}$ is negative, so the period is getting shorter.

(c) The shortest period is when all the water has leaked out and $m = 2.00 \text{ kg}.$ In that case,

$T = 2\pi\sqrt{m/k} = 0.419 \text{ s}.$

EVALUATE: The rate at which the period changes is not constant but instead increases in time, even though the rate at which the water flows out is constant.

14.76. IDENTIFY: $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$. Use energy considerations to find the new amplitude.

SET UP: $f = 0.600$ Hz, $m = 400$ kg; $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$ gives $k = 5685$ N/m. This is the effective force constant of the two springs.

EXECUTE: (a) After the gravel sack falls off, the remaining mass attached to the springs is 225 kg. The force constant of the springs is unaffected, so $f = 0.800$ Hz. To find the new amplitude use energy considerations to find the distance downward that the beam travels after the gravel falls off. Before the sack falls off, the amount x_0 that the spring is stretched at equilibrium is given by $mg = kx_0$, so

$x_0 = mg/k = (400 \text{ kg})(9.80 \text{ m/s}^2)/(5685 \text{ N/m}) = 0.6895$ m. The maximum upward displacement of the beam is $A = 0.400$ m above this point, so at this point the spring is stretched 0.2895 m. With the new mass, the mass 225 kg of the beam alone, at equilibrium the spring is stretched $mg/k = (225 \text{ kg})(9.80 \text{ m/s}^2)/(5685 \text{ N/m}) = 0.3879$ m. The new amplitude is therefore $0.3879 \text{ m} - 0.2895 \text{ m} = 0.098$ m. The beam moves 0.098 m above and below the new equilibrium position. Energy calculations show that $v = 0$ when the beam is 0.098 m above and below the equilibrium point.

(b) The remaining mass and the spring constant is the same in part (a), so the new frequency is again 0.800 Hz. The sack falls off when the spring is stretched 0.6895 m. And the speed of the beam at this point is $v = A\sqrt{k/m} = (0.400 \text{ m})\sqrt{(5685 \text{ N/m})/(400 \text{ kg})} = 1.508$ m/s. Take $y = 0$ at this point. The total energy of the beam at this point, just after the sack falls off, is

$E = K + U_{\text{el}} + U_{\text{grav}} = \frac{1}{2}(225 \text{ kg})(1.508 \text{ m/s})^2 + \frac{1}{2}(5685 \text{ N/m})(0.6895 \text{ m})^2 + 0 = 1608$ J. Let this be point 1. Let point 2 be where the beam has moved upward a distance d and where $v = 0$.

$E_2 = \frac{1}{2}k(0.6895 \text{ m} - d)^2 + mgd$. $E_1 = E_2$ gives $d = 0.7275$ m. At this end point of motion the spring is compressed $0.7275 \text{ m} - 0.6895 \text{ m} = 0.0380$ m. At the new equilibrium position the spring is stretched 0.3879 m, so the new amplitude is $0.3879 \text{ m} + 0.0380 \text{ m} = 0.426$ m. Energy calculations show that v is also zero when the beam is 0.426 m below the equilibrium position.

EVALUATE: The new frequency is independent of the point in the motion at which the bag falls off. The new amplitude is smaller than the original amplitude when the sack falls off at the maximum upward displacement of the beam. The new amplitude is larger than the original amplitude when the sack falls off when the beam has maximum speed.

14.77. IDENTIFY and SET UP: Measure x from the equilibrium position of the object, where the gravity and spring forces balance. Let $+x$ be downward.

(a) Use conservation of energy $\frac{1}{2}mv_x^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$ to relate v_x and x . Use $T = 2\pi\sqrt{\frac{m}{k}}$ to relate T to k/m .

EXECUTE: $\frac{1}{2}mv_x^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$

For $x = 0$, $\frac{1}{2}mv_x^2 = \frac{1}{2}kA^2$ and $v = A\sqrt{k/m}$, just as for horizontal SHM. We can use the period to calculate $\sqrt{k/m} : T = 2\pi\sqrt{m/k}$ implies $\sqrt{k/m} = 2\pi/T$. Thus $v = 2\pi A/T = 2\pi(0.100 \text{ m})/4.20 \text{ s} = 0.150$ m/s.

(b) IDENTIFY and SET UP: Use $a_x = -\frac{k}{m}x$ to relate a_x and x .

EXECUTE: $ma_x = -kx$ so $a_x = -(k/m)x$

$+x$ -direction is downward, so here $x = -0.050$ m

$a_x = -(2\pi/T)^2(-0.050 \text{ m}) = +(2\pi/4.20 \text{ s})^2(0.050 \text{ m}) = 0.112 \text{ m/s}^2$ (positive, so direction is downward)

(c) IDENTIFY and SET UP: Use $x = A \cos(\omega t + \phi)$ to relate x and t . The time asked for is twice the time it takes to go from $x = 0$ to $x = +0.050$ m.

EXECUTE: $x(t) = A \cos(\omega t + \phi)$


Let $\phi = -\pi/2$, so $x = 0$ at $t = 0$. Then $x = A \cos(\omega t - \pi/2) = A \sin \omega t = A \sin(2\pi t/T)$. Find the time t that gives $x = +0.050$ m: $0.050 \text{ m} = (0.100 \text{ m}) \sin(2\pi t/T)$

$$2\pi t/T = \arcsin(0.50) = \pi/6 \text{ and } t = T/12 = 4.20 \text{ s}/12 = 0.350 \text{ s}$$

The time asked for in the problem is twice this, 0.700 s.

(d) IDENTIFY: The problem is asking for the distance d that the spring stretches when the object hangs at rest from it. Apply Newton's second law to the object.

SET UP: The free-body diagram for the object is given in Figure 14.77.

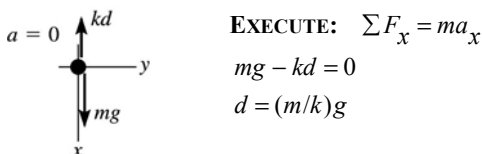

EXECUTE: $\sum F_x = ma_x$

$$mg - kd = 0$$

$$d = (m/k)g$$

Figure 14.77

But $\sqrt{k/m} = 2\pi/T$ (part (a)) and $m/k = (T/2\pi)^2$

$$d = \left(\frac{T}{2\pi}\right)^2 g = \left(\frac{4.20 \text{ s}}{2\pi}\right)^2 (9.80 \text{ m/s}^2) = 4.38 \text{ m}.$$

EVALUATE: When the displacement is upward (part (b)), the acceleration is downward. The mass of the partridge is never entered into the calculation. We used just the ratio k/m , that is determined from T .

14.78. IDENTIFY: $x(t) = A \cos(\omega t + \phi)$, $v_x = -A\omega \sin(\omega t + \phi)$ and $a_x = -\omega^2 x$. $\omega = 2\pi/T$.

SET UP: $x = A$ when $t = 0$ gives $\phi = 0$.

$$\text{EXECUTE: } x = (0.240 \text{ m}) \cos\left(\frac{2\pi t}{1.50 \text{ s}}\right). \quad v_x = -\left(\frac{2\pi(0.240 \text{ m})}{(1.50 \text{ s})}\right) \sin\left(\frac{2\pi t}{1.50 \text{ s}}\right) = -(1.00530 \text{ m/s}) \sin\left(\frac{2\pi t}{1.50 \text{ s}}\right).$$

$$a_x = -\left(\frac{2\pi}{1.50 \text{ s}}\right)^2 (0.240 \text{ m}) \cos\left(\frac{2\pi t}{1.50 \text{ s}}\right) = -(4.2110 \text{ m/s}^2) \cos\left(\frac{2\pi t}{1.50 \text{ s}}\right).$$

(a) Substitution gives $x = -0.120$ m, or using $t = \frac{T}{3}$ gives $x = A \cos 120^\circ = \frac{-A}{2}$.

(b) Substitution gives $ma_x = +(0.0200 \text{ kg})(2.106 \text{ m/s}^2) = 4.21 \times 10^{-2} \text{ N}$, in the $+x$ -direction.

(c) $t = \frac{T}{2\pi} \arccos\left(\frac{-3A/4}{A}\right) = 0.577 \text{ s}.$

(d) Using the time found in part (c), $v = 0.665 \text{ m/s}.$

EVALUATE: We could also calculate the speed in part (d) from the conservation of energy expression,

$$v_x = \pm \sqrt{\frac{k}{m}} \sqrt{A^2 - x^2}.$$

14.79. IDENTIFY: Apply conservation of linear momentum to the collision between the steak and the pan. Then apply conservation of energy to the motion after the collision to find the amplitude of the subsequent SHM.

Use $T = 2\pi\sqrt{\frac{m}{k}}$ to calculate the period.

(a) SET UP: First find the speed of the steak just before it strikes the pan. Use a coordinate system with $+y$ downward.

$$v_{0y} = 0 \text{ (released from the rest); } y - y_0 = 0.40 \text{ m; } a_y = +9.80 \text{ m/s}^2; \quad v_y = ?$$

$$v_y^2 = v_{0y}^2 + 2a_y(y - y_0)$$

$$\text{EXECUTE: } v_y = +\sqrt{2a_y(y - y_0)} = +\sqrt{2(9.80 \text{ m/s}^2)(0.40 \text{ m})} = +2.80 \text{ m/s}$$

SET UP: Apply conservation of momentum to the collision between the steak and the pan. After the collision the steak and the pan are moving together with common velocity v_2 . Let A be the steak and B be the pan. The system before and after the collision is shown in Figure 14.79.

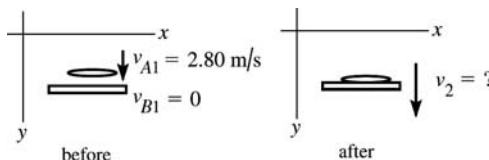


Figure 14.79

EXECUTE: P_y conserved: $m_A v_{A1y} + m_B v_{B1y} = (m_A + m_B) v_{2y}$

$$m_A v_{A1} = (m_A + m_B) v_2$$

$$v_2 = \left(\frac{m_A}{m_A + m_B} \right) v_{A1} = \left(\frac{2.2 \text{ kg}}{2.2 \text{ kg} + 0.20 \text{ kg}} \right) (2.80 \text{ m/s}) = 2.57 \text{ m/s}$$

(b) SET UP: Conservation of energy applied to the SHM gives: $\frac{1}{2}mv_0^2 + \frac{1}{2}kx_0^2 = \frac{1}{2}kA^2$ where v_0 and x_0 are the initial speed and displacement of the object and where the displacement is measured from the equilibrium position of the object.

EXECUTE: The weight of the steak will stretch the spring an additional distance d given by $kd = mg$ so

$$d = \frac{mg}{k} = \frac{(2.2 \text{ kg})(9.80 \text{ m/s}^2)}{400 \text{ N/m}} = 0.0539 \text{ m.}$$

So just after the steak hits the pan, before the pan has had time to move, the steak plus pan is 0.0539 m above the equilibrium position of the combined object. Thus $x_0 = 0.0539 \text{ m}$. From part (a) $v_0 = 2.57 \text{ m/s}$, the speed of the combined object just after the collision.

Then $\frac{1}{2}mv_0^2 + \frac{1}{2}kx_0^2 = \frac{1}{2}kA^2$ gives

$$A = \sqrt{\frac{mv_0^2 + kx_0^2}{k}} = \sqrt{\frac{2.4 \text{ kg}(2.57 \text{ m/s})^2 + (400 \text{ N/m})(0.0539 \text{ m})^2}{400 \text{ N/m}}} = 0.21 \text{ m}$$

$$\text{(c) } T = 2\pi\sqrt{m/k} = 2\pi\sqrt{\frac{2.4 \text{ kg}}{400 \text{ N/m}}} = 0.49 \text{ s}$$

EVALUATE: The amplitude is less than the initial height of the steak above the pan because mechanical energy is lost in the inelastic collision.

14.80. IDENTIFY: $F_x = -kx$ allows us to calculate k . $T = 2\pi\sqrt{m/k}$. $x(t) = A\cos(\omega t + \phi)$. $F_{\text{net}} = -kx$.

SET UP: Let $\phi = \pi/2$ so $x(t) = A\sin(\omega t)$. At $t = 0$, $x = 0$ and the object is moving downward. When the object is below the equilibrium position, F_{spring} is upward.

EXECUTE: (a) Solving Eq. (14.12) for m , and using $k = \frac{F}{\Delta l}$

$$m = \left(\frac{T}{2\pi} \right)^2 \frac{F}{\Delta l} = \left(\frac{1.00 \text{ s}}{2\pi} \right)^2 \frac{40.0 \text{ N}}{0.250 \text{ m}} = 4.05 \text{ kg.}$$


(b) $t = (0.35)T$, and so $x = -A\sin[2\pi(0.35)] = -0.0405 \text{ m}$. Since $t > T/4$, the mass has already passed the lowest point of its motion, and is on the way up.

(c) Taking upward forces to be positive, $F_{\text{spring}} - mg = -kx$, where x is the displacement from equilibrium, so $F_{\text{spring}} = -(160 \text{ N/m})(-0.030 \text{ m}) + (4.05 \text{ kg})(9.80 \text{ m/s}^2) = 44.5 \text{ N}$.

EVALUATE: When the object is below the equilibrium position the net force is upward and the upward spring force is larger in magnitude than the downward weight of the object.

14.81. IDENTIFY: Use $x = A\cos(\omega t + \phi)$ to relate x and t . $T = 3.5$ s.

SET UP: The motion of the raft is sketched in Figure 14.81.



Let the raft be at $x = +A$ when $t = 0$.

Then $\phi = 0$ and $x(t) = A\cos\omega t$.

Figure 14.81

EXECUTE: Calculate the time it takes the raft to move from $x = +A = +0.200$ m to $x = A - 0.100$ m = 0.100 m.

Write the equation for $x(t)$ in terms of T rather than ω . $\omega = 2\pi/T$ gives that $x(t) = A\cos(2\pi t/T)$

$x = A$ at $t = 0$

$x = 0.100$ m implies 0.100 m = $(0.200$ m) $\cos(2\pi t/T)$

$\cos(2\pi t/T) = 0.500$ so $2\pi t/T = \arccos(0.500) = 1.047$ rad

$t = (T/2\pi)(1.047 \text{ rad}) = (3.5 \text{ s}/2\pi)(1.047 \text{ rad}) = 0.583$ s

This is the time for the raft to move down from $x = 0.200$ m to $x = 0.100$ m. But people can also get off while the raft is moving up from $x = 0.100$ m to $x = 0.200$ m, so during each period of the motion the time the people have to get off is $2t = 2(0.583 \text{ s}) = 1.17$ s.

EVALUATE: The time to go from $x = 0$ to $x = A$ and return is $T/2 = 1.75$ s. The time to go from $x = A/2$ to A and return is less than this.

14.82. IDENTIFY: $T = 2\pi/\omega$. $F_r(r) = -kr$ to determine k .

SET UP: Example 13.10 derives $F_r(r) = -\frac{GM_E m}{R_E^3} r$.

EXECUTE: $a_r = F_r/m$ is in the form of Eq. (14.8), with x replaced by r , so the motion is simple

harmonic. $k = \frac{GM_E m}{R_E^3}$. $\omega^2 = \frac{k}{m} = \frac{GM_E}{R_E^3} = \frac{g}{R_E}$. The period is then

$$T = \frac{2\pi}{\omega} = 2\pi\sqrt{\frac{R_E}{g}} = 2\pi\sqrt{\frac{6.37 \times 10^6 \text{ m}}{9.80 \text{ m/s}^2}} = 5070 \text{ s, or } 84.5 \text{ min.}$$

EVALUATE: The period is independent of the mass of the object but does depend on R_E , which is also the amplitude of the motion.

14.83. IDENTIFY: During the collision, linear momentum is conserved. After the collision, mechanical energy is conserved and the motion is SHM.

SET UP: The linear momentum is $p_x = mv_x$, the kinetic energy is $\frac{1}{2}mv^2$, and the potential energy is

$\frac{1}{2}kx^2$. The period is $T = 2\pi\sqrt{\frac{m}{k}}$, which is the target variable.

EXECUTE: Apply conservation of linear momentum to the collision:

$(8.00 \times 10^{-3} \text{ kg})(280 \text{ m/s}) = (1.00 \text{ kg})v$. $v = 2.24$ m/s. This is v_{\max} for the SHM. $A = 0.150$ m (given).

So $\frac{1}{2}mv_{\max}^2 = \frac{1}{2}kA^2$. $k = \left(\frac{v_{\max}}{A}\right)^2 m = \left(\frac{2.24 \text{ m/s}}{0.150 \text{ m}}\right)^2 (1.00 \text{ kg}) = 223.0$ N/m.

$$T = 2\pi\sqrt{\frac{m}{k}} = 2\pi\sqrt{\frac{1.00 \text{ kg}}{223.0 \text{ N/m}}} = 0.421 \text{ s.}$$

EVALUATE: This block would weigh about 2 pounds, which is rather heavy, but the spring constant is large enough to keep the period within an easily observable range.

14.84. IDENTIFY: Newton's second law, in both its linear and rotational form, applies to this system. The motion is SHM.

SET UP: $\sum F = ma_{\text{cm}}$ and $\sum \tau = I\alpha$, where $I = \frac{2}{5}MR^2$ for a solid sphere, and $R\alpha = a_{\text{cm}}$ with no slipping.

EXECUTE: For each sphere, $f_s R = \left(\frac{2}{5}MR^2\right)\alpha$. $R\alpha = a_{\text{cm}}$. $f_s = \frac{2}{5}Ma_{\text{cm}}$. For the system of two spheres,

$$2f_s - kx = -2Ma_{\text{cm}}. \quad \frac{4}{5}Ma_{\text{cm}} - kx = -2Ma_{\text{cm}}. \quad kx = \frac{14}{5}Ma_{\text{cm}} \quad \text{and} \quad a_{\text{cm}} = \frac{5}{14}\left(\frac{k}{M}\right)x. \quad a_x = -\frac{5}{14}\left(\frac{k}{M}\right)x.$$

$$a_x = -\omega^2 x \quad \text{so} \quad \omega = \sqrt{\frac{5k}{14M}}. \quad T = \frac{2\pi}{\omega} = 2\pi\sqrt{\frac{14M}{5k}} = 2\pi\sqrt{\frac{14(0.800 \text{ kg})}{5(160 \text{ N/m})}} = 0.743 \text{ s}.$$

EVALUATE: If the surface were smooth, there would be no rolling, but the presence of friction provides the torque to cause the spheres to rotate.

14.85. IDENTIFY: Apply conservation of energy to the motion before and after the collision. Apply conservation of linear momentum to the collision. After the collision the system moves as a simple pendulum. If the

maximum angular displacement is small, $f = \frac{1}{2\pi}\sqrt{\frac{g}{L}}$.

SET UP: In the motion before and after the collision there is energy conversion between gravitational potential energy mgh , where h is the height above the lowest point in the motion, and kinetic energy.

EXECUTE: Energy conservation during downward swing: $m_2gh_0 = \frac{1}{2}m_2v^2$ and

$$v = \sqrt{2gh_0} = \sqrt{2(9.8 \text{ m/s}^2)(0.100 \text{ m})} = 1.40 \text{ m/s}.$$

Momentum conservation during collision: $m_2v = (m_2 + m_3)V$ and

$$V = \frac{m_2v}{m_2 + m_3} = \frac{(2.00 \text{ kg})(1.40 \text{ m/s})}{5.00 \text{ kg}} = 0.560 \text{ m/s}.$$

Energy conservation during upward swing: $Mgh_f = \frac{1}{2}MV^2$ and

$$h_f = V^2/2g = \frac{(0.560 \text{ m/s})^2}{2(9.80 \text{ m/s}^2)} = 0.0160 \text{ m} = 1.60 \text{ cm}.$$

Figure 14.85 shows how the maximum angular displacement is calculated from h_f . $\cos\theta = \frac{48.4 \text{ cm}}{50.0 \text{ cm}}$ and

$$\theta = 14.5^\circ. \quad f = \frac{1}{2\pi}\sqrt{\frac{g}{l}} = \frac{1}{2\pi}\sqrt{\frac{9.80 \text{ m/s}^2}{0.500 \text{ m}}} = 0.705 \text{ Hz}.$$

EVALUATE: $14.5^\circ = 0.253 \text{ rad}$. $\sin(0.253 \text{ rad}) = 0.250$. $\sin\theta \approx \theta$ and the equation $f = \frac{1}{2\pi}\sqrt{\frac{g}{L}}$ is accurate.

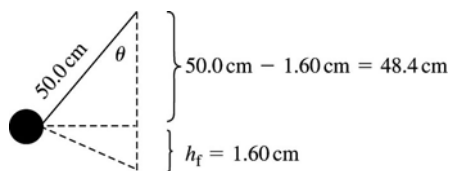


Figure 14.85

- 14.86. IDENTIFY and SET UP:** $T = 2\pi\sqrt{\frac{I}{mgd}}$ gives the period for the bell and $T = 2\pi\sqrt{L/g}$ gives the period for the clapper.

EXECUTE: The bell swings as a physical pendulum so its period of oscillation is given by

$$T = 2\pi\sqrt{I/mgd} = 2\pi\sqrt{18.0 \text{ kg} \cdot \text{m}^2 / (34.0 \text{ kg})(9.80 \text{ m/s}^2)(0.60 \text{ m})} = 1.885 \text{ s}.$$

The clapper is a simple pendulum so its period is given by $T = 2\pi\sqrt{L/g}$.

$$\text{Thus } L = g(T/2\pi)^2 = (9.80 \text{ m/s}^2)(1.885 \text{ s}/2\pi)^2 = 0.88 \text{ m}.$$

EVALUATE: If the cm of the bell were at the geometrical center of the bell, the bell would extend 1.20 m from the pivot, so the clapper is well inside the bell.

- 14.87. IDENTIFY:** The motion is simple harmonic if the equation of motion for the angular oscillations is of the form $\frac{d^2\theta}{dt^2} = -\frac{\kappa}{I}\theta$, and in this case the period is $T = 2\pi\sqrt{I/\kappa}$.

SET UP: For a slender rod pivoted about its center, $I = \frac{1}{12}ML^2$.

EXECUTE: The torque on the rod about the pivot is $\tau = -\left(k\frac{L}{2}\theta\right)\frac{L}{2}$. $\tau = I\alpha = I\frac{d^2\theta}{dt^2}$ gives

$$\frac{d^2\theta}{dt^2} = -k\frac{L^2/4}{I}\theta = -\frac{3k}{M}\theta. \quad \frac{d^2\theta}{dt^2} \text{ is proportional to } \theta \text{ and the motion is angular SHM. } \frac{\kappa}{I} = \frac{3k}{M},$$

$$T = 2\pi\sqrt{\frac{M}{3k}}.$$

EVALUATE: The expression we used for the torque, $\tau = -\left(k\frac{L}{2}\theta\right)\frac{L}{2}$, is valid only when θ is small enough for $\sin\theta \approx \theta$ and $\cos\theta \approx 1$.

- 14.88. IDENTIFY:** The object oscillates as a physical pendulum, with $f = \frac{1}{2\pi}\sqrt{\frac{Mgd}{I}}$, where $M = 2m$ is the total mass of the object.

SET UP: The moment of inertia about the pivot is $2(1/3)ML^2 = (2/3)ML^2$, and the center of gravity when balanced is a distance $d = L/(2\sqrt{2})$ below the pivot.

$$\text{EXECUTE: The frequency is } f = \frac{1}{T} = \frac{1}{2\pi}\sqrt{\frac{6g}{4\sqrt{2}L}} = \frac{1}{4\pi}\sqrt{\frac{6g}{\sqrt{2}L}}.$$

EVALUATE: If $f_{\text{sp}} = \frac{1}{2\pi}\sqrt{\frac{g}{L}}$ is the frequency for a simple pendulum of length L ,

$$f = \frac{1}{2}\sqrt{\frac{6}{\sqrt{2}}}f_{\text{sp}} = 1.03f_{\text{sp}}.$$

- 14.89. IDENTIFY:** The velocity is a sinusoidal function. From the graph we can read off the period and use it to calculate the other quantities.

SET UP: The period is the time for 1 cycle; after time T the motion repeats. The graph shows that $T = 1.60 \text{ s}$ and $v_{\text{max}} = 20.0 \text{ cm/s}$. Mechanical energy is conserved, so $\frac{1}{2}mv_x^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$, and Newton's second law applies to the mass.

EXECUTE: (a) $T = 1.60 \text{ s}$ (from the graph).

$$\text{(b) } f = \frac{1}{T} = 0.625 \text{ Hz}.$$

$$\text{(c) } \omega = 2\pi f = 3.93 \text{ rad/s}.$$

(d) $v_x = v_{\max}$ when $x = 0$ so $\frac{1}{2}kA^2 = \frac{1}{2}mv_{\max}^2$. $A = v_{\max}\sqrt{\frac{m}{k}}$. $f = \frac{1}{2\pi}\sqrt{\frac{k}{m}}$ so $A = v_{\max}/(2\pi f)$. From the graph in the problem, $v_{\max} = 0.20$ m/s, so $A = \frac{0.20 \text{ m/s}}{2\pi(0.625 \text{ Hz})} = 0.051 \text{ m} = 5.1 \text{ cm}$. The mass is at $x = \pm A$ when $v_x = 0$, and this occurs at $t = 0.4 \text{ s}$, 1.2 s , and 1.8 s .

(e) Newton's second law gives $-kx = ma_x$, so

$a_{\max} = \frac{kA}{m} = (2\pi f)^2 A = (4\pi^2)(0.625 \text{ Hz})^2(0.051 \text{ m}) = 0.79 \text{ m/s}^2 = 79 \text{ cm/s}^2$. The acceleration is maximum when $x = \pm A$ and this occurs at the times given in (d).

(f) $T = 2\pi\sqrt{\frac{m}{k}}$ so $m = k\left(\frac{T}{2\pi}\right)^2 = (75 \text{ N/m})\left(\frac{1.60 \text{ s}}{2\pi}\right)^2 = 4.9 \text{ kg}$.

EVALUATE: The speed is maximum at $x = 0$, when $a_x = 0$. The magnitude of the acceleration is maximum at $x = \pm A$, where $v_x = 0$.

14.90. IDENTIFY and SET UP: As stated in the problem, $T = 2\pi\sqrt{\frac{m + m_{\text{eff}}}{k}}$.

EXECUTE: (a) The graph of T^2 versus m is shown in Figure 14.90. Note that the times given in the table with the problem are for 10 oscillations, so we must divide each of them by 10 to get the period.

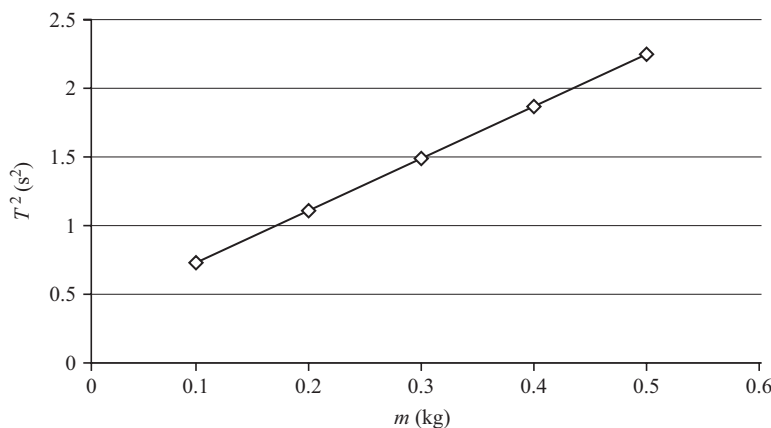


Figure 14.90

(b) Squaring the equation $T = 2\pi\sqrt{\frac{m + m_{\text{eff}}}{k}}$ and solving for T^2 in terms of m , we get

$$T^2 = \left(\frac{4\pi^2}{k}\right)m + \frac{4\pi^2 m_{\text{eff}}}{k}.$$

In the graph of T^2 versus m , the slope is $4\pi^2/k$ and the vertical intercept is $4\pi^2 m_{\text{eff}}/k$. The best-fit equation to our plotted points is $T^2 = (3.878 \text{ s}^2/\text{kg})m + 0.3492 \text{ s}^2$. Therefore we have

$$\text{slope} = 4\pi^2/k = 3.876 \text{ s}^2/\text{kg}$$

$$k = 4\pi^2/(3.876 \text{ s}^2/\text{kg}) = 10.19 \text{ kg/s}^2 \text{ which rounds to } 10.2 \text{ kg/s}^2 = 10.2 \text{ N/m}.$$

(c) Using the vertical intercept, we have

$$4\pi^2 m_{\text{eff}}/k = 0.3492 \text{ s}^2$$

$$m_{\text{eff}} = (0.3492 \text{ s}^2)(10.19 \text{ kg/s}^2)/(4\pi^2) = 0.0901 \text{ kg}.$$

(d) The mass of the spring is 0.250 kg, so

$$m_{\text{eff}}/m_{\text{spring}} = (0.0901 \text{ kg})/(0.250 \text{ kg}) = 0.360.$$

Thus m_{eff} is 36% the mass of the spring.

$$(e) T = 2\pi\sqrt{\frac{m + m_{\text{eff}}}{k}} = 2\pi\sqrt{\frac{0.450 \text{ kg} + 0.0901 \text{ kg}}{10.19 \text{ kg/s}^2}} = 1.45 \text{ s}.$$

$$f = 1/T = 1/(1.45 \text{ s}) = 0.691 \text{ Hz}.$$

$$\omega = 2\pi f = 2\pi(0.691 \text{ H}) = 4.34 \text{ rad/s}.$$

EVALUATE: If the mass of a spring is comparable to the mass of the object oscillating from it, the mass of the spring can have a significant effect on the period. The result we found, that the effective mass is 0.36 times the mass of the spring, is in very good agreement with the result of challenge problem 14.93(c), which shows that the effective mass is 1/3 the mass of the spring.

14.91. IDENTIFY and SET UP: For small-amplitude oscillations, the period of a simple pendulum is $T = 2\pi\sqrt{L/g}$.

EXECUTE: (a) The graph of T^2 versus L is shown in Figure 14.91a. Using $T = 2\pi\sqrt{L/g}$, we solve for

T^2 in terms of L , which gives $T^2 = \left(\frac{4\pi^2}{g}\right)L$. The graph of T^2 versus L should be a straight line having

slope $4\pi^2/g$. The best-fit line for our data has the equation $T^2 = (3.9795 \text{ s}^2/\text{m})L + 0.6674 \text{ s}^2$.

The quantity $4\pi^2/g = 4\pi^2/(9.80 \text{ m/s}^2) = 4.03 \text{ s}^2/\text{m}$. Our line has slope $3.98 \text{ s}^2/\text{m}$, which is in very close agreement with the expected slope.

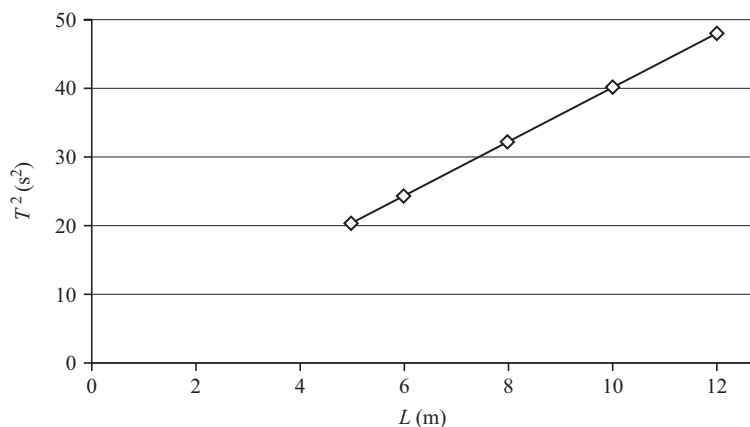


Figure 14.91a

(b) As L decreases, the angle the string makes with the vertical increases because the metal sphere is always released when it is touching the vertical wall. The formula $T = 2\pi\sqrt{L/g}$ is valid only for small angles. Figure 14.91b shows the graph of T/T_0 versus L .

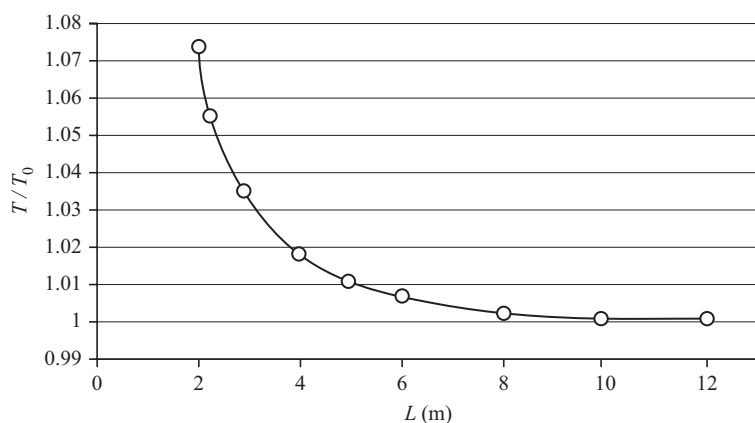


Figure 14.91b

(c) Since $T > T_0$, if T_0 is in error by 5%, $T/T_0 = 1.05$. From the graph in Figure 14.91b, that occurs for $L \approx 2.5$ m. In that case, $\sin \theta = (2.0 \text{ m})/(2.5 \text{ m}) = 0.80$, which gives $\theta = 53^\circ$.

EVALUATE: Even for an angular amplitude of 53° , the error in using the formula $T = 2\pi\sqrt{L/g}$ is only 5%, so this formula is very useful in most situations. But for very large angular amplitudes it is not reliable.

- 14.92. IDENTIFY:** In each situation, imagine the mass moves a distance Δx , the springs move distances Δx_1 and Δx_2 , with forces $F_1 = -k_1\Delta x_1$, $F_2 = -k_2\Delta x_2$.

SET UP: Let Δx_1 and Δx_2 be positive if the springs are stretched, negative if compressed.

EXECUTE: (a) $\Delta x = \Delta x_1 = \Delta x_2$, $F = F_1 + F_2 = -(k_1 + k_2)\Delta x$, so $k_{\text{eff}} = k_1 + k_2$.

(b) Despite the orientation of the springs, and the fact that one will be compressed when the other is extended, $\Delta x = \Delta x_1 - \Delta x_2$ and both spring forces are in the same direction. The above result is still valid; $k_{\text{eff}} = k_1 + k_2$.

(c) For massless springs, the force on the block must be equal to the tension in any point of the spring combination, and $F = F_1 = F_2$. $\Delta x_1 = -\frac{F}{k_1}$, $\Delta x_2 = -\frac{F}{k_2}$, $\Delta x = -\left(\frac{1}{k_1} + \frac{1}{k_2}\right)F = -\frac{k_1 + k_2}{k_1 k_2}F$ and

$$k_{\text{eff}} = \frac{k_1 k_2}{k_1 + k_2}.$$

(d) The result of part (c) shows that when a spring is cut in half, the effective spring constant doubles, and so the frequency increases by a factor of $\sqrt{2}$. Therefore $f_1/f_2 = 1/\sqrt{2}$.

EVALUATE: In cases (a) and (b) the effective force constant is greater than either k_1 or k_2 and in case (c) it is less.

- 14.93. IDENTIFY:** Follow the procedure specified in the hint.

SET UP: Denote the position of a piece of the spring by l ; $l = 0$ is the fixed point and $l = L$ is the moving end of the spring. Then the velocity of the point corresponding to l , denoted u , is $u(l) = v \frac{l}{L}$ (when the spring is moving, l will be a function of time, and so u is an implicit function of time).

EXECUTE: (a) $dm = \frac{M}{L}dl$, and so $dK = \frac{1}{2}dm u^2 = \frac{1}{2} \frac{Mv^2}{L^3} l^2 dl$ and $K = \int dK = \frac{Mv^2}{2L^3} \int_0^L l^2 dl = \frac{Mv^2}{6}$.

(b) $mv \frac{dv}{dt} + kx \frac{dx}{dt} = 0$, or $ma + kx = 0$, which is Eq. (14.4).

(c) m is replaced by $\frac{M}{3}$, so $\omega = \sqrt{\frac{3k}{M}}$ and $M' = \frac{M}{3}$.

EVALUATE: The effective mass of the spring is only one-third of its actual mass.

- 14.94. IDENTIFY and SET UP:** The frequency is $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$.

EXECUTE: Use $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$ to solve for the mass:

$m = k/(2\pi f)^2 = (1000 \text{ N/m})/[2\pi(100 \times 10^3 \text{ Hz})]^2 = 2.5 \times 10^{-9} \text{ kg} = 2.5 \times 10^{-6} \text{ g} = 2.5 \text{ } \mu\text{g}$, which is choice (c).

EVALUATE: This is a much smaller mass than we've dealt with in the previous problems, but we are looking at vibrations at the molecular level.

- 14.95. IDENTIFY and SET UP:** The energy is constant, so it is equal to the potential energy when the speed is zero, so $E = \frac{1}{2} kA^2$.

EXECUTE: $E = \frac{1}{2} (1000 \text{ N/m})(0.050 \times 10^{-9})^2 = 1.25 \times 10^{-18} \text{ J}$, which is closest to choice (a).

EVALUATE: This is a much smaller energy than we've dealt with in the previous problems, but we are looking at vibrations at the molecular level.

14.96. IDENTIFY and SET UP: The frequency is $f = \frac{1}{2\pi}\sqrt{\frac{k}{m}}$, and we want $\frac{\Delta f}{f}$.

EXECUTE: $\frac{\Delta f}{f} = \frac{f - f_0}{f_0}$. Using $f = \frac{1}{2\pi}\sqrt{\frac{k}{m}}$ and calling k the new force constant, we have

$$\frac{\Delta f}{f} = \frac{(1/2\pi)\sqrt{k/m} - (1/2\pi)\sqrt{k_0/m}}{(1/2\pi)\sqrt{k_0/m}} = \frac{\sqrt{k} - \sqrt{k_0}}{\sqrt{k_0}} = \sqrt{\frac{k}{k_0}} - 1 = \sqrt{\frac{1005 \text{ N/m}}{1000 \text{ N/m}}} - 1$$

$$\frac{\Delta f}{f} = 2.5 \times 10^{-3} = 0.25\%, \text{ which is choice (b).}$$

EVALUATE: Since $k_{\text{surf}} = 5 \text{ N/m}$ is only $5/1000 = 0.5\%$ of the original force constant, the effect on the frequency is even less, at 0.25% . This is reasonable because the frequency is proportional to the square root of the force constant.