

# DBAT — The Damped Bundle Adjustment Toolbox for Matlab

v0.9.2.0

Niclas Börnin<sup>1</sup> and Pierre Grussenmeyer<sup>2</sup>

<sup>1</sup>Department of Computing Science, Umeå University, Sweden,  
`niclas.borlin@cs.umu.se`

<sup>2</sup>ICube Laboratory UMR 7357, Photogrammetry and Geomatics  
Group, INSA Strasbourg, France,  
`pierre.grussenmeyer@insa-strasbourg.fr`

Jun 27, 2020

With contributions from:

- Arnaud Durand, ICube-SERTIT, University of Strasbourg, France.
- Jan Hieronymus, TU Berlin, Germany.
- Jean-François Hullo, EDF, France.
- Fabio Menna, Fondazione Bruno Kessler, Trento, Italy.
- Arnadi Murtiyoso, ICube, INSA Strasbourg, France.
- Kostas Naskou, University of Nottingham, UK.
- Erica Nocerino, Fondazione Bruno Kessler, Trento, Italy.
- Deni Suwardhi, Bandung Institute of Technology, Indonesia.

# Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
1.1	Purpose . . . . .	4
1.2	Contents . . . . .	4
1.2.1	XML scripts . . . . .	4
1.2.2	Matlab code . . . . .	4
1.2.3	Data . . . . .	6
1.3	Legal . . . . .	6
<b>2</b>	<b>Installation</b>	<b>7</b>
<b>3</b>	<b>Change log</b>	<b>9</b>
<b>4</b>	<b>Usage</b>	<b>15</b>
4.1	Demos . . . . .	15
4.1.1	Plotting . . . . .	15
4.1.1.1	Roma . . . . .	15
4.1.1.2	Cam . . . . .	15
4.1.2	Camera calibration . . . . .	15
4.1.2.1	Evolution plots . . . . .	16
4.1.2.2	Quality plots . . . . .	19
4.1.2.3	Result file . . . . .	22
4.1.3	Lens distortion models . . . . .	22
4.1.4	Bundle adjustment . . . . .	22
4.1.4.1	Roma . . . . .	22
4.1.4.2	Prague'16 . . . . .	22
4.1.4.3	Hamburg'17 . . . . .	22
4.1.4.4	Prior camera observations . . . . .	22
4.1.5	Error detection . . . . .	22
4.1.5.1	Missing observations . . . . .	23
4.1.5.2	Single-ray observations . . . . .	23
4.1.5.3	Missing datum . . . . .	23
4.2	Using your own data . . . . .	25
4.2.1	Photoscan/Metashape . . . . .	25
4.2.1.1	Known limitations . . . . .	25
4.2.2	PhotoModeler . . . . .	25
4.2.2.1	Export from PhotoModeler . . . . .	25
4.2.2.2	Loading into Matlab . . . . .	26
4.2.2.3	Using the bundle adjustment of DBAT . . . . .	26
4.3	XML scripts . . . . .	26
4.3.1	The XML language . . . . .	26
4.3.2	The DBAT XML file . . . . .	27
4.3.2.1	XML comments . . . . .	27
4.3.2.2	Metadata . . . . .	27
4.3.2.3	Input . . . . .	28

4.3.2.4	Processing . . . . .	30
4.3.2.5	Output . . . . .	32
4.3.2.6	File organisation . . . . .	32
4.3.2.7	Text files and format strings . . . . .	33
4.3.3	Example scripts . . . . .	33
<b>5</b>	<b>References</b>	<b>34</b>
<b>A</b>	<b>License</b>	<b>36</b>
<b>B</b>	<b>Enabling text export from PhotoModeler</b>	<b>37</b>
<b>C</b>	<b>Rotation model</b>	<b>37</b>
<b>D</b>	<b>Result files</b>	<b>37</b>
D.1	Result file with missing observations . . . . .	37
D.2	Result file with single-ray observations . . . . .	37
D.3	Result file with missing datum . . . . .	38
D.4	Successful result file example . . . . .	40
<b>E</b>	<b>XML</b>	<b>47</b>
E.1	XML input section . . . . .	47
E.1.1	Camera specification . . . . .	47
E.1.1.1	Descriptive parameters . . . . .	47
E.1.1.2	Calibration parameters . . . . .	47
E.1.2	Camera file example . . . . .	48
E.1.3	Control point format . . . . .	48
E.1.4	Control point file example . . . . .	48
E.1.5	Image list format . . . . .	49
E.1.6	Image list file example . . . . .	49
E.1.7	Prior EO observation format . . . . .	50
E.1.8	Prior EO observation file example . . . . .	50
E.1.9	Image observation format . . . . .	50
E.2	Operations . . . . .	51
E.2.1	Specify parameters to estimate . . . . .	51
E.2.2	Specify initial values . . . . .	52
E.3	XML output section . . . . .	54
E.3.1	Plots . . . . .	54
E.3.2	Files . . . . .	55
E.4	XML demo scripts . . . . .	56
E.4.1	camcaldemo.xml . . . . .	56
E.4.2	romabundledemo.xml . . . . .	58
E.4.3	sxb.xml . . . . .	60

# 1 Introduction

## 1.1 Purpose

The purpose of the Damped Bundle Adjustment toolbox is to be a high-level toolbox for photogrammetry in general and bundle adjustment in particular. It is the hope of the authors that the high-level nature of the code will inspire algorithm development. The code is written in Matlab and is verified to work with Matlab version 9.8 (release R2020a). The intention is that at least the computation routines will be Octave-compatible. This has however not been tested yet.

## 1.2 Contents

### 1.2.1 XML scripts

As of DBAT version 0.9, DBAT can be used via an XML interface or a direct Matlab interface. The XML interface allows usage without much Matlab knowledge, see Section 4.3 and Börlin et al. (2019a).

### 1.2.2 Matlab code

The toolbox currently includes routines for (Matlab function names in parentheses):

- File handling:
  - Reading PhotoModeler-style text export files (`loadpm`), and 2D/3D point table exports files (`loadpm2dtbl` and `loadpm3dtbl`, respectively).
  - Reading PhotoScan native (.psz) files (`loadpsz`).
  - Writing PhotoModeler-style text result files (`bundle_result_file`).
- Post-processing:
  - Post-processing of PhotoScan projects (`ps_postproc`). Includes object point filtering on low ray count and low intersection angles. For self-calibration post-processing, see the help text for `ps_postproc`.
  - As of version 0.7.0.0, DBAT supports both lens distortion models used by Photomodeler and Photoscan.
- Photogrammetric calculations, including:
  - Spatial resection (`resect`).
  - Forward intersection (`forwintersect`).
  - Absolute orientation (`rigidbody`).
  - Relative orientation based on the Nistér 5-point algorithm (Stewénius et al., 2006) will be added in the future.

- Bundle adjustment proper (`bundle`):
  - With or without self-calibration.
  - Works with fixed or weighted prior observations, e.g., control points.
  - Works with prior observations of camera positions.
  - Supports check points.
  - What parameters that should be estimated are selectable at the parameter level, e.g. down to the coordinate level for 3D points.
  - Estimated parameters can be block-invariant (the same for a whole block), image-variant (individual for each image), or anything in-between. Parameter sets may be split-variant, e.g., with some IO parameters block-invariant and some IO parameters image-variant (Börlin et al., 2019b).
  - Uses either Classical Gauss-Markov, Gauss-Newton-Armijo, Levenberg-Marquardt, or Levenberg-Marquardt-Powell damping schemes (Börlin and Grussenmeyer, 2013a, 2014, 2016).
  - Posterior covariance calculations (`bundle_cov`) from the bundle result, including correlations and significance levels, point and image quality statistics (Börlin et al., 2020).
- Analysis of camera networks, including:
  - Detection of structural rank deficiency (Matlab’s `dmperm`, `sprank`). Useful as a sanity check on input data. Structural rank deficiency is typically caused by trying to estimate a parameter with too few direct observations.
  - Null-space analysis if the normal matrix is singular using `spnrank` (Foster, 2009). This might, e.g., be caused by insufficient datum specification.

The result of the analysis, including suggestions for what parameters may be impossible to estimate are written to the report file by `bundle_result_file`.

- Various plotting functions, including:
  - Plot image covered by measurements (`plotcoverage`).
  - Plot camera network (`plotnetwork`), either static (as-loaded) or as an illustration of the bundle iterations.
  - Plot .psz project (`loadplotpsz`).
  - Plot of the iteration trace of parameters estimated by bundle (`plotparams`).
  - Plots of quality statistics from the bundle result (`plotimagestats`, `plotopstats`).

- Demo functions using the above functions. The demo functions are detailed in Section 4.1. The available demos are listed by executing the command `help dbatdemos`. This manual does not contain detailed information about how to use each function. More information may be found by typing `help <function name>` at the Matlab prompt, studying the source code of the demo functions, and reading the source code of each file directly.
- XML scripts that allow a user to tailor the computation without writing any Matlab code (`rundbatscript`), see Section 4.3 and Börnin et al. (2019a).

### 1.2.3 Data

The toolbox contains several datasets, including datasets for the Börnin and Grussenmeyer (2016); Murtiyoso et al. (2017) papers.

- PhotoModeler export files or PhotoScan projects.
- Images. To reduce the size of the distribution package, only low resolution images are included in the package <sup>1</sup>. The corresponding high resolution images can be downloaded from [http://people.cs.umu.se/niclas/dbat\\_images](http://people.cs.umu.se/niclas/dbat_images). Further instructions are found in `README.txt` files in the respective image directories.

The simplest way to access the data sets is through the XML scripts, described in Section 4.3, or through the demos, described in Section 4.1.

## 1.3 Legal

The licence detail are described in the `LICENSE.txt` file included in the distribution and in Appendix A. In summary:

- You use the code at your own risk.
- You may use the code for any purpose, including commercial, as long as you give due credit. Specifically, if you use the code, or derivatives thereof, for scientific publications, you should refer to on or more of the papers Börnin and Grussenmeyer (2013a,b, 2014, 2016); Börnin et al. (2018, 2019a,b, 2020) that the code is based on.
- You may modify and redistribute the code as long as the licensing details are also redistributed.

---

<sup>1</sup>No images are included in the StPierre data set.

## 2 Installation (from the file INSTALL.txt)

```
# == INSTALLATION ==
#
# You can either install DBAT by downloading the source code or (if
# you use a git client) by cloning the repository.
#
# === Download ===
#
# 1) Download the package file dbat-master.zip (from the main page) or
#    dbat-x.y.z.w.zip/dbat-x.y.z.w.tar.gz (from the releases page) of
#    https://github.com/niclasborlin/dbat/
#
# 2) Unpack the file into a directory, e.g., c:\dbat or ~/dbat.
#
# === Clone ===
#
# At the unix/windows command line, write:
#
#   git clone https://github.com/niclasborlin/dbat.git
#
# to clone the repository into the directory 'dbat'. Use
#
#   git clone https://github.com/niclasborlin/dbat.git <dir-name>
#
# to clone the repository to another directory.
#
# If you use a graphical git client, e.g., tortoisegit
# (https://tortoisegit.org), select Git Clone... and enter
# https://github.com/niclasborlin/dbat.git or
# git@github.com:niclasborlin/dbat.git as the URL.
#
#
# ==== Download high-resolution images ====
#
# To reduce the size of the repository and hence download times, only
# low-resolution images are included in the repository. High-resolution
# images can be downloaded from http://people.cs.umu.se/niclas/dbat_images/.
# For further details, consult the README.txt files in the respective
# image directories.
#
#
# == TESTING THE INSTALLATION ==
#
# 1) Start Matlab. Inside Matlab, do the following initialization:
# 1.1) cd c:\dbat % (change to where you unpacked the files)
# 1.2) dbatSetup % will set the necessary paths, etc.
#
# 2) To test the demos, do 'help dbatdemos' or consult the manual.
#
```

```

#
# == UPDATING THE INSTALLATION==
#
# === Git ===
#
# If you cloned the archive, updating to the latest release is a
# simple as (replace ~/dbat and c:\dbat with where you cloned the
# repository):
#
#   cd ~/dbat
#   git pull
#
# at the command line. In TortoiseGit, right-click on the folder
# c:\dbat, select Git Sync... followed by Pull.
#
# === Download ===
#
# If you downloaded the code, repeat the download process under
# INSTALLATION. Most of the time it should be ok to unzip the new
# version on top of the old. However, we suggest you unzip the new
# version into a new directory, e.g., dbat-x-y-z-w, where x-y-z-w is
# the version number.
#
#

```



### 3 Change log (from the file ChangeLog.txt)

Summary changelog file for release.

Release 0.9.2.0, Jun 27, 2020.

- Speed up computations of posterior covariance of object points by some orders of magnitude as described in the Nice 2020 paper.

Release 0.9.1.4, Jun 26, 2020.

- Add timing of posterior covariance computations.
- Fix camera plot bugs in plotnetworks.

Release 0.9.1.3, Jan 14, 2020.

- Speed up loading of image points by some orders of magnitude.
- Speed up project creation.
- Add ref\_cam attribute to iteration trace.
- Bugfix to use cam\_size in iteration trace.

Release 0.9.1.2, Dec 09, 2019.

- Hide internal sign flip for some camera parameters.
- Add change log to the manual.

Release 0.9.1.1, Dec 07, 2019.

- Updated manual to include DBAT XML scripts.
- Added UUID tags.

Release 0.9.1.0, Dec 02, 2019.

- First public support for DBAT XML scripts.
- Reorganization of data files.

Release 0.9.0.1, Nov 22, 2019.

- Internal release with full operations and plotting support and file output except IO.

Release 0.9.0.0, Nov 16, 2019.

- Internal release with nominal support for DBAT XML scripts.
- Scripting support for input (full), operations (most), output (minor).

Release 0.8.5.1, Jan 13, 2019.

- Fix to avoid some lengthy pre-bundle computations unless they are needed.

Release 0.8.5.0, Jan 03, 2019.

- Major restructuring of the main data structure.
- Added support for prior observations of camera positions.
- Added high-level functions to refer to camera parameters by name rather than by row number.
- Added high-level functions to set up EO/OP parameters for the bundle.
- Added more information about computer system to report file.
- Added information about control files to report file.
- Cleaned up naming scheme of camera parameters.

- Various bugfixed, including handling of overlapping normal and smartpoint ids in PM export file.

Release 0.8.0.0, Oct 26, 2018.

- Parameter handling in bundle rewritten to allow parameters to be estimated to be block-invariant (common to all images), image-variant (unique for each image), and anything inbetween. Furthermore, parameter sets can be split-variant, e.g., some I0 parameters can be block-invariant and some can be image-variant.
- Added cumulative significance computation for lens K and P parameters to the result file.
- Added parameter and observation count and total redundancy to the result file.

Release 0.7.6.1, Oct 25, 2018.

- Bugfix to v0.7.6.0 to fix that the format change was introduced with Photoscan v1.4.1 and not with v1.4.0.

Release 0.7.6.0, Oct 17, 2018.

- Added support for Photoscan file format v1.4.0 (Photoscan program v1.4.x).

Release 0.7.5.0, May 30, 2018.

- Restructured Jacobian computations for Riva 2018 conference paper.
- Added support for affine parameters (aspect and skew) (lens distortion models 3-5).
- Bugfixes to generate report file also when bundle fails.
- Added absolute termination criteria - useful when testing on synthetic data without errors.
- Added sanity check of input problem based on structural rank (Dulmage-Mendelsohn permutations) to detect if any parameter is impossible to estimate due to too few observations.
- Added null-space analysis if normal matrix is singular to suggest what parameters are linearly dependent. Uses spnrank function by Leslie Foster, Math Dept., San Jose State University.
- Added example demos with missing observations or no datum.
- Updated manual with descriptions of the error detection demos.

Release 0.7.0.4, Dec 28, 2017.

- Bugfixes and updated instructions.
- Removed unintended reliance on the Statistical Toolbox (nanmean function).
- Improved error messages and testing of loading problems for Photomodeler export files reported by some users.
- Added a loadpm bugfix that showed up in early (pre-R2015b) Matlab versions only. Bugfix provided by Fabio Menna.
- Updated INSTALL.txt with instructions for git cloning and DBAT updates.
- Added file BUGREPORTS with instructions how to submit a bug report and/or feature request.

Release 0.7.0.3, Dec 27, 2017.

- Internal release for testing only.

Release 0.7.0.2, Dec 27, 2017.

- Bugfixes, including removing spurious incorrect warning for non-local coordinate system in .psz file.

Release 0.7.0.1, Nov 29, 2017.

- Various bugfixes.
- Now ignores disabled and unoriented cameras in .psz project files.
- Added warning for non-local coordinate system in .psz file.

Release 0.7.0.0, Nov 24, 2017.

- Public release of version with StPierre test data and support for Forward Brown (Computer Vision/Photoscan) lens distortion model.

Release 0.6.5.5, Oct 16, 2017.

- Bugfixes.
- Added computation and printout of rigid-body transformation for ctrl/check pts to detect mismatches between ctrl pt file and projects.
- Added cleaned (no image info) StPierre .psz file.
- Added ray count printout for ctrl/check pts in result file.
- Fixed scaling of PS lens distortion coordinates.

Release 0.6.5.0, Oct 12, 2017.

- Added automatic support for check points. Ctrl pts found in the control point file but not used as ctrl pts in the PM/PS project are used as check points.
- Added printout of prior and posterior ctrl pts estimates.

Release 0.6.4.3, Oct 11, 2017.

- Added loading of external ctrl pts for the StPierre data set.

Release 0.6.4.2, Oct 6, 2017.

- General performance increase, especially with self-calibration.

Release 0.6.4.1, Oct 5, 2017.

- Performance increase when a subset of K and P are used/self-calibrated.

Release 0.6.4.0, Oct 4, 2017.

- Added analytical Jacobian for Forward Brown.
- Always print camera parameters, even without self-calibration.
- Added self-calibration info to report file.

Release 0.6.3.1, Oct 4, 2017.

- Added execution time, host info, etc. to report file.
- Added analytical Jacobian for Backward Brown.

Release 0.6.3.0, Sep 28, 2017.

- ID bugfixes.
- Added printout of OP with smallest angles in report file.
- First version to support both Forward and Backward Brown lens distortion.

Numerical Jacobians only.

Release 0.6.2.2, May 5, 2017.

- ps\_postproc now runs self-calibration on all parameters that were either part of an "adjusted" camera or marked as optimized.
- Camera reference coordinates, e.g. from geotagged images, are loaded (but not processed).

Release 0.6.2.1, Mar 30, 2017.

- Bugfix to handle Photoscan .ply files with no size info.
- Autocalibration now defaults to f, cx, cy, K1-K3, P1-P2 if the camera was optimized in Photoscan.

Release 0.6.2.0, Mar 10, 2017.

- Added functions to analyze and plot a .psz project.
- Added automatic column scaling of the Jacobian to reduce numeric warnings.
- Improved performance for posterior OP variance computation.
- Can now work with .psz projects with a mix of enabled/disabled control points.
- Can now load .psz project without any transform.
- Added explanation of how to run self-calibration postprocessing of Photoscan project (see ps\_postproc.m).

Release 0.6.1.0, Dec 15, 2016.

- Cleaned up the id handling in the Photoscan loader. Now, the images (cameras) in the .psz projects can have any ids. Previously, the camera ids were assumed to be 0, 1, ...
- Fixed bug that assumed that all unreconstructed mark points in a .psz project had a ray count of 1.

Release 0.6.0.0, Dec 1, 2016.

- Added support for post-processing of Photoscan .psz projects. This includes:
  - Post-processing in fixed camera mode without lens distortion.
  - Post-processing in auto-calibration mode with lens distortion using the Photomodeler lens distortion model.
  - Post-processing may be performed in global coordinates or semi-local coordinates (same translation and scaling used by Photoscan, but no rotation). The latter reduces the condition number of the design matrix.
- Added progressbar to loadpsz for long load times.
- Added logarithmic autoscaling to lens distortion parameter plotting.
- Expanded OP ray count and OP high correlation info in report file.
- Enabled processing in semilocal coordinate system (translate, scale, but not rotate).
- Various bugfixes related to Photoscan project loading.

Release 0.5.1.6, Oct 18, 2016.

- Various bugfixes.
- Fixed code issues in xchg dir due to Windows handling of links.
- Fixed PhotoModeler table loading bug due to end-of-file issue in Windows.
- Fixed several PhotoScan loading issues.
  - Can now load any chunk of multi-chunk file.

- Improved loading tolerance (i.e. does not crash) towards single/multiple instances of projections, sensors, etc.
- Now uses PhotoScan default values for control point std and mark point std.
- Now handles object/mark point #0 by shifting all IDs with 1.
- Fixed a weighting issue for PhotoScan projects. Previously, the high weights (low std) that should be associated with the control point image measurements in all images were given to the first points in the first image.

Release 0.5.1.5, Aug 11, 2016.

- Added lo-res images for the ROMA, CAM, SXB data sets to the repo with instructions on how to download hi-res images.
- Added plotting of measured point on images to many demos.
- Cleaned up some unused code.

Release 0.5.1.4, Jul 11, 2016.

- Added auto-help for demo functions.

Release 0.5.1.3, Jul 11, 2016.

- Modified doc files for github.

Release 0.5.1.2, Jun 29, 2016.

- Re-added camera calibration demo.
- Updated manual.

Release 0.5.1.1, Jun 28, 2016.

- Removed 2-ray object points from SXB project.

Release 0.5.1, Jun 26, 2016.

- Cleaned up demos for Prague 2016.
- Added functions for loading PhotoModeler 2D/3D point export tables.

Release 0.5.0, May 13, 2016.

- Added support for fixed & weighted control points.
- Added support for reading PhotoScan native files.

Release 0.4.1, Sep 3, 2014.

- Added handling of id collisions in Photomodeler export files between smartpoints and normal points.

Release 0.4.0, Jun 25, 2014.

- Simplified switching between running Gauss-Markov, Gauss-Newton-Armijo, Levenberg-Marquardt, and Levenberg-Marquardt-Powell.

Release 0.3.1, Feb 12, 2014.

- Added calculation and plotting of radial coverage.
- Updated manual with larger figures.

Release 0.3.0, Feb 11, 2014.

- Added Levenberg-Marquardt and Levenberg-Marquardt-Powell damping.
- Internal release only due to more testing needed.

Release 0.2.0, Feb 7, 2014.

- First publically released version with manual.
- Added Photomodeler-style result file.
- Added plots for bundle result and iteration trace.
- Speedup of covariance computations for the roma demo from 20 minutes to 20 seconds.

Release 0.1.0, Nov 13, 2013.

- First packaged version.

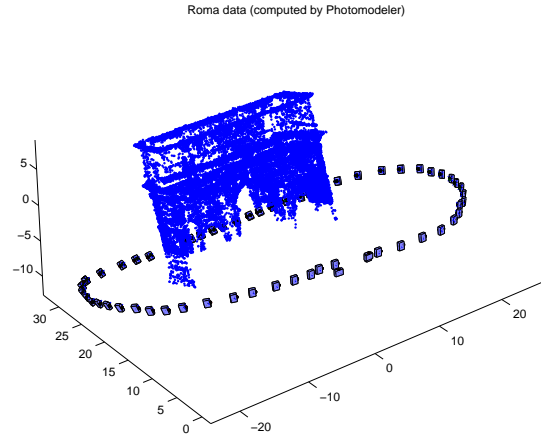


Figure 1: The figure generated by the `loadplotdemo` demo.

## 4 Usage

### 4.1 Demos

A summary of the demos is found in Table 1. **Hint: You may wish to use the command `close all` between the demos to close all windows.**

#### 4.1.1 Plotting

The `loadplotdemo` function load and plots the content of a PhotoModeler text export file. Two examples are included in the toolbox: `Roma` and `Cam`.

**4.1.1.1 Roma** `loadplotdemo('roma')` loads a modified PhotoModeler text export file of the 60-camera, 26000-point project used in Börlin and Grussenmeyer (2013a). The camera network, as computed by PhotoModeler, is plotted with camera 1 aligned to the cardinal axes. The result should look like Figure 1. The figure is a standard Matlab 3D figure and may, e.g., be rotated or zoomed using the camera toolbar.

**4.1.1.2 Cam** `loadplotdemo('cam')` demo loads a modified PhotoModeler text export file of a 21-camera, 100-point camera calibration project. The camera network, as computed by PhotoModeler, is plotted and should look like Figure 2. The figure is a standard Matlab 3D figure and may, e.g., be rotated or zoomed using the camera toolbar.

#### 4.1.2 Camera calibration

The `camcaldemo` demo loads the camera calibration export file from Section 4.1.1.2 and runs a camera calibration. The EXIF focal length is used as the initial value.

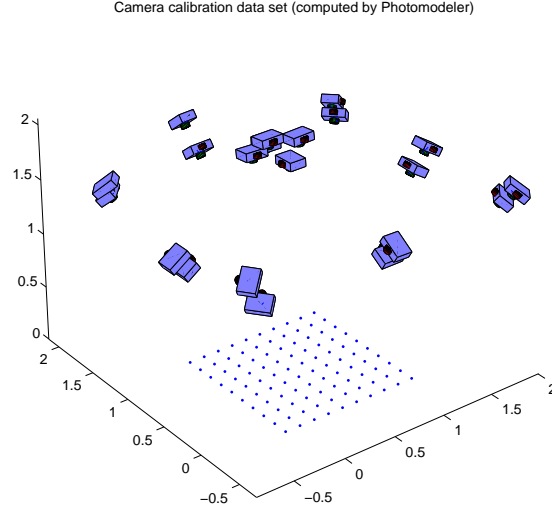


Figure 2: The figure generated by the `loadplotdemo('cam')` demo.

The other values are set to “default” values, e.g., the principal point at the center of the sensor and all lens distortion parameters equal to zero. The initial value for the EO parameters are computed by spatial resection (Haralick et al., 1994; McGlone et al., 2004, Chap. 11.1.3.4) using the control points defined for the PhotoModeler calibration sheet. The initial OP coordinates are subsequently computed by forward intersection.

The bundle adjustment is run with Gauss-Newton-Armijo damping (Börlin and Grussenmeyer, 2013a). The result is given in a number of plot windows and a Photo-modeler-style result text file. The result plots are of two kinds: Plots that show the evolution of the iterations and plots that show the quality of the input or output data. The former plots may be useful to understand how the bundle adjustment works but also to “debug” a difficult network that has convergence difficulties. The latter plots give information about the quality of the result and may also provide clues on how to improve a network when the bundle did converge.

**4.1.2.1 Evolution plots** The evolution plots are collected in figures 3–8. Figures 3–4 shows a snapshot of the 3D trace figure at the beginning and end of the iterations. As default, the evolution is presented iteration by iteration with intervening presses of the return key. The figure window is interactive and may be rotated, zoomed, etc. In this example, it is clear in Figure 4 that one camera station had poorer initial values than the rest.

Figures 5–7 contain three plots showing the evolution of the internal orientation (IO), external orientation (EO), and object point (OP), respectively, during the iterations. The IO plot is split into a focal/principal point panel and a radial and tangential distortion panel, where the radial distortion parameters



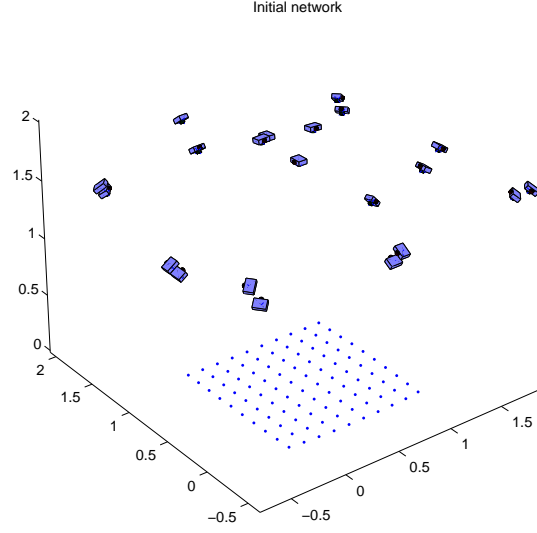


Figure 3: Initial network configuration for the 3D network. Only the EO and OP parameters are illustrated.

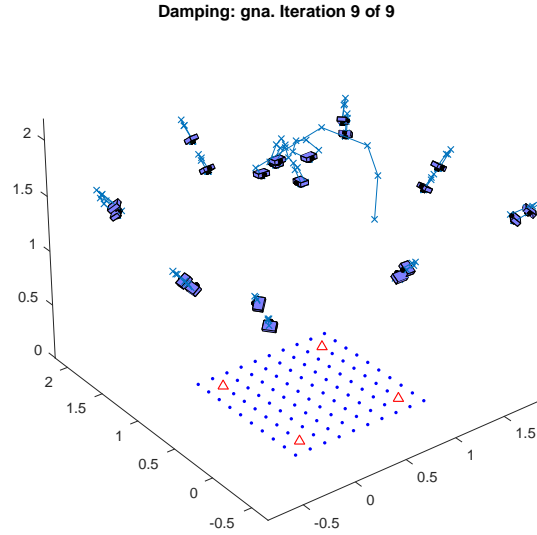


Figure 4: Network configuration after convergence, with camera center trace lines. In this example, the variation of the OP coordinates is barely visible.

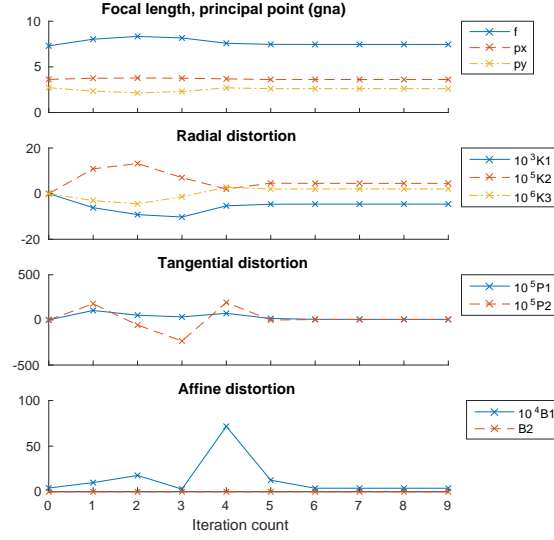


Figure 5: Evolution of IO parameters during the iteration sequence.

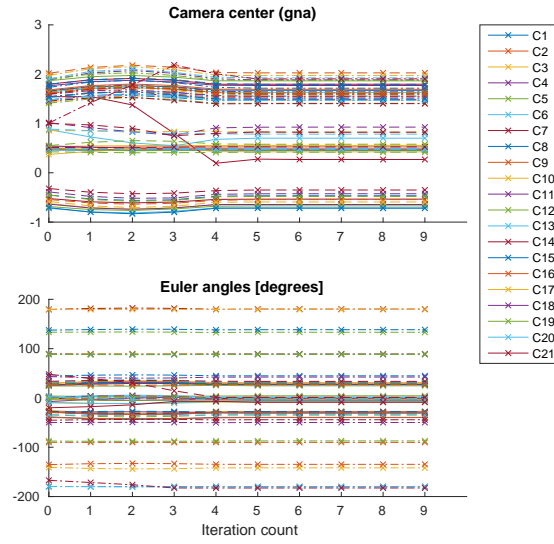


Figure 6: Evolution of EO parameters during the iteration sequence.

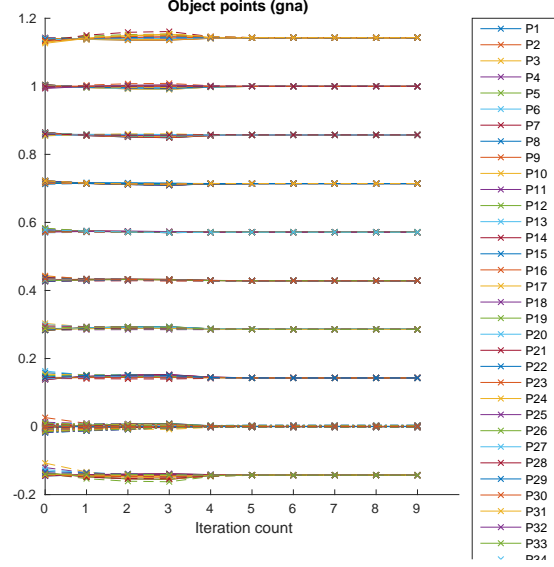


Figure 7: Evolution of OP parameters during the iteration sequence.

are scaled to provide more information. The EO plot contains a camera center panel and an  $\omega$ - $\phi$ - $\kappa$  Euler angle panel. The EO and OP plots are interactive. Lines in the plots or legends may be selected and all corresponding lines will be highlighted. In the top panel of Figure 6, the motion of one camera stands out. Clicking that line reveals that it belongs to camera station 21, which can be further investigated to decide if it should be excluded from the calibration.

The final evolution plot, shown in Figure 8, illustrates the evolution of the norm of the total residual and the damping behaviour, if any, during the bundle iterations. In this example, the Gauss-Newton-Armijo linesearch damping is active during the first two iterations. For further details on the damping, see Börlin and Grussenmeyer (2013a).

**4.1.2.2 Quality plots** The quality plots are gathered in figures 9–11. Per-image quality statistics is shown in Figure 10. The statistics presented for each image are the image coverage (rectangular coverage, convex hull coverage, and radial coverage); the number of measured points; the average (RMS) point residual; and the standard deviations for the EO parameters for the camera stations. In this example, the data does not give any obvious support to exclude the suspected image 21 from the calibration.

The image coverage is detailed in a separate Figure 9. The plotted data is selectable. All observations from a specific image, including their convex hull, will be highlighted when a point or line is selected.

Finally, the per-OP quality statistics in Figure 11 show the number of observations per OP; the maximum ray intersection angle; the average (RMS) point

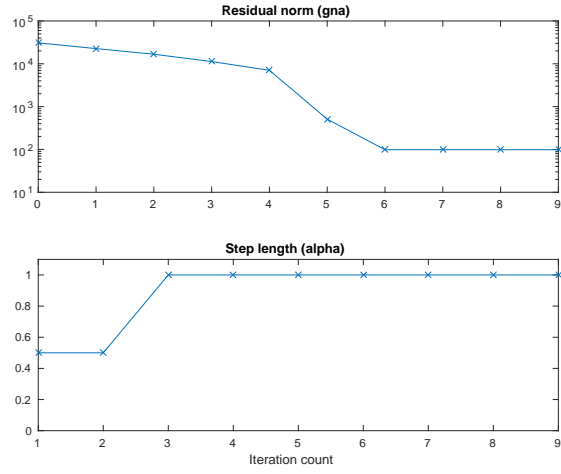


Figure 8: Residual evolution and damping behaviour during the iterations.

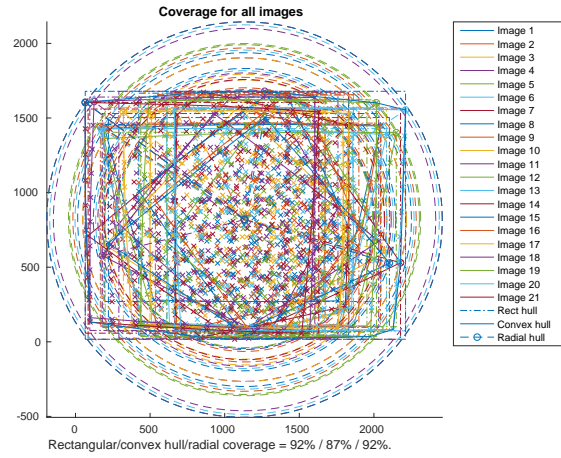


Figure 9: Plots of input/output statistics: Image coverage.

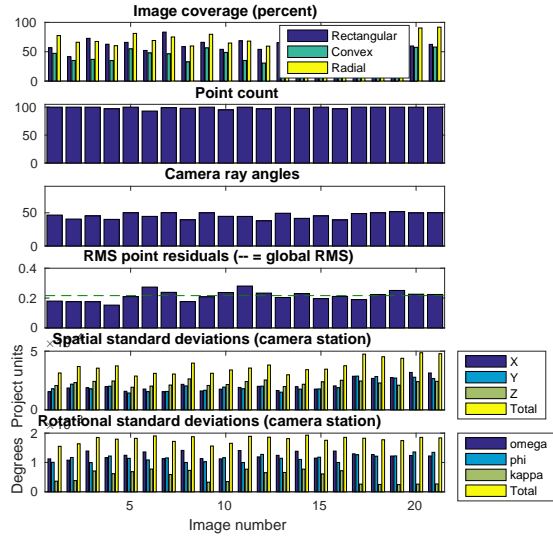


Figure 10: Plots of input/output statistics: Image statistics.

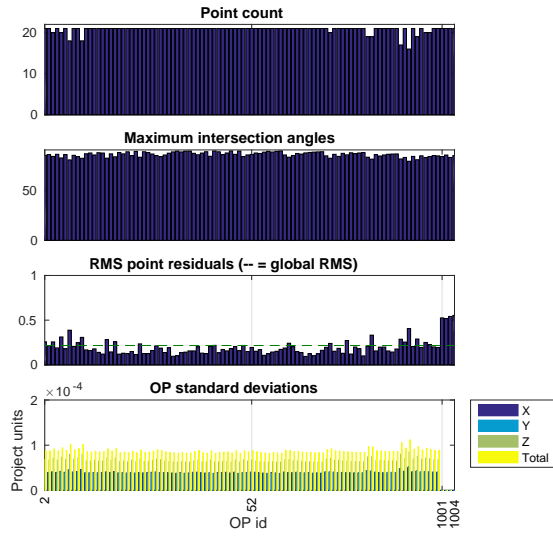


Figure 11: Plots of input/output statistics: Object point statistics.

residual; and the OP coordinate standard deviation. The presentation may be zoomed to show only a subset of the OPs by activating the “zoom” function of the figure window.

**4.1.2.3 Result file** The result file is modelled after the PhotoModeler result file. The result file of a successful run is listed in Appendix D.4.

### 4.1.3 Lens distortion models

The `camcaldemo_allmodels` demo calibrates the camera using each of the available lens distortion models. A result file is generate for each model.

### 4.1.4 Bundle adjustment

**4.1.4.1 Roma** The `romabundledemo` function loads the project from Section 4.1.1 and present essentially the same plots and the `camcaldemo`. This demo uses the PhotoModeler file as input to the bundle adjustment that runs a few iterations until convergence. The same result file and result plots as `camcaldemo` are essentially generated. Since the project is larger (60 cams/26 000 points) than the previous example (20 cams/100 points), the computation will take a bit longer. Computation time was around one minute running on a HP compaq dc7800 with an Intel Core2 Quad CPU Q9300 @ 2.50GHz under 64-bit Ubuntu 12.04 (kernel 3.5.0-45). Two variants with self-calibration (`romabundledemo_selfcal`) and image-variant self-calibration (`romabundledemo_imagevariant`) are also included. In the latter, the principal point is image-variant whereas the other IO parameters are block-invariant.

**4.1.4.2 Prague’16** The `prague2016_pm` function displays six projects that compare the result of the bundle adjustment procedure in DBAT and the results of PhotoModeler (Börlin and Grussenmeyer, 2016). Similarly, the `prague2016_ps` function displays the results of a comparison between DBAT and PhotoScan.

The v0.5.1.6 release includes a fix to a bug the distributed the image observation weights incorrectly. The result is slightly different estimation results than in Börlin and Grussenmeyer (2016). However, the conclusions remain valid.

**4.1.4.3 Hamburg’17** The `stpierrebundledemo_ps` function runs a self-calibration bundle on a Photoscan project included in the StPierre data set.

**4.1.4.4 Prior camera observations** The `sxb_prior_eo` demo shows how to include prior observations of the camera positions in the bundle.

### 4.1.5 Error detection

Three demos are included to illustrate the error detection capabilities of `sprank` (`dmperrm`) and `spnrank`. All are modelled from `camcaldemo`.

**4.1.5.1 Missing observations** The `camcaldemo_missing_obs` demo contains a data file where the image observations of two object points (id 13 and 60, respectively) have been deleted. With no observations of either point, the rank deficiency detected by `sprank` is six. In the generated result file (Section D.1), the X/Y/Z coordinates of both points number 12 and 59 (with id 13 and 60, respectively) are indeed listed as suspicious.

**4.1.5.2 Single-ray observations** The `camcaldemo_1ray` demo contains a data file that contains only one observation of object point with id 88. Since two observations (one 2D point) is present but three parameter (one 3D point) is to be estimated, the rank deficiency is one, the rank deficiency detected by `sprank` is one. The generated result file (Section D.2) lists one coordinate of point 87 (with id 88) as suspicious.

**4.1.5.3 Missing datum** The `camcaldemo_no_datum` demo contains a demo where no datum has been specified. As in the previous problems, the result is a numerical problem with a singular (rank deficient) normal matrix. However, in this case the problem is manifested by that many or all parameters are linearly dependent of each other. This will not be detected by `sprank`. In such a case, the null-space of the normal matrix will carry information about what parameters are linearly dependent, i.e. what parameters are part of the problem. However, when the normal matrix is large, computing the null-space of the normal matrix in the conventional way using the Matlab function `null` will be intractable. Instead, the `spnrank` (Foster, 2009) function is used to estimate the rank deficiency of the normal matrix, i.e. the dimension of the null-space. Given the dimension of the null-space, a basis for the null-space is found using Matlab's `eigs` function. For this demo, the generated result file (Section D.3) lists many EO parameters as suspicious. The cause of the problem is less straight-forward to determine from the list. However, the listed rank deficiency of seven should be a strong hint of a datum problem.

Table 1: Summary of demos.

Demo	Description	Datum	Self-calibration
loadplotdemo	Load and plot	-	-
romabundledemo	Bundle adjustment	Relative dependent orientation	no
romabundledemo_selfcal	Bundle adjustment	Relative dependent orientation	yes
romabundledemo_imagevariant	Bundle adjustment	Relative dependent orientation	split-variant
camcaldemo	Camera calibration	Synthetic control pts	yes
camcaldemo_allmodels	Camera calibration, varying distortion models	Synthetic control pts	yes
camcaldemo_missing_obs	Exact singular normal matrix	Synthetic control pts	yes
camcaldemo_1ray	Exact singular normal matrix	Synthetic control pts	yes
camcaldemo_no_datum	Numerically singular normal matrix	Missing	yes
prague2016_pm('c1')	Camera calibration	Synthetic fixed control points	yes
prague2016_pm('c2')	Camera calibration	Synthetic weighted control points	yes
prague2016_pm('s1')	Bundle adjustment	Fixed ctrl pts from text file	no
prague2016_pm('s2')	Bundle adjustment	Weighted ctrl pts from text file	no
prague2016_pm('s4')	Bundle adjustment	Weighted ctrl pts from text file	no
prague2016_ps('s5')	Photoscan post-processing	Weighted ctrl pts from psz file	no
ps_postproc('')	Photoscan post-processing	Weighted ctrl pts from psz file	no
stpierrebundledemo_ps	Photoscan post-processing	Weighted ctrl pts from psz file	yes
sxb_prior_eo	Use of prior camera positions in bundle	Weighted ctrl pts, cam pos from text file	no
rundbatdemos	XML scripts	Varies	varies



## 4.2 Using your own data

### 4.2.1 Photoscan/Metashape

DBAT can read native Photoscan Archive (**.psz**) files. DBAT cannot read Photoscan Project (**.psx**) files. If you have a **.psx** project, use the *Save as...* menu in Photoscan and save the project as a Photoscan Archive (**.psz**). DBAT has been tested with Photoscan file versions up to v1.4.0, Photoscan program version v1.4.4 as well as a pre-release v1.5.0 of Metashape.

The **ps\_postproc** function can be used to post-process a Photoscan project. **loadplotpsz** may be useful to visualize the project, as computed by Photoscan. As of DBAT version 0.8.5.0, prior observations of the camera positions are acknowledged and used in the bundle.

**4.2.1.1 Known limitations** DBAT cannot handle all Photoscan coordinate systems. If you get strange results, you may have to convert to Local Coordinates. **loadplotpsz** may be useful for debugging the input.

### 4.2.2 PhotoModeler

This section describes how to import you own data using PhotoModeler text export files. If you have another type of input file, you may be able to write your own loader. Otherwise, if you have a text file you wish to import, feel free to mail the file to the the toolbox authors and request an import function. Although we cannot guarantee anything, we may adhere to the request, time permitting.

**4.2.2.1 Export from PhotoModeler** To import a PhotoModeler project into the toolbox, the following steps are valid in PhotoModeler Scanner 2012:

- Export the project using the *Export Text File* menu command. If the command is not available, follow the instructions in Appendix B.
- After export, open the *Project/Cameras...* dialog and select the camera that was used in your project.
- Open the generated text file in a text editor.
  - On the 2nd line (usually reading 0.00005 20), append the width and height in pixels of your images, e.g., to 0.000500 20 5616 3744.
  - Inspect the 4th line. For instance, the original data in **roma.txt** was (some trailing zeros removed):  
24.3581 18.1143 12.0 35.96404 24.0 0.00022 -0.0 0.0 0.0  
0.0

The values correspond to the following camera parameters:

focal pp\_x pp\_y format\_w format\_h K1 K2 K3 P1 P2.

Notice that most of the significant digits of K1–K3 were lost in the text export.

- Update the parameter values on the 4th line with values from the camera dialog *for each parameter with a larger number of significant digits in the dialog*. This usually means all parameters except `format_w`. In the `roma.txt` test case, the 4th line was modified to:  
24.3581 18.1143 12 35.96404 24 2.174e-4 -1.518e-7 0 0 0.

#### 4.2.2.2 Loading into Matlab

- In Matlab, run steps 1.1-1.2 under TESTING THE INSTALLATION from Section 2 if not already done.
- Call `loadplotdemo` with the name of your text export file as first parameter. A figure with your camera network, aligned with the first camera and rotated to have +Z 'up', should now have been generated.

**4.2.2.3 Using the bundle adjustment of DBAT** Modify either of the demo functions or the demo XML files to match what you want to do. The interesting results may either be in the plots or in the result file.

### 4.3 XML scripts

The XML scripting language allow the user to use most of the features of DBAT without writing or modifying any Matlab code. The processing is controlled via scripts written in the XML language.

#### 4.3.1 The XML language

The XML (eXtensible Markup Language) language<sup>2</sup> is a structured, text-based, markup language. The data components are called *elements* that contain *content* delineated by *tags*. Elements may have *attributes* that consist of name-value pairs within the opening tag. For instance, the element

```
<operation min_rays="2">check_ray_count</operation>
```

has the content `check_ray_count`, is surrounded by the tag `operation` and has an argument named `min_rays` with a value of 2. In DBAT, the argument `min_rays` with value 2 will be passed on to the operation `check_ray_count`.

The content of one element may be one or more other elements. Thus, elements may be grouped recursively. For instance, in

```
<operations>
  <operation>spatial_resection</operation>
  <operation>forward_intersection</operation>
  <operation>bundle_adjustment</operation>
</operations>
```

<sup>2</sup><https://en.wikipedia.org/wiki/XML>

the element `operations` contain three elements `operation`, that have the content `spatial_resection`, `forward_intersection`, and `bundle_adjustment`, respectively. This is used in DBAT XML files to organize group similar elements together.

#### 4.3.2 The DBAT XML file

The DBAT function `rundbatscript` processes a main XML script. The script is organized into four major parts: metadata, input, processing, and output.

**4.3.2.1 XML comments** The XML language supports comments on the form

```
<!-- Your comment goes here. -->
```

As of Matlab Version: 9.4.0.813654 (R2018a), the Matlab XML parser (or rather, the Java XML parser used by Matlab), has a bug in the comment parser. As a workaround, surround comments with the `<c>` tag instead, as in

```
<c>
  Your comment goes here.
</c>
```

**4.3.2.2 Metadata** The metadata section has the tag `<meta>`. As the name suggests, it is intended to be used for project metadata. However, the data is not processed by DBAT and any data may be stored there. Thus, the metadata section can be extended with any tag. Since the XML language is standardized, other software may interact with the DBAT XML files for e.g. storage or searching.

```
<meta>
  <name>Camcaldemo</name>
  <date>2019-10-23</date>
  <author>Niclas Börlin</author>
  <version>1.0</version>
  <project>DBAT</project>
  <project_unit>m</project_unit>
  <purpose>
    Demonstrate camera calibration using the scripting feature of
    DBAT. See also camcaldemo.m in the demo folder.
  </purpose>
  ...
</meta>
```

For more examples of metadata blocks, see the example scripts in Appendix E.4.

**4.3.2.3 Input** The input section uses the `<input>` tag and specifies what data to use for the processing, including camera specifications, control information, other prior observations, image lists and image observations. The camera information, image list and image observations are mandatory. Some information may be stored in separate XML or text files. See Section 4.3.2.6 for a discussion of path names. For a general discussion on text file formats, see Section 4.3.2.7.

**Cameras** The camera section uses the `<cameras>` tag. The camera information may be specified directly in the main XML file, as in

```
<cameras>
  <camera>
    <c>Camera specification goes here</c>
  </camera>
  <camera>
    <c>Another specification goes here</c>
  </camera>
</cameras>
```

or in a separate camera file, as in

```
<cameras>
  <file>cameras/camera.xml</file>
</cameras>
```

For a list of all camera parameters, consult Appendix E.1.1. For an example of a camera file, see Appendix E.1.2.

**Control points** The control point section uses the `<ctrl_pts>` tag. Control points are stored in "comma-separated" text files. The parsing of the text files are controlled via a `format` attribute. Furthermore, the control points may be filtered to remove unused control points or points used as check points. In the example below, the control points with id 351 and 410 are removed from the control point list. For a full list of the supported format components, see Appendix E.1.3. For an example control point file, see Appendix E.1.4.

```
<ctrl_pts>
  <file format="id,label,x,y,z,sx,sy,sz">
    reference/sxb-control.txt
  </file>
  <filter id="351,410">remove</filter>
</ctrl_pts>
```

**Check points** The check point section uses the `<check_pts>` tag and uses the same format as the control point section. If any point is used as both control and check point, an error is signalled. In the example below, the points excluded as control points above are used as check points.

```

<check_pts>
  <file format="id,label,x,y,z,sx,sy,sz">
    reference/sxb-control.txt
  </file>
  <filter id="351,410">keep</filter>
</check_pts>

```

**Images** The image list section uses the `<images>` tag. The information is stored in a comma-separated text file. The supported format components are listed in Appendix E.1.5. For an example image list file, see Appendix E.1.6. In the example below, any relative path name in the `images.txt` file is relative to the DBAT installation directory (see Section 4.3.2.6).

```

<images image_base_dir="$DBAT">
  <file format="id,path">images/images.txt</file>
</images>

```

The image files are not needed for DBAT computations. Thus, a non-present image file will only trigger an error if the image is needed for plotting of, e.g., image observations.

**Prior EO observations** The prior EO observations section uses the `<prior_eo>` tag. The data is stored in a comma-separated text file. In addition to the camera position, camera angles can be specified, in which case angle units must be specified. The supported format components are listed in Appendix E.1.7. An example EO file is presented in see Appendix E.1.8.

```

<prior_eo>
  <file format="id,x,y,z,omega,phi,kappa" units="degrees">
    prior/initial_eo.txt
  </file>
</prior_eo>

```

Prior EO observations may be used as prior observations and/or as initial values for the bundle.

**Image observations** The image observations section uses the `<image_pts>` tag. The image observations are stored in comma-separated text files. Multiple files may be specified, as in the example below. The standard deviations may be read from the text files or specified via attributes to the `file` tag. The supported format components are listed in Appendix E.1.9.

```
<image_pts>
  <file format="id,im,x,y" sxy="0.5">
    measurements/markpts.txt
  </file>
  <file format="id,im,x,y" sxy="1.0">
    measurements/smartpts.txt
  </file>
</image_pts>
```

**4.3.2.4 Processing** The processing section uses a single `<operations>` tag containing one or more `<operation>` tags. The listed operations will be executed in sequence. The operations are of seven types: Sanity checks, filtering, set initial values, specify parameters to estimate, set the datum, pre-bundle computation, and execute the bundle proper.

**Sanity checks** The sanity check operations include:

- Check ray count. Verify that no object point has too few rays. The minimum number of rays is specified via an attribute, as in

```
<operation min_rays="2">check_ray_count</operation>
```

An error will be thrown if an object point has fewer than the specified number of rays. A control point may have one fewer ray without triggering an error.

- Future sanity checks include check ray angles, check object point projections, check structural rank and check numerical rank.

**Filtering** Future filtering operations include:

- Filter on ray count. Remove any object points and associated image observations that have too few rays.
- Filter on intersection angle. Remove any object points that have too low intersection angle. For this filtering to be applied, camera and object point positions must have been estimated.

**Specify parameters to estimate** The `<set_bundle_estimate_params>` section specifies what parameters should be estimated by the bundle. The section is structured into IO, EO, and OP subsections. Within each subsection, the specifications are parsed in sequence. In the example below, all EO and OP parameters are estimated, as are all camera parameters except skew. See Appendix E.2.1 for a complete specification of the section.

```

<set_bundle_estimate_params>
  <io>
    <all>true</all>
    <skew>>false</skew>
  </io>
  <eo>true</eo>
  <op>true</op>
</set_bundle_estimate_params>

```

**Set initial values** The `<set_initial_values>` operation specifies initial values for the bundle. This should be used if the initial values are not computed by other means, e.g., by spatial intersection or forward intersection. Often, the initial values may be set to values loaded in the `input` section. In the example below, the IO and OP parameters are set to their preloaded values. No values are specified for the EO parameters, and they must be estimated by, e.g., spatial intersection. See Appendix E.2.2 for a complete specification.

```

<set_initial_values>
  <io>loaded</io>
  <op>loaded</op>
</set_initial_values>

```

**Set datum** Usually, the datum is set via control points. For a control-point-free project, it is possible to set up the project for dependent relative orientation instead. In that case, the EO parameters of one camera is fixed together with a position coordinate of another camera. In the example below, camera number 1 is used as the reference camera. The coordinate of the second camera is set to make the baseline as long as possible. If the baseline parameter is `x`, `y`, or `z`, the coordinate selection for the second camera is restricted to that coordinate.

```

<operation>
  <set_datum ref_cam="1" ref_base="longest">depend</set_datum>
</operation>

```

**Pre-bundle computations** The pre-bundle computations include

**Spatial resection** Estimate external orientation parameters by spatial resection. The operation will fail if IO parameters are unset or too few control points are visible in some image.

```

<operation>spatial_resection</operation>

```

**Forward intersection** Compute OP coordinates using forward intersection. Only the object points that are to be estimated by the bundle

are computed. The operation will fail unless the IO and EO parameters are set and that at least two image points are present for every object point.

```
<operation>forward_intersection</operation>
```

**The bundle proper** Execute the bundle adjustment procedure. All parameters must have initial values and the parameters to estimate must have been set.

```
<operation>bundle_adjustment</operation>
```

**4.3.2.5 Output** The output section specifies what plots (<plots>) and files (<files>) should be produced after the completion of the processing. A complete list of the plots that can be produced is given in Appendix E.3.1. A list of the output files that can be generated is presented in Appendix E.3.2.

**4.3.2.6 File organisation** The <input> and output <files> tags support the attribute `base_dir` that is used to simplify the organisation of files that belong to the same project. If the `base_dir` attribute is specified, any relative path name<sup>3</sup> in the subblock is assumed to be rooted in `base_dir`. For instance, the block

```
<input base_dir="C:/projects/sxb">
...
  <ctrl_pts>
    <file format="id,label,x,y,z,sx,sy,sz">
      reference/sxb-control.txt
    </file>
  </ctrl_pts>
...
</input>
```

will load the control points from the file `C:/projects/sxb/reference/sxb-control.txt`. The `base_dir` attribute can be any path. Furthermore, `base_dir` can be specified to be relative to the special directories listed below.

**\$DBAT** The root of the DBAT installation, i.e., the directory that contains the `README.txt` file.

**\$HOME** The home directory of the user, as known to Matlab via the `user.home` Java property<sup>4</sup>. This is typically `C:\Users\username` on Windows, `/Users/username` on Mac/OS X, and `/home/username` on Linux, where 'username' is the current user name.

<sup>3</sup>Path names can be absolute or relative. An absolute path name starts with a root symbol (backslash \ on Windows, slash / on other operating systems) or a drive letter followed by a colon, e.g. `C:\`. A relative path starts with something else.

<sup>4</sup>The Matlab command is `char(java.lang.System.getProperty('user.home'))`.



\$HERE The directory containing the XML file in use.

Furthermore, the `images` tag supports another tag `image_base_dir` that can be used to specify a root directory for the images. For instance, the block

```
<input base_dir="C:/projects/sxb">
...
  <images image_base_dir="Z:/server/project_images/sxb">
    <file format="id,path">images/images.txt</file>
  </images>
...
</input>
```

specifies that any relative path name loaded from `images.txt` is relative to the path `Z:/server/project_images/sxb`. Note that the path `images/images.txt` is relative to the input `base_dir`, i.e., the full path name is `C:/projects/sxb/images/images.txt`.

**4.3.2.7 Text files and format strings** Several types of data is stored in "comma-separated" text files. DBAT uses format strings to indicate what data is to be read or written to each file. As default, the text files may include comment lines starting with the hash (#) character. The non-comment lines contain the specified information, separated by commas<sup>5</sup>. The elements of the format are numeric or strings. Please note that any string cannot contain the separator character, i.e. a comma.

To avoid processing incorrect data, DBAT will require that each data line conforms to the format. If too few or too many elements are present on a data line, DBAT will signal an error. To allow some flexibility of what data to use, the format keyword `ignored` may be used to indicate that a data item is present, but should be ignored. For instance, if the data stored in a control point file corresponds to the format `"id,label,x,y,z,sx,sy,sz"`, but the standard deviations should be ignored, the format string `"id,label,x,y,z,ignored,ignored,ignored"` should be used.

### 4.3.3 Example scripts

The supplied scripts are presented in Appendix E.4. To run one of the supplied scripts, call `rundbatscript` with either of the strings `camcaldemo`, `romabundledemo`, or `sxb` as arguments. If you wish to locate a script yourself, start `rundbatscript` without any argument and you will be asked about the location of the script to run.

---

<sup>5</sup>The DBAT back-end supports other separators and comment characters. This support is not yet implemented in the DBAT front-end XML parser.

## 5 References

### References

- N. Börlin and P. Grussenmeyer. Bundle adjustment with and without damping. *Photogrammetric Record*, 28(144):396–415, Dec. 2013a. doi: 10.1111/phor.12037.
- N. Börlin and P. Grussenmeyer. Experiments with metadata-derived initial values and linesearch bundle adjustment in architectural photogrammetry. *ISPRS Annals of the Photogrammetry, Remote Sensing, and Spatial Information Sciences*, II-5/W1:43–48, Sept. 2013b. doi: 10.5194/isprsannals-II-5-W1-43-2013.
- N. Börlin and P. Grussenmeyer. Camera calibration using the damped bundle adjustment toolbox. *ISPRS Annals of the Photogrammetry, Remote Sensing, and Spatial Information Sciences*, II(5):89–96, June 2014. doi: 10.5194/isprsannals-II-5-89-2014. Best paper award.
- N. Börlin and P. Grussenmeyer. External verification of the bundle adjustment in photogrammetric software using the damped bundle adjustment toolbox. *International Archives of Photogrammetry, Remote Sensing, and Spatial Information Sciences*, XLI-B5:7–14, July 2016. doi: 10.5194/isprs-archives-XLI-B5-7-2016.
- N. Börlin, A. Murtiyoso, P. Grussenmeyer, F. Menna, and E. Nocerino. Modular bundle adjustment for photogrammetric computations. *International Archives of Photogrammetry, Remote Sensing, and Spatial Information Sciences*, XLII(2):133–140, June 2018. doi: <https://doi.org/10.5194/isprs-archives-XLII-2-133-2018>.
- N. Börlin, A. Murtiyoso, and P. Grussenmeyer. Implementing functional modularity for processing of general photogrammetric data with the damped bundle adjustment toolbox (dbat). *International Archives of Photogrammetry, Remote Sensing, and Spatial Information Sciences*, XLII(2/W17):69–75, Dec. 2019a. doi: 10.5194/isprs-archives-XLII-2-W17-69-2019.
- N. Börlin, A. Murtiyoso, P. Grussenmeyer, F. Menna, and E. Nocerino. Flexible photogrammetric computations using modular bundle adjustment. *Photogrammetric Engineering and Remote Sensing*, 85(5):361–368, May 2019b. doi: 10.14358/PERS.85.5.361.
- N. Börlin, A. Murtiyoso, and P. Grussenmeyer. Efficient computation of posterior covariance in bundle adjustment in dbat for projects with large number of object points. *International Archives of Photogrammetry, Remote Sensing, and Spatial Information Sciences*, 2020. To appear.

- L. Foster. Calculating the rank of sparse matrices using spnrank. <http://www.math.sjsu.edu/singular/matrices/software/SJsingular/Doc/spnrank.pdf>, Apr. 2009.
- R. M. Haralick, C.-N. Lee, K. Ottenberg, and M. Nölle. Review and analysis of solutions of the three point perspective pose estimation problem. *Int J Comp Vis*, 13(3):331–356, 1994.
- C. McGlone, E. Mikhail, and J. Bethel, editors. *Manual of Photogrammetry*. ASPRS, 5th edition, July 2004. ISBN 1-57083-071-1.
- A. Murtiyoso, P. Grussenmeyer, and N. Börlin. Reprocessing close range terrestrial and UAV photogrammetric projects with the DBAT toolbox for independent verification and quality control. *ISPRS - International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, XLII-2/W8:171–177, 2017. doi: 10.5194/isprs-archives-XLII-2-W8-171-2017.
- H. Stewénius, C. Engels, and D. Nistér. Recent developments on direct relative orientation. *ISPRS J Photogramm*, 60(4):284–294, June 2006.

## A License

```
# == LICENSE ==
#
# Copyright (C) 2013-2020, Niclas Börnin, niclas.borlin@cs.umu.se (*),
# and Pierre Grussenmeyer, pierre.grussenmeyer@insa-strasbourg.fr (**).
# All rights reserved.
#
# (*) Department of Computing Science, Umeå University, Sweden.
# (**) ICube Laboratory UMR 7357, Photogrammetry and Geomatics Group,
# Institut national des sciences appliquées de Strasbourg,
# Strasbourg, France.
#
# Redistribution and use in source and binary forms, with or without
# modification, are permitted provided that the following conditions
# are met:
#
# 1. Redistributions of source code must retain the above copyright
# notice, this list of conditions and the following disclaimer.
#
# 2. Redistributions in binary form must reproduce the above copyright
# notice, this list of conditions and the following disclaimer in
# the documentation and/or other materials provided with the
# distribution.
#
# 3. If you use the code, or derivatives thereof, for scientific
# publications, you should refer to on or more of the papers in the
# REFERENCES section.
#
# THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
# "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
# LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS
# FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE
# COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT,
# INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING,
# BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
# LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER
# CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
# LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN
# ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
# POSSIBILITY OF SUCH DAMAGE.
#
# == REFERENCES ==
#
# Börnin and Grussenmeyer (2013). "Bundle adjustment with and without
# damping", Photogrammetric Record, vol. 28(144):396-415.
# DOI: 10.1111/phor.12037.
# Börnin and Grussenmeyer (2013). "Experiments with Metadata-derived
# Initial Values and Linesearch Bundle Adjustment in Architectural
# Photogrammetry", ISPRS Annals of the Photogrammetry, Remote
# Sensing, and Spatial Information Sciences, vol II-5/W1:43-48.
# DOI: 10.5194/isprsannals-II-5-W1-43-2013.
# Börnin and Grussenmeyer (2014). "Camera Calibration using the Damped
# Bundle Adjustment Toolbox", ISPRS Annals of the Photogrammetry,
# Remote Sensing, and Spatial Information Sciences, vol
# II-5:89-96. DOI: 10.5194/isprsannals-II-5-89-2014.
# Börnin and Grussenmeyer (2016). "External Verification of the Bundle
# Adjustment in Photogrammetric Software using the Damped Bundle
# Adjustment Toolbox", ISPRS Archives XLII-B5, p. 7-14.
# DOI: 10.5194/isprs-archives-XLII-B5-7-2016.
# Murtiyoso, Grussenmeyer, and Börnin (2017). "Reprocessing close
# range terrestrial and UAV photogrammetric projects with the DBAT
# toolbox for independent verification and quality control.",
# ISPRS Archives XLII-2/W8:171-177.
# DOI: 10.5194/isprs-archives-XLII-2-W8-171-2017.
# Börnin, Murtiyoso, Grussenmeyer, Menna, and Nocerino (2018).
# "Modular bundle adjustment for photogrammetric computations",
# ISPRS Archives XLII-2:133-140.
# DOI: 10.5194/isprs-archives-XLII-2-133-2018.
# Börnin, Murtiyoso, Grussenmeyer, Menna, and Nocerino (2019).
# "Flexible Photogrammetric Computations using Modular Bundle Adjustment",
# Photogrammetric Engineering and Remote Sensing, vol. 85(5):361-369.
# DOI: 10.14358/PERS.85.5.361.
# Börnin, Murtiyoso, Grussenmeyer (2019).
# "Implementing Functional Modularity for Processing of General
# Photogrammetric Data with the Damped Bundle Adjustment Toolbox (DBAT)",
# ISPRS Archives, XLII-2/W17, p. 69-75.
# DOI: 10.5194/isprs-archives-XLII-2-W17-69-2019.
# Börnin, Murtiyoso, Grussenmeyer (2020).
# "Efficient Computation of Posterior Covariance in Bundle Adjustment
# in DBAT for Projects with Large Number of Object Points". To appear
# in the ISPRS Archives.
#
#
```

## B Enabling text export from PhotoModeler

Some versions of PhotoModeler do not have the text file export option enabled by default. In that case, the following steps worked in PhotoModeler Scanner 2012:

- Right-click on the main window toolbar, select *Customize toolbar...*
- In the *Commands* tab, select the *File* category.
- Drag the *Export Text File...* command to a toolbar of your choice.
- Now you should be able to export your project as a text file by clicking on the *Export Text File* button.

## C Rotation model

Currently, the only supported rotation model is the omega-phi-kappa Euler angle rotation model (McGlone et al., 2004, Ch. 2.1.2.3).

## D Result files

### D.1 Result file with missing observations

```
Damped Bundle Adjustment Toolbox result file
Project Name: Bundle Soln PhotoModeler Calibration Project
Problems and suggestions:
Project Problems:
  Structural rank: 417 (deficiency: 6)
  DMPERM suggests the following parameters have problems:
    OX-12/13
    OY-12/13
    OZ-12/13
    OX-59/60
    OY-59/60
    OZ-59/60
  Numerical rank: not tested.
Problems related to the processing: (1)
  Bundle failed with code -4 (see below for details).
.
.
.
```

### D.2 Result file with single-ray observations

```
Damped Bundle Adjustment Toolbox result file
Project Name: Bundle Soln PhotoModeler Calibration Project
Problems and suggestions:
Project Problems:
  Structural rank: 422 (deficiency: 1)
  DMPERM suggests the following parameters have problems:
    OZ-87/88
  Numerical rank: not tested.
Problems related to the processing: (1)
  Bundle failed with code -4 (see below for details).
.
.
.
```

### D.3 Result file with missing datum

```
Damped Bundle Adjustment Toolbox result file
Project Name: Bundle Soln PhotoModeler Calibration Project
Problems and suggestions:
Project Problems:
  Structural rank: ok.
  Numerical rank: 428 (deficiency: 7)
  Null-space suggest the following parameters are part of the problem:
    Vector 1 (eigenvalue 1.36254e-18):
      (EX-21, -0.156)
      (EX-9, -0.13)
      (EX-13, -0.12)
      (EX-10, -0.119)
      (EX-11, -0.115)
      (EX-12, -0.108)
      (EX-14, -0.104)
    Vector 2 (eigenvalue -1.60532e-17):
      (EX-21, 0.207)
      (EY-21, 0.195)
      (EY-1, 0.192)
      (EY-2, 0.178)
      (EX-13, 0.167)
      (EY-15, 0.166)
      (EY-3, 0.166)
      (EY-4, 0.163)
      (EY-16, 0.161)
      (EX-14, 0.157)
      (EX-15, 0.151)
      (EX-11, 0.149)
      (EY-18, 0.147)
      (EX-12, 0.146)
      (EX-16, 0.145)
      (EY-20, 0.133)
      (EY-17, 0.128)
    Vector 3 (eigenvalue 5.21745e-17):
      (om-21, -0.16)
      (EX-3, -0.155)
      (EX-4, -0.151)
      (EX-5, -0.147)
      (EX-6, -0.136)
      (E2-7, 0.132)
      (om-13, -0.129)
      (EX-1, -0.129)
      (om-15, -0.127)
      (om-16, -0.125)
      (E2-8, 0.125)
      (om-14, -0.125)
      (E2-9, 0.122)
      (EX-2, -0.117)
      (om-11, -0.116)
      (E2-10, 0.116)
      (om-12, -0.114)
      (om-18, -0.113)
      (om-20, -0.113)
      (E2-11, 0.111)
      (EX-7, -0.111)
      (E2-12, 0.11)
      (om-19, -0.109)
      (om-9, -0.108)
      (E2-5, 0.107)
      (om-1, -0.106)
      (om-17, -0.106)
      (om-2, -0.105)
      (om-10, -0.105)
    Vector 4 (eigenvalue -5.5516e-17):
      (E2-21, -0.174)
      (EX-5, -0.13)
      (EX-7, -0.129)
      (EX-8, -0.12)
      (EX-6, -0.119)
      (EY-9, -0.114)
      (EY-11, -0.111)
    Vector 5 (eigenvalue -1.45759e-16):
      (EY-7, 0.158)
      (EY-5, 0.154)
      (EY-8, 0.153)
      (EY-9, 0.151)
      (om-4, -0.147)
      (EY-19, 0.147)
      (om-3, -0.144)
      (EY-6, 0.143)
      (EY-10, 0.143)
      (EY-17, 0.133)
      (E2-3, -0.132)
      (E2-4, -0.129)
      (om-17, -0.126)
      (om-19, -0.126)
      (om-18, -0.125)
      (om-1, -0.124)
```

```

(om-9, -0.124)
(om-2, -0.124)
(EY-18, 0.121)
(om-10, -0.121)
(EY-20, 0.12)
(om-20, -0.12)
(om-5, -0.12)
(EZ-2, -0.118)
(EZ-1, -0.118)
(om-6, -0.116)
(ph-9, -0.114)
(ph-7, -0.113)
(ph-11, -0.112)
(EY-11, 0.112)
(ph-12, -0.111)
(ph-8, -0.11)
(ph-10, -0.109)
(ph-5, -0.108)
(om-11, -0.108)
(EY-12, 0.107)
(EZ-5, -0.106)
(ph-13, -0.106)
(om-7, -0.104)
(ph-19, -0.104)
(om-12, -0.104)
(ph-14, -0.104)
Vector 6 (eigenvalue -1.54875e-16):
(om-21, 0.185)
(ph-9, -0.174)
(EZ-21, 0.174)
(ph-10, -0.169)
(ph-11, -0.167)
(ph-7, -0.167)
(ph-8, -0.165)
(ph-12, -0.164)
(EX-9, -0.162)
(EX-7, -0.161)
(EX-8, -0.161)
(EY-11, -0.148)
(EY-12, -0.146)
(EX-10, -0.146)
(EZ-15, 0.142)
(EZ-16, 0.137)
(EY-13, -0.136)
(ph-5, -0.135)
(EY-14, -0.133)
(EZ-13, 0.127)
(ph-13, -0.127)
(EZ-14, 0.126)
(ph-14, -0.124)
(ph-6, -0.123)
(ph-19, -0.12)
(EY-21, -0.117)
Vector 7 (eigenvalue 1.9046e-16):
(ph-1, 0.194)
(ph-2, 0.194)
(ph-15, 0.173)
(EX-2, 0.173)
(om-5, -0.173)
(ph-16, 0.169)
(ph-4, 0.169)
(EX-1, 0.168)
(ph-3, 0.164)
(om-8, -0.163)
(om-7, -0.16)
(om-6, -0.16)
(ph-21, 0.157)
(EY-21, -0.138)
(EY-5, 0.138)
(EY-6, 0.132)
(om-3, -0.127)
(ph-20, 0.126)
(om-4, -0.125)
Problems related to the processing: (1)
Bundle failed with code -2 (see below for details).
.
.
.

```

## D.4 Successful result file example

```
Damped Bundle Adjustment Toolbox result file
Project
  Name      : Bundle Soln PhotoModeler Calibration Project
  Computation UUID : ad3f5419-1c29-427b-a0b7-af5bfe2d4827
  Input file name  : /home/niclas/dbat/data/dbat/psexports/camcal-psexport.txt
  Ctrl pt file    : /home/niclas/dbat/data/dbat/ref/camcal-fixed.txt
Problems and suggestions:
Project Problems:
  Structural rank: ok.
  Numerical rank: ok.
  Problems related to the processing: (1)
    One or more of the camera parameter has a high correlation (see below).
Information from last bundle
  Last Bundle Run: 27-Jun-2020 01:17:24
  DBAT version: 0.9.2.0 (2020-06-27)
  MATLAB version: 9.8.0.1323502 (R2020a)
  Host system: GLNXA64 (endian=L, max #elems=281474976710655)
  Host name: slartibartfast
  Status: OK
  Sigma0: 1.6148
  Sigma0 (pixels): 0.16148
  Redundancy: 3725
  Number of params: 423 (9 ID, 126 ED, 288 OP)
  Number of observations: 4148 (4148 IP, 0 ID, 0 ED, 0 OP)
Processing options:
  Orientation: on
  Global optimization: on
  Calibration: on
  Constraints: off
  Maximum # of iterations: 20
  Convergence tolerance: 1e-06
  Termination criteria: relative
  Singular test: on
  Chirality veto: off
  Damping: gna
  Camera unit (cu): mm
  Object space unit (ou): m
  Initial value comment: Camera calibration from EXIF value
Total error:
  Number of stages: 1
  Number of iterations: 9
  First error: 30873.9
  Last error: 98.556
Execution times (s):
  Bundle: 1.17
  Post-cov prep: 0.02
  Post-cov CIG: 0.00
  Post-cov CEO: 0.01
  Post-cov COP: 0.01
Lens distortion models:
  Backward (Photogrammetry) model 3
Cameras:
  Calibration: yes (cc px py as K1 K2 K3 P1 P2)
  Camera1 (simple)
    Lens distortion model:
      Backward (Photogrammetry) model 3
    Camera Constant:
      Value: 7.457 mm
      Deviation: 0.00105 mm
    px - principal point x:
      Value: 3.61546 mm
      Deviation: 0.00082 mm
    py - principal point y:
      Value: 2.61329 mm
      Deviation: 0.00098 mm
    Format width:
      Value: 7.25301 mm
    Format height:
      Value: 5.43764 mm
    K1 - radial distortion 1:
      Value: 0.00458861 mm-3
      Deviation: 2.21e-05 mm-3
      Significance: p=1.00
      Cumulative significance: p=1.00
    K2 - radial distortion 2:
      Value: -4.51351e-05 mm-5
      Deviation: 2.65e-06 mm-5
      Significance: p=1.00
      Cumulative significance: p=1.00
      Correlations over 95%: K3: -97.9%
    K3 - radial distortion 3:
      Value: -2.05253e-06 mm-7
      Deviation: 1.01e-07 mm-7
      Significance: p=1.00
      Cumulative significance: p=1.00
      Correlations over 95%: K2: -97.9%
    P1 - decentering distortion 1:
      Value: -6.12803e-05 mm-3
```



```

Deviation: 3.52e-06 mm*(-3)
Significance: p=1.00
P2 - decentering distortion 2:
Value: -4.41172e-05 mm*(-3)
Deviation: 3.94e-06 mm*(-3)
as - off-unit aspect parameter:
Value: 0.000389598
Deviation: 2.08e-05
Significance: p=1.00
sk - skew:
Value: 0
Image width:
Value: 2272 px
Image height:
Value: 1704 px
X resolution:
Value: 313.249 px/mm
Y resolution:
Value: 313.371 px/mm
Pixel width:
Value: 0.00319235 mm
Pixel height:
Value: 0.0031911 mm
Rated angle of view (h,v,d): (52, 40, 63) deg
Largest distortion: 0.37 mm (116.2 px, 8.2% of half-diagonal)
Precisions / Standard Deviations:
Photograph Standard Deviations:
Photo 1: P8250021.JPG
Omega:
Value: -39.413082 deg
Deviation: 0.0085 deg
Phi:
Value: -1.183179 deg
Deviation: 0.00761 deg
Kappa:
Value: -179.838467 deg
Deviation: 0.00275 deg
Xc:
Value: 0.454947 ou
Deviation: 0.000155 ou
Yc:
Value: 1.793849 ou
Deviation: 0.000179 ou
Zc:
Value: 1.468066 ou
Deviation: 0.000207 ou
Photo 2: P8250022.JPG
Omega:
Value: -39.734523 deg
Deviation: 0.00816 deg
Phi:
Value: -1.813688 deg
Deviation: 0.00886 deg
Kappa:
Value: -90.123062 deg
Deviation: 0.00289 deg
Xc:
Value: 0.470305 ou
Deviation: 0.000186 ou
Yc:
Value: 2.026401 ou
Deviation: 0.000219 ou
Zc:
Value: 1.639148 ou
Deviation: 0.000232 ou
Photo 3: P8250023.JPG
Omega:
Value: -27.227000 deg
Deviation: 0.0105 deg
Phi:
Value: -28.559177 deg
Deviation: 0.00753 deg
Kappa:
Value: -141.839170 deg
Deviation: 0.00538 deg
Xc:
Value: -0.644442 ou
Deviation: 0.000188 ou
Yc:
Value: 1.466578 ou
Deviation: 0.000179 ou
Zc:
Value: 1.580187 ou
Deviation: 0.000243 ou
Photo 4: P8250024.JPG
Omega:
Value: -28.556794 deg
Deviation: 0.00881 deg
Phi:
Value: -30.289704 deg
Deviation: 0.00923 deg

```

Kappa:  
   Value: -49.786720 deg  
   Deviation: 0.00467 deg  
 Xc:  
   Value: -0.643144 ou  
   Deviation: 0.000198 ou  
 Yc:  
   Value: 1.490295 ou  
   Deviation: 0.000202 ou  
 Zc:  
   Value: 1.637492 ou  
   Deviation: 0.000246 ou  
 Photo 5: P8250025.JPG  
   Omega:  
     Value: 4.385418 deg  
     Deviation: 0.00943 deg  
   Phi:  
     Value: -34.659929 deg  
     Deviation: 0.00863 deg  
   Kappa:  
     Value: -87.134063 deg  
     Deviation: 0.00519 deg  
   Xc:  
     Value: -0.671014 ou  
     Deviation: 0.000158 ou  
   Yc:  
     Value: 0.417412 ou  
     Deviation: 0.000144 ou  
   Zc:  
     Value: 1.409244 ou  
     Deviation: 0.000193 ou  
 Photo 6: P8250026.JPG  
   Omega:  
     Value: 2.063986 deg  
     Deviation: 0.0103 deg  
   Phi:  
     Value: -33.988460 deg  
     Deviation: 0.00823 deg  
   Kappa:  
     Value: 1.485869 deg  
     Deviation: 0.00587 deg  
   Xc:  
     Value: -0.712797 ou  
     Deviation: 0.000177 ou  
   Yc:  
     Value: 0.476083 ou  
     Deviation: 0.000155 ou  
   Zc:  
     Value: 1.465130 ou  
     Deviation: 0.000203 ou  
 Photo 7: P8250027.JPG  
   Omega:  
     Value: 27.342174 deg  
     Deviation: 0.00854 deg  
   Phi:  
     Value: -28.292503 deg  
     Deviation: 0.00875 deg  
   Kappa:  
     Value: -44.210389 deg  
     Deviation: 0.00445 deg  
   Xc:  
     Value: -0.534821 ou  
     Deviation: 0.000154 ou  
   Yc:  
     Value: -0.349595 ou  
     Deviation: 0.000157 ou  
   Zc:  
     Value: 1.402489 ou  
     Deviation: 0.000212 ou  
 Photo 8: P8250028.JPG  
   Omega:  
     Value: 26.875970 deg  
     Deviation: 0.0107 deg  
   Phi:  
     Value: -28.129516 deg  
     Deviation: 0.00757 deg  
   Kappa:  
     Value: 44.840805 deg  
     Deviation: 0.00553 deg  
   Xc:  
     Value: -0.718081 ou  
     Deviation: 0.000218 ou  
   Yc:  
     Value: -0.466107 ou  
     Deviation: 0.000204 ou  
   Zc:  
     Value: 1.715475 ou  
     Deviation: 0.000264 ou  
 Photo 9: P8250029.JPG  
   Omega:  
     Value: 30.383673 deg

```

    Deviation: 0.00856 deg
  Phi:
    Value: 0.193944 deg
    Deviation: 0.00776 deg
  Kappa:
    Value: 0.084838 deg
    Deviation: 0.00248 deg
  Xc:
    Value: 0.524897 ou
    Deviation: 0.000161 ou
  Yc:
    Value: -0.543737 ou
    Deviation: 0.000167 ou
  Zc:
    Value: 1.533003 ou
    Deviation: 0.000208 ou
Photo 10: P8250030.JPG
  Omega:
    Value: 30.975069 deg
    Deviation: 0.0085 deg
  Phi:
    Value: 1.702984 deg
    Deviation: 0.00879 deg
  Kappa:
    Value: 89.537060 deg
    Deviation: 0.00264 deg
  Xc:
    Value: 0.554430 ou
    Deviation: 0.000176 ou
  Yc:
    Value: -0.592328 ou
    Deviation: 0.000194 ou
  Zc:
    Value: 1.617413 ou
    Deviation: 0.000216 ou
Photo 11: P8250031.JPG
  Omega:
    Value: 27.620051 deg
    Deviation: 0.0106 deg
  Phi:
    Value: 30.742857 deg
    Deviation: 0.00756 deg
  Kappa:
    Value: 42.343765 deg
    Deviation: 0.00584 deg
  Xc:
    Value: 1.770052 ou
    Deviation: 0.000191 ou
  Yc:
    Value: -0.425243 ou
    Deviation: 0.00018 ou
  Zc:
    Value: 1.551302 ou
    Deviation: 0.000241 ou
Photo 12: P8250032.JPG
  Omega:
    Value: 24.647784 deg
    Deviation: 0.00901 deg
  Phi:
    Value: 30.199261 deg
    Deviation: 0.00965 deg
  Kappa:
    Value: 133.199858 deg
    Deviation: 0.00493 deg
  Xc:
    Value: 1.864503 ou
    Deviation: 0.000201 ou
  Yc:
    Value: -0.480191 ou
    Deviation: 0.000202 ou
  Zc:
    Value: 1.614517 ou
    Deviation: 0.000255 ou
Photo 13: P8250033.JPG
  Omega:
    Value: 0.519301 deg
    Deviation: 0.00941 deg
  Phi:
    Value: 33.141786 deg
    Deviation: 0.00865 deg
  Kappa:
    Value: 88.708362 deg
    Deviation: 0.00499 deg
  Xc:
    Value: 1.630951 ou
    Deviation: 0.000165 ou
  Yc:
    Value: 0.497645 ou
    Deviation: 0.000151 ou
  Zc:
    Value: 1.470402 ou

```

Deviation: 0.000199 ou  
 Photo 14: P8250034.JPG  
 Omega:  
 Value: -1.707201 deg  
 Deviation: 0.0105 deg  
 Phi:  
 Value: 33.605390 deg  
 Deviation: 0.00835 deg  
 Kappa:  
 Value: 180.179674 deg  
 Deviation: 0.00585 deg  
 Xc:  
 Value: 1.795963 ou  
 Deviation: 0.000196 ou  
 Yc:  
 Value: 0.525690 ou  
 Deviation: 0.000177 ou  
 Zc:  
 Value: 1.598647 ou  
 Deviation: 0.000218 ou  
 Photo 15: P8250035.JPG  
 Omega:  
 Value: -30.757132 deg  
 Deviation: 0.00869 deg  
 Phi:  
 Value: 28.161929 deg  
 Deviation: 0.00893 deg  
 Kappa:  
 Value: 138.427120 deg  
 Deviation: 0.00462 deg  
 Xc:  
 Value: 1.671692 ou  
 Deviation: 0.000177 ou  
 Yc:  
 Value: 1.554494 ou  
 Deviation: 0.000178 ou  
 Zc:  
 Value: 1.500046 ou  
 Deviation: 0.000239 ou  
 Photo 16: P8250036.JPG  
 Omega:  
 Value: -29.841912 deg  
 Deviation: 0.0105 deg  
 Phi:  
 Value: 26.976407 deg  
 Deviation: 0.00757 deg  
 Kappa:  
 Value: -134.657860 deg  
 Deviation: 0.00543 deg  
 Xc:  
 Value: 1.693214 ou  
 Deviation: 0.000204 ou  
 Yc:  
 Value: 1.619159 ou  
 Deviation: 0.000189 ou  
 Zc:  
 Value: 1.590375 ou  
 Deviation: 0.000252 ou  
 Photo 17: P8250037.JPG  
 Omega:  
 Value: -8.536369 deg  
 Deviation: 0.00979 deg  
 Phi:  
 Value: -0.515819 deg  
 Deviation: 0.00956 deg  
 Kappa:  
 Value: 179.396590 deg  
 Deviation: 0.00198 deg  
 Xc:  
 Value: 0.424677 ou  
 Deviation: 0.000287 ou  
 Yc:  
 Value: 0.824641 ou  
 Deviation: 0.000288 ou  
 Zc:  
 Value: 1.971217 ou  
 Deviation: 0.000246 ou  
 Photo 18: P8250038.JPG  
 Omega:  
 Value: -4.760952 deg  
 Deviation: 0.00959 deg  
 Phi:  
 Value: 0.661695 deg  
 Deviation: 0.00919 deg  
 Kappa:  
 Value: 88.788380 deg  
 Deviation: 0.00189 deg  
 Xc:  
 Value: 0.483059 ou  
 Deviation: 0.000268 ou  
 Yc:

```

Value: 0.925982 ou
Deviation: 0.000284 ou
Zc:
Value: 1.885017 ou
Deviation: 0.000229 ou
Photo 19: P8250039.JPG
Omega:
Value: -4.415305 deg
Deviation: 0.00923 deg
Phi:
Value: -0.416632 deg
Deviation: 0.00926 deg
Kappa:
Value: 88.245577 deg
Deviation: 0.00186 deg
Xc:
Value: 0.462946 ou
Deviation: 0.000275 ou
Yc:
Value: 0.578695 ou
Deviation: 0.000271 ou
Zc:
Value: 1.874858 ou
Deviation: 0.00021 ou
Photo 20: P8250040.JPG
Omega:
Value: -7.619745 deg
Deviation: 0.00935 deg
Phi:
Value: -1.571494 deg
Deviation: 0.0103 deg
Kappa:
Value: -180.050126 deg
Deviation: 0.00199 deg
Xc:
Value: 0.701429 ou
Deviation: 0.000319 ou
Yc:
Value: 0.784042 ou
Deviation: 0.000278 ou
Zc:
Value: 1.925303 ou
Deviation: 0.00024 ou
Photo 21: P8250041.JPG
Omega:
Value: -8.708623 deg
Deviation: 0.00925 deg
Phi:
Value: 1.058407 deg
Deviation: 0.0102 deg
Kappa:
Value: -182.614638 deg
Deviation: 0.00203 deg
Xc:
Value: 0.269149 ou
Deviation: 0.000314 ou
Yc:
Value: 0.822761 ou
Deviation: 0.000266 ou
Zc:
Value: 1.904844 ou
Deviation: 0.000243 ou
Quality
Photographs
Total number: 21
Numbers used: 21
Cameras
Total number: 1 (1 simple, 0 mixed)
Camera1:
Calibration: yes
Number of photos using camera: 21
Photo point coverage:
Rectangular: 41%-83% (61% average, 92% union)
Convex hull: 31%-62% (46% average, 87% union)
Radial: 60%-92% (73% average, 92% union)
Photo Coverage
Reference points outside calibrated region:
Camera 1: none
Point Measurements
Number of control pts: 4
Number of check pts: 0
Number of object pts: 96
CP ray count: 21-21 (21.0 avg)
4 points with 21 rays.
CCP ray count: -
OP ray count: 16-21 (20.7 avg)
1 points with 16 rays.
1 points with 17 rays.
2 points with 18 rays.
3 points with 19 rays.
5 points with 20 rays.

```

```

      84 points with 21 rays.
Point Marking Residuals
Overall point RMS: 0.216 pixels
Mark point residuals:
  Maximum: 0.955 pixels (DP 1003 on photo 5)
Object point residuals (RMS over all images of a point):
  Minimum: 0.095 pixels (DP 65 over 21 images)
  Maximum: 0.553 pixels (DP 1004 over 21 images)
Photo residuals (RMS over all points in an image):
  Minimum: 0.153 pixels (photo 4 over 97 points)
  Maximum: 0.281 pixels (photo 11 over 100 points)
Point Precision
Total standard deviation (RMS of X/Y/Z std):
  Minimum: 8.2e-05 (DP 49)
  Maximum: 0.00011 (DP 90)
Maximum X standard deviation: 5e-05 (DP 90)
Maximum Y standard deviation: 5.3e-05 (DP 90)
Maximum Z standard deviation: 8.5e-05 (DP 90)
Points with high correlations
  Points with correlation above 95%: 0
  Points with correlation above 99%: 0
Point Angles
CP
  Minimum: 83.4 degrees (CP 1003, label CP3)
  Maximum: 85.8 degrees (CP 1002, label CP2)
  Average: 84.7 degrees
CCP
  Minimum: -
  Maximum: -
  Average: -
OP
  Minimum: 79.6 degrees (DP 90)
  Maximum: 90.0 degrees (DP 59)
  Average: 86.5 degrees
Smallest angles (ID, angle [deg], vis in cameras)
90: 79.61 ( 1 2 3 5 8 9 11 13 14 15 16 17 18 19 20 21)
8: 81.00 ( 1 2 3 4 5 7 9 10 11 12 13 14 15 17 18 19 20 21)
92: 81.15 ( 1 2 3 4 5 7 8 9 10 11 13 14 15 16 17 18 19 20 21)
Ctrl measurements
Prior
  id,      x,      y,      z,      stdx,      stdy,      stdz, label
1001, 0.000, 1.000, 0.000, 0, 0, 0, CP1
1002, 1.000, 1.000, 0.000, 0, 0, 0, CP2
1003, 0.000, 0.000, 0.000, 0, 0, 0, CP3
1004, 1.000, 0.000, 0.000, 0, 0, 0, CP4
Posterior
  id,      x,      y,      z,      stdx,      stdy,      stdz, rays, label
1001, 0.000, 1.000, 0.000, 0, 0, 0, 21, CP1
1002, 1.000, 1.000, 0.000, 0, 0, 0, 21, CP2
1003, 0.000, 0.000, 0.000, 0, 0, 0, 21, CP3
1004, 1.000, 0.000, 0.000, 0, 0, 0, 21, CP4
Diff (pos=abs diff, std=rel diff)
  id,      x,      y,      z,      xy,      xyz,      stdx,      stdy,      stdz, rays, label
1001, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21, CP1
1002, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21, CP2
1003, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21, CP3
1004, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21, CP4
Ctrl point delta
Max: 0.000 ou (CP1, pt 1001)
Max X,Y,Z
  X: 0.000 ou (CP1, pt 1001)
  Y: 0.000 ou (CP1, pt 1001)
  Z: 0.000 ou (CP1, pt 1001)
RMS: 0.000 ou (from 4 items)
Check measurements
  none
End of result file

```

## E XML

### E.1 XML input section

#### E.1.1 Camera specification

The tags below are used to specify camera information.

**E.1.1.1 Descriptive parameters** The following parameters describe the camera type and projection model:

**id** Integer. The camera number used if multiple cameras are used. Not currently supported.

**name** A string describing the camera.

**unit** A string with the unit used to describe the camera parameters. Currently, only `mm` is supported.

**image** The width and height of the image, in pixels, separated by a comma.

**sensor** The sensor width and height, in camera units, separated by a comma. The special string `auto` may be used for the sensor width, in which case the sensor width is computed to match the `aspect`. See also `aspect`.

**focal** The nominal focal length in camera units.

**nK** The number of radial lens distortion coefficients. Can also be specified implicitly via the `K` tag.

**nP** The number of tangential lens distortion coefficients. Can also be specified implicitly via the `P` tag.

**calibrated** String `yes` or `no`, indicating whether the camera is calibrated.

**model** Integer denoting the projection model to be used by DBAT.

**E.1.1.2 Calibration parameters** The following parameters can be estimated by the bundle:

**cc** The camera constant.

**pp** The principal point coordinates, separated by a comma. The special string `default` will set the principal point to the center of the image.

**aspect** The pixel aspect ratio, i.e., width/height. The special string `auto` can be used to compute the aspect ratio from the sensor and image sizes. See also `sensor`.

**skew** The skew, i.e., the non-orthogonality of the image axis.

**K** The radial lens distortion coefficients values, separated by commas.

**P** The tangential lens distortion coefficients values, separated by commas.

### E.1.2 Camera file example

The following file is an example of a file with a calibrated camera.

```
<?xml version="1.0" encoding="utf-8"?>
<document dbat_camera_version="1.0">
  <cameras>
    <camera>
      <id>1</id>
      <name>Canon EOS 5D Mark II</name>
      <unit>mm</unit>
      <calibrated>yes</calibrated>
      <sensor>auto,24</sensor>
      <image>5616,3744</image>
      <aspect>1</aspect>
      <focal>7.5</focal>
      <model>3</model>
      <nK>3</nK>
      <nP>2</nP>
      <cc>24.3581</cc>
      <pp>18.1143,12</pp>
      <skew>0</skew>
      <K>2.174e-4,-1.518e-7,0</K>
      <P>0,0</P>
    </camera>
  </cameras>
</document>
```

### E.1.3 Control point format

The following strings are supported in control/check point format strings:

Name	Description
id	integer id for the control point
label	string with the name of the control point
ignored	field to be ignored
x, y, z	numeric fields with x, y, or, z coordinates of the control point
sx, sy, sz	numeric fields with standard deviations of individual coordinates
sxy	numeric field with the planimetric standard deviation
sxyz	numeric field with the standard deviation for all coordinates

Please note that any string component cannot contain the separator character (comma as default).

### E.1.4 Control point file example

The following file is an example of a control point file.



```
# Id, Name, X, Y, Z, sigmaX, sigmaY, sigmaZ
317, B2.16, 999604.580, 112344.443, 139.453, 0.02, 0.02, 0.04
375, B3.05, 999619.041, 112370.818, 138.97, 0.02, 0.02, 0.04
403, B3.09, 999170.674, 112692.548, 139.64, 0.02, 0.02, 0.04
410, B3.11, 999974.432, 112476.893, 139.72, 0.02, 0.02, 0.04
422, B3.13, 1000126.748, 112179.093, 138.54, 0.02, 0.02, 0.04
428, B3.14, 999971.948, 112044.540, 139.55, 0.02, 0.02, 0.04
333, B4.1, 1000134.50, 112591.16, 138.01, 0.02, 0.02, 0.04
347, B4.5, 1000460.33, 112765.82, 139.45, 0.02, 0.02, 0.04
```

### E.1.5 Image list format

The following strings are supported in the image list format strings:

Name	Description
id	integer id for the image id
path	string with the path to the image file
label	string with the label to use for the image
ignored	field to be ignored

If no label is specified in the format string, the last path component is used. Please note that any string components cannot contain the separator character (comma as default).

### E.1.6 Image list file example

The following file is an example of a image list file.

```
# id, path
1, data/prague2016/sxb/images/8811.jpg
2, data/prague2016/sxb/images/8936.jpg
3, data/prague2016/sxb/images/8937.jpg
4, data/prague2016/sxb/images/8938.jpg
5, data/prague2016/sxb/images/9111.jpg
```

### E.1.7 Prior EO observation format

The following strings are supported in the prior EO observation format strings:

Name	Description
id	integer id corresponding to the image id
ignored	field to be ignored
x, y, z	numeric fields with x, y, or, z coordinates of the control point
sx, sy, sz	numeric fields with standard deviations of individual coordinates
sxy	numeric field with the planimetric standard deviation
sxyz	numeric field with the standard deviation for all coordinates
omega, phi, kappa	numeric fields with camera angles
so, sp, sk	numeric fields with individual angle standard deviations
sang	numeric field with common angle standard deviation

If any angles are specified in the format string, angle units must be specified via the `units` attribute. Supported angle units are `degrees`, `radians`, and `gon`.

### E.1.8 Prior EO observation file example

The following file is part of a file with prior EO observations.

```
# Initial EO values for the romabundledemo script demo
1, 1.86, -19.22, -6.49, 39.43, 7.46, 99.59
2, 1.97, -19.39, -6.45, 40.85, -0.68, 9.61
3, 1.57, -18.08, -5.02, 42.47, 3.25, 8.53
4, 1.24, -16.93, -2.65, 41.84, 0.98, 8.63
5, 0.45, -14.60, -0.73, 40.82, 0.20, 10.35
6, -0.09, -12.49, 1.20, 32.81, -0.17, 8.40
7, -0.09, -8.47, 2.02, 23.81, -2.03, 5.42
8, -0.36, -5.72, 2.30, 15.97, -2.18, 3.20
```

### E.1.9 Image observation format

The following strings are supported in the image observation format strings:

Name	Description
id	integer corresponding to the point id
im	integer corresponding to the image id
ignored	field to be ignored
x, y	numeric fields with x, y, or, z coordinates of the control point
sx, sy	numeric fields with standard deviations of individual coordinates
sxy	numeric field with the planimetric standard deviation

## E.2 Operations

### E.2.1 Specify parameters to estimate

The `<set_bundle_estimate_params>` section has `<io>`, `<eo>`, and `<op>` subsections. Within each subsection, parameter names, individual or groups, are listed with a `true` or `false` string as content. For the EO and OP parameters, the string `default` may be used to indicate that all parameters except parameters with fixed prior observations, including control points, should be estimated. The tags within the subsections are parsed and executed in sequence. Thus, in the example below, all camera parameters are estimated except skew.

```
<set_bundle_estimate_params>
  <io>
    <all>true</all>
    <skew>false</skew>
  </io>
  <eo>
    <all>true</all>
  </eo>
  <op>
    <all>true</all>
  </op>
</set_bundle_estimate_params>
```

If the same string applies to all parameters in a subblock, the block may be abbreviated. In the example below, none of the IO parameters, all of the EO parameters, and all non-fixed OP parameters are estimated.

```
<set_bundle_estimate_params>
  <io>false</io>
  <eo>true</eo>
  <op>default</op>
</set_bundle_estimate_params>
```

The table below contains all tags that may be used to specify what parameters to estimate.

IO parameters	
cc	The camera constant
pp	The principal point
px, py	The x- and y- components of the principal point
aspect	The pixel aspect ratio
skew	The image axis off-orthogonal parameter
K	All radial lens distortion coefficients
K1, K2, K3	Individual radial lens distortion coefficients
P	All tangential lens distortion coefficients
P1, P2	Individual tangential lens distortion coefficients
all	All camera parameters
EO parameters	
x, y, z	Individual coordinates
pos	All coordinates
angles	All angles
all	All external orientation parameters
OP parameters	
x, y, z	Individual coordinates
all	All coordinates

If parameter  $K_i$  is set to be estimated, so is  $K_1, \dots, K_{i-1}$ . Similarly, if parameter  $K_i$  is set to not be estimated, so is  $K_{i+1}, \dots$ . The same is true for the  $P$  parameters, except that  $P_1$  and  $P_2$  are always estimated together.

### E.2.2 Specify initial values

The `<set_initial_values>` section is similarly organized as the `<set_bundle_estimate_params>`. Thus, it has `<io>`, `<eo>`, and `<op>` subsections and the tags within each subsection are parsed and executed in sequence.

The only content for the EO and OP sections is the string `loaded`, which means that prior observations loaded by the input section are used as initial values. The `loaded` string may also be used for the IO parameters. Otherwise, IO parameters may be set to specified constant values or default values. For the principal point, radial, and tangential distortion coefficients, multiple values (2, `nK`, and `nP`, respectively) should be entered separated by commas. The string `focal` can be used for the camera constant to use the nominal focal length as an initial value. The string `default` can be used for all parameters with meanings in the table below:

Parameter	Default value
<code>cc</code>	<code>focal</code>
<code>pp</code>	The center of the image
<code>aspect</code>	1
<code>skew</code>	0
<code>K</code>	List of <code>nK</code> zeros
<code>P</code>	List of <code>nP</code> zeros
<code>all</code>	All values above

## E.3 XML output section

### E.3.1 Plots

The plots that may be generated by DBAT include

**Images with observations** Plot an image together with any image observations. The image to plot must be specified with the `id` attribute.

```
<plot id="1">image</plot>
```

**Image statistics** Statistics for each image, including image coverage, point count, camera ray angles, point residuals and posterior standard deviations. See Figure 10 for an example.

```
<plot>image_stats</plot>
```

**Object point statistics** Statistics for each object point, including the ray count, the maximum ray intersection angle, the image residuals, and the posterior standard deviations. The attribute `max_op` specifies the maximum number of object points to be plotted. See Figure 11 for an example.

```
<plot max_op="1000">op_stats</plot>
```

**Image coverage** How much of each image is covered by the image point measurements. The attribute `convex_hull` specifies whether the convex hull of the image coverage should be plotted. See Figure 9 for an example.

```
<plot convex_hull="true">coverage</plot>
```

**Parameter evolution (1D)** The evolution of the estimated parameters during the bundle iterations. See figures 5–7 for examples.

```
<plot>params</plot>
```

**Camera network evolution (3D)** The evolution of the EO and OP parameters during the bundle iterations. The attribute `cam_size` is used to specify the size of the camera icon in object units. The plot is aligned with the global coordinate system. The attribute `ref_cam` can be used to align the plot with the camera specified by `ref_cam`. See Figure 4 for an example.

```
<plot cam_size="0.1">iteration_trace</plot>
```

### E.3.2 Files

The output files to be generated are listed inside the `<files>` tag. The `<files>` tag may include a `base_dir` specification, see Section 4.3.2.6. The output files include:

**Report file** A Photomodeler-style text report file. See Appendix D.4 for an example.

```
<report>
  <file>result/report.txt</file>
</report>
```

**Posterior camera file** A camera file (see appendices E.1.1 and E.1.2) with the post-bundle estimated parameters.

```
<io>
  <file>result/c4040z.xml</file>
</io>
```

**Posterior EO file** A text file with the estimated EO parameters, including posterior standard deviations.

```
<eo>
  <file>result/camera_stations.txt</file>
</eo>
```

**List of largest residuals** A text file with the image observations with the highest post-bundle image residuals. The attribute `top_count` determine how many residuals are written.

```
<image_residuals top_count="50">
  <file>result/top_residuals.txt</file>
</image_residuals>
```

## E.4 XML demo scripts

### E.4.1 camcaldemo.xml

The file below is an example of a camera calibration project.

```
<?xml version="1.0" encoding="UTF-8"?>
<document dbat_script_version="1.0.0">
  <c>
    NOTE: XML comments <!-- --> is not supported. Use a c (comment)
    block instead.
  </c>
  <meta>
    <c>
      Note: The meta section section is optional and can contain anything.
      One possible use is for bookkeeping purposes.
    </c>

    <name>Camcaldemo</name>
    <date>2019-12-04</date>
    <author>Niclas Börnin</author>
    <version>1.1</version>
    <version_history>
      <version>
        1.0, 2019-10-02: Version presented at LCSD 2019 in Strasbourg.
      </version>
      <version>
        1.1, 2019-12-04: Updated metadata with UUID, datum, control points.
      </version>
    </version_history>

    <c>
      Note: The UUID should be unique for each script! The DBAT
      function uuid may be used to generate a new UUID.
    </c>
    <uuid>9401c56c-d102-4363-8791-589a7af8ec6a</uuid>

    <project>DBAT</project>
    <project_unit>m</project_unit>
    <purpose>
      Demonstrate camera calibration using the scripting feature of DBAT.
      See also camcaldemo.m in the demo folder.
    </purpose>
    <software>
      Software used to generate the data files, e.g., the image
      measurements.
    </software>
    <datum>
      This project uses fixed control points. To use weighted control
      points, load the file reference/camcal-weighted with format
      string "id,label,x,y,z,sxyz" instead.
    </datum>
    <control_points>
      The control points in this project are synthetic, i.e., they are
      assumed to have specific coordinates.
    </control_points>
  </meta>

  <input base_dir="$HERE">
    <c>
      The base_dir will be prepended to all relative paths in the
      input section. An absolute path is defined to start with slash,
      backslash, or 'X:', where X is any letter.

      The special string $DBAT will be replaced by the DBAT
      installation directory. The special string $HOME will be
      replaced by the user home directory. The special string $HERE
      will be replaced by the directory in which this XML file
      resides.
    </c>

    <ctrl_pts>
      <file format="id,label,x,y,z">reference/camcal-fixed.txt</file>
    </ctrl_pts>

    <images image_base_dir="$DBAT">
      <file format="id,path">images/images.txt</file>
    </images>

    <image_pts>
      <file format="im,id,x,y,sxyz">measurements/markpts.txt</file>
    </image_pts>

    <cameras>
      <camera>
        <id>1</id>
        <name>Olympus Camedia C4040Z</name>
        <unit>mm</unit>
      </camera>
    </cameras>
  </input>
</document>
```



```

    <sensor>auto,5.43764</sensor>
    <image>2272,1704</image>
    <aspect>1</aspect>
    <focal>7.5</focal>
    <model>3</model>
    <nK>3</nK>
    <nP>2</nP>
  </camera>
</cameras>
</input>

<operations>
  <operation min_rays="2">check_ray_count</operation>
  <operation>
    <set_initial_values>
      <io>
        <all>default</all>
      </io>
      <op>
        <all>loaded</all>
      </op>
    </set_initial_values>
  </operation>
  <operation>
    <set_bundle_estimate_params>
      <io>
        <all>true</all>
        <skew>false</skew>
      </io>
      <eo>
        <all>true</all>
      </eo>
      <op>
        <all>default</all>
      </op>
    </set_bundle_estimate_params>
  </operation>
  <operation>spatial_resection</operation>
  <operation>forward_intersection</operation>
  <operation>bundle_adjustment</operation>
</operations>

<output>
  <plots>
    <plot id="1">image</plot>
    <plot>image_stats</plot>
    <plot max_op="1000">op_stats</plot>
    <plot convex_hull="true">coverage</plot>
    <plot>params</plot>
    <plot cam_size="0.1">iteration_trace</plot>
  </plots>
  <files base_dir="$HERE">
    <report>
      <file>result/report.txt</file>
    </report>
    <io>
      <file>result/c4040z.xml</file>
    </io>
    <eo>
      <file>result/camera_stations.txt</file>
    </eo>
    <image_residuals top_count="50">
      <file>result/top_residuals.txt</file>
    </image_residuals>
  </files>
</output>
</document>

```

### E.4.2 romabundledemo.xml

The file below is an example of a control-point-free bundle adjustment project with self-calibration and listed EO parameters as initial values.

```
<?xml version="1.0" encoding="UTF-8"?>
<document dbat_script_version="1.0">
  <c>
    NOTE: XML comments <!-- --> is not supported. Use a c (comment)
    block instead.
  </c>
  <meta>
    <c>
      Note: The meta section section is optional and can contain anything.
      One possible use is for bookkeeping purposes.
    </c>

    <name>Romabundledemo</name>
    <date>2019-12-04</date>
    <author>Niclas Börnin</author>
    <version>1.1</version>
    <version_history>
      <version>
        1.0, 2019-10-02: Version presented at LCSD 2019 in Strasbourg.
      </version>
      <version>
        1.1, 2019-12-04: Added metadata section.
      </version>
    </version_history>

    <c>
      Note: The UUID should be unique for each script! The DBAT
      function uuid may be used to generate a new UUID.
    </c>
    <uuid>899cf814-70df-4a60-8486-f9d01155037a</uuid>

    <project>DBAT</project>
    <project_unit>m</project_unit>
    <purpose>
      Demonstrate self-calibration bundle adjustment without control
      points using the scripting feature of DBAT. See also
      romabundledemo_selfcal.m in the demo folder.
    </purpose>
    <datum>
      The project contains no control points. Instead, dependent
      relative orientation is used as the datum for the bundle.
    </datum>
  </meta>

  <input base_dir="$HERE">

    <c>No control points</c>

    <images image_base_dir="$DBAT">
      <file format="id,path">images/images.txt</file>
    </images>

    <prior_eo>
      <file format="id,x,y,z,omega,phi,kappa" units="degrees">prior/initial_eo.txt</file>
    </prior_eo>

    <image_pts>
      <file format="im,id,x,y" sxy="1">measurements/markpts.txt</file>
    </image_pts>

    <cameras>
      <file>cameras/E055DMarkII.xml</file>
    </cameras>
  </input>

  <operations>
    <operation min_rays="2">check_ray_count</operation>
    <operation>
      <set_initial_values>
        <io>
          <all>loaded</all>
          <aspect>1</aspect>
          <skew>0</skew>
        </io>
        <eo>
          <all>loaded</all>
        </eo>
      </set_initial_values>
    </operation>
    <operation>
      <set_bundle_estimate_params>
        <io>
          <all>true</all>
        </io>
      </set_bundle_estimate_params>
    </operation>
  </operations>
</document>
```

```

        <aspect>false</aspect>
        <skew>false</skew>
        <p>false</p>
        <K3>false</K3>
    </io>
    <eo>
        <all>true</all>
    </eo>
    <op>
        <all>true</all>
    </op>
</set_bundle_estimate_params>
</operation>
<operation>forward_intersection</operation>
<operation>
    <set_datum ref_cam="1" ref_base="longest">depend</set_datum>
</operation>
<operation>bundle_adjustment</operation>
</operations>

<output>
    <plots>
        <plot id="1">image</plot>
        <plot cam_size="1" ref_cam="1">iteration_trace</plot>
    </plots>
    <files base_dir="$HERE">
        <report>
            <file>result/report.txt</file>
        </report>
        <io>
            <file>result/EOS5DMarkII.xml</file>
        </io>
    </files>
</output>
</document>

```

### E.4.3 sxb.xml

The file below is an example of a small aerial bundle adjustment project with check points and multiple image measurement files.

```
<?xml version="1.0" encoding="UTF-8"?>
<document dbat_script_version="1.0">
  <c>
    NOTE: XML comments <!-- --> is not supported. Use a c (comment)
    block instead.
  </c>
  <meta>
    <c>
      Note: The meta section section is optional and can contain anything.
      One possible use is for bookkeeping purposes.
    </c>

    <name>Romabundledemo</name>
    <date>2019-12-04</date>
    <author>Niclas Börnin</author>
    <version>1.1</version>
    <version_history>
      <version>
        1.0, 2019-10-02: Version presented at LCSD 2019 in Strasbourg.
      </version>
      <version>
        1.1, 2019-12-04: Added metadata section.
      </version>
    </version_history>

    <c>
      Note: The UUID should be unique for each script! The DBAT
      function uuid may be used to generate a new UUID.
    </c>
    <uuid>71de6bef-m46d-451e-b9b2-6919b73b8a1f</uuid>

    <project>DBAT</project>
    <project_unit>m</project_unit>
    <purpose>
      Demonstrate bundle adjustment on a small aerial project over the
      city of Strasbourg (SXB) with control and check points using the
      scripting feature of DBAT. Illustrates that the same file can be
      used for control points and check points. Also illustrates that
      multiple image measurement files may be specified and that the
      standard deviation of the image observations can be overridden
      in the XML file.
    </purpose>
    <datum>
      Measured control points.
    </datum>
  </meta>

  <input base_dir="$HERE">

    <ctrl_pts>
      <file format="id,label,x,y,z,sx,sy,sz">reference/sxb-control.txt</file>
      <filter id="351,410">remove</filter>
    </ctrl_pts>

    <c> Use a subset of the control points as check points </c>
    <check_pts>
      <file format="id,label,x,y,z,sx,sy,sz">reference/sxb-control.txt</file>
      <filter id="351,410">keep</filter>
    </check_pts>

    <images image_base_dir="$DBAT">
      <file format="id,path">images/images.txt</file>
    </images>

    <image_pts>
      <file format="id,im,x,y" sxy="0.5">measurements/markpts.txt</file>
      <file format="id,im,x,y" sxy="1.0">measurements/smartpts.txt</file>
    </image_pts>

    <cameras>
      <camera>
        <name>Aerial camera</name>
        <unit>mm</unit>
        <sensor>53.14800,77.97600</sensor>
        <image>8858,12996</image>
        <focal>123</focal>
        <cc>123.9392</cc>
        <pp>26.5770,38.8110</pp>
        <k>0,0,0</k>
        <p>0,0</p>
        <model>3</model>
        <skew>0</skew>
        <aspect>1</aspect>
      </camera>
    </cameras>
  </input>
</document>
```

```

    </camera>
  </cameras>
</input>

<operations>
  <operation min_rays="2">check_ray_count</operation>
  <operation>
    <set_initial_values>
      <io>loaded</io>
      <op>loaded</op>
    </set_initial_values>
  </operation>
  <operation>
    <set_bundle_estimate_params>
      <io>false</io>
      <eo>
        <all>true</all>
      </eo>
      <op>
        <all>default</all>
      </op>
    </set_bundle_estimate_params>
  </operation>
  <operation>spatial_resection</operation>
  <operation>forward_intersection</operation>
  <operation>bundle_adjustment</operation>
</operations>

<output>
  <c>
    <plots>
      <plot>params</plot>
      <plot convex_hull="true">coverage</plot>
      <plot>image_stats</plot>
      <plot max_op="1000">op_stats</plot>
      <plot cam_size="0.1">iteration_trace</plot>
      <plot id="1">image</plot>
    </plots>
  </c>
  <files base_dir="$HERE">
    <report>
      <file>result/report.txt</file>
    </report>
  </files>
</output>
</document>

```