

Arduino

1.0

Generated by Doxygen 1.8.14

Contents

1	Class Index	1
1.1	Class List	1
2	File Index	3
2.1	File List	3
3	Class Documentation	5
3.1	CpuLoad Class Reference	5
3.1.1	Detailed Description	5
3.1.2	Constructor & Destructor Documentation	6
3.1.2.1	CpuLoad()	6
3.1.3	Member Function Documentation	6
3.1.3.1	ComputeCPULoad()	6
3.1.3.2	getAverageCPULoad()	7
3.1.3.3	getCurrentCPULoad()	7
3.1.3.4	getMaxCPULoad()	8
3.1.4	Member Data Documentation	8
3.1.4.1	avg_load	8
3.1.4.2	current_load	8
3.1.4.3	last_sum_value	9
3.1.4.4	max_load	9
3.1.4.5	sample_cnt	9
3.1.4.6	sample_idx	9
3.1.4.7	sample_mem	9

3.2	DebugInterface Class Reference	10
3.2.1	Detailed Description	10
3.2.2	Constructor & Destructor Documentation	11
3.2.2.1	DebugInterface()	11
3.2.3	Member Function Documentation	11
3.2.3.1	read()	11
3.2.3.2	sendBool()	11
3.2.3.3	sendInteger()	12
3.2.3.4	sendString() [1/2]	13
3.2.3.5	sendString() [2/2]	14
3.2.4	Member Data Documentation	15
3.2.4.1	uart_drv_ptr	15
3.3	DebugManagement Class Reference	15
3.3.1	Detailed Description	16
3.3.2	Constructor & Destructor Documentation	16
3.3.2.1	DebugManagement()	16
3.3.3	Member Function Documentation	17
3.3.3.1	DebugModeManagement()	17
3.3.3.2	DisplayCPULoad_task()	18
3.3.3.3	DisplaySensors_task()	19
3.3.3.4	getIftPtr()	19
3.3.4	Member Data Documentation	20
3.3.4.1	debug_ift_ptr	20
3.3.4.2	debug_state	20
3.4	dht22 Class Reference	20
3.4.1	Detailed Description	21
3.4.2	Constructor & Destructor Documentation	21
3.4.2.1	dht22()	21
3.4.3	Member Function Documentation	22
3.4.3.1	initializeCommunication()	22

3.4.3.2	read()	22
3.5	dio Class Reference	23
3.5.1	Detailed Description	24
3.5.2	Constructor & Destructor Documentation	24
3.5.2.1	dio()	25
3.5.3	Member Function Documentation	25
3.5.3.1	dio_changePortPinCnf()	25
3.5.3.2	dio_getPort()	26
3.5.3.3	dio_getPort_fast()	27
3.5.3.4	dio_invertPort()	27
3.5.3.5	dio_memorizePINaddress()	28
3.5.3.6	dio_setPort()	29
3.5.3.7	getDDRxAddress()	30
3.5.3.8	getPINxAddress()	31
3.5.3.9	getPORTxAddress()	31
3.5.3.10	ports_init()	32
3.5.4	Member Data Documentation	32
3.5.4.1	PINx_addr_mem	32
3.5.4.2	PINx_idx_mem	33
3.6	DisplayInterface Class Reference	33
3.6.1	Detailed Description	34
3.6.2	Constructor & Destructor Documentation	34
3.6.2.1	DisplayInterface()	34
3.6.3	Member Function Documentation	35
3.6.3.1	ClearFullScreen()	35
3.6.3.2	ClearLine()	36
3.6.3.3	ClearStringInDataStruct()	37
3.6.3.4	DisplayFullLine()	37
3.6.3.5	FindFirstCharAddr()	38
3.6.3.6	getDisplayDataPtr()	39

3.6.3.7	IsLineEmpty()	40
3.6.3.8	RefreshLine()	40
3.6.3.9	shiftLine_task()	41
3.6.4	Member Data Documentation	41
3.6.4.1	display_data	42
3.6.4.2	dummy	42
3.6.4.3	isShiftInProgress	42
3.6.4.4	p_lcd	42
3.7	DisplayManagement Class Reference	43
3.7.1	Detailed Description	44
3.7.2	Constructor & Destructor Documentation	44
3.7.2.1	DisplayManagement()	44
3.7.3	Member Function Documentation	45
3.7.3.1	DisplaySensorData_Task()	45
3.7.3.2	GetIftPointer()	46
3.7.3.3	GetTempSensorPtr()	46
3.7.3.4	RemoveWelcomeMessage_Task()	47
3.7.4	Member Data Documentation	47
3.7.4.1	p_display_ift	48
3.7.4.2	p_tempSensor	48
3.8	I2C Class Reference	48
3.8.1	Detailed Description	49
3.8.2	Constructor & Destructor Documentation	49
3.8.2.1	I2C()	49
3.8.3	Member Function Documentation	49
3.8.3.1	initializeBus()	50
3.8.3.2	setBitRate()	50
3.8.3.3	setTxAddress()	51
3.8.3.4	writeByte()	51
3.8.4	Member Data Documentation	52

3.8.4.1	bitrate	52
3.8.4.2	tx_address	52
3.9	keepAliveLed Class Reference	52
3.9.1	Detailed Description	53
3.9.2	Constructor & Destructor Documentation	53
3.9.2.1	keepAliveLed()	53
3.9.3	Member Function Documentation	53
3.9.3.1	blinkLed_task()	54
3.10	LCD Class Reference	54
3.10.1	Detailed Description	56
3.10.2	Constructor & Destructor Documentation	56
3.10.2.1	LCD()	56
3.10.3	Member Function Documentation	57
3.10.3.1	command()	57
3.10.3.2	ConfigureBacklight()	58
3.10.3.3	ConfigureCursorBlink()	59
3.10.3.4	ConfigureCursorOnOff()	59
3.10.3.5	ConfigureDisplayOnOff()	60
3.10.3.6	ConfigureEntryModeDir()	60
3.10.3.7	ConfigureEntryModeShift()	61
3.10.3.8	ConfigureFontType()	62
3.10.3.9	ConfigureI2CAddr()	63
3.10.3.10	ConfigureLineNumber()	63
3.10.3.11	GetDDRAMAddress()	64
3.10.3.12	GetLineNumberCnf()	64
3.10.3.13	InitializeScreen()	65
3.10.3.14	SetDDRAMAddress()	65
3.10.3.15	write()	66
3.10.3.16	write4bits()	67
3.10.3.17	WriteInRam()	68

3.10.4 Member Data Documentation	69
3.10.4.1 <code>backlight_enable</code>	69
3.10.4.2 <code>cnfCursorBlink</code>	69
3.10.4.3 <code>cnfCursorOnOff</code>	69
3.10.4.4 <code>cnfDisplayOnOff</code>	69
3.10.4.5 <code>cnfEntryModeDir</code>	69
3.10.4.6 <code>cnfEntryModeShift</code>	70
3.10.4.7 <code>cnfFontType</code>	70
3.10.4.8 <code>cnfI2C_addr</code>	70
3.10.4.9 <code>cnfLineNumber</code>	70
3.10.4.10 <code>ddram_addr</code>	70
3.10.4.11 <code>i2c_drv_ptr</code>	71
3.11 <code>LinkedList</code> Class Reference	71
3.11.1 Detailed Description	72
3.11.2 Member Typedef Documentation	72
3.11.2.1 <code>T_LL_element</code>	73
3.11.3 Constructor & Destructor Documentation	73
3.11.3.1 <code>LinkedList()</code>	73
3.11.3.2 <code>~LinkedList()</code>	73
3.11.4 Member Function Documentation	74
3.11.4.1 <code>AttachNewElement()</code>	74
3.11.4.2 <code>getCurrentElement()</code>	74
3.11.4.3 <code>IsLLEmpty()</code>	75
3.11.4.4 <code>MoveToNextElement()</code>	76
3.11.4.5 <code>RemoveElement()</code>	76
3.11.4.6 <code>ResetElementPtr()</code>	77
3.11.5 Member Data Documentation	77
3.11.5.1 <code>curElement_ptr</code>	77
3.11.5.2 <code>firstElement</code>	78
3.12 <code>scheduler</code> Class Reference	78

3.12.1 Detailed Description	79
3.12.2 Member Typedef Documentation	79
3.12.2.1 Task_t	80
3.12.3 Constructor & Destructor Documentation	80
3.12.3.1 scheduler()	80
3.12.4 Member Function Documentation	80
3.12.4.1 addPeriodicTask()	80
3.12.4.2 getPitNumber()	81
3.12.4.3 launchPeriodicTasks()	82
3.12.4.4 LLElementCompare()	82
3.12.4.5 removePeriodicTask()	83
3.12.4.6 startScheduling()	84
3.12.5 Member Data Documentation	85
3.12.5.1 pit_number	85
3.12.5.2 TasksLL_ptr	85
3.13 String Class Reference	86
3.13.1 Detailed Description	86
3.13.2 Constructor & Destructor Documentation	87
3.13.2.1 String() [1/2]	87
3.13.2.2 String() [2/2]	87
3.13.2.3 ~String()	88
3.13.3 Member Function Documentation	88
3.13.3.1 appendBool()	88
3.13.3.2 appendChar()	89
3.13.3.3 appendInteger()	90
3.13.3.4 appendString()	91
3.13.3.5 Clear()	91
3.13.3.6 ComputeStringSize()	92
3.13.3.7 getSize()	93
3.13.3.8 getString()	93

3.13.4 Member Data Documentation	94
3.13.4.1 size	94
3.13.4.2 string	94
3.14 T_ASW_cnf_struct Struct Reference	94
3.14.1 Detailed Description	95
3.14.2 Member Data Documentation	95
3.14.2.1 p_DebugInterface	95
3.14.2.2 p_DebugManagement	95
3.14.2.3 p_DisplayInterface	95
3.14.2.4 p_DisplayManagement	96
3.14.2.5 p_keepAliveLed	96
3.14.2.6 p_TempSensor	96
3.15 T_BSW_cnf_struct Struct Reference	96
3.15.1 Detailed Description	97
3.15.2 Member Data Documentation	97
3.15.2.1 p_cpupload	97
3.15.2.2 p_dht22	97
3.15.2.3 p_dio	97
3.15.2.4 p_i2c	98
3.15.2.5 p_lcd	98
3.15.2.6 p_timer	98
3.15.2.7 p_usart	98
3.16 T_display_data Struct Reference	99
3.16.1 Detailed Description	99
3.16.2 Member Data Documentation	99
3.16.2.1 display_str	100
3.16.2.2 isEmpty	100
3.16.2.3 mode	100
3.16.2.4 shift_data	100
3.17 T_Display_shift_data Struct Reference	101

3.17.1	Detailed Description	101
3.17.2	Member Data Documentation	101
3.17.2.1	str_cur_ptr	101
3.17.2.2	str_ptr	102
3.17.2.3	temporization	102
3.18	T_LCD_conf_struct Struct Reference	102
3.18.1	Detailed Description	102
3.18.2	Member Data Documentation	103
3.18.2.1	backlight_en	103
3.18.2.2	cursor_en	103
3.18.2.3	cursorBlink_en	103
3.18.2.4	display_en	103
3.18.2.5	entryModeDir	103
3.18.2.6	entryModeShift	104
3.18.2.7	fontType_cnf	104
3.18.2.8	i2c_addr	104
3.18.2.9	i2c_bitrate	104
3.18.2.10	lineNumber_cnf	104
3.19	LinkedList::T_LL_element Struct Reference	105
3.19.1	Detailed Description	105
3.19.2	Member Data Documentation	105
3.19.2.1	data_ptr	105
3.19.2.2	nextElement	105
3.20	scheduler::Task_t Struct Reference	106
3.20.1	Detailed Description	106
3.20.2	Member Data Documentation	106
3.20.2.1	period	106
3.20.2.2	TaskPtr	106
3.21	TempSensor Class Reference	106
3.21.1	Detailed Description	107

3.21.2 Constructor & Destructor Documentation	108
3.21.2.1 TempSensor()	108
3.21.3 Member Function Documentation	108
3.21.3.1 GetHumDecimal()	108
3.21.3.2 getHumidity()	109
3.21.3.3 GetHumInteger()	109
3.21.3.4 getHumPtr()	110
3.21.3.5 getTemp()	110
3.21.3.6 GetTempDecimal()	110
3.21.3.7 GetTempInteger()	111
3.21.3.8 getTempPtr()	112
3.21.3.9 GetValidity()	112
3.21.3.10 readTempSensor_task()	113
3.21.3.11 setValidity()	113
3.21.3.12 updateLastValidValues()	114
3.21.4 Member Data Documentation	114
3.21.4.1 read_humidity	115
3.21.4.2 read_temperature	115
3.21.4.3 valid_hum	115
3.21.4.4 valid_pit	115
3.21.4.5 valid_temp	115
3.21.4.6 validity	116
3.21.4.7 validity_last_read	116
3.22 timer Class Reference	116
3.22.1 Detailed Description	117
3.22.2 Constructor & Destructor Documentation	117
3.22.2.1 timer()	117
3.22.3 Member Function Documentation	117
3.22.3.1 configureTimer1()	117
3.22.3.2 getTimer1Value()	118

3.22.3.3 startTimer1()	119
3.22.3.4 stopTimer1()	119
3.22.4 Member Data Documentation	119
3.22.4.1 prescaler	119
3.23 usart Class Reference	120
3.23.1 Detailed Description	120
3.23.2 Constructor & Destructor Documentation	120
3.23.2.1 usart()	120
3.23.3 Member Function Documentation	121
3.23.3.1 setBaudRate()	121
3.23.3.2 usart_init()	122
3.23.3.3 usart_read()	122
3.23.3.4 usart_sendString()	122
3.23.3.5 usart_transmit()	123
3.23.4 Member Data Documentation	124
3.23.4.1 BaudRate	124
4 File Documentation	125
4.1 asw.cpp File Reference	125
4.1.1 Detailed Description	126
4.1.2 Function Documentation	126
4.1.2.1 asw_init()	126
4.1.3 Variable Documentation	126
4.1.3.1 ASW_cnf_struct	127
4.2 asw.h File Reference	127
4.2.1 Detailed Description	127
4.2.2 Function Documentation	128
4.2.2.1 asw_init()	128
4.2.3 Variable Documentation	128
4.2.3.1 ASW_cnf_struct	128
4.3 bsw.cpp File Reference	129

4.3.1	Detailed Description	129
4.3.2	Function Documentation	129
4.3.2.1	<code>bsw_init()</code>	130
4.3.3	Variable Documentation	130
4.3.3.1	<code>BSW_cnf_struct</code>	130
4.4	bsw.h File Reference	130
4.4.1	Detailed Description	131
4.4.2	Function Documentation	131
4.4.2.1	<code>bsw_init()</code>	131
4.4.3	Variable Documentation	132
4.4.3.1	<code>BSW_cnf_struct</code>	132
4.5	CpuLoad.cpp File Reference	132
4.5.1	Detailed Description	132
4.6	CpuLoad.h File Reference	133
4.6.1	Detailed Description	133
4.6.2	Macro Definition Documentation	133
4.6.2.1	<code>NB_OF_SAMPLES</code>	133
4.7	DebugInterface.cpp File Reference	134
4.8	DebugInterface.h File Reference	134
4.8.1	Macro Definition Documentation	134
4.8.1.1	<code>USART_BAUDRATE</code>	135
4.9	DebugManagement.cpp File Reference	135
4.9.1	Detailed Description	135
4.9.2	Variable Documentation	136
4.9.2.1	<code>str_debug_main_menu</code>	136
4.10	DebugManagement.h File Reference	136
4.10.1	Detailed Description	137
4.10.2	Macro Definition Documentation	137
4.10.2.1	<code>PERIOD_MS_TASK_DISPLAY_CPU_LOAD</code>	137
4.10.2.2	<code>PERIOD_MS_TASK_DISPLAY_SENSORS</code>	137

4.10.3 Enumeration Type Documentation	137
4.10.3.1 debug_state_t	137
4.11 dht22.cpp File Reference	138
4.11.1 Detailed Description	138
4.11.2 Macro Definition Documentation	138
4.11.2.1 MAX_WAIT_TIME_US	139
4.12 dht22.h File Reference	139
4.12.1 Detailed Description	139
4.12.2 Macro Definition Documentation	139
4.12.2.1 DHT22_PORT	140
4.13 dio.cpp File Reference	140
4.13.1 Detailed Description	140
4.14 dio.h File Reference	140
4.14.1 Detailed Description	141
4.14.2 Macro Definition Documentation	141
4.14.2.1 DECODE_PIN	141
4.14.2.2 DECODE_PORT	142
4.14.2.3 ENCODE_PORT	142
4.14.2.4 PORT_A	142
4.14.2.5 PORT_B	142
4.14.2.6 PORT_C	142
4.14.2.7 PORT_CNF_IN	143
4.14.2.8 PORT_CNF_OUT	143
4.14.2.9 PORT_D	143
4.15 dio_port_cnf.h File Reference	143
4.15.1 Detailed Description	143
4.15.2 Macro Definition Documentation	144
4.15.2.1 PORTB_CNF_DDRB	144
4.15.2.2 PORTB_CNF_PORTB	144
4.16 dio_reg_atm2560.h File Reference	144

4.16.1 Macro Definition Documentation	145
4.16.1.1 DDRA_PTR	145
4.16.1.2 DDRB_PTR	145
4.16.1.3 DDRC_PTR	145
4.16.1.4 DDRD_PTR	145
4.16.1.5 PINA_PTR	145
4.16.1.6 PINB_PTR	146
4.16.1.7 PINC_PTR	146
4.16.1.8 PIND_PTR	146
4.16.1.9 PORTA_PTR	146
4.16.1.10 PORTB_PTR	146
4.16.1.11 PORTC_PTR	147
4.16.1.12 PORTD_PTR	147
4.17 DisplayInterface.cpp File Reference	147
4.17.1 Detailed Description	148
4.18 DisplayInterface.h File Reference	148
4.18.1 Detailed Description	149
4.18.2 Macro Definition Documentation	149
4.18.2.1 DISPLAY_LINE_SHIFT_PERIOD_MS	149
4.18.2.2 DISPLAY_LINE_SHIFT_TEMPO_TIME	149
4.18.3 Enumeration Type Documentation	149
4.18.3.1 T_DisplayInterface_LineDisplayMode	149
4.19 DisplayManagement.cpp File Reference	150
4.19.1 Detailed Description	150
4.20 DisplayManagement.h File Reference	151
4.20.1 Detailed Description	151
4.20.2 Macro Definition Documentation	152
4.20.2.1 DISPLAY_MGT_I2C_BITRATE	152
4.20.2.2 DISPLAY_MGT_LCD_I2C_ADDR	152
4.20.2.3 DISPLAY_MGT_LINE_HUM	152

4.20.2.4	DISPLAY_MGT_LINE_TEMP	152
4.20.2.5	DISPLAY_MGT_PERIOD_TASK_SENSOR	152
4.20.2.6	DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL	153
4.20.3	Variable Documentation	153
4.20.3.1	humidityDisplayString	153
4.20.3.2	LCD_init_cnf	153
4.20.3.3	tempDisplayString	154
4.20.3.4	welcomeMessageString	154
4.21	I2C.cpp File Reference	154
4.21.1	Detailed Description	154
4.22	I2C.h File Reference	155
4.22.1	Detailed Description	155
4.22.2	Macro Definition Documentation	155
4.22.2.1	DATA_ACK	155
4.22.2.2	SLA_ACK	156
4.22.2.3	START	156
4.23	keepAliveLed.cpp File Reference	156
4.23.1	Detailed Description	156
4.24	keepAliveLed.h File Reference	157
4.24.1	Detailed Description	157
4.24.2	Macro Definition Documentation	157
4.24.2.1	LED_PORT	157
4.24.2.2	PERIOD_MS_TASK_LED	158
4.25	LCD.cpp File Reference	158
4.25.1	Detailed Description	158
4.26	LCD.h File Reference	158
4.26.1	Detailed Description	160
4.26.2	Macro Definition Documentation	160
4.26.2.1	BACKLIGHT_PIN	160
4.26.2.2	EN_PIN	160

4.26.2.3 LCD_CNF_BACKLIGHT_OFF	161
4.26.2.4 LCD_CNF_BACKLIGHT_ON	161
4.26.2.5 LCD_CNF_CURSOR_BLINK_OFF	161
4.26.2.6 LCD_CNF_CURSOR_BLINK_ON	161
4.26.2.7 LCD_CNF_CURSOR_OFF	161
4.26.2.8 LCD_CNF_CURSOR_ON	162
4.26.2.9 LCD_CNF_DISPLAY_OFF	162
4.26.2.10 LCD_CNF_DISPLAY_ON	162
4.26.2.11 LCD_CNF_ENTRY_MODE_DIRECTION_LEFT	162
4.26.2.12 LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT	162
4.26.2.13 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF	163
4.26.2.14 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON	163
4.26.2.15 LCD_CNF_FONT_5_11	163
4.26.2.16 LCD_CNF_FONT_5_8	163
4.26.2.17 LCD_CNF_ONE_LINE	163
4.26.2.18 LCD_CNF_SHIFT_ID	164
4.26.2.19 LCD_CNF_SHIFT_SH	164
4.26.2.20 LCD_CNF_TWO_LINE	164
4.26.2.21 LCD_DISPLAY_CTRL_FIELD_B	164
4.26.2.22 LCD_DISPLAY_CTRL_FIELD_C	164
4.26.2.23 LCD_DISPLAY_CTRL_FIELD_D	165
4.26.2.24 LCD_FCT_SET_FIELD_DL	165
4.26.2.25 LCD_FCT_SET_FIELD_F	165
4.26.2.26 LCD_FCT_SET_FIELD_N	165
4.26.2.27 LCD_INST_CLR_DISPLAY_BIT	165
4.26.2.28 LCD_INST_DISPLAY_CTRL	166
4.26.2.29 LCD_INST_ENTRY_MODE_SET	166
4.26.2.30 LCD_INST_FUNCTION_SET	166
4.26.2.31 LCD_INST_SET_DDRAM_ADDR	166
4.26.2.32 LCD_RAM_1_LINE_MAX	166

4.26.2.33 LCD_RAM_1_LINE_MIN	167
4.26.2.34 LCD_RAM_2_LINES_MAX_1	167
4.26.2.35 LCD_RAM_2_LINES_MAX_2	167
4.26.2.36 LCD_RAM_2_LINES_MIN_1	167
4.26.2.37 LCD_RAM_2_LINES_MIN_2	167
4.26.2.38 LCD_SIZE_NB_CHAR_PER_LINE	168
4.26.2.39 LCD_SIZE_NB_LINES	168
4.26.2.40 LCD_WAIT_CLR_RETURN	168
4.26.2.41 LCD_WAIT_OTHER_MODES	168
4.26.2.42 RS_PIN	168
4.26.2.43 RW_PIN	169
4.26.3 Enumeration Type Documentation	169
4.26.3.1 T_LCD_command	169
4.26.3.2 T_LCD_config_mode	169
4.26.3.3 T_LCD_ram_area	170
4.27 LinkedList.cpp File Reference	170
4.28 LinkedList.h File Reference	170
4.28.1 Detailed Description	171
4.28.2 Typedef Documentation	171
4.28.2.1 CompareFctPtr_t	171
4.29 main.cpp File Reference	172
4.29.1 Detailed Description	172
4.29.2 Function Documentation	173
4.29.2.1 ISR() [1/2]	173
4.29.2.2 ISR() [2/2]	173
4.29.2.3 main()	174
4.30 main.h File Reference	175
4.30.1 Detailed Description	175
4.30.2 Macro Definition Documentation	175
4.30.2.1 DEBUG_MODE	175

4.31 operators.cpp File Reference	176
4.31.1 Detailed Description	176
4.31.2 Function Documentation	176
4.31.2.1 operator delete()	176
4.31.2.2 operator new()	177
4.32 operators.h File Reference	177
4.32.1 Detailed Description	178
4.32.2 Function Documentation	178
4.32.2.1 operator delete()	178
4.32.2.2 operator new()	178
4.33 scheduler.cpp File Reference	180
4.33.1 Detailed Description	180
4.33.2 Variable Documentation	181
4.33.2.1 p_scheduler	181
4.34 scheduler.h File Reference	181
4.34.1 Detailed Description	182
4.34.2 Macro Definition Documentation	182
4.34.2.1 PRESCALER_PERIODIC_TIMER	182
4.34.2.2 SW_PERIOD_MS	182
4.34.2.3 TIMER_CTC_VALUE	182
4.34.3 Typedef Documentation	182
4.34.3.1 TaskPtr_t	183
4.34.4 Variable Documentation	183
4.34.4.1 p_scheduler	183
4.35 String.cpp File Reference	183
4.35.1 Detailed Description	183
4.36 String.h File Reference	184
4.36.1 Detailed Description	184
4.37 TempSensor.cpp File Reference	184
4.37.1 Detailed Description	185

4.37.2 Macro Definition Documentation	185
4.37.2.1 PIT_BEFORE_INVALID	185
4.38 TempSensor.h File Reference	185
4.38.1 Detailed Description	186
4.38.2 Macro Definition Documentation	186
4.38.2.1 PERIOD_MS_TASK_TEMP_SENSOR	186
4.39 timer.cpp File Reference	186
4.39.1 Detailed Description	187
4.40 timer.h File Reference	187
4.40.1 Detailed Description	187
4.41 usart.cpp File Reference	188
4.41.1 Detailed Description	188
4.42 usart.h File Reference	188
4.42.1 Detailed Description	189
Index	191

Chapter 1

Class Index

1.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

CpuLoad	Class defining CPU load libraries	5
DebugInterface	Class used for debugging on usart link	10
DebugManagement	Debug management class	15
dht22	DHT 22 driver class	20
dio	DIO class	23
DisplayInterface	Display interface services class	33
DisplayManagement	Display management class	43
I2C	Two-wire serial interface (I2C) class definition	48
keepAliveLed	Class for keep-alive LED blinking	52
LCD	Class for LCD S2004A display driver	54
LinkedList	Linked list class	71
scheduler	Scheduler class	78
String	String management class	86
T_ASW_cnf_struct	ASW configuration structure	94
T_BSW_cnf_struct	BSW configuration structure	96
T_display_data	Structure containing display data	99
T_Display_shift_data	Structure containing shift data	101
T_LCD_conf_struct	Structure defining LCD configuration	102

LinkedList::T_LL_element	
Type defining a linked list element	105
scheduler::Task_t	
Type defining a task structure	106
TempSensor	
Class for temperature sensor	106
timer	
Class defining a timer	116
usart	
USART serial bus class	120

Chapter 2

File Index

2.1 File List

Here is a list of all files with brief descriptions:

asw.cpp	ASW main file	125
asw.h	ASW main header file	127
bsw.cpp	BSW main file	129
bsw.h	BSW main header file	130
CpuLoad.cpp	Defines functions of class CpuLoad	132
CpuLoad.h	CpuLoad class header file	133
DebugInterface.cpp		134
DebugInterface.h		134
DebugManagement.cpp	Debug management class source file	135
DebugManagement.h	Debug management class header file	136
dht22.cpp	This file defines classes for DHT22 driver	138
dht22.h	DHT22 driver header file	139
dio.cpp	DIO library	140
dio.h	DIO library header file	140
dio_port_cnf.h	Digital ports configuration file	143
dio_reg_atm2560.h		144
DisplayInterface.cpp	Source code file for display services	147
DisplayInterface.h	DisplayInterface class header file	148
DisplayManagement.cpp	Display management source file	150

DisplayManagement.h	
Display management class header file	151
I2C.cpp	
Two-wire interface (I2C) source file	154
I2C.h	
I2C class header file	155
keepAliveLed.cpp	
Definition of function for class keepAliveLed	156
keepAliveLed.h	
Class keepAliveLed header file	157
LCD.cpp	
LCD class source file	158
LCD.h	
LCD class header file	158
LinkedList.cpp	
Linked List library header file	170
LinkedList.h	
Linked List library header file	170
main.cpp	
Background task file	172
main.h	
Background task header file	175
operators.cpp	
C++ operators definitions	176
operators.h	
C++ operators definitions header file	177
scheduler.cpp	
Defines scheduler class	180
scheduler.h	
Scheduler class header file	181
String.cpp	
String class source file	183
String.h	
String class header file	184
TempSensor.cpp	
Defines function of class TempSensor	184
TempSensor.h	
Class TempSensor header file	185
timer.cpp	
Defines function for class timer	186
timer.h	
Timer class header file	187
uart.cpp	
BSW library for USART	188
uart.h	
Header file for USART library	188

Chapter 3

Class Documentation

3.1 CpuLoad Class Reference

Class defining CPU load libraries.

```
#include <CpuLoad.h>
```

Public Member Functions

- [CpuLoad \(\)](#)
CpuLoad class constructor.
- [void ComputeCPULoad \(\)](#)
Computes current CPU load.
- [uint8_t getCurrentCPULoad \(\)](#)
Get current CPU load value.
- [uint8_t getAverageCPULoad \(\)](#)
Get average CPU load value.
- [uint8_t getMaxCPULoad \(\)](#)
Get maximum CPU load value.

Private Attributes

- [uint8_t current_load](#)
- [uint8_t avg_load](#)
- [uint8_t max_load](#)
- [uint8_t sample_cnt](#)
- [uint8_t sample_mem \[NB_OF_SAMPLES\]](#)
- [uint8_t sample_idx](#)
- [uint16_t last_sum_value](#)

3.1.1 Detailed Description

Class defining CPU load libraries.

This class defines tools to compute and monitor CPU load.

Definition at line 19 of file CpuLoad.h.

3.1.2 Constructor & Destructor Documentation

3.1.2.1 CpuLoad()

`CpuLoad::CpuLoad ()`

`CpuLoad` class constructor.

This function initializes class `CpuLoad`

Returns

Nothing

Definition at line 13 of file `CpuLoad.cpp`.

3.1.3 Member Function Documentation

3.1.3.1 ComputeCPULoad()

`void CpuLoad::ComputeCPULoad ()`

Computes current CPU load.

This function computes the current CPU load using value of the timer used by the scheduler at the end of the periodic cycle. This value is divided by the PIT period to obtain CPU load;

Returns


Nothing

Definition at line 27 of file `CpuLoad.cpp`.

Here is the call graph for this function:



Here is the caller graph for this function:



3.1.3.2 getAverageCPULoad()

```
uint8_t CpuLoad::getAverageCPULoad ( ) [inline]
```

Get average CPU load value.

This function returns the average CPU load value

Returns

Average CPU load value

Definition at line 56 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.3.3 getCurrentCPULoad()

```
uint8_t CpuLoad::getCurrentCPULoad ( ) [inline]
```

Get current CPU load value.


This function returns the current CPU load value

Returns

Current CPU load value

Definition at line 45 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.3.4 getMaxCPUload()

```
uint8_t CpuLoad::getMaxCPUload ( ) [inline]
```

Get maximum CPU load value.

This function returns the maximum CPU load value

Returns

Maximum CPU load value

Definition at line 67 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.4 Member Data Documentation

3.1.4.1 avg_load

```
uint8_t CpuLoad::avg_load [private]
```

Average CPU load based on the last 50 cycles

Definition at line 74 of file CpuLoad.h.

3.1.4.2 current_load

```
uint8_t CpuLoad::current_load [private]
```

Current CPU load (load of last cycle)

Definition at line 73 of file CpuLoad.h.

3.1.4.3 last_sum_value

```
uint16_t CpuLoad::last_sum_value [private]
```

Value of the last computed sum (it will reduce the number of samples to sum and speed up execution time)

Definition at line 79 of file CpuLoad.h.

3.1.4.4 max_load

```
uint8_t CpuLoad::max_load [private]
```

Maximum CPU load since power on

Definition at line 75 of file CpuLoad.h.

3.1.4.5 sample_cnt

```
uint8_t CpuLoad::sample_cnt [private]
```

Number of samples used to compute average load

Definition at line 76 of file CpuLoad.h.

3.1.4.6 sample_idx

```
uint8_t CpuLoad::sample_idx [private]
```

Current measurement index (used to memorize the current measure at the correct location in table)

Definition at line 78 of file CpuLoad.h.

3.1.4.7 sample_mem

```
uint8_t CpuLoad::sample_mem[NB_OF_SAMPLES] [private]
```

Memorization of the last NB_OF_SAMPLES measures

Definition at line 77 of file CpuLoad.h.

The documentation for this class was generated from the following files:


- [CpuLoad.h](#)
- [CpuLoad.cpp](#)

3.2 DebugInterface Class Reference

Class used for debugging on usart link.

```
#include <DebugInterface.h>
```

Collaboration diagram for DebugInterface:



Public Member Functions

- [DebugInterface \(\)](#)
Class DebugInterface constructor.
- [void sendInteger \(uint16_t data, uint8_t base\)](#)
Send a integer data on USART link.
- [void sendBool \(bool data, bool isText\)](#)
Send a boolean data on USART link.
- [void sendString \(String *str\)](#)
Send a string on USART link.
- [void sendString \(uint8_t *str\)](#)
Send a chain of characters on USART link.
- [uint8_t read \(\)](#)
USART read function.

Private Attributes

- [uart * usart_drv_ptr](#)

3.2.1 Detailed Description

Class used for debugging on usart link.

This class defines functions used for sending debug data on USART link.

Definition at line 21 of file DebugInterface.h.

3.2.2 Constructor & Destructor Documentation

3.2.2.1 DebugInterface()

```
DebugInterface::DebugInterface ( )
```

Class [DebugInterface](#) constructor.

Initializes the class [DebugInterface](#). It creates a new instance of USART driver of needed.

Returns

Nothing

Definition at line 43 of file [DebugInterface.cpp](#).

3.2.3 Member Function Documentation

3.2.3.1 read()

```
uint8_t DebugInterface::read ( ) [inline]
```

USART read function.


This function will read the last received byte on USART link

Returns

Received byte

Definition at line 73 of file [DebugInterface.h](#).

Here is the caller graph for this function:

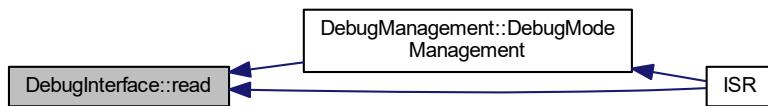

3.2.3.2 sendBool()

```
void DebugInterface::sendBool (   
    bool data,  
    bool isText )
```

Send a boolean data on USART link.

This function sends the requested boolean on USART link by calling driver's transmission function. The boolean data is first converted into a string and then sent. The parameter `isText` defines if the data is converted into a string (true/false) or an integer (1/0).

Parameters


in	<i>data</i>	boolean data to be sent
in	<i>isText</i>	String conversion configuration

Returns

Nothing

Definition at line 78 of file DebugInterface.cpp.

Here is the call graph for this function:

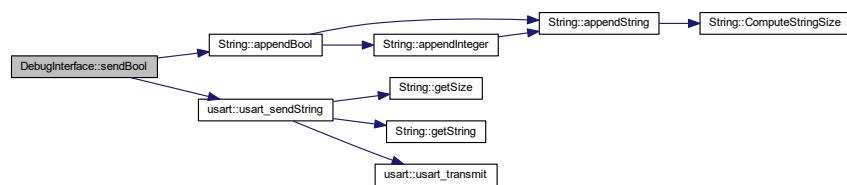**3.2.3.3 sendInteger()**

```
void DebugInterface::sendInteger (
    uint16_t data,
    uint8_t base )
```

Send a integer data on USART link.

This function sends the requested integer on USART link by calling driver's transmission function. The integer is first converted into a string and then sent

Parameters


in	<i>data</i>	integer data to be sent
in	<i>base</i>	numerical base used to convert integer into string (between 2 and 36)

Returns


Nothing

Definition at line 65 of file DebugInterface.cpp.

Here is the call graph for this function:

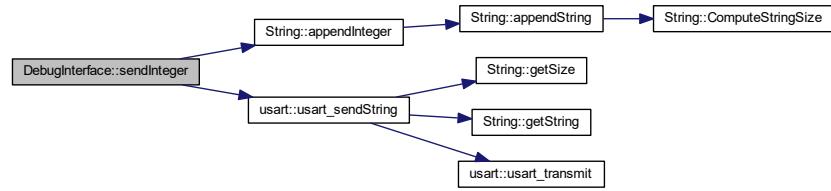

Here is the caller graph for this function:

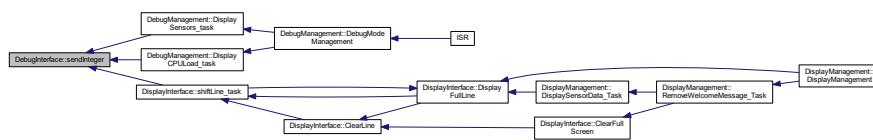

3.2.3.4 sendString() [1/2]

```
void DebugInterface::sendString (
    String * str )
```

Send a string on USART link.

This function sends the requested string on USART link by calling driver's transmission function

Parameters


in	<i>str</i>	Pointer to the string being sent
----	------------	----------------------------------

Returns


Nothing

Definition at line 52 of file DebugInterface.cpp.

Here is the call graph for this function:

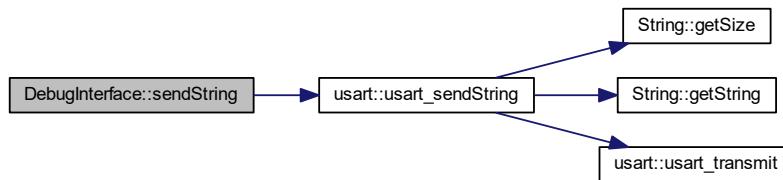

Here is the caller graph for this function:

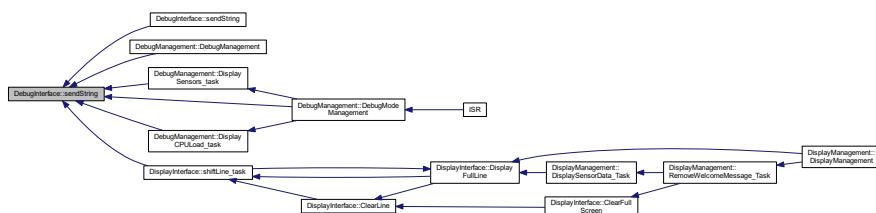

3.2.3.5 sendString() [2/2]

```
void DebugInterface::sendString (
    uint8_t * str )
```

Send a chain of characters on USART link.

This function sends the requested chain of characters on USART link by calling driver's transmission function. The chain is first converted into a string object.

Parameters


<code>in</code>	<code>str</code>	Pointer to the chain to send.
-----------------	------------------	-------------------------------

Returns

Nothing

Definition at line 58 of file DebugInterface.cpp.

Here is the call graph for this function:

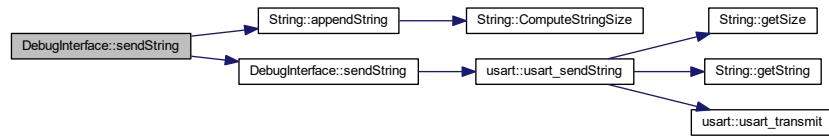

3.2.4 Member Data Documentation

3.2.4.1 usart_drv_ptr

`usart* DebugInterface::usart_drv_ptr [private]`

Pointer to USART driver object

Definition at line 82 of file DebugInterface.h.

The documentation for this class was generated from the following files:


- [DebugInterface.h](#)
- [DebugInterface.cpp](#)

3.3 DebugManagement Class Reference

Debug management class.

#include <DebugManagement.h>

Collaboration diagram for DebugManagement:

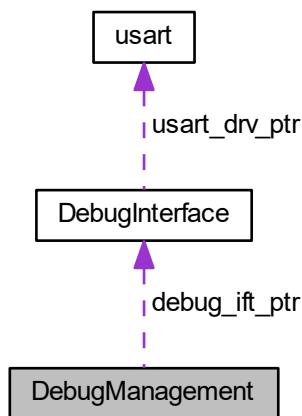

Public Member Functions

- [DebugManagement \(\)](#)
Class constructor.
- [bool DebugModeManagement \(\)](#)
Management of debug mode.
- [DebugInterface * getIfpt \(\)](#)
Interface pointer get function.

Static Public Member Functions

- [static void DisplaySensors_task \(\)](#)
Displays sensors data on usart link.
- [static void DisplayCPUload_task \(\)](#)
Displays CPU load data on usart link.

Private Attributes

- [DebugInterface * debug_ifpt_ptr](#)
- [debug_state_t debug_state](#)

3.3.1 Detailed Description

Debug management class.

This class manages the debug menu available on USART interface. It allows to display SW informations like sensors data, CPU load...

Definition at line 31 of file DebugManagement.h.

3.3.2 Constructor & Destructor Documentation

3.3.2.1 DebugManagement()

`DebugManagement::DebugManagement ()`

Class constructor.


This function initializes the class. If needed, it creates a new instance of debug interface object.

Returns

Nothing

Definition at line 50 of file DebugManagement.cpp.

Here is the call graph for this function:

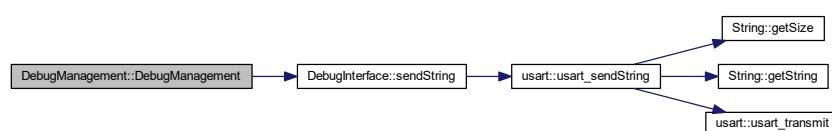

3.3.3 Member Function Documentation

3.3.3.1 DebugModeManagement()

```
bool DebugManagement::DebugModeManagement ( )
```

Management of debug mode.

This function manages the debug mode according to the following state machine :

- INIT state : handles user choice in main menu and selects next state
- DISPLAY_DATA state : display sensor data periodically
- DISPLAY CPU LOAD : display CPU load periodically


It is called each time a data is received on USART and debug mode is active.

Returns

True if the debug mode shall be closed, false otherwise

Definition at line 112 of file DebugManagement.cpp.

Here is the call graph for this function:

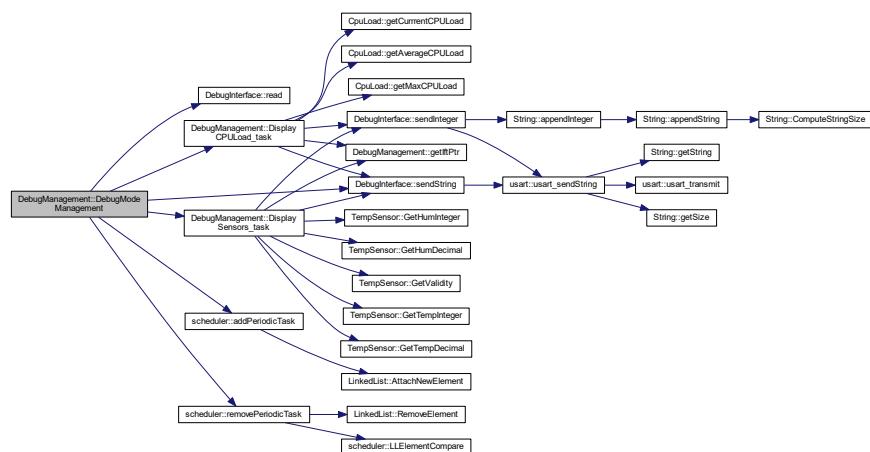

Here is the caller graph for this function:



3.3.3.2 DisplayCPULoad_task()

```
void DebugManagement::DisplayCPULoad_task ( ) [static]
```

Displays CPU load data on usart link.


This task sends CPU load data (current and average load) on usart link every 5 seconds

Returns


Nothing

Definition at line 98 of file DebugManagement.cpp.

Here is the call graph for this function:

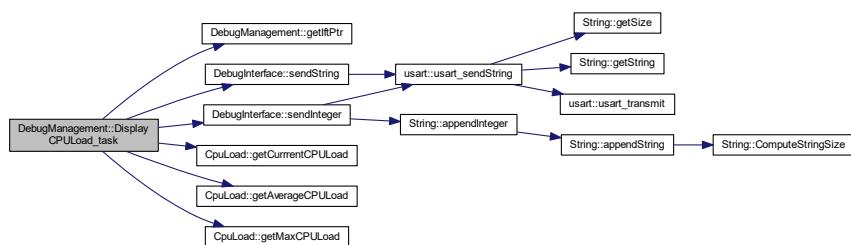

Here is the caller graph for this function:



3.3.3.3 DisplaySensors_task()

```
void DebugManagement::DisplaySensors_task ( ) [static]
```

Displays sensors data on usart link.


This task sends sensors data (temperature and humidity) on usart link every 5 seconds

Returns


Nothing

Definition at line 65 of file DebugManagement.cpp.

Here is the call graph for this function:

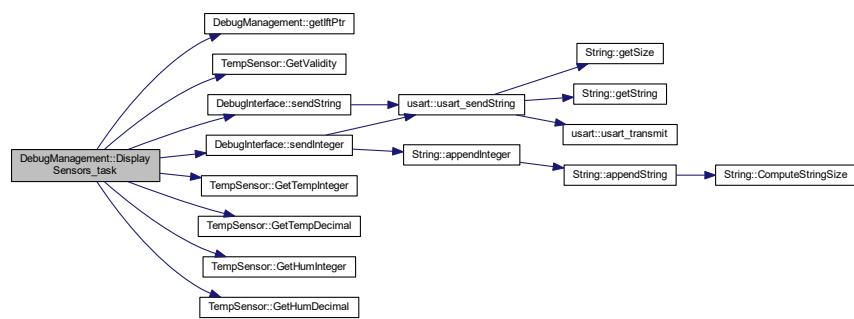

Here is the caller graph for this function:



3.3.3.4 getIftPtr()

```
DebugInterface* DebugManagement::getIftPtr ( ) [inline]
```

Interface pointer get function.


This function returns the pointer to the debug interface object

Returns

Pointer to debug interface

Definition at line 76 of file DebugManagement.h.

Here is the caller graph for this function:



3.3.4 Member Data Documentation

3.3.4.1 debug_if_ptr

`DebugInterface* DebugManagement::debug_if_ptr [private]`

Pointer to the debug interface object, which is used to send data on usart link

Definition at line 83 of file DebugManagement.h.

3.3.4.2 debug_state

`debug_state_t DebugManagement::debug_state [private]`

Current debug state

Definition at line 85 of file DebugManagement.h.

The documentation for this class was generated from the following files:

- [DebugManagement.h](#)
- [DebugManagement.cpp](#)

3.4 dht22 Class Reference

DHT 22 driver class.

```
#include <dht22.h>
```

Public Member Functions

- `dht22 ()`
`dht22` class constructor
- bool `read (uint16_t *raw_humidity, uint16_t *raw_temperature)`
Reads the data from DHT22.

Private Member Functions

- void `initializeCommunication ()`
Initializes the communication.

3.4.1 Detailed Description

DHT 22 driver class.

This class defines all useful functions for DHT22 temperature and humidity sensor

Definition at line 22 of file dht22.h.

3.4.2 Constructor & Destructor Documentation

3.4.2.1 dht22()

`dht22::dht22 ()`

`dht22` class constructor


Initializes the class `dht22`

Returns

Nothing

Definition at line 22 of file dht22.cpp.

Here is the call graph for this function:



3.4.3 Member Function Documentation

3.4.3.1 initializeCommunication()

```
void dht22::initializeCommunication ( ) [private]
```

Initializes the communication.


This function initializes the communication with DHT22 using 1-wire protocol

Returns


Nothing

Definition at line 198 of file dht22.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.4.3.2 read()

```
bool dht22::read (
    uint16_t * raw_humidity,
    uint16_t * raw_temperature )
```

Reads the data from DHT22.

This function communicates with DHT22 using 1-wire protocol to read raw values of temperature and humidity. A checksum check is done when communication is finished to validate the received data

Parameters


<code>out</code>	<code>raw_humidity</code>	Raw humidity value received from sensor
<code>out</code>	<code>raw_temperature</code>	Raw temperature value received from sensor

Returns

Validity of the read value

Definition at line 27 of file dht22.cpp.

Here is the call graph for this function:

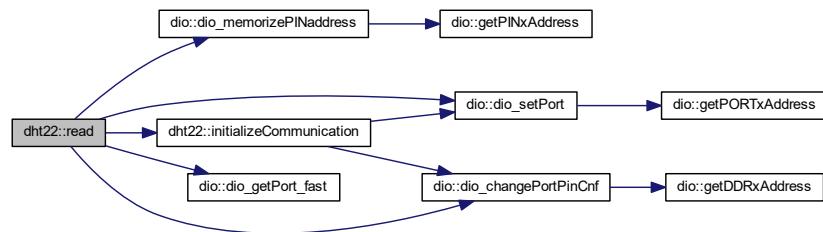

Here is the caller graph for this function:



The documentation for this class was generated from the following files:

- [dht22.h](#)
- [dht22.cpp](#)

3.5 dio Class Reference

DIO class.

```
#include <dio.h>
```

Public Member Functions

- `dio ()`
`dio class constructor`
- `void dio_setPort (uint8_t portcode, bool state)`
`Port setting function.`
- `void dio_invertPort (uint8_t portcode)`
`Inverts the state of output port.`
- `bool dio_getPort (uint8_t portcode)`
`Gets the logical state of selected pin.`
- `bool dio_getPort_fast (void)`
`Gets the logical state of the memorized pin.`
- `void dio_changePortPinCnf (uint8_t portcode, uint8_t cnf)`
`Changes the IO configuration of the selected pin.`
- `void dio_memorizePINaddress (uint8_t portcode)`
`Memorizes PINx register address and pin index.`

Private Member Functions

- `void ports_init ()`
`Digital ports hardware initialization function.`
- `uint8_t * getPORTxAddress (uint8_t portcode)`
`Gets the physical address of the requested register PORTx.`
- `uint8_t * getPINxAddress (uint8_t portcode)`
`Gets the physical address of the requested register PINx.`
- `uint8_t * getDDRxAddress (uint8_t portcode)`
`Gets the physical address of the requested register DDRx.`

Private Attributes

- `uint8_t * PINx_addr_mem`
- `uint8_t PINx_idx_mem`

3.5.1 Detailed Description

DIO class.

This class defines all useful functions for digital input/output ports

Definition at line 31 of file dio.h.

3.5.2 Constructor & Destructor Documentation

3.5.2.1 dio()

```
dio::dio ( )
```

dio class constructor


Initializes class dio and calls DIO hardware initialization function

Returns

Nothing

Definition at line 112 of file dio.cpp.

Here is the call graph for this function:

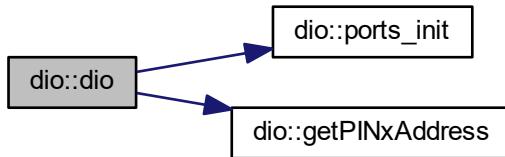

3.5.3 Member Function Documentation

3.5.3.1 dio_changePortPinCnf()

```
void dio::dio_changePortPinCnf (
    uint8_t portcode,
    uint8_t cnf )
```

Changes the IO configuration of the selected pin.

This function configures the selected pin as input or output according to parameter cnf. The corresponding port and pin index is extracted from parameter portcode.

Parameters

in	<i>portcode</i>	Encoded pin and register index
in	<i>cnf</i>	Requested configuration for the selected pin PORT_CNF_OUT (1) : pin configured as output PORT_CNF_IN (0) : pin configured as input

Returns

Nothing

Definition at line 149 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.5.3.2 dio_getPort()

```
bool dio::dio_getPort (
    uint8_t portcode )
```

Gets the logical state of selected pin.

This function gets the logical value of the selected pin. The corresponding port and pin index is extracted from parameter portcode.

Parameters

in	<i>portcode</i>	Encoded pin and register index
----	-----------------	--------------------------------

Returns

Logical state of selected pin

Definition at line 139 of file dio.cpp.

Here is the call graph for this function:



3.5.3.3 dio_getPort_fast()

```
bool dio::dio_getPort_fast (
    void )
```

Gets the logical state of the memorized pin.


This function gets the logical value of the memorized pin. The corresponding port and pin index are stored in class members PINx_addr_mem and PINx_idx_mem. This mechanism is used to speed up reading time as this function no longer needs to extract register address and pin index from portcode.

Returns

Logical state of selected pin

Definition at line 171 of file dio.cpp.

Here is the caller graph for this function:



3.5.3.4 dio_invertPort()

```
void dio::dio_invertPort (
    uint8_t portcode )
```

Inverts the state of output port.

This function inverts the state of the chosen pin. The corresponding port and pin index is extracted from parameter portcode.

Parameters


in	<i>portcode</i>	Encoded pin and register index
----	-----------------	--------------------------------

Returns

Nothing

Definition at line 131 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.5.3.5 dio_memorizePINaddress()**

```
void dio::dio_memorizePINaddress (
    uint8_t portcode )
```

Memorizes PINx register address and pin index.

This function is used to speed up reading of register PINx. Register address and pin index are decoded from portcode parameter and stored for later use by function dio_getPort_fast.

Parameters

in	<i>portcode</i>	Encoded pin and register index
----	-----------------	--------------------------------

Returns

Nothing

Definition at line 165 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.5.3.6 dio_setPort()**

```
void dio::dio_setPort (
    uint8_t portcode,
    bool state )
```

Port setting function.

This function sets the requested digital output to the requested state. The corresponding port and pin index is extracted from parameter portcode.

Parameters


in	<i>portcode</i>	Encoded pin and register index
in	<i>state</i>	Requested state to set pin

Returns

Nothing

Definition at line 121 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.5.3.7 getDDRxAddress()

```
uint8_t * dio::getDDRxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register DDRx.

This function retrieves the address of the register DDRx where x is encoded into the parameter portcode.

Parameters


in	<i>portcode</i>	Encoded port code
----	-----------------	-------------------

Returns

Pointer to the DDRx register

Definition at line 83 of file dio.cpp.

Here is the caller graph for this function:



3.5.3.8 getPINxAddress()

```
uint8_t * dio::getPINxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register PINx.

This function retrieves the address of the register PINx where x is encoded into the parameter portcode.

Parameters


in	<i>portcode</i>	Encoded port code
----	-----------------	-------------------

Returns

Pointer to the PINx register

Definition at line 54 of file dio.cpp.

Here is the caller graph for this function:



3.5.3.9 getPORTxAddress()

```
uint8_t * dio::getPORTxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register PORTx.

This function retrieves the address of the register PORTx where x is encoded into the parameter portcode.

Parameters

in	<i>portcode</i>	Encoded port code
----	-----------------	-------------------

Returns

Pointer to the PORTx register

Definition at line 25 of file dio.cpp.

Here is the caller graph for this function:



3.5.3.10 ports_init()

```
void dio::ports_init ( ) [private]
```

Digital ports hardware initialization function.

This function initializes digital ports as input or output and sets their initial values

Returns

Nothing

Definition at line 16 of file dio.cpp.

Here is the caller graph for this function:



3.5.4 Member Data Documentation

3.5.4.1 PINx_addr_mem

```
uint8_t* dio::PINx_addr_mem [private]
```

Memorizes physical address of register PINx in order to speed up register reading time in function dio_getPort_fast

Definition at line 146 of file dio.h.

3.5.4.2 PINx_idx_mem

```
uint8_t dio::PINx_idx_mem [private]
```

Memorizes pin index of register PINx in order to speed up register reading time in function dio_getPort_fast

Definition at line 147 of file dio.h.

The documentation for this class was generated from the following files:


- [dio.h](#)
- [dio.cpp](#)

3.6 DisplayInterface Class Reference

Display interface services class.

```
#include <DisplayInterface.h>
```

Collaboration diagram for DisplayInterface:

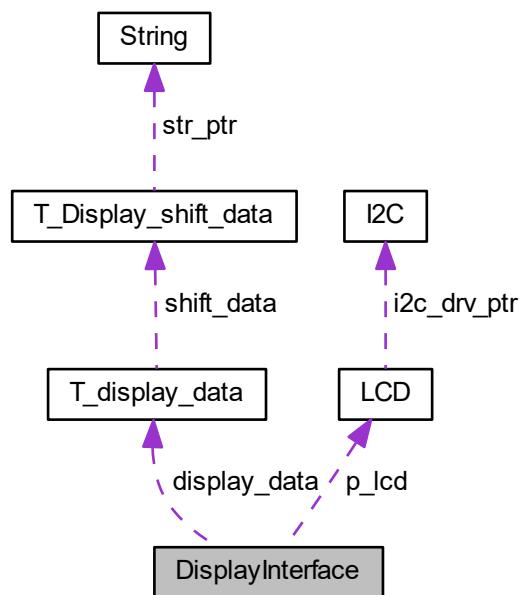

Public Member Functions

- `DisplayInterface (const T_LCD_conf_struct *LCD_init_cnf)`
Class constructor.
- `bool DisplayFullLine (uint8_t *str, uint8_t size, uint8_t line, T_DisplayInterface_LineDisplayMode mode=NORMAL, bool isCallRecursive=false)`
Line display function.
- `bool ClearLine (uint8_t line)`
Line clearing function.
- `void ClearFullScreen ()`
Screen cleaning function.
- `bool IsLineEmpty (uint8_t line)`
Empty line get function.
- `T_display_data * getDisplayDataPtr ()`
Display data get function.

Static Public Member Functions

- `static void shiftLine_task ()`
Line shifting periodic task.

Private Member Functions

- `uint8_t FindFirstCharAddr (uint8_t line)`
Finds start address of a line.
- `void RefreshLine (uint8_t line)`
Line refresh function.
- `void ClearStringInDataStruct (uint8_t line)`
String data clearing structure.

Private Attributes

- `LCD * p_lcd`
- `uint32_t dummy`
- `T_display_data display_data [LCD_SIZE_NB_LINES]`
- `bool isShiftInProgress`

3.6.1 Detailed Description

Display interface services class.

This class defines the services used for interfacing display management services and `LCD` screen driver

Definition at line 66 of file `DisplayInterface.h`.

3.6.2 Constructor & Destructor Documentation

3.6.2.1 `DisplayInterface()`

```
DisplayInterface::DisplayInterface (
    const T_LCD_conf_struct * LCD_init_cnf )
```

Class constructor.

This function initializes all class variables and instantiates the `LCD` driver according to the given configuration.

Parameters

in	<i>LCD_init_cnf</i>	Initial configuration of the screen
----	---------------------	-------------------------------------

Returns

Nothing

Definition at line 40 of file DisplayInterface.cpp.

Here is the call graph for this function:

**3.6.3 Member Function Documentation****3.6.3.1 ClearFullScreen()**

```
void DisplayInterface::ClearFullScreen ( )
```

Screen cleaning function.


This functions clears the entire display. It uses the ClearLine function on every line of the screen.

Returns

Nothing

Definition at line 245 of file DisplayInterface.cpp.

Here is the call graph for this function:

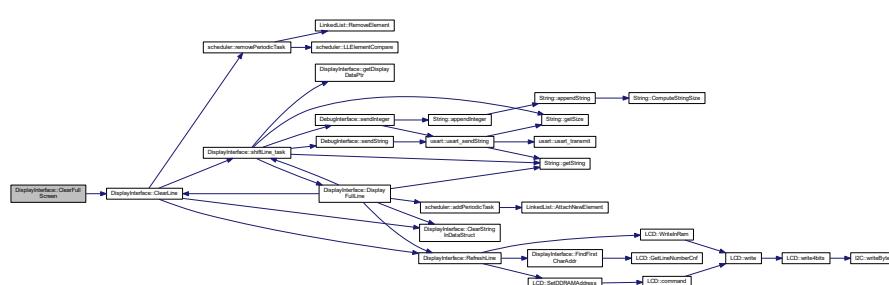

Here is the caller graph for this function:



3.6.3.2 ClearLine()

```
bool DisplayInterface::ClearLine (
    uint8_t line )
```

Line clearing function.

This function clears the requested line. It sets the corresponding DDRAM addresses to the ASCII value of space character. If it was the last line with a display shift in progress, it removes the periodic task from the scheduler.

Parameters


in	<i>line</i>	Line to clear
----	-------------	---------------

Returns


True if the line has been cleared, false otherwise

Definition at line 208 of file DisplayInterface.cpp.

Here is the call graph for this function:

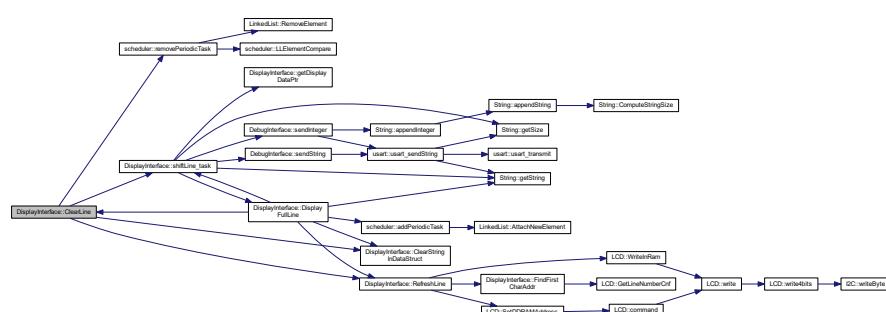

Here is the caller graph for this function:

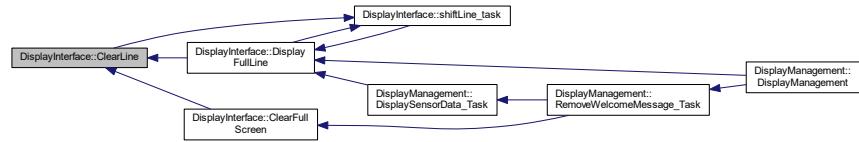

3.6.3.3 ClearStringInDataStruct()

```
void DisplayInterface::ClearStringInDataStruct (
    uint8_t line ) [private]
```

String data clearing structure.

This function clears the string contained in the display data structure. It sets all characters to space character.

Parameters


in	<i>line</i>	Line to clear
----	-------------	---------------

Returns

Nothing

Definition at line 161 of file DisplayInterface.cpp.

Here is the caller graph for this function:

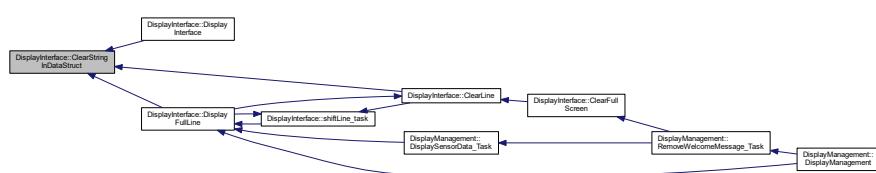

3.6.3.4 DisplayFullLine()

```
bool DisplayInterface::DisplayFullLine (
    uint8_t * str,
    uint8_t size,
    uint8_t line,
```

```
T_DisplayInterface_LineDisplayMode mode = NORMAL,
bool isCallRecursive = false )
```

Line display function.

This function displays the given string on the requested line. If the string is too long to be displayed entirely, the behavior is defined by the selected mode.

Parameters


in	<i>str</i>	Pointer to the string to display
in	<i>size</i>	Size of the string to display
in	<i>line</i>	Index of the line where the string shall be displayed
in	<i>mode</i>	Display mode

Returns


True if the line has been correctly displayed, false otherwise

Definition at line 71 of file DisplayInterface.cpp.

Here is the call graph for this function:

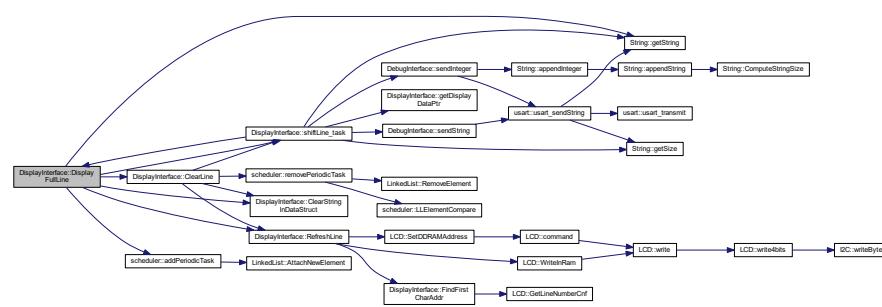

Here is the caller graph for this function:



3.6.3.5 FindFirstCharAddr()

```
uint8_t DisplayInterface::FindFirstCharAddr (
    uint8_t line ) [private]
```

Finds start address of a line.

This function finds the address in DDRAM of the first character of a line.

Parameters


<code>in</code>	<code>line</code>	Line which address shall be found
-----------------	-------------------	-----------------------------------

Returns


Address in DDRAM of the first character of the line

Definition at line 169 of file DisplayInterface.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.6.3.6 getDisplayDataPtr()**

`T_display_data* DisplayInterface::getDisplayDataPtr () [inline]`

Display data get function.


This function returns a pointer to the display data structure.

Returns

Pointer to display data structure.

Definition at line 131 of file DisplayInterface.h.

Here is the caller graph for this function:



3.6.3.7 IsLineEmpty()

```
bool DisplayInterface::IsLineEmpty (
    uint8_t line )
```

Empty line get function.

This function answers if the line given in parameter is empty or not, according to the table isLineEmpty[]

Parameters

in	<i>line</i>	Requested line
----	-------------	----------------

Returns

True if the line is empty, false otherwise

Definition at line 253 of file DisplayInterface.cpp.

3.6.3.8 RefreshLine()

```
void DisplayInterface::RefreshLine (
    uint8_t line ) [private]
```

Line refresh function.

This function refreshes the display on the requested line. It computes the screen RAM address and writes the string to display into the screen RAM. It shall be called everytime the string in display data structure is updated.

Parameters


in	<i>line</i>	Line to refresh
----	-------------	-----------------

Returns


Nothing

Definition at line 148 of file DisplayInterface.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.6.3.9 shiftLine_task()

```
void DisplayInterface::shiftLine_task ( ) [static]
```

Line shifting periodic task.


This function is called periodically by the scheduler. It shifts all the lines in line shifting mode and updates the data structures.

Returns


Nothing

Definition at line 262 of file DisplayInterface.cpp.

Here is the call graph for this function:

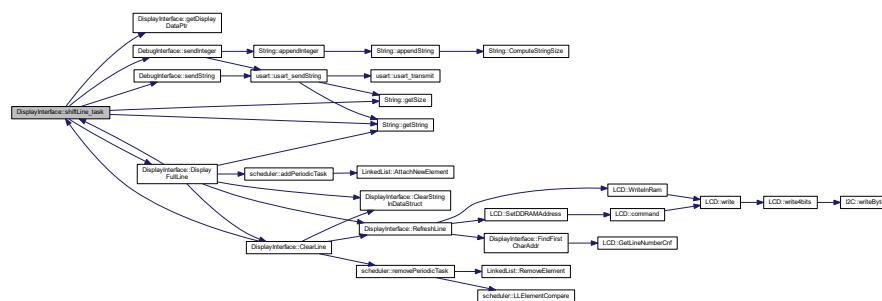

Here is the caller graph for this function:



3.6.4 Member Data Documentation

3.6.4.1 display_data

```
T_display_data DisplayInterface::display_data[LCD_SIZE_NB_LINES] [private]
```

Screen display data

Definition at line 140 of file DisplayInterface.h.

3.6.4.2 dummy

```
uint32_t DisplayInterface::dummy [private]
```

Needed for data alignment

Definition at line 139 of file DisplayInterface.h.

3.6.4.3 isShiftInProgress

```
bool DisplayInterface::isShiftInProgress [private]
```

Flag indicating if a shift is in progress on any line

Definition at line 141 of file DisplayInterface.h.

3.6.4.4 p_lcd

```
LCD* DisplayInterface::p_lcd [private]
```

Pointer to the attached LCD driver object

Definition at line 138 of file DisplayInterface.h.

The documentation for this class was generated from the following files:


- [DisplayInterface.h](#)
- [DisplayInterface.cpp](#)

3.7 DisplayManagement Class Reference

Display management class.

```
#include <DisplayManagement.h>
```

Collaboration diagram for DisplayManagement:

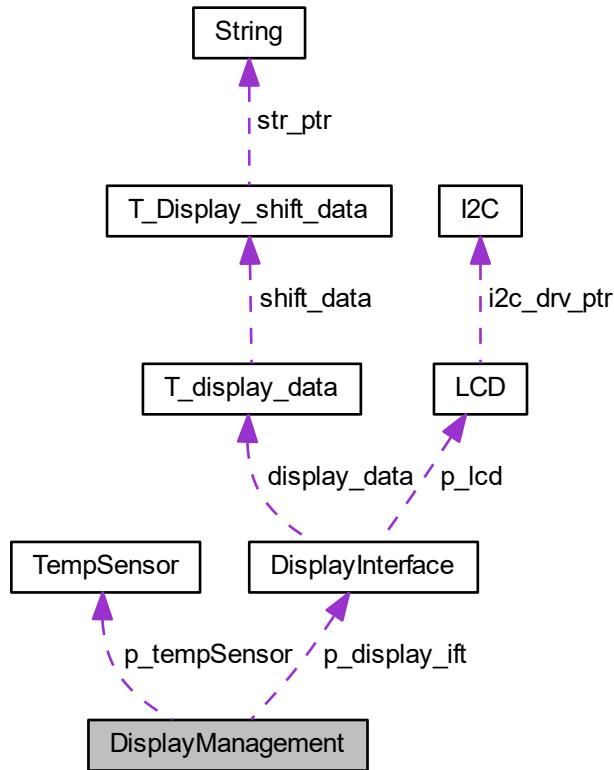

Public Member Functions

- **DisplayManagement ()**
Class constructor.
- **DisplayInterface * GetIfpPointer ()**
Interface pointer get function.
- **TempSensor * GetTempSensorPtr ()**
Sensor pointer get function.

Static Public Member Functions

- static void **DisplaySensorData_Task ()**
Periodic task for displaying sensor data.
- static void **RemoveWelcomeMessage_Task ()**
End of welcome message task.

Private Attributes

- `DisplayInterface * p_display_ift`
- `TempSensor * p_tempSensor`

3.7.1 Detailed Description

Display management class.

This class manages all displays. It is a top-level class. It retrieves the data computed by other ASW classes and displays them. It is interfaced with `DisplayInterface` class to display data on screens. One interface class is used for each screen.

Definition at line 52 of file `DisplayManagement.h`.

3.7.2 Constructor & Destructor Documentation

3.7.2.1 `DisplayManagement()`

`DisplayManagement::DisplayManagement ()`

Class constructor.

This class initializes display management.


It creates a display interface object and initializes all class variables.

Returns

Nothing

Definition at line 40 of file `DisplayManagement.cpp`.

Here is the call graph for this function:

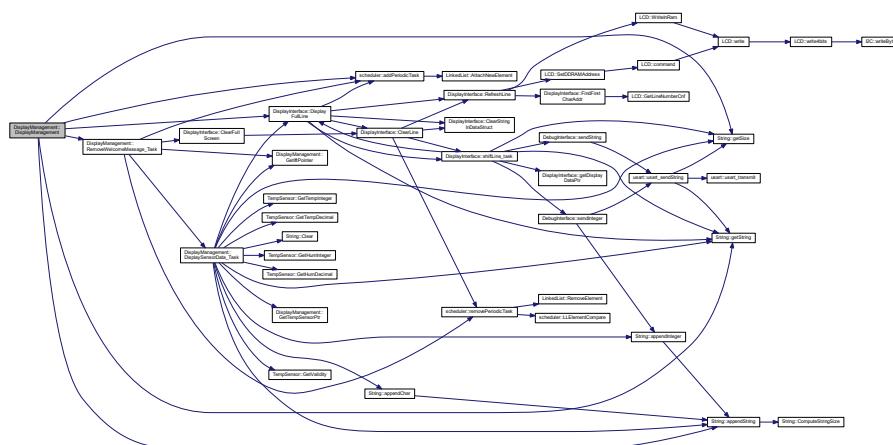

3.7.3 Member Function Documentation

3.7.3.1 DisplaySensorData_Task()

```
void DisplayManagement::DisplaySensorData_Task ( ) [static]
```

Periodic task for displaying sensor data.

This function displays the sensors data on the screen. Currently temperature and humidity data coming from **dht22** sensor are displayed.


It is called periodically by scheduler.

Returns

Nothing

Definition at line 73 of file DisplayManagement.cpp.

Here is the call graph for this function:

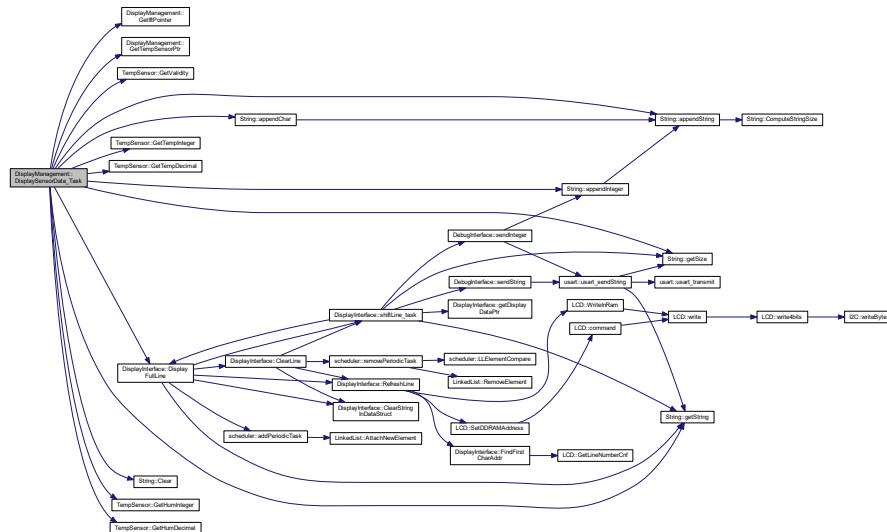

Here is the caller graph for this function:



3.7.3.2 GetIfPointer()

```
DisplayInterface* DisplayManagement::GetIfPointer ( ) [inline]
```

Interface pointer get function.


This function returns the pointer to the display interface object

Returns

Pointer to display interface object

Definition at line 81 of file DisplayManagement.h.

Here is the caller graph for this function:



3.7.3.3 GetTempSensorPtr()

```
TempSensor* DisplayManagement::GetTempSensorPtr ( ) [inline]
```

Sensor pointer get function.

This function returns the pointer to the temperature sensor object

Returns

Pointer to sensor object

Definition at line 92 of file DisplayManagement.h.

Here is the caller graph for this function:



3.7.3.4 RemoveWelcomeMessage_Task()

```
void DisplayManagement::RemoveWelcomeMessage_Task( ) [static]
```

End of welcome message task.


This task clears the welcome message from the screen and start periodic display of sensor data. This task shall be added in scheduler when the welcome message is displayed on screen. As it shall be called only once, the task removes itself from the scheduler after the first call.

Returns

Nothing

Definition at line 59 of file DisplayManagement.cpp.

Here is the call graph for this function:

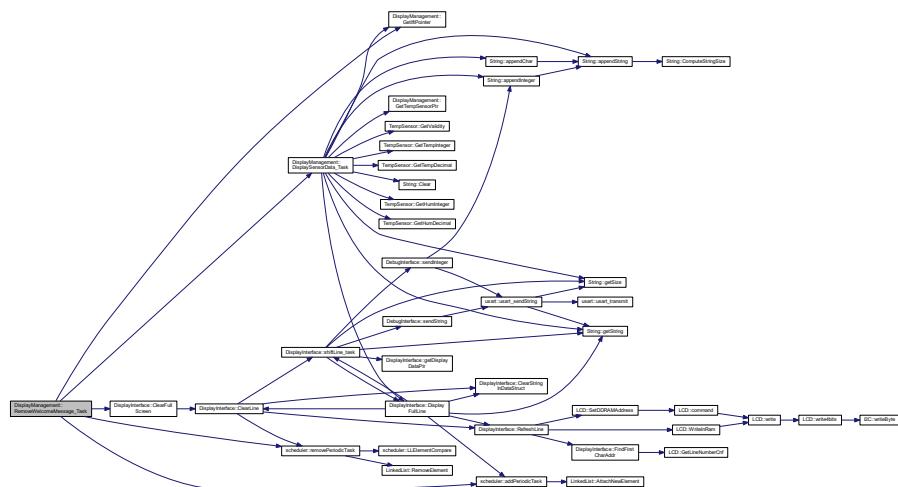

Here is the caller graph for this function:



3.7.4 Member Data Documentation

3.7.4.1 p_display_ift

`DisplayInterface* DisplayManagement::p_display_ift [private]`

Pointer to the display interface object

Definition at line 109 of file `DisplayManagement.h`.

3.7.4.2 p_tempSensor

`TempSensor* DisplayManagement::p_tempSensor [private]`

Pointer to the temperature sensor object

Definition at line 110 of file `DisplayManagement.h`.

The documentation for this class was generated from the following files:

- [DisplayManagement.h](#)
- [DisplayManagement.cpp](#)

3.8 I2C Class Reference

Two-wire serial interface ([I2C](#)) class definition.

```
#include <I2C.h>
```

Public Member Functions

- [`I2C \(uint32_t l_bitrate\)`](#)
I2C class constructor.
- [`bool writeByte \(uint8_t *data\)`](#)
Byte sending function.
- [`void setTxAddress \(uint8_t address\)`](#)
Setting function for Tx I2C address.
- [`void setBitRate \(uint32_t l_bitrate\)`](#)
Variable bitrate setting function.

Private Member Functions

- [`void initializeBus \(\)`](#)
I2C bus initialization.

Private Attributes

- [`uint8_t tx_address`](#)
- [`uint32_t bitrate`](#)

3.8.1 Detailed Description

Two-wire serial interface ([I2C](#)) class definition.

This class manages [I2C](#) driver.

Definition at line 23 of file I2C.h.

3.8.2 Constructor & Destructor Documentation

3.8.2.1 I2C()

```
I2C::I2C (
    uint32_t l_bitrate )
```

[I2C](#) class constructor.

This function initializes the [I2C](#) class and calls bus initialization function

Parameters


in	<i>l_bitrate</i>	Requested bitrate for I2C bus (in Hz)
----	------------------	---

Returns

Nothing

Definition at line 15 of file I2C.cpp.

Here is the call graph for this function:



3.8.3 Member Function Documentation

3.8.3.1 initializeBus()

```
void I2C::initializeBus ( ) [private]
```

I2C bus initialization.

This function initializes the I2C bus, it resets the bus and configure the bitrate as requested. Bitrate is configured according to formula in the ATMEGA2560 datasheet : SCL freq = F_CPU / (16 + 2*TWBR*(4^TWPS)). Prescaler value is fixed to 1 (TWPS1 = 0 and TWPS0 = 0), then only TWBR value shall be computed.

Returns

Nothing

Definition at line 76 of file I2C.cpp.

Here is the caller graph for this function:



3.8.3.2 setBitRate()

```
void I2C::setBitRate (
    uint32_t l_bitrate )
```

Variable bitrate setting function.

This function sets the class variable bitrate as requested in parameter.

Parameters

in	<i>l_bitrate</i>	Requested bitrate (in Hz)
----	------------------	---------------------------

Returns

Nothing

Definition at line 71 of file I2C.cpp.

3.8.3.3 setTxAddress()

```
void I2C::setTxAddress (
    uint8_t address )
```

Setting function for Tx I2C address.

This function sets the given Tx I2C address in the internal class variable.

Parameters


in	address	Requested Tx address
----	---------	----------------------

Returns

Nothing

Definition at line 66 of file I2C.cpp.

Here is the caller graph for this function:



3.8.3.4 writeByte()

```
bool I2C::writeByte (
    uint8_t * data )
```

Byte sending function.

This function sends one byte on I2C bus

Parameters


in	data	Pointer to the data to send
----	------	-----------------------------

Returns

True if transmission is completed, False if an error has occurred

Definition at line 23 of file I2C.cpp.

Here is the caller graph for this function:



3.8.4 Member Data Documentation

3.8.4.1 bitrate

`uint32_t I2C::bitrate [private]`

Definition at line 63 of file I2C.h.

3.8.4.2 tx_address

`uint8_t I2C::tx_address [private]`

Definition at line 62 of file I2C.h.

The documentation for this class was generated from the following files:

- [I2C.h](#)
- [I2C.cpp](#)

3.9 keepAliveLed Class Reference

Class for keep-alive LED blinking.

```
#include <keepAliveLed.h>
```

Public Member Functions

- [keepAliveLed \(\)](#)

Class constructor.

Static Public Member Functions

- static void [blinkLed_task \(\)](#)

Task for LED blinking.

3.9.1 Detailed Description

Class for keep-alive LED blinking.

This class defines all functions to make keep-alive LED blink

Definition at line 22 of file keepAliveLed.h.

3.9.2 Constructor & Destructor Documentation

3.9.2.1 keepAliveLed()

```
keepAliveLed::keepAliveLed ( )
```

Class constructor.


This function initializes the class keepAliveLed

Returns

Nothing

Definition at line 36 of file keepAliveLed.cpp.

Here is the call graph for this function:



3.9.3 Member Function Documentation

3.9.3.1 blinkLed_task()

```
void keepAliveLed::blinkLed_task ( ) [static]
```

Task for LED blinking.


This function is inserted into the scheduler. It changes the state of the LED output to make it blink

Returns

Nothing

Definition at line 42 of file `keepAliveLed.cpp`.

Here is the call graph for this function:



Here is the caller graph for this function:



The documentation for this class was generated from the following files:


- [keepAliveLed.h](#)
- [keepAliveLed.cpp](#)

3.10 LCD Class Reference

Class for [LCD](#) S2004A display driver.

```
#include <LCD.h>
```

Collaboration diagram for LCD:



Public Member Functions

- `LCD (const T_LCD_conf_struct *init_conf)`
LCD class constructor.
- `void command (T_LCD_command cmd)`
LCD command management function.
- `void ConfigureBacklight (bool enable)`
Backlight configuration function.
- `void ConfigureLineNumber (bool param)`
Line type configuration function.
- `void ConfigureFontType (bool param)`
Font configuration function.
- `void ConfigureDisplayOnOff (bool param)`
Display configuration function.
- `void ConfigureCursorOnOff (bool param)`
Cursor configuration function.
- `void ConfigureCursorBlink (bool param)`
Cursor blinking configuration function.
- `void ConfigureEntryModeDir (bool param)`
Entry mode direction configuration function.
- `void ConfigureEntryModeShift (bool param)`
Entry mode shift configuration function.
- `void ConfigureI2CAddr (uint8_t param)`
I2C address configuration function.
- `void SetDDRAMAddress (uint8_t addr)`
DDRAM address setting function.
- `uint8_t GetDDRAMAddress ()`
DDRAM address get function.
- `void WriteInRam (uint8_t a_char, T_LCD_ram_area area)`
Screen RAM write function.
- `bool GetLineNumberCnf ()`
Number of line get function.

Private Member Functions

- void `write4bits` (uint8_t data)
I2C write function for 4-bits mode.
- void `write` (uint8_t data, `T_LCD_config_mode` mode)
I2C write function.
- void `InitializeScreen` ()
Screen configuration function.

Private Attributes

- bool `backlight_enable`
- bool `cnfLineNumber`
- bool `cnfFontType`
- bool `cnfDisplayOnOff`
- bool `cnfCursorOnOff`
- bool `cnfCursorBlink`
- bool `cnfEntryModeDir`
- bool `cnfEntryModeShift`
- uint8_t `cnfI2C_addr`
- I2C * `i2c_drv_ptr`
- uint8_t `ddram_addr`

3.10.1 Detailed Description

Class for `LCD` S2004A display driver.

This class handles functions managing `LCD` display S2004a on `I2C` bus

Definition at line 147 of file LCD.h.

3.10.2 Constructor & Destructor Documentation

3.10.2.1 LCD()

```
LCD::LCD (
    const T_LCD_conf_struct * init_conf )
```

`LCD` class constructor.

This constructor function initializes the class `LCD` and calls screen configuration function. It also creates a new instance of the `I2C` driver if needed.

Parameters

in	<code>init_conf</code>	Initial configuration structure
----	------------------------	---------------------------------

Returns

Nothing

Definition at line 27 of file LCD.cpp.

Here is the call graph for this function:



3.10.3 Member Function Documentation

3.10.3.1 command()

```
void LCD::command (
    T_LCD_command cmd )
```

LCD command management function.

This function sends the requested command to the **LCD** screen. It builds the 8-bit command word and sends it on **I₂C** bus.

Parameters

in	cmd	Requested command
----	-----	-------------------

Returns


Nothing

Definition at line 134 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.3.2 ConfigureBacklight()

```
void LCD::ConfigureBacklight (
    bool enable ) [inline]
```

Backlight configuration function.

This function configures the screen backlight (enable or disable) according to the parameter enable.

Parameters

in	<i>enable</i>	True if backlight shall be on, False otherwise
----	---------------	--

Returns

Nothing

Definition at line 178 of file LCD.h.

Here is the caller graph for this function:



3.10.3.3 ConfigureCursorBlink()

```
void LCD::ConfigureCursorBlink (
    bool param ) [inline]
```

Cursor blinking configuration function.

This function configures the cursor blinking (on or off mode) according to the parameter.

Parameters

in	param	Configuration value
----	-------	---------------------

Returns

Nothing

Definition at line 238 of file LCD.h.

Here is the caller graph for this function:



3.10.3.4 ConfigureCursorOnOff()

```
void LCD::ConfigureCursorOnOff (
    bool param ) [inline]
```

Cursor configuration function.

This function configures the cursor (on or off mode) according to the parameter.

Parameters

in	param	Configuration value
----	-------	---------------------

Returns

Nothing

Definition at line 226 of file LCD.h.

Here is the caller graph for this function:



3.10.3.5 ConfigureDisplayOnOff()

```
void LCD::ConfigureDisplayOnOff (  
    bool param ) [inline]
```

Display configuration function.

This function configures the display (on or off mode) according to the parameter.

Parameters

in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 214 of file LCD.h.

Here is the caller graph for this function:



3.10.3.6 ConfigureEntryModeDir()

```
void LCD::ConfigureEntryModeDir (   
    bool param ) [inline]
```

Entry mode direction configuration function.

This function configures the direction of entry mode (right or left) according to the parameter.

Parameters

in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 250 of file LCD.h.

Here is the caller graph for this function:



3.10.3.7 ConfigureEntryModeShift()

```
void LCD::ConfigureEntryModeShift ( bool param ) [inline]
```

Entry mode shift configuration function.

This function configures the display shift of entry mode (enable or disable) according to the parameter.

Parameters

in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 262 of file LCD.h.

Here is the caller graph for this function:



3.10.3.8 ConfigureFontType()

```
void LCD::ConfigureFontType (  
    bool param ) [inline]
```

Font configuration function.

This function configures the font type of the screen (5*8 or 5*11 dots) according to the parameter.

Parameters

in	param	Configuration value
----	-------	---------------------

Returns

Nothing

Definition at line 202 of file LCD.h.

Here is the caller graph for this function:



3.10.3.9 ConfigureI2CAddr()

```
void LCD::ConfigureI2CAddr (
    uint8_t param ) [inline]
```

I2C address configuration function.

This function configures the I2V address of the [LCD](#) screen according to the parameter.

Parameters

in	param	I2C address
----	-------	-------------

Returns

Nothing

Definition at line 274 of file LCD.h.

Here is the caller graph for this function:



3.10.3.10 ConfigureLineNumber()

```
void LCD::ConfigureLineNumber (
    bool param ) [inline]
```

Line type configuration function.

This function configures the line number configuration of the screen (1 or 2 lines mode) according to the parameter.

Parameters


in	param	Configuration value
----	-------	---------------------

Returns

Nothing

Definition at line 190 of file LCD.h.

Here is the caller graph for this function:



3.10.3.11 GetDDRAMAddress()

```
uint8_t LCD::GetDDRAMAddress ( ) [inline]
```

DDRAM address get function.

This function return the value of the current DDRAM address stored in internal variable `ddram_addr`.

Returns

Current DDRAM address

Definition at line 294 of file LCD.h.

3.10.3.12 GetLineNumberCnf()

```
bool LCD::GetLineNumberCnf ( ) [inline]
```

Number of line get function.


This function returns the line number configuration of the screen : 1 or 2 lines mode.

Returns

Line number configuration

Definition at line 316 of file LCD.h.

Here is the caller graph for this function:



3.10.3.13 InitializeScreen()

```
void LCD::InitializeScreen ( ) [private]
```

Screen configuration function.


This function configures the [LCD](#) screen. It's must be called during initialization phase, or the screen won't be usable. The configuration process is described in [LCD](#) datasheet J2004A-GFDN-DYNC

Returns

Nothing

Definition at line 82 of file LCD.cpp.

Here is the call graph for this function:

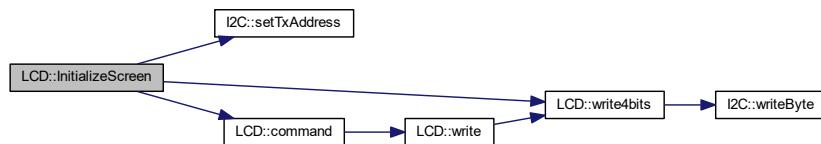

Here is the caller graph for this function:



3.10.3.14 SetDDRAMAddress()

```
void LCD::SetDDRAMAddress (
    uint8_t addr )
```

DDRAM address setting function.

This function updates the DDRAM address according to the given parameter. The parameter is checked against limits to be sure the address stays always coherent. It also calls the command function to update screen accordingly.

Parameters

in	<i>addr</i>	New DDRAM address
----	-------------	-------------------

Returns


Nothing

Definition at line 177 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.10.3.15 write()**

```
void LCD::write (
    uint8_t data,
    T_LCD_config_mode mode ) [private]
```

[I2C](#) write function.

This function writes the requested data on [I2C](#) bus. It's assumed we only perform write operation so the R/W bit is forced LOW. It's also assumed we work in 4-bit mode, then two calls of write4bits are performed, first with bits 4-7 of data, second with bits 0-3.

Parameters

in	<i>data</i>	8-bit data for D0-7 pins of screen
in	<i>mode</i>	Requested mode for LCD communication

Returns


Nothing

Definition at line 71 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.3.16 write4bits()

```
void LCD::write4bits (
    uint8_t data ) [private]
```

I2C write function for 4-bits mode.

This function sends the requested 8-bits data on the [I2C](#) bus. The backlight pin is also set/clear according to the configuration. The function sends the data a first time with EN pin set, then a second time with EN bit clear.

Parameters

in	<i>data</i>	8-bit data to send
----	-------------	--------------------

Returns


Nothing

Definition at line 54 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.3.17 WriteInRam()

```
void LCD::WriteInRam (
    uint8_t a_char,
    T_LCD_ram_area area )
```

Screen RAM write function.

This function writes in the memorized RAM address the character given as parameter. After a write the screen automatically increment/decrement the RAM address, so we do the same in the function to stay coherent. Currently only DDRAM write is implemented.

Parameters

in	<i>a_char</i>	Data byte to write in RAM
in	<i>area</i>	Area in RAM where the data will be written : DDRAM or CGRAM

Returns


Nothing

Definition at line 199 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.4 Member Data Documentation

3.10.4.1 `backlight_enable`

```
bool LCD::backlight_enable [private]
```

Backlight enable flag

Definition at line 324 of file LCD.h.

3.10.4.2 `cnfCursorBlink`

```
bool LCD::cnfCursorBlink [private]
```

Cursor blinking configuration : 1 = cursor blink is on, 0 = cursor blink is off

Definition at line 329 of file LCD.h.

3.10.4.3 `cnfCursorOnOff`

```
bool LCD::cnfCursorOnOff [private]
```

Cursor configuration : 1 = cursor on, 0 = cursor off

Definition at line 328 of file LCD.h.

3.10.4.4 `cnfDisplayOnOff`

```
bool LCD::cnfDisplayOnOff [private]
```

Display configuration : 1 = display on, 0 = display off

Definition at line 327 of file LCD.h.

3.10.4.5 `cnfEntryModeDir`

```
bool LCD::cnfEntryModeDir [private]
```

Entry mode direction configuration : 1 = cursor moves to right when DDRAM address is incremented, 0 = cursor moves to left when DDRAM address is incremented

Definition at line 330 of file LCD.h.

3.10.4.6 cnfEntryModeShift

```
bool LCD::cnfEntryModeShift [private]
```

Entry mode configuration : 0 = no display shift is performed after a DDRAM read, 1 = a shift is performed

Definition at line 331 of file LCD.h.

3.10.4.7 cnfFontType

```
bool LCD::cnfFontType [private]
```

Font type configuration, 0 = 5*8 dots, 1 = 5*11 dots

Definition at line 326 of file LCD.h.

3.10.4.8 cnfI2C_addr

```
uint8_t LCD::cnfI2C_addr [private]
```

I2C address of the [LCD](#) screen

Definition at line 332 of file LCD.h.

3.10.4.9 cnfLineNumber

```
bool LCD::cnfLineNumber [private]
```

Display line number configuration, 0 = 1-line mode, 1 = 2-line mode

Definition at line 325 of file LCD.h.

3.10.4.10 ddram_addr

```
uint8_t LCD::ddram_addr [private]
```

Screen DDRAM address

Definition at line 336 of file LCD.h.

3.10.4.11 i2c_drv_ptr

```
I2C* LCD::i2c_drv_ptr [private]
```

Pointer to the I2C driver object

Definition at line 334 of file LCD.h.

The documentation for this class was generated from the following files:


- [LCD.h](#)
- [LCD.cpp](#)

3.11 LinkedList Class Reference

Linked list class.

```
#include <LinkedList.h>
```

Collaboration diagram for LinkedList:

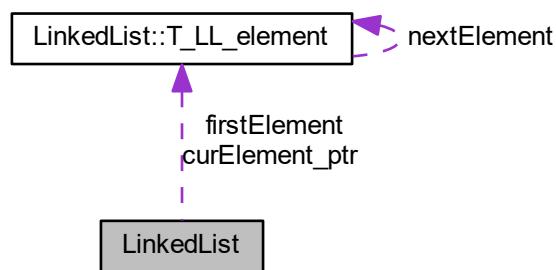

Classes

- struct [T_LL_element](#)

Type defining a linked list element.

Public Member Functions

- [LinkedList \(\)](#)
Class constructor.
- [~LinkedList \(\)](#)
Class destructor.
- [void AttachNewElement \(void *data_ptr\)](#)
Add an new element to the list.
- [bool RemoveElement \(CompareFctPtr_t comparisonFct_ptr, void *reference_ptr\)](#)
Removes an element from the chain.
- [void *getCurrentElement \(\)](#)
Current element get function.
- [bool MoveToNextElement \(\)](#)
Move to next element function.
- [void ResetElementPtr \(\)](#)
Resets element pointer.
- [bool IsLLEmpty \(\)](#)
Empty linked list.

Private Types

- [typedef struct LinkedList::T_LL_element T_LL_element](#)
Type defining a linked list element.

Private Attributes

- [T_LL_element * firstElement](#)
- [T_LL_element * curElement_ptr](#)

3.11.1 Detailed Description

Linked list class.

This class defines a linked list and the associated services.

All classes using a linked list with this interface shall implement a comparison function used to find the list element to remove. This function shall have the following prototype : static bool LLElementCompare(void* LLElement, void* CompareElement);

Definition at line 22 of file [LinkedList.h](#).

3.11.2 Member Typedef Documentation

3.11.2.1 T_LL_element

```
typedef struct LinkedList::T_LL_element LinkedList::T_LL_element [private]
```

Type defining a linked list element.

This structure defines a linked list element. An element is defined by a pointer to the attached data and a pointer to the next element.

3.11.3 Constructor & Destructor Documentation

3.11.3.1 LinkedList()

```
LinkedList::LinkedList ( )
```

Class constructor.

This constructor initializes a linked list

Returns

Nothing

Definition at line 15 of file LinkedList.cpp.

3.11.3.2 ~LinkedList()

```
LinkedList::~LinkedList ( )
```

Class destructor.

This function deletes the linked list

Returns

Nothing

Definition at line 21 of file LinkedList.cpp.

Here is the call graph for this function:



3.11.4 Member Function Documentation

3.11.4.1 AttachNewElement()

```
void LinkedList::AttachNewElement (
    void * data_ptr )
```

Add an new element to the list.

This function adds a new element at the end of the list. The data pointer to attach to the element is given in parameter

Parameters


in	<i>data_ptr</i>	Pointer to the data element
----	-----------------	-----------------------------

Returns

Nothing

Definition at line 39 of file `LinkedList.cpp`.

Here is the caller graph for this function:

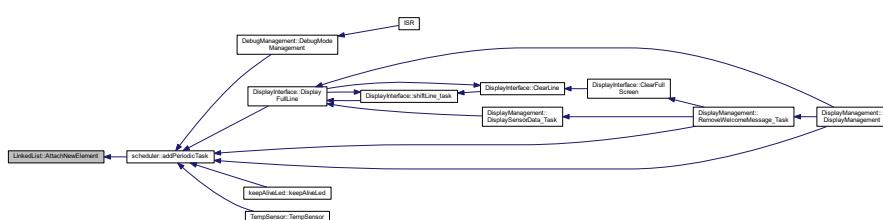

3.11.4.2 getCurrentElement()

```
void* LinkedList::getCurrentElement ( ) [inline]
```

Current element get function.


This function returns a pointer to the current pointed data in the chain.

Returns

Pointer to the current data

Definition at line 67 of file LinkedList.h.

Here is the caller graph for this function:



3.11.4.3 IsLLEmpty()

```
bool LinkedList::IsLLEmpty ( )
```

Empty linked list.


This function checks whether the linked list is empty or not (pointer to first element is equal to 0 or not).

Returns

True if the list is empty, false otherwise

Definition at line 105 of file LinkedList.cpp.

Here is the caller graph for this function:

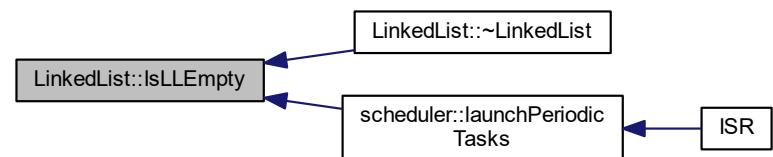

3.11.4.4 MoveToNextElement()

```
bool LinkedList::MoveToNextElement ( )
```

Move to next element function.


This function moves the element pointer to the next element of the chain.

Returns

True if the next element exists, false if there is no next element

Definition at line 91 of file LinkedList.cpp.

Here is the caller graph for this function:



3.11.4.5 RemoveElement()

```
bool LinkedList::RemoveElement (
    CompareFctPtr_t comparisonFct_ptr,
    void * reference_ptr )
```

Removes an element from the chain.

This function removes an element from the chain. To know which element shall be removed, we use the comparison function given in parameter. This function is called with two parameters : the data pointer from the chain and the reference pointer given as parameter.

Parameters


in	<i>comparisonFct_ptr</i>	Pointer to the comparison function to use
in	<i>reference_ptr</i>	Pointer to the reference data used for comparison

Returns

True if the element has been correctly removed from the chain, false otherwise

Definition at line 64 of file LinkedList.cpp.

Here is the caller graph for this function:

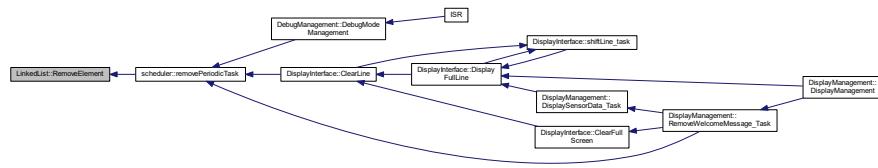

3.11.4.6 ResetElementPtr()

```
void LinkedList::ResetElementPtr ( ) [inline]
```

Resets element pointer.


This function sets the element pointer to the first element of the chain.

Returns

Nothing

Definition at line 86 of file `LinkedList.h`.

Here is the caller graph for this function:



3.11.5 Member Data Documentation

3.11.5.1 curElement_ptr

```
T_LL_element* LinkedList::curElement_ptr [private]
```

Pointer to the current element of the list

Definition at line 113 of file `LinkedList.h`.

3.11.5.2 firstElement

```
T_LL_element* LinkedList::firstElement [private]
```

Pointer to the first element of the list

Definition at line 112 of file LinkedList.h.

The documentation for this class was generated from the following files:


- [LinkedList.h](#)
- [LinkedList.cpp](#)

3.12 scheduler Class Reference

Scheduler class.

```
#include <scheduler.h>
```

Collaboration diagram for scheduler:

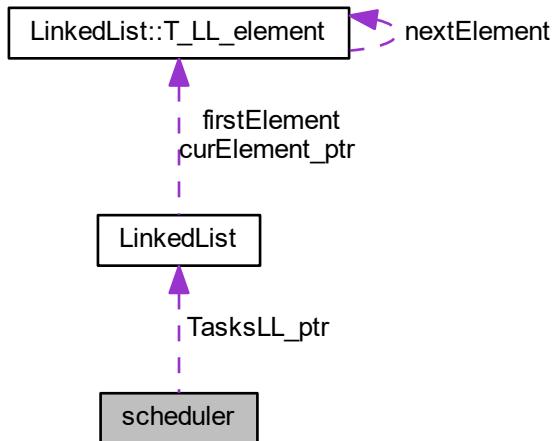

Classes

- struct [Task_t](#)

Type defining a task structure.

Public Member Functions

- `scheduler ()`
scheduler class constructor
- `void launchPeriodicTasks ()`
Main scheduler function.
- `void startScheduling ()`
Starts the tasks scheduling.
- `void addPeriodicTask (TaskPtr_t task_ptr, uint16_t a_period)`
Add a task into the scheduler.
- `bool removePeriodicTask (TaskPtr_t task_ptr)`
Remove a task from the scheduler.
- `uint32_t getPitNumber ()`
Get function for PIT number.

Static Public Member Functions

- `static bool LLElementCompare (void *LLElement, void *CompareElement)`
Linked list comparison function.

Private Types

- `typedef struct scheduler::Task_t Task_t`
Type defining a task structure.

Private Attributes

- `LinkedList * TasksLL_ptr`
- `uint32_t pit_number`

3.12.1 Detailed Description

Scheduler class.

This class defines the scheduler of the system.

It is called by the main interrupt and calls successively all applicative functions according to their recurrence time.
All tasks called by the scheduler shall have the following prototype : static void task();

Definition at line 30 of file scheduler.h.

3.12.2 Member Typedef Documentation

3.12.2.1 Task_t

```
typedef struct scheduler::Task_t scheduler::Task_t [private]
```

Type defining a task structure.

This structure defines a task. A task is defined by a function to call (defined by its pointer) and a period.

3.12.3 Constructor & Destructor Documentation

3.12.3.1 scheduler()

```
scheduler::scheduler ()
```

scheduler class constructor

This function initializes the class scheduler

Returns

Nothing

Definition at line 40 of file scheduler.cpp.

Here is the call graph for this function:



3.12.4 Member Function Documentation

3.12.4.1 addPeriodicTask()

```
void scheduler::addPeriodicTask (
    TaskPtr_t task_ptr,
    uint16_t a_period )
```

Add a task into the scheduler.

This function create a new task in the scheduler linked to the function task_ptr with a period a_period and an ID a_task_id

Parameters

in	<i>task_ptr</i>	Pointer to the task which will be added
in	<i>a_period</i>	Period of the new task

Returns


Nothing

Definition at line 93 of file scheduler.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

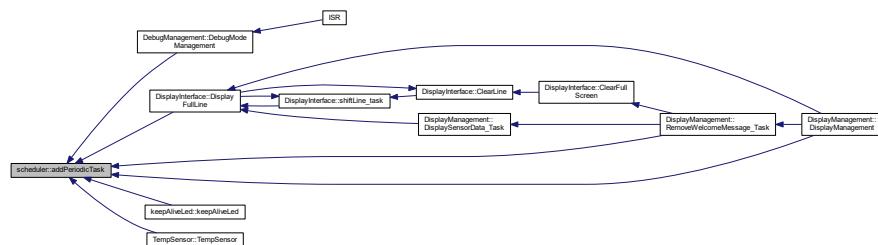**3.12.4.2 getPitNumber()**

```
uint32_t scheduler::getPitNumber ( )
```

Get function for PIT number.


This function returns the PIT number

Returns

PIT number

Definition at line 105 of file scheduler.cpp.

Here is the caller graph for this function:



3.12.4.3 launchPeriodicTasks()

```
void scheduler::launchPeriodicTasks ( )
```

Main scheduler function.


This function launches the scheduled tasks according to current software time and task configuration

Returns


Nothing

Definition at line 52 of file scheduler.cpp.

Here is the call graph for this function:

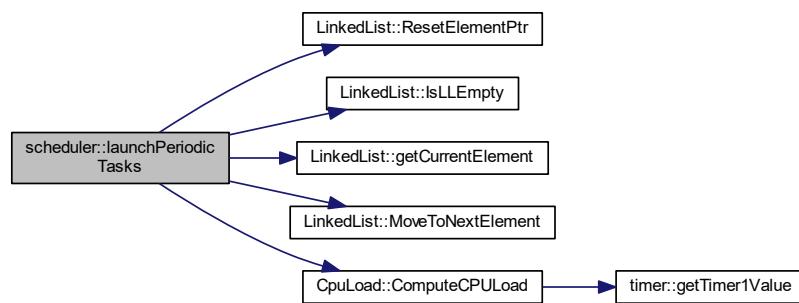

Here is the caller graph for this function:



3.12.4.4 LLElementCompare()

```
bool scheduler::LLElementCompare (
    void * LLElement,
    void * CompareElement ) [static]
```

Linked list comparison function.

This function is called by the linked list class to compare one element of the list to a given element. In the class `scheduler`, the `LLElement` is a task pointer (containing a function pointer and a period), and the `compareElement` a function pointer. The comparison will be done between the two function pointer.

Parameters


in	<i>LLElement</i>	Pointer to the linked list element
in	<i>CompareElement</i>	Pointer to the element to the compare

Returns

True if both elements are identical, false otherwise

Definition at line 116 of file scheduler.cpp.

Here is the caller graph for this function:

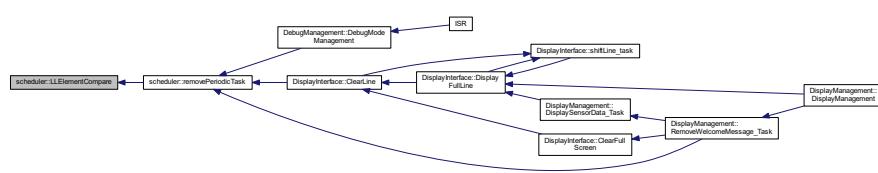**3.12.4.5 removePeriodicTask()**

```
bool scheduler::removePeriodicTask (
    TaskPtr_t task_ptr )
```

Remove a task from the scheduler.

This function finds the task defined by task_ptr in the scheduler and removes it.

Parameters


in	<i>task_ptr</i>	address of the task to remove from scheduler
----	-----------------	--

Returns


TRUE if the task has been removed, FALSE if the task does not exist in the scheduler

Definition at line 111 of file scheduler.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

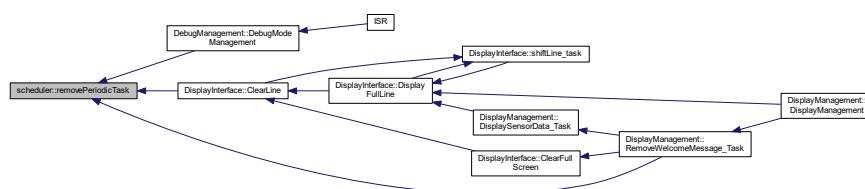**3.12.4.6 startScheduling()**

```
void scheduler::startScheduling ( )
```

Starts the tasks scheduling.

This function starts the timer which will trigger an interrupt every software period. When the interrupt is raised the scheduler will launch applications

Returns

Nothing

Definition at line 87 of file scheduler.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.12.5 Member Data Documentation

3.12.5.1 pit_number

```
uint32_t scheduler::pit_number [private]
```

Counter of periodic interrupts

Definition at line 116 of file scheduler.h.

3.12.5.2 TasksLL_ptr

```
LinkedList* scheduler::TasksLL_ptr [private]
```

Pointer to the linked list object containing the tasks

Definition at line 114 of file scheduler.h.

The documentation for this class was generated from the following files:

- [scheduler.h](#)
- [scheduler.cpp](#)

3.13 String Class Reference

`String` management class.

```
#include <String.h>
```

Public Member Functions

- `String (const uint8_t *str)`
Class constructor.
- `String ()`
Class constructor.
- `~String ()`
Class destructor.
- `uint8_t * getString ()`
String pointer get function.
- `uint8_t getSize ()`
Size get function.
- `void appendString (uint8_t *str)`
String adding function.
- `void appendInteger (uint16_t value, uint8_t base)`
Integer adding function.
- `void appendBool (bool data, bool isText)`
Boolean adding function.
- `void appendChar (uint8_t data)`
Character adding function.
- `void Clear ()`
String clear function.

Private Member Functions

- `uint8_t ComputeStringSize (uint8_t *str)`
String size computation function.

Private Attributes

- `uint8_t * string`
- `uint8_t size`

3.13.1 Detailed Description

`String` management class.

This class defines string object. It implements some functions to manage chains of characters. The string is limited to 255 characters. It must finish by the character '\0'.

Definition at line 18 of file String.h.

3.13.2 Constructor & Destructor Documentation

3.13.2.1 String() [1/2]

```
String::String (
    const uint8_t * str )
```

Class constructor.

This function initializes the class. The string is initialized with the data given in parameter.

Parameters

in	str	Pointer to initialization string
----	-----	----------------------------------

Returns

Nothing

Definition at line 15 of file String.cpp.

Here is the call graph for this function:



3.13.2.2 String() [2/2]

```
String::String ( )
```

Class constructor.

This function initializes the class with an empty string. The size is set to 0.

Returns

Nothing

Definition at line 33 of file String.cpp.

3.13.2.3 ~String()

```
String::~String ( )
```

Class destructor.

This function frees the memory used to contain the string when the object is deleted

Returns

Nothing

Definition at line 39 of file String.cpp.

Here is the call graph for this function:



3.13.3 Member Function Documentation

3.13.3.1 appendBool()

```
void String::appendBool (
    bool data,
    bool isText )
```

Boolean adding function.

This functions adds the given boolean data at the end of the main string. The string size is updated accordingly. According to the input parameter isText, the boolean parameter is converted into a string (true/false) or an integer (0/1).

Parameters


in	<i>data</i>	Boolean data to add
in	<i>isText</i>	Defines the conversion mode : text or integer

Returns


Nothing

Definition at line 121 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.13.3.2 appendChar()

```
void String::appendChar (
    uint8_t data )
```

Character adding function.

This functions adds the given character at the end of the main string. The string size is updated by 1.

Parameters

in	<i>data</i>	1-byte character to add
----	-------------	-------------------------

Returns

Nothing

Definition at line 139 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.13.3.3 appendInteger()

```
void String::appendInteger (
    uint16_t value,
    uint8_t base )
```

Integer adding function.

This functions adds the given integer at the end of the main string. The string size is updated accordingly. The integer parameter is first converted into a chain of character according to the base and then added to the string.

Parameters


in	value	Integer to add
in	base	Base of computation of the integer (between 2 and 36)

Returns


Nothing

Definition at line 95 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

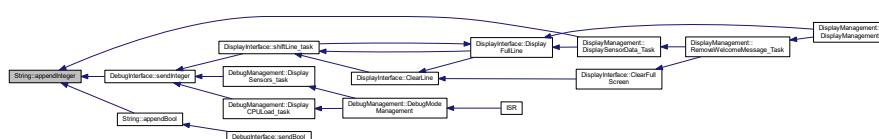

3.13.3.4 appendString()

```
void String::appendString (
    uint8_t * str )
```

[String](#) adding function.

This functions adds the given string at the end of the main string. The string size is updated accordingly.

Parameters


in	str	New string to add
----	-----	-------------------

Returns


Nothing

Definition at line 57 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

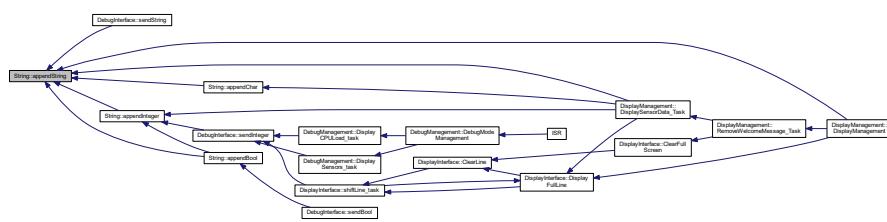

3.13.3.5 Clear()

```
void String::Clear ( )
```

[String](#) clear function.


This function clears the string. Size is set to 0 and the memory is freed.

Returns

Nothing

Definition at line 113 of file String.cpp.

Here is the caller graph for this function:

**3.13.3.6 ComputeStringSize()**

```
uint8_t String::ComputeStringSize (
    uint8_t * str ) [private]
```

String size computation function.

This function computes the sizes of the given string. It counts the number of character between the start of the string given in parameter and the next \0 character.

Parameters


in	str	Pointer to the beginning of the string
----	------------	--

Returns

Number of character of the string (the \0 is excluded)

Definition at line 44 of file String.cpp.

Here is the caller graph for this function:

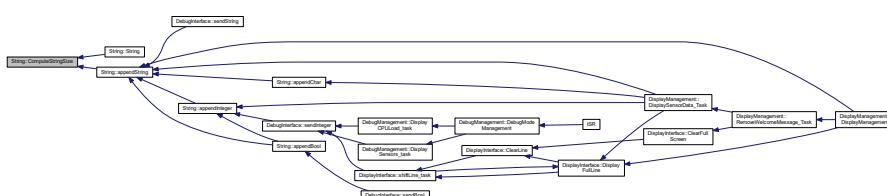

3.13.3.7 getSize()

```
uint8_t String::getSize ( ) [inline]
```

Size get function.


This function returns the size of the string.

Returns

Size of the string

Definition at line 64 of file String.h.

Here is the caller graph for this function:

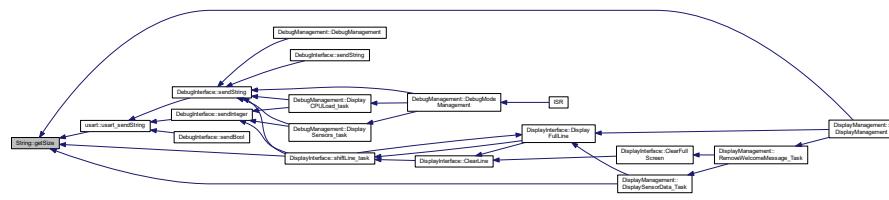

3.13.3.8 getString()

```
uint8_t* String::getString ( ) [inline]
```

`String` pointer get function.


This function returns the pointer to the beginning of the string.

Returns

`String` pointer

Definition at line 53 of file String.h.

Here is the caller graph for this function:

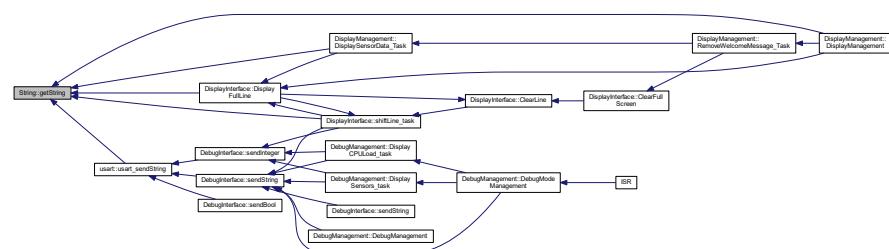

3.13.4 Member Data Documentation

3.13.4.1 size

```
uint8_t String::size [private]
```

Size of the string (the '\0' at the end of the string is not taken into account)

Definition at line 121 of file String.h.

3.13.4.2 string

```
uint8_t* String::string [private]
```

Pointer to the start of the string

Definition at line 120 of file String.h.

The documentation for this class was generated from the following files:


- [String.h](#)
- [String.cpp](#)

3.14 T_ASW_cnf_struct Struct Reference

ASW configuration structure.

```
#include <asw.h>
```

Collaboration diagram for T_ASW_cnf_struct:

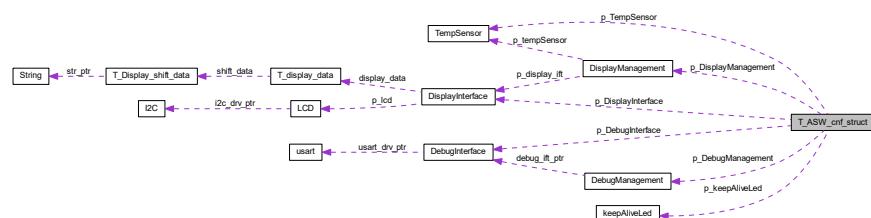

Public Attributes

- `DebugInterface * p_DebugInterface`
- `keepAliveLed * p_KeepAliveLed`
- `TempSensor * p_TempSensor`
- `DisplayInterface * p_DisplayInterface`
- `DisplayManagement * p_DisplayManagement`
- `DebugManagement * p_DebugManagement`

3.14.1 Detailed Description

ASW configuration structure.

This structure contains all pointers to instanced applicative objects

Definition at line 18 of file asw.h.

3.14.2 Member Data Documentation

3.14.2.1 p_DebugInterface

```
DebugInterface* T_ASW_cnf_struct::p_DebugInterface
```

Pointer to USART debug interface object

Definition at line 20 of file asw.h.

3.14.2.2 p_DebugManagement

```
DebugManagement* T_ASW_cnf_struct::p_DebugManagement
```

Pointer to the `DebugManagement` object

Definition at line 25 of file asw.h.

3.14.2.3 p_DisplayInterface

```
DisplayInterface* T_ASW_cnf_struct::p_DisplayInterface
```

Pointer to `DisplayInterface` object

Definition at line 23 of file asw.h.

3.14.2.4 p_DisplayManagement

`DisplayManagement* T_ASW_cnf_struct::p_DisplayManagement`

Pointer to `DisplayManagement` object

Definition at line 24 of file asw.h.

3.14.2.5 p_keepAliveLed

`keepAliveLed* T_ASW_cnf_struct::p_keepAliveLed`

Pointer to `keepAliveLed` object

Definition at line 21 of file asw.h.

3.14.2.6 p_TempSensor

`TempSensor* T_ASW_cnf_struct::p_TempSensor`

Pointer to `TempSensor` object

Definition at line 22 of file asw.h.

The documentation for this struct was generated from the following file:


- `asw.h`

3.15 T_BSW_cnf_struct Struct Reference

BSW configuration structure.

```
#include <bsw.h>
```

Collaboration diagram for `T_BSW_cnf_struct`:

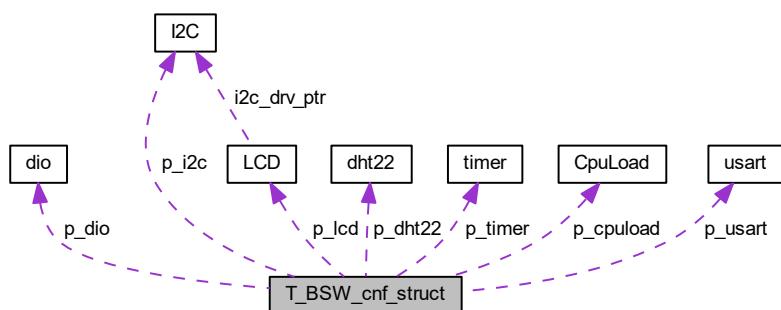

Public Attributes

- `uart * p_usart`
- `dio * p_dio`
- `timer * p_timer`
- `dht22 * p_dht22`
- `CpuLoad * p_cpuload`
- `I2C * p_i2c`
- `LCD * p_lcd`

3.15.1 Detailed Description

BSW configuration structure.

This structure contains all pointers to instanced drivers objects

Definition at line 17 of file bsw.h.

3.15.2 Member Data Documentation

3.15.2.1 p_cpuload

`CpuLoad* T_BSW_cnf_struct::p_cpuload`

Pointer to cpu load library object

Definition at line 23 of file bsw.h.

3.15.2.2 p_dht22

`dht22* T_BSW_cnf_struct::p_dht22`

Pointer to `dht22` driver object

Definition at line 22 of file bsw.h.

3.15.2.3 p_dio

`dio* T_BSW_cnf_struct::p_dio`

Pointer to dio driver object

Definition at line 20 of file bsw.h.

3.15.2.4 p_i2c

`I2C* T_BSW_cnf_struct::p_i2c`

Pointer to [I2C](#) driver object

Definition at line 24 of file bsw.h.

3.15.2.5 p_lcd

`LCD* T_BSW_cnf_struct::p_lcd`

Pointer to [LCD](#) driver object

Definition at line 25 of file bsw.h.

3.15.2.6 p_timer

`timer* T_BSW_cnf_struct::p_timer`

Pointer to timer driver object

Definition at line 21 of file bsw.h.

3.15.2.7 p_usart

`usart* T_BSW_cnf_struct::p_usart`

Pointer to usart driver object

Definition at line 19 of file bsw.h.

The documentation for this struct was generated from the following file:


- [bsw.h](#)

3.16 T_display_data Struct Reference

Structure containing display data.

```
#include <DisplayInterface.h>
```

Collaboration diagram for T_display_data:

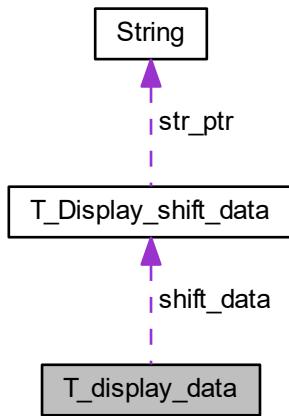

Public Attributes

- `bool isEmpty`
- `T_DisplayInterface_LineDisplayMode mode`
- `T_Display_shift_data shift_data`
- `uint8_t display_str [LCD_SIZE_NB_CHAR_PER_LINE]`

3.16.1 Detailed Description

Structure containing display data.

This structure contains all data used for screen display

Definition at line 48 of file `DisplayInterface.h`.

3.16.2 Member Data Documentation

3.16.2.1 display_str

```
uint8_t T_display_data::display_str[LCD_SIZE_NB_CHAR_PER_LINE]
```

Current string displayed on the screen

Definition at line 53 of file DisplayInterface.h.

3.16.2.2 isEmpty

```
bool T_display_data::isEmpty
```

Flag indicating if the line is empty or not

Definition at line 50 of file DisplayInterface.h.

3.16.2.3 mode

```
T_DisplayInterface_LineDisplayMode T_display_data::mode
```

Current display mode

Definition at line 51 of file DisplayInterface.h.

3.16.2.4 shift_data

```
T_Display_shift_data T_display_data::shift_data
```

Shift data for the current line

Definition at line 52 of file DisplayInterface.h.

The documentation for this struct was generated from the following file:


- [DisplayInterface.h](#)

3.17 T_Display_shift_data Struct Reference

Structure containing shift data.

```
#include <DisplayInterface.h>
```

Collaboration diagram for T_Display_shift_data:



Public Attributes

- `String * str_ptr`
- `uint8_t * str_cur_ptr`
- `uint8_t temporization`

3.17.1 Detailed Description

Structure containing shift data.

This structure contains all useful data for line shifting. These data need to be kept between each call of the periodic function.

Definition at line 36 of file DisplayInterface.h.

3.17.2 Member Data Documentation

3.17.2.1 str_cur_ptr

```
uint8_t* T_Display_shift_data::str_cur_ptr
```

Pointer to the address of the first displayed character

Definition at line 39 of file DisplayInterface.h.

3.17.2.2 str_ptr

`String* T_Display_shift_data::str_ptr`

Pointer to the start address of the string

Definition at line 38 of file DisplayInterface.h.

3.17.2.3 temporization

`uint8_t T_Display_shift_data::temporization`

Shifting period

Definition at line 40 of file DisplayInterface.h.

The documentation for this struct was generated from the following file:

- [DisplayInterface.h](#)

3.18 T_LCD_conf_struct Struct Reference

Structure defining [LCD](#) configuration.

```
#include <LCD.h>
```

Public Attributes

- `uint32_t i2c_bitrate`
- `uint8_t i2c_addr`
- `bool backlight_en`
- `bool lineNumber_cnf`
- `bool fontType_cnf`
- `bool display_en`
- `bool cursor_en`
- `bool cursorBlink_en`
- `bool entryModeDir`
- `bool entryModeShift`

3.18.1 Detailed Description

Structure defining [LCD](#) configuration.

Definition at line 128 of file LCD.h.

3.18.2 Member Data Documentation

3.18.2.1 `backlight_en`

```
bool T_LCD_conf_struct::backlight_en
```

Screen backlight enable flag

Definition at line 132 of file LCD.h.

3.18.2.2 `cursor_en`

```
bool T_LCD_conf_struct::cursor_en
```

Screen cursor enable flag

Definition at line 136 of file LCD.h.

3.18.2.3 `cursorBlink_en`

```
bool T_LCD_conf_struct::cursorBlink_en
```

Screen cursor blinking enable flag

Definition at line 137 of file LCD.h.

3.18.2.4 `display_en`

```
bool T_LCD_conf_struct::display_en
```

Screen display enable flag

Definition at line 135 of file LCD.h.

3.18.2.5 `entryModeDir`

```
bool T_LCD_conf_struct::entryModeDir
```

Entry mode direction configuration

Definition at line 138 of file LCD.h.

3.18.2.6 entryModeShift

```
bool T_LCD_conf_struct::entryModeShift
```

Entry mode shift configuration

Definition at line 139 of file LCD.h.

3.18.2.7 fontType_cnf

```
bool T_LCD_conf_struct::fontType_cnf
```

Font configuration

Definition at line 134 of file LCD.h.

3.18.2.8 i2c_addr

```
uint8_t T_LCD_conf_struct::i2c_addr
```

I²C address if the screen

Definition at line 131 of file LCD.h.

3.18.2.9 i2c_bitrate

```
uint32_t T_LCD_conf_struct::i2c_bitrate
```

I²C bitrate needed by the LCD screen

Definition at line 130 of file LCD.h.

3.18.2.10 lineNumber_cnf

```
bool T_LCD_conf_struct::lineNumber_cnf
```

Screen line number configuration (1 or 2 lines)

Definition at line 133 of file LCD.h.

The documentation for this struct was generated from the following file:

- [LCD.h](#)

3.19 LinkedList::T_LL_element Struct Reference

Type defining a linked list element.

Collaboration diagram for LinkedList::T_LL_element:



Public Attributes

- void * `data_ptr`
- `T_LL_element *` `nextElement`

3.19.1 Detailed Description

Type defining a linked list element.

This structure defines a linked list element. An element is defined by a pointer to the attached data and a pointer to the next element.

Definition at line 105 of file `LinkedList.h`.

3.19.2 Member Data Documentation

3.19.2.1 `data_ptr`

```
void* LinkedList::T_LL_element::data_ptr
```

Definition at line 107 of file `LinkedList.h`.

3.19.2.2 `nextElement`

```
T_LL_element* LinkedList::T_LL_element::nextElement
```

Definition at line 108 of file `LinkedList.h`.

The documentation for this struct was generated from the following file:

- [LinkedList.h](#)

3.20 scheduler::Task_t Struct Reference

Type defining a task structure.

Public Attributes

- `TaskPtr_t TaskPtr`
- `uint16_t period`

3.20.1 Detailed Description

Type defining a task structure.

This structure defines a task. A task is defined by a function to call (defined by its pointer) and a period.

Definition at line 107 of file scheduler.h.

3.20.2 Member Data Documentation

3.20.2.1 period

```
uint16_t scheduler::Task_t::period
```

Period of the task

Definition at line 110 of file scheduler.h.

3.20.2.2 TaskPtr

```
TaskPtr_t scheduler::Task_t::TaskPtr
```

Pointer to the task

Definition at line 109 of file scheduler.h.

The documentation for this struct was generated from the following file:

- `scheduler.h`

3.21 TempSensor Class Reference

Class for temperature sensor.

```
#include <TempSensor.h>
```

Public Member Functions

- `TempSensor ()`
Class constructor.
- `uint16_t * getTempPtr ()`
Get pointer to data raw_temperature.
- `uint16_t * getHumPtr ()`
Get pointer to data raw_humidity.
- `bool getTemp (uint16_t *temp)`
Get temperature data.
- `bool getHumidity (uint16_t *hum)`
Get humidity data.
- `void setValidity (bool validity)`
Set data val_validity.
- `void updateLastValidValues ()`
- `uint8_t GetTempInteger ()`
Temperature formatting function - Integer part.
- `uint8_t GetTempDecimal ()`
Temperature formatting function - Decimal part.
- `uint8_t GetHumInteger ()`
Humidity formatting function - Integer part.
- `uint8_t GetHumDecimal ()`
Humidity formatting function - Decimal part.
- `bool GetValidity ()`
Data validity get function.

Static Public Member Functions

- `static void readTempSensor_task ()`
Task for reading temperature and humidity values.

Private Attributes

- `uint16_t read_temperature`
- `uint16_t read_humidity`
- `bool validity_last_read`
- `bool validity`
- `uint32_t valid_pit`
- `uint16_t valid_temp`
- `uint16_t valid_hum`

3.21.1 Detailed Description

Class for temperature sensor.

This class defines all functions used to read data from temperature sensor and monitor it

Definition at line 19 of file TempSensor.h.

3.21.2 Constructor & Destructor Documentation

3.21.2.1 TempSensor()

```
TempSensor::TempSensor ( )
```

Class constructor.


This function initializes all data of the class [TempSensor](#)

Returns

Nothing

Definition at line 37 of file TempSensor.cpp.

Here is the call graph for this function:

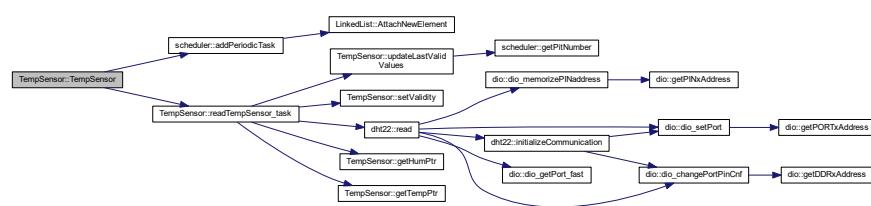

3.21.3 Member Function Documentation

3.21.3.1 GetHumDecimal()

```
uint8_t TempSensor::GetHumDecimal ( ) [inline]
```

Humidity formatting function - Decimal part.


This function return the decimal part of the humidity

Returns

Decimal value of the humidity

Definition at line 122 of file TempSensor.h.

Here is the caller graph for this function:



3.21.3.2 getHumidity()

```
bool TempSensor::getHumidity (
    uint16_t * hum )
```

Get humidity data.

This function returns the value of the humidity. If the official value is not valid, the function return false.

Parameters

out	hum	Humidity value
-----	-----	----------------

Returns

Validity of humidity

Definition at line 87 of file TempSensor.cpp.

3.21.3.3 GetHumInteger()

```
uint8_t TempSensor::GetHumInteger ( ) [inline]
```

Humidity formatting function - Integer part.


This function return the integer part of the humidity

Returns

Integer value of the humidity

Definition at line 111 of file TempSensor.h.

Here is the caller graph for this function:



3.21.3.4 getHumPtr()

```
uint16_t * TempSensor::getHumPtr ( )
```

Get pointer to data raw_humidity.


This function returns a pointer to the class member raw_humidity

Returns

Pointer to raw_humidity

Definition at line 62 of file TempSensor.cpp.

Here is the caller graph for this function:



3.21.3.5 getTemp()

```
bool TempSensor::getTemp (
    uint16_t * temp )
```

Get temperature data.

This function returns the value of the temperature. If the official value is not valid, the function return false.

Parameters

out	<i>temp</i>	Temperature value
-----	-------------	-------------------

Returns

Validity of temperature

Definition at line 93 of file TempSensor.cpp.

3.21.3.6 GetTempDecimal()

```
uint8_t TempSensor::GetTempDecimal ( ) [inline]
```

Temperature formatting function - Decimal part.


This function return the decimal part of the temperature

Returns

Decimal value of the temperature

Definition at line 100 of file TempSensor.h.

Here is the caller graph for this function:

**3.21.3.7 GetTempInteger()**

```
uint8_t TempSensor::GetTempInteger ( ) [inline]
```

Temperature formatting function - Integer part.


This function return the integer part of the temperature

Returns

Integer value of the temperature

Definition at line 89 of file TempSensor.h.

Here is the caller graph for this function:



3.21.3.8 getTempPtr()

```
uint16_t * TempSensor::getTempPtr ( )
```

Get pointer to data raw_temperature.


This function returns a pointer to the class member raw_temperature

Returns

Pointer to raw_temperature

Definition at line 67 of file TempSensor.cpp.

Here is the caller graph for this function:



3.21.3.9 GetValidity()

```
bool TempSensor::GetValidity ( ) [inline]
```

Data validity get function.


This function returns the validity of the sensor data

Returns

True if the sensor values are valid, false otherwise

Definition at line 133 of file TempSensor.h.

Here is the caller graph for this function:



3.21.3.10 readTempSensor_task()

```
void TempSensor::readTempSensor_task ( ) [static]
```

Task for reading temperature and humidity values.


This task reads temperature and humidity data using DHT22 driver. It is called every 5 seconds.

Returns

Nothing

Definition at line 51 of file TempSensor.cpp.

Here is the call graph for this function:

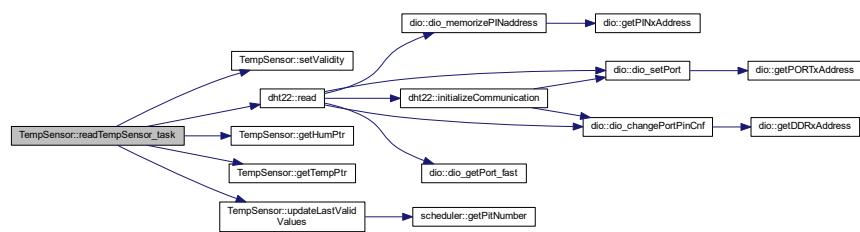

Here is the caller graph for this function:



3.21.3.11 setValidity()

```
void TempSensor::setValidity (
    bool validity )
```

Set data `val_validity`.

This function sets the class member `val_validity`

Parameters


in	<code>validity</code>	Value of validity
----	-----------------------	-------------------

Returns

Nothing

Definition at line 57 of file TempSensor.cpp.

Here is the caller graph for this function:




3.21.3.12 updateLastValidValues()


```
void TempSensor::updateLastValidValues( )
```

Definition at line 72 of file TempSensor.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.21.4 Member Data Documentation

3.21.4.1 `read_humidity`

```
uint16_t TempSensor::read_humidity [private]
```

Raw value of humidity read from DHT22 (= real humidity *10)

Definition at line 141 of file TempSensor.h.

3.21.4.2 `read_temperature`

```
uint16_t TempSensor::read_temperature [private]
```

Raw value of temperature read from DHT22 (= real temperature *10)

Definition at line 140 of file TempSensor.h.

3.21.4.3 `valid_hum`

```
uint16_t TempSensor::valid_hum [private]
```

Valid value of humidity

Definition at line 148 of file TempSensor.h.

3.21.4.4 `valid_pit`

```
uint32_t TempSensor::valid_pit [private]
```

pit number of the last time when data were valid

Definition at line 145 of file TempSensor.h.

3.21.4.5 `valid_temp`

```
uint16_t TempSensor::valid_temp [private]
```

Valid value of temperature

Definition at line 147 of file TempSensor.h.

3.21.4.6 validity

```
bool TempSensor::validity [private]
```

validity of official temperature and humidity data

Definition at line 144 of file TempSensor.h.

3.21.4.7 validity_last_read

```
bool TempSensor::validity_last_read [private]
```

Validity of last read temperature and humidity data

Definition at line 142 of file TempSensor.h.

The documentation for this class was generated from the following files:

- [TempSensor.h](#)
- [TempSensor.cpp](#)

3.22 timer Class Reference

Class defining a timer.

```
#include <timer.h>
```

Public Member Functions

- [timer \(\)](#)
Class constructor.
- void [configureTimer1 \(uint16_t a_prescaler, uint16_t a_ctcValue\)](#)
Configures Timer #1.
- void [startTimer1 \(\)](#)
Start Timer #1.
- void [stopTimer1 \(\)](#)
Stops Timer #1.
- uint16_t [getTimer1Value \(\)](#)
Reads current value of timer #1.

Private Attributes

- uint8_t [prescaler](#)

3.22.1 Detailed Description

Class defining a timer.

This class defines a timer/counter. The selected timer is configured in CTC mode and interrupts are enabled. The prescaler value and CTC value can both be configured by user.

Definition at line 19 of file timer.h.

3.22.2 Constructor & Destructor Documentation

3.22.2.1 timer()

```
timer::timer ( )
```

Class constructor.

This function initializes class attributes

Returns

Nothing

Definition at line 13 of file timer.cpp.

3.22.3 Member Function Documentation

3.22.3.1 configureTimer1()

```
void timer::configureTimer1 (
    uint16_t a_prescaler,
    uint16_t a_ctcValue )
```

Configures Timer #1.

This function configures hardware timer #1 in CTC mode, enables its interrupts, sets prescaler to `a_prescaler` and CTC value to `a_ctcValue`

Parameters

in	<code>a_prescaler</code>	prescaler value
in	<code>a_ctcValue</code>	Value to which the counter will compare before raising an interrupt

Returns

Nothing

Definition at line 18 of file timer.cpp.

Here is the caller graph for this function:



3.22.3.2 getTimer1Value()

```
uint16_t timer::getTimer1Value () [inline]
```

Reads current value of timer #1.


This function reads the value of of timer #1 using register TCNT1. The function is inlined to speed up SW execution.

Returns

Current timer value

Definition at line 58 of file timer.h.

Here is the caller graph for this function:



3.22.3.3 startTimer1()

```
void timer::startTimer1 ( )
```

Start Timer #1.


This functions starts Timer #1. Timer shall be initialized before this function is called.

Returns

Nothing

Definition at line 56 of file timer.cpp.

Here is the caller graph for this function:



3.22.3.4 stopTimer1()

```
void timer::stopTimer1 ( )
```

Stops Timer #1.

This functions stops timer #1 by resetting bits 0-2 of TCCR1B

Returns

Nothing

Definition at line 67 of file timer.cpp.

3.22.4 Member Data Documentation

3.22.4.1 prescaler

```
uint8_t timer::prescaler [private]
```

Definition at line 64 of file timer.h.

The documentation for this class was generated from the following files:

- [timer.h](#)
- [timer.cpp](#)

3.23 usart Class Reference

USART serial bus class.

```
#include <uart.h>
```

Public Member Functions

- [uart \(uint16_t a_BaudRate\)](#)
Class usart constructor.
- [void usart_sendString \(String *str\)](#)
Send a string on USART link.
- [void setBaudRate \(uint16_t a_BaudRate\)](#)
Setting baud rate.
- [void usart_init \(\)](#)
USART hardware initialization.
- [uint8_t usart_read \(\)](#)
USART read function.

Private Member Functions

- [void usart_transmit \(uint8_t Data\)](#)
USART Transmit data.

Private Attributes

- [uint16_t BaudRate](#)

3.23.1 Detailed Description

USART serial bus class.

This class defines all useful functions for USART serial bus

Definition at line 16 of file usart.h.

3.23.2 Constructor & Destructor Documentation

3.23.2.1 usart()

```
uart::uart (
```

```
          uint16_t a_BaudRate )
```

Class usart constructor.

Initializes the class and call hardware initialization function

Parameters

in	<i>a_BaudRate</i>	Desired Baud Rate (16 bit) - up to 57600
----	-------------------	--

Returns

Nothing.

Definition at line 17 of file usart.cpp.

Here is the call graph for this function:



3.23.3 Member Function Documentation

3.23.3.1 setBaudRate()

```
void usart::setBaudRate (
    uint16_t a_BaudRate ) [inline]
```

Setting baud rate.

This function sets the attribute BaudRate of the class usart

Parameters

in	<i>a_BaudRate</i>	Desired Baud Rate (16 bit) - up to 57600
----	-------------------	--

Returns

Nothing

Definition at line 68 of file usart.cpp.

3.23.3.2 usart_init()

```
void usart::usart_init ( )
```

USART hardware initialization.


This function will initialize the USART using selected baudrate. User must pay attention to select one of the usually used Baud Rate (9600, 19200, 38400, 57600). Note that since an uint16 is used as argument, Baud rate cannot be more than 57600.

Returns

Nothing.

Definition at line 24 of file usart.cpp.

Here is the caller graph for this function:



3.23.3.3 usart_read()

```
uint8_t usart::usart_read ( )
```

USART read function.

This function will read reception register of USART

Returns

The function returns the 8 bits read from reception buffer

Definition at line 84 of file usart.cpp.

3.23.3.4 usart_sendString()

```
void usart::usart_sendString (
    String * str )
```

Send a string on USART link.

This function writes the string object data to the serial link using usart_transmit function

Parameters


in	str	Pointer to the string being sent
----	-----	----------------------------------

Returns


Nothing.

Definition at line 47 of file usart.cpp.

Here is the call graph for this function:

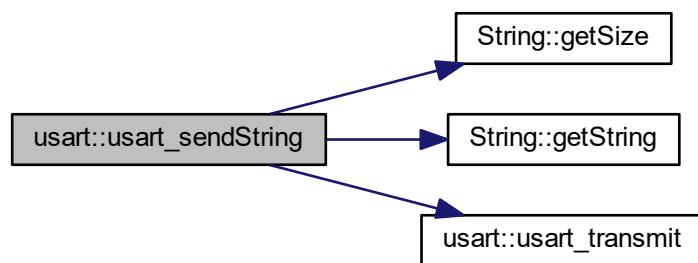

Here is the caller graph for this function:

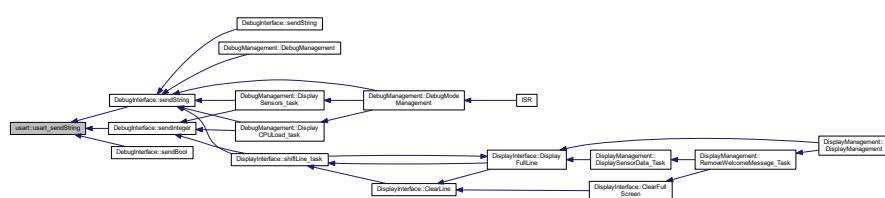

3.23.3.5 usart_transmit()

```
void USART::usart_transmit (
    uint8_t Data ) [private]
```

USART Transmit data.

Nothing Special. It just wait for the transmit buffer is empty before writing it again.

Parameters


in	Data	Desired data char to transmit
----	------	-------------------------------

Returns

Nothing.

Definition at line 75 of file usart.cpp.

Here is the caller graph for this function:

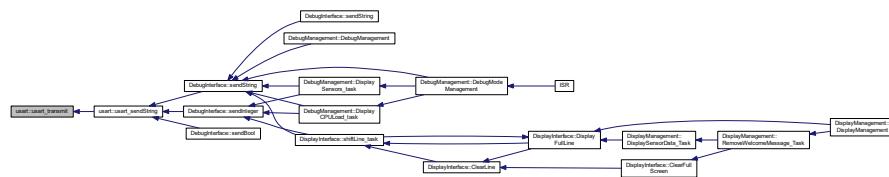

3.23.4 Member Data Documentation

3.23.4.1 BaudRate

```
uint16_t USART::BaudRate [private]
```

Defines the baud rate used by driver

Definition at line 72 of file usart.h.

The documentation for this class was generated from the following files:

- [usart.h](#)
- [usart.cpp](#)

Chapter 4

File Documentation

4.1 asw.cpp File Reference

ASW main file.

```
#include <stdlib.h>
#include <avr/io.h>
#include "../lib/LinkedList/LinkedList.h"
#include "../lib/string/String.h"
#include "../bsw/usart/usart.h"
#include "../bsw/I2C/I2C.h"
#include "../bsw/LCD/LCD.h"
#include "debug_ift/DebugInterface.h"
#include "debug_mgt/DebugManagement.h"
#include "TempSensor/TempSensor.h"
#include "display_ift/DisplayInterface.h"
#include "display_mgt/DisplayManagement.h"
#include "keepAliveLed/keepAliveLed.h"
#include "../main.h"
#include "asw.h"
```

Include dependency graph for asw.cpp:



Functions

- [void asw_init \(\)](#)

Initialization of ASW.

Variables

- [T_ASW_cnf_struct ASW_cnf_struct](#)

4.1.1 Detailed Description

ASW main file.

Date

15 mars 2018

Author

nicls67

4.1.2 Function Documentation

4.1.2.1 asw_init()

```
void asw_init ( )
```

Initialization of ASW.


This function instantiates all applicative objects. The addresses of objects are then stored in ASW_cnf_struct structure. This function shall be called after BSW initialization function.

Returns

Nothing

Definition at line 37 of file asw.cpp.

Here is the caller graph for this function:



4.1.3 Variable Documentation

4.1.3.1 ASW_cnf_struct

`T_ASW_cnf_struct ASW_cnf_struct`


ASW configuration structure

Definition at line 34 of file asw.cpp.

4.2 asw.h File Reference

ASW main header file.

This graph shows which files directly or indirectly include this file:



Classes

- struct `T_ASW_cnf_struct`
ASW configuration structure.

Functions

- void `asw_init ()`
Initialization of ASW.

Variables

- `T_ASW_cnf_struct ASW_cnf_struct`

4.2.1 Detailed Description

ASW main header file.

Date

15 mars 2018

Author

nicls67

4.2.2 Function Documentation

4.2.2.1 asw_init()

```
void asw_init ( )
```

Initialization of ASW.


This function instantiates all applicative objects. The addresses of objects are then stored in ASW_cnf_struct structure. This function shall be called after BSW initialization function.

Returns

Nothing

Definition at line 37 of file asw.cpp.

Here is the caller graph for this function:



4.2.3 Variable Documentation

4.2.3.1 ASW_cnf_struct

```
T_ASW_cnf_struct ASW_cnf_struct
```

ASW configuration structure


Definition at line 34 of file asw.cpp.

4.3 bsw.cpp File Reference

BSW main file.

```
#include <avr/io.h>
#include <stdlib.h>
#include "../lib/string/String.h"
#include "uart/usart.h"
#include "timer/timer.h"
#include "I2C/I2C.h"
#include "lcd/LCD.h"
#include "dio/dio.h"
#include "dht22/dht22.h"
#include "cpuLoad/CpuLoad.h"
#include "bsw.h"
```

Include dependency graph for bsw.cpp:



Functions

- void **bsw_init ()**

Initialization of BSW.

Variables

- T_BSW_cnf_struct BSW_cnf_struct

4.3.1 Detailed Description

BSW main file.

Date

13 mars 2018

Author

nicls67

4.3.2 Function Documentation

4.3.2.1 bsw_init()

```
void bsw_init ( )
```

Initialization of BSW.

This function instantiates all driver objects, leading hardware initialization. The addresses of driver objects are then stored in BSW_cnf_struct structure.

Returns

Nothing

Definition at line 26 of file bsw.cpp.

Here is the caller graph for this function:



4.3.3 Variable Documentation

4.3.3.1 BSW_cnf_struct

`T_BSW_cnf_struct` BSW_cnf_struct


BSW configuration structure

Definition at line 24 of file bsw.cpp.

4.4 bsw.h File Reference

BSW main header file.

This graph shows which files directly or indirectly include this file:



Classes

- struct [T_BSW_cnf_struct](#)
BSW configuration structure.

Functions

- void [bsw_init \(\)](#)
Initialization of BSW.

Variables

- [T_BSW_cnf_struct BSW_cnf_struct](#)

4.4.1 Detailed Description

BSW main header file.

Date

13 mars 2018

Author

nicls67

4.4.2 Function Documentation

4.4.2.1 [bsw_init\(\)](#)

`void bsw_init ()`

Initialization of BSW.


This function instantiates all driver objects, leading hardware initialization. The addresses of driver objects are then stored in `BSW_cnf_struct` structure.

Returns

Nothing

Definition at line 26 of file `bsw.cpp`.

Here is the caller graph for this function:



4.4.3 Variable Documentation

4.4.3.1 BSW_cnf_struct

`T_BSW_cnf_struct` BSW_cnf_struct


BSW configuration structure

Definition at line 24 of file bsw.cpp.

4.5 CpuLoad.cpp File Reference

Defines functions of class [CpuLoad](#).

```
#include <avr/io.h>
#include "CpuLoad.h"
Include dependency graph for CpuLoad.cpp:
```



4.5.1 Detailed Description

Defines functions of class [CpuLoad](#).

Date

21 mars 2019

Author

nicls67

4.6 CpuLoad.h File Reference

[CpuLoad](#) class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [CpuLoad](#)

Class defining CPU load libraries.

Macros

- `#define NB_OF_SAMPLES 50`

4.6.1 Detailed Description

[CpuLoad](#) class header file.

Date

21 mars 2019

Author

nicls67

4.6.2 Macro Definition Documentation

4.6.2.1 NB_OF_SAMPLES

```
#define NB_OF_SAMPLES 50
```

Definition at line 13 of file CpuLoad.h.

4.7 DebugInterface.cpp File Reference


```
#include <avr/io.h>
#include <stdlib.h>
#include "../lib/LinkedList/LinkedList.h"
#include "../lib/string/String.h"
#include "../scheduler/scheduler.h"
#include "../bsw/usart/usart.h"
#include "../bsw/timer/timer.h"
#include "../bsw/I2C/I2C.h"
#include "../bsw/lcd/LCD.h"
#include "../bsw/dio/dio.h"
#include "../bsw/dht22/dht22.h"
#include "../bsw/cpuLoad/CpuLoad.h"
#include "../bsw-bsw.h"
#include "../debug_ift/DebugInterface.h"
#include "../debug_mgt/DebugManagement.h"
#include "../TempSensor/TempSensor.h"
#include "../display_ift/DisplayInterface.h"
#include "../display_mgt/DisplayManagement.h"
#include "../keepAliveLed/keepAliveLed.h"
#include "../asw.h"
```

Include dependency graph for DebugInterface.cpp:



4.8 DebugInterface.h File Reference

This graph shows which files directly or indirectly include this file:



Classes

- class [DebugInterface](#)
Class used for debugging on usart link.

Macros

- #define [USART_BAUDRATE](#) (uint16_t)9600

4.8.1 Macro Definition Documentation

4.8.1.1 USART_BAUDRATE

```
#define USART_BAUDRATE (uint16_t) 9600

uart connection to PC uses a baud rate of 9600


Definition at line 15 of file DebugInterface.h.
```

4.9 DebugManagement.cpp File Reference

Debug management class source file.

```
#include <avr/io.h>
#include <stdlib.h>
#include "../../lib/LinkedList/LinkedList.h"
#include "../../lib/string/String.h"
#include "../../scheduler/scheduler.h"
#include "../../bsw/usart/usart.h"
#include "../../bsw/timer/timer.h"
#include "../../bsw/I2C/I2C.h"
#include "../../bsw/lcd/LCD.h"
#include "../../bsw/dio/dio.h"
#include "../../bsw/dht22/dht22.h"
#include "../../bsw/cpuLoad/CpuLoad.h"
#include "../../bsw/bsw.h"
#include "../debug_ift/DebugInterface.h"
#include "../debug_mgt/DebugManagement.h"
#include "../TempSensor/TempSensor.h"
#include "../display_ift/DisplayInterface.h"
#include "../display_mgt/DisplayManagement.h"
#include "../keepAliveLed/keepAliveLed.h"
#include "../asw.h"
```

Include dependency graph for DebugManagement.cpp:



Variables

- const uint8_t str_debug_main_menu []
Main menu of debug mode.

4.9.1 Detailed Description

Debug management class source file.

Date

8 mai 2019

Author

nicls67

4.9.2 Variable Documentation

4.9.2.1 str_debug_main_menu

```
const uint8_t str_debug_main_menu[ ]
```

Initial value:

```
=
"\n\n"
"Menu principal : \n"
"1 : Afficher donnees capteurs\n"
"2 : Afficher charge CPU\n"
"\n"
"s : Quitter debug\n"
```


Main menu of debug mode.

Definition at line 41 of file DebugManagement.cpp.

4.10 DebugManagement.h File Reference

Debug management class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [DebugManagement](#)

Debug management class.

Macros

- `#define PERIOD_MS_TASK_DISPLAY_SENSORS 5000`
- `#define PERIOD_MS_TASK_DISPLAY_CPU_LOAD 5000`

Enumerations

- enum [debug_state_t](#) { `INIT`, `DISPLAY_DATA`, `DISPLAY_CPU_LOAD` }

Defines the debug states.

4.10.1 Detailed Description

Debug management class header file.

Date

8 mai 2019

Author

nicls67

4.10.2 Macro Definition Documentation

4.10.2.1 PERIOD_MS_TASK_DISPLAY_CPU_LOAD

```
#define PERIOD_MS_TASK_DISPLAY_CPU_LOAD 5000
```

Period for displaying CPU load data

Definition at line 14 of file DebugManagement.h.

4.10.2.2 PERIOD_MS_TASK_DISPLAY_SENSORS

```
#define PERIOD_MS_TASK_DISPLAY_SENSORS 5000
```

Period for displaying temperature and humidity data

Definition at line 13 of file DebugManagement.h.

4.10.3 Enumeration Type Documentation

4.10.3.1 debug_state_t

```
enum debug_state_t
```

Defines the debug states.

Enumerator

INIT	Init state : main menu has been displayed, wait for a received character
DISPLAY_DATA	Display sensor data in continuous
DISPLAY_CPU_LOAD	Display CPU load in continuous

Generated by Doxygen


Definition at line 19 of file DebugManagement.h.

4.11 dht22.cpp File Reference

This file defines classes for DHT22 driver.

```
#include <avr/io.h>
#include <util/delay.h>
#include <avr/interrupt.h>
#include "dht22.h"
```

Include dependency graph for dht22.cpp:

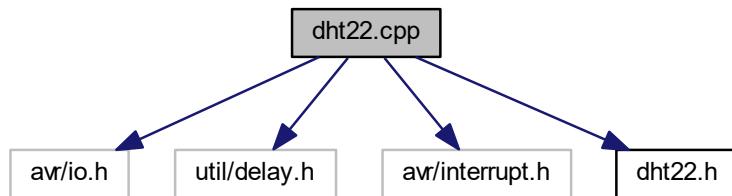

Macros

- `#define MAX_WAIT_TIME_US 100`

4.11.1 Detailed Description

This file defines classes for DHT22 driver.

Date

23 mars 2018

Author

nicls67

4.11.2 Macro Definition Documentation

4.11.2.1 MAX_WAIT_TIME_US


```
#define MAX_WAIT_TIME_US 100
```

Definition at line 20 of file dht22.cpp.

4.12 dht22.h File Reference

DHT22 driver header file.

This graph shows which files directly or indirectly include this file:



Classes

- class `dht22`

DHT 22 driver class.

Macros

- `#define DHT22_PORT ENCODE_PORT(PORT_B, 6)`

4.12.1 Detailed Description

DHT22 driver header file.

Date

23 mars 2018

Author

nicls67

4.12.2 Macro Definition Documentation

4.12.2.1 DHT22_PORT

```
#define DHT22_PORT ENCODE_PORT(PORT_B, 6)
```


DHT22 is connected to port PB6

Definition at line 16 of file dht22.h.

4.13 dio.cpp File Reference

DIO library.

```
#include <avr/io.h>
#include "dio.h"
#include "../../asw/asw.h"
Include dependency graph for dio.cpp:
```

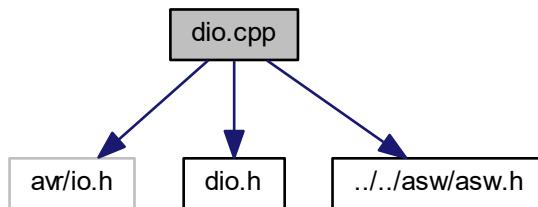

4.13.1 Detailed Description

DIO library.

Date

13 mars 2018


Author

nicls67

4.14 dio.h File Reference

DIO library header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [dio](#)
DIO class.

Macros

- `#define PORT_CNF_OUT 1`
- `#define PORT_CNF_IN 0`
- `#define ENCODE_PORT(port, pin) (uint8_t)((((uint8_t)(port & 0xF)) << 3) | (uint8_t)(pin & 0x7))`
- `#define DECODE_PORT(portcode) (uint8_t)((portcode >> 3) & 0xF)`
- `#define DECODE_PIN(portcode) (uint8_t)(portcode & 0x7)`
- `#define PORT_A 0`
- `#define PORT_B 1`
- `#define PORT_C 2`
- `#define PORT_D 3`

4.14.1 Detailed Description

DIO library header file.

Date

13 mars 2018

Author

nicls67

4.14.2 Macro Definition Documentation

4.14.2.1 DECODE_PIN

```
#define DECODE_PIN( portcode ) (uint8_t)(portcode & 0x7)
```

Macro used to extract pin index

Definition at line 19 of file dio.h.

4.14.2.2 DECODE_PORT

```
#define DECODE_PORT(  
    portcode ) (uint8_t) ((portcode >> 3) & 0xF)
```

Macro used to extract port index

Definition at line 18 of file dio.h.

4.14.2.3 ENCODE_PORT

```
#define ENCODE_PORT(  
    port,  
    pin ) (uint8_t) (((uint8_t)(port & 0xF)) << 3) | (uint8_t)(pin & 0x7))
```

Macro used to encode port and pin indexes into one single byte

Definition at line 17 of file dio.h.

4.14.2.4 PORT_A

```
#define PORT_A 0
```

PORTA index

Definition at line 21 of file dio.h.

4.14.2.5 PORT_B

```
#define PORT_B 1
```

PORTB index

Definition at line 22 of file dio.h.

4.14.2.6 PORT_C

```
#define PORT_C 2
```

PORTC index

Definition at line 23 of file dio.h.

4.14.2.7 PORT_CNF_IN

```
#define PORT_CNF_IN 0
```

Pin is configured as input

Definition at line 15 of file dio.h.

4.14.2.8 PORT_CNF_OUT

```
#define PORT_CNF_OUT 1
```

Pin is configured as output

Definition at line 14 of file dio.h.

4.14.2.9 PORT_D

```
#define PORT_D 3
```

PORTD index

Definition at line 24 of file dio.h.

4.15 dio_port_cnf.h File Reference

Digital ports configuration file.

Macros

- #define PORTB_CNF_DDRB (uint8_t)0b11000000
Defines the configuration of DDRB register.
- #define PORTB_CNF_PORTB (uint8_t)0b11000000
Defines the configuration of PORTB register.

4.15.1 Detailed Description

Digital ports configuration file.

Date

19 mars 2019

Author

nicls67

4.15.2 Macro Definition Documentation

4.15.2.1 PORTB_CNF_DDRB

```
#define PORTB_CNF_DDRB (uint8_t)0b11000000
```

Defines the configuration of DDRB register.

This constant defines the direction of IO pins of PORT B. It will configure register DDRB.

PB0 : N/A
 PB1 : N/A
 PB2 : N/A
 PB3 : N/A
 PB4 : N/A
 PB5 : N/A
 PB6 : OUT
 PB7 : OUT

Definition at line 25 of file dio_port_cnf.h.

4.15.2.2 PORTB_CNF_PORTB

```
#define PORTB_CNF_PORTB (uint8_t)0b11000000
```

Defines the configuration of PORTB register.

This constant defines the initial value of IO pins for PORT B. It will configure register PORTB. Pins configured as input shall not be configured here.

PB0 : N/A
 PB1 : N/A
 PB2 : N/A
 PB3 : N/A
 PB4 : N/A
 PB5 : N/A
 PB6 : HIGH
 PB7 : HIGH

Definition at line 40 of file dio_port_cnf.h.

4.16 dio_reg_atm2560.h File Reference

Macros

- #define PORTA_PTR (volatile uint8_t *)(0x02 + 0x20)
- #define PORTB_PTR (volatile uint8_t *)(0x05 + 0x20)
- #define PORTC_PTR (volatile uint8_t *)(0x08 + 0x20)
- #define PORTD_PTR (volatile uint8_t *)(0x0B + 0x20)
- #define PINA_PTR (volatile uint8_t *)(0x00 + 0x20)
- #define PINB_PTR (volatile uint8_t *)(0x03 + 0x20)
- #define PINC_PTR (volatile uint8_t *)(0x06 + 0x20)
- #define PIND_PTR (volatile uint8_t *)(0x09 + 0x20)
- #define DDRA_PTR (volatile uint8_t *)(0x01 + 0x20)
- #define DDRB_PTR (volatile uint8_t *)(0x04 + 0x20)
- #define DDRC_PTR (volatile uint8_t *)(0x07 + 0x20)
- #define DDRD_PTR (volatile uint8_t *)(0x0A + 0x20)

4.16.1 Macro Definition Documentation

4.16.1.1 DDRA_PTR

```
#define DDRA_PTR (volatile uint8_t *) (0x01 + 0x20)
```

Macro defining pointer to DDR A register

Definition at line 24 of file dio_reg_atm2560.h.

4.16.1.2 DDRB_PTR

```
#define DDRB_PTR (volatile uint8_t *) (0x04 + 0x20)
```

Macro defining pointer to DDR B register

Definition at line 25 of file dio_reg_atm2560.h.

4.16.1.3 DDRC_PTR

```
#define DDRC_PTR (volatile uint8_t *) (0x07 + 0x20)
```

Macro defining pointer to DDR C register

Definition at line 26 of file dio_reg_atm2560.h.

4.16.1.4 DDRD_PTR

```
#define DDRD_PTR (volatile uint8_t *) (0x0A + 0x20)
```

Macro defining pointer to DDR D register

Definition at line 27 of file dio_reg_atm2560.h.

4.16.1.5 PINA_PTR

```
#define PINA_PTR (volatile uint8_t *) (0x00 + 0x20)
```

Macro defining pointer to PIN A register

Definition at line 19 of file dio_reg_atm2560.h.

4.16.1.6 PINB_PTR

```
#define PINB_PTR (volatile uint8_t *) (0x03 + 0x20)
```

Macro defining pointer to PIN B register

Definition at line 20 of file dio_reg_atm2560.h.

4.16.1.7 PINC_PTR

```
#define PINC_PTR (volatile uint8_t *) (0x06 + 0x20)
```

Macro defining pointer to PIN C register

Definition at line 21 of file dio_reg_atm2560.h.

4.16.1.8 PIND_PTR

```
#define PIND_PTR (volatile uint8_t *) (0x09 + 0x20)
```

Macro defining pointer to PIN D register

Definition at line 22 of file dio_reg_atm2560.h.

4.16.1.9 PORTA_PTR

```
#define PORTA_PTR (volatile uint8_t *) (0x02 + 0x20)
```

Macro defining pointer to PORT A register

Definition at line 14 of file dio_reg_atm2560.h.

4.16.1.10 PORTB_PTR

```
#define PORTB_PTR (volatile uint8_t *) (0x05 + 0x20)
```

Macro defining pointer to PORT B register

Definition at line 15 of file dio_reg_atm2560.h.

4.16.1.11 PORTC_PTR

```
#define PORTC_PTR (volatile uint8_t *) (0x08 + 0x20)
```

Macro defining pointer to PORT C register

Definition at line 16 of file dio_reg_atm2560.h.

4.16.1.12 PORTD_PTR

```
#define PORTD_PTR (volatile uint8_t *) (0x0B + 0x20)
```

Macro defining pointer to PORT D register

Definition at line 17 of file dio_reg_atm2560.h.

4.17 DisplayInterface.cpp File Reference

Source code file for display services.

```
#include <stdlib.h>
#include <avr/io.h>
#include <util/delay.h>
#include "../../lib/LinkedList/LinkedList.h"
#include "../../lib/string/String.h"
#include "../../scheduler/scheduler.h"
#include "../../bsw/usart/usart.h"
#include "../../bsw/timer/timer.h"
#include "../../bsw/I2C/I2C.h"
#include "../../bsw/lcd/LCD.h"
#include "../../bsw/dio/dio.h"
#include "../../bsw/dht22/dht22.h"
#include "../../bsw/cpuLoad/CpuLoad.h"
#include "../../bsw-bsw.h"
#include "../debug_ift/DebugInterface.h"
#include "../debug_mgt/DebugManagement.h"
#include "../TempSensor/TempSensor.h"
#include "../display_ift/DisplayInterface.h"
#include "../display_mgt/DisplayManagement.h"
#include "../keepAliveLed/keepAliveLed.h"
#include "../asw.h"
```

Include dependency graph for DisplayInterface.cpp:



4.17.1 Detailed Description

Source code file for display services.

Date

23 avr. 2019


Author

nicls67

4.18 DisplayInterface.h File Reference

[DisplayInterface](#) class header file.

This graph shows which files directly or indirectly include this file:



Classes

- struct [T_Display_shift_data](#)
Structure containing shift data.
- struct [T_display_data](#)
Structure containing display data.
- class [DisplayInterface](#)
Display interface services class.

Macros

- #define [DISPLAY_LINE_SHIFT_PERIOD_MS](#) 500
- #define [DISPLAY_LINE_SHIFT_TEMPO_TIME](#) 6

Enumerations

- enum [T_DisplayInterface_LineDisplayMode](#) { [NORMAL](#), [LINE_SHIFT](#), [GO_TO_NEXT_LINE](#) }
Modes for line display.

4.18.1 Detailed Description

[DisplayInterface](#) class header file.

Date

23 avr. 2019

Author

nicls67

4.18.2 Macro Definition Documentation

4.18.2.1 DISPLAY_LINE_SHIFT_PERIOD_MS

```
#define DISPLAY_LINE_SHIFT_PERIOD_MS 500
```

In "line shift" mode for line display, line is shifted every 500 ms

Definition at line 58 of file DisplayInterface.h.

4.18.2.2 DISPLAY_LINE_SHIFT_TEMPO_TIME

```
#define DISPLAY_LINE_SHIFT_TEMPO_TIME 6
```

In "line shift" mode for line display, a temporization of 6 periods is added at the end and the beginning of the lines

Definition at line 59 of file DisplayInterface.h.

4.18.3 Enumeration Type Documentation

4.18.3.1 T_DisplayInterface_LineDisplayMode

```
enum T_DisplayInterface_LineDisplayMode
```

Modes for line display.

This enumeration defines the available modes for the line display functionality :

- 1- Normal mode : if the string is too long to be displayed entirely, the end of the string is cut.
- 2- Line shift mode : the display is moving to display all the string.
- 3- Next line mode : the remaining characters are displayed on the next lines.

Enumerator

NORMAL	
LINE_SHIFT	
GO_TO_NEXT_LINE	

Definition at line 24 of file DisplayInterface.h.

4.19 DisplayManagement.cpp File Reference

Display management source file.

```
#include <stdlib.h>
#include <avr/io.h>
#include "../../lib/LinkedList/LinkedList.h"
#include "../../lib/string/string.h"
#include "../../scheduler/scheduler.h"
#include "../../bsw/usart/usart.h"
#include "../../bsw/timer/timer.h"
#include "../../bsw/I2C/I2C.h"
#include "../../bsw/lcd/LCD.h"
#include "../../bsw/dio/dio.h"
#include "../../bsw/dht22/dht22.h"
#include "../../bsw/cpuLoad/CpuLoad.h"
#include "../../bsw/bsw.h"
#include "../debug_ift/DebugInterface.h"
#include "../debug_mgt/DebugManagement.h"
#include "../display_ift/DisplayInterface.h"
#include "../keepAliveLed/keepAliveLed.h"
#include "../TempSensor/TempSensor.h"
#include "DisplayManagement.h"
#include "../asw.h"
```

Include dependency graph for DisplayManagement.cpp:



4.19.1 Detailed Description

Display management source file.

Date

1 mai 2019


Author

nicls67

4.20 DisplayManagement.h File Reference

Display management class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [DisplayManagement](#)

Display management class.

Macros

- #define DISPLAY_MGT_LCD_I2C_ADDR 0x27
- #define DISPLAY_MGT_PERIOD_TASK_SENSOR 5000
- #define DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL 5000
- #define DISPLAY_MGT_LINE_TEMP 0
- #define DISPLAY_MGT_LINE_HUM 1
- #define DISPLAY_MGT_I2C_BITRATE (uint32_t)100000

Variables

- const [T_LCD_conf_struct](#) LCD_init_cnf
 - LCD configuration structure.*
- const uint8_t welcomeMessageString [] = "Bienvenue !"
- const uint8_t tempDisplayString [] = "Temperature : "
- const uint8_t humidityDisplayString [] = "Humidite : "

4.20.1 Detailed Description

Display management class header file.

Date

1 mai 2019

Author

nicls67

4.20.2 Macro Definition Documentation

4.20.2.1 DISPLAY_MGT_I2C_BITRATE

```
#define DISPLAY_MGT_I2C_BITRATE (uint32_t)100000
```

I2C bus bitrate is 100 kHz

Definition at line 21 of file DisplayManagement.h.

4.20.2.2 DISPLAY_MGT_LCD_I2C_ADDR

```
#define DISPLAY_MGT_LCD_I2C_ADDR 0x27
```

I2C address of the screen

Definition at line 13 of file DisplayManagement.h.

4.20.2.3 DISPLAY_MGT_LINE_HUM

```
#define DISPLAY_MGT_LINE_HUM 1
```

Current humidity is displayed on line 1

Definition at line 19 of file DisplayManagement.h.

4.20.2.4 DISPLAY_MGT_LINE_TEMP

```
#define DISPLAY_MGT_LINE_TEMP 0
```

Current temperature is displayed on line 0

Definition at line 18 of file DisplayManagement.h.

4.20.2.5 DISPLAY_MGT_PERIOD_TASK_SENSOR

```
#define DISPLAY_MGT_PERIOD_TASK_SENSOR 5000
```

Display is updated every 5s

Definition at line 15 of file DisplayManagement.h.

4.20.2.6 DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL

```
#define DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL 5000
```

Time after which one the welcome message is removed

Definition at line 16 of file DisplayManagement.h.

4.20.3 Variable Documentation

4.20.3.1 humidityDisplayString

```
const uint8_t humidityDisplayString[] = "Humidite : "
```

[String](#) used for humidity display

Definition at line 43 of file DisplayManagement.h.

4.20.3.2 LCD_init_cnf

```
const T\_LCD\_conf\_struct LCD_init_cnf
```

Initial value:

```
= {  
    DISPLAY_MGT_I2C_BITRATE,  
    DISPLAY_MGT_LCD_I2C_ADDR,  
    LCD_CNF_BACKLIGHT_ON,  
    LCD_CNF_TWO_LINE,  
    LCD_CNF_FONT_5_8,  
    LCD_CNF_DISPLAY_ON,  
    LCD_CNF_CURSOR_OFF,  
    LCD_CNF_CURSOR_BLINK_OFF,  
    LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT,  
    LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF  
}
```

[LCD](#) configuration structure.

This structure defines the initial configuration of the [LCD](#) screen.

Definition at line 27 of file DisplayManagement.h.

4.20.3.3 tempDisplayString

```
const uint8_t tempDisplayString[] = "Temperature : "
```

[String](#) used for temperature display

Definition at line 42 of file DisplayManagement.h.

4.20.3.4 welcomeMessageString

```
const uint8_t welcomeMessageString[] = "Bienvenue !"
```


Definition at line 41 of file DisplayManagement.h.

4.21 I2C.cpp File Reference

Two-wire interface ([I2C](#)) source file.

```
#include <avr/io.h>
#include "I2C.h"
```

Include dependency graph for I2C.cpp:



4.21.1 Detailed Description

Two-wire interface ([I2C](#)) source file.

Date

19 avr. 2019


Author

nicls67

4.22 I2C.h File Reference

I2C class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [I2C](#)

Two-wire serial interface ([I2C](#)) class definition.

Macros

- #define [START](#) 0x08
- #define [SLA_ACK](#) 0x18
- #define [DATA_ACK](#) 0x28

4.22.1 Detailed Description

I2C class header file.

Date

19 avr. 2019

Author

nicls67

4.22.2 Macro Definition Documentation

4.22.2.1 [DATA_ACK](#)

```
#define DATA_ACK 0x28
```

TWSR status code : DATA has been transmitted and ACK has been received

Definition at line 15 of file I2C.h.

4.22.2.2 SLA_ACK

```
#define SLA_ACK 0x18
```

TWSR status code : SLA has been transmitted and ACK has been received

Definition at line 14 of file I2C.h.

4.22.2.3 START

```
#define START 0x08
```

TWSR status code : START condition transmitted


Definition at line 13 of file I2C.h.

4.23 keepAliveLed.cpp File Reference

Definition of function for class [keepAliveLed](#).

```
#include <avr/io.h>
#include "../../../lib/LinkedList/LinkedList.h"
#include "../../../lib/string/String.h"
#include "../../../scheduler/scheduler.h"
#include "../../../bsw/usart/usart.h"
#include "../../../bsw/timer/timer.h"
#include "../../../bsw/I2C/I2C.h"
#include "../../../bsw/lcd/LCD.h"
#include "../../../bsw/dio/dio.h"
#include "../../../bsw/dht22/dht22.h"
#include "../../../bsw/cpuLoad/CpuLoad.h"
#include "../../../bsw/bsw.h"
#include "../debug_ift/DebugInterface.h"
#include "../debug_mgt/DebugManagement.h"
#include "../TempSensor/TempSensor.h"
#include "../display_ift/DisplayInterface.h"
#include "../display_mgt/DisplayManagement.h"
#include "../keepAliveLed/keepAliveLed.h"
#include "../asw.h"
```

Include dependency graph for keepAliveLed.cpp:



4.23.1 Detailed Description

Definition of function for class [keepAliveLed](#).

Date

17 mars 2018


Author

nicls67

4.24 keepAliveLed.h File Reference

Class [keepAliveLed](#) header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [keepAliveLed](#)
Class for keep-alive LED blinking.

Macros

- `#define PERIOD_MS_TASK_LED SW_PERIOD_MS`
- `#define LED_PORT ENCODE_PORT(PORT_B, 7)`

4.24.1 Detailed Description

Class [keepAliveLed](#) header file.

Date

17 mars 2018

Author

nicls67

4.24.2 Macro Definition Documentation

4.24.2.1 LED_PORT

```
#define LED_PORT ENCODE_PORT(PORT_B, 7)
```

LED is connected to port PB7

Definition at line 16 of file [keepAliveLed.h](#).

4.24.2.2 PERIOD_MS_TASK_LED

```
#define PERIOD_MS_TASK_LED SW_PERIOD_MS
```

Period for led blinking


Definition at line 15 of file keepAliveLed.h.

4.25 LCD.cpp File Reference

[LCD](#) class source file.

```
#include <util/delay.h>
#include <avr/io.h>
#include "../lib/string/string.h"
#include "../uart/usart.h"
#include "../timer/timer.h"
#include "../I2C/I2C.h"
#include "../lcd/LCD.h"
#include "../dio/dio.h"
#include "../dht22/dht22.h"
#include "../cpuLoad/CpuLoad.h"
#include "../bsw.h"
```

Include dependency graph for LCD.cpp:



4.25.1 Detailed Description

[LCD](#) class source file.

Date

20 avr. 2019


Author

nicls67

4.26 LCD.h File Reference

[LCD](#) class header file.

This graph shows which files directly or indirectly include this file:



Classes

- struct [T_LCD_conf_struct](#)
Structure defining LCD configuration.
- class [LCD](#)
Class for LCD S2004A display driver.

Macros

- `#define EN_PIN 2`
- `#define RW_PIN 1`
- `#define RS_PIN 0`
- `#define BACKLIGHT_PIN 3`
- `#define LCD_INST_CLR_DISPLAY_BIT 0`
- `#define LCD_INST_FUNCTION_SET 5`
- `#define LCD_INST_DISPLAY_CTRL 3`
- `#define LCD_INST_ENTRY_MODE_SET 2`
- `#define LCD_INST_SET_DDRAM_ADDR 7`
- `#define LCD_FCT_SET_FIELD_DL 4`
- `#define LCD_FCT_SET_FIELD_N 3`
- `#define LCD_FCT_SET_FIELD_F 2`
- `#define LCD_DISPLAY_CTRL_FIELD_D 2`
- `#define LCD_DISPLAY_CTRL_FIELD_C 1`
- `#define LCD_DISPLAY_CTRL_FIELD_B 0`
- `#define LCD_CNF_SHIFT_ID 1`
- `#define LCD_CNF_SHIFT_SH 0`
- `#define LCD_CNF_ONE_LINE 0`
- `#define LCD_CNF_TWO_LINE 1`
- `#define LCD_CNF_FONT_5_8 0`
- `#define LCD_CNF_FONT_5_11 1`
- `#define LCD_CNF_DISPLAY_ON 1`
- `#define LCD_CNF_DISPLAY_OFF 0`
- `#define LCD_CNF_CURSOR_ON 1`
- `#define LCD_CNF_CURSOR_OFF 0`
- `#define LCD_CNF_CURSOR_BLINK_ON 1`
- `#define LCD_CNF_CURSOR_BLINK_OFF 0`
- `#define LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT 1`
- `#define LCD_CNF_ENTRY_MODE_DIRECTION_LEFT 0`
- `#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON 1`
- `#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF 0`
- `#define LCD_CNF_BACKLIGHT_ON 1`
- `#define LCD_CNF_BACKLIGHT_OFF 0`
- `#define LCD_RAM_1_LINE_MIN 0`
- `#define LCD_RAM_1_LINE_MAX 0x4F`
- `#define LCD_RAM_2_LINES_MIN_1 0`
- `#define LCD_RAM_2_LINES_MAX_1 0x27`
- `#define LCD_RAM_2_LINES_MIN_2 0x40`
- `#define LCD_RAM_2_LINES_MAX_2 0x67`
- `#define LCD_WAIT_CLR_RETURN 1600`
- `#define LCD_WAIT_OTHER_MODES 40`
- `#define LCD_SIZE_NB_CHAR_PER_LINE 20`
- `#define LCD_SIZE_NB_LINES 4`

Enumerations

- enum `T_LCD_command` {
 `LCD_CMD_FUNCTION_SET`, `LCD_CMD_CLEAR_DISPLAY`, `LCD_CMD_DISPLAY_CTRL`, `LCD_CMD_ENTRY_MODE_SET`,
 `LCD_CMD_SET_DDRAM_ADDR` }
 LCD commands enumeration.
- enum `T_LCD_config_mode` { `LCD_MODE_INSTRUCTION` = 0, `LCD_MODE_DATA` = 1 }
 LCD modes enumeration.
- enum `T_LCD_ram_area` { `LCD_DATA_DDRAM`, `LCD_DATA_CGRAM` }
 Screen RAM definition.

4.26.1 Detailed Description

`LCD` class header file.

Date

20 avr. 2019

Author

nicls67

4.26.2 Macro Definition Documentation

4.26.2.1 BACKLIGHT_PIN

```
#define BACKLIGHT_PIN 3
```

Backlight pin is on P3

Definition at line 17 of file LCD.h.

4.26.2.2 EN_PIN

```
#define EN_PIN 2
```

EN bit is on P2

Definition at line 14 of file LCD.h.

4.26.2.3 LCD_CNF_BACKLIGHT_OFF

```
#define LCD_CNF_BACKLIGHT_OFF 0
```

Backlight is disabled

Definition at line 70 of file LCD.h.

4.26.2.4 LCD_CNF_BACKLIGHT_ON

```
#define LCD_CNF_BACKLIGHT_ON 1
```

Backlight is enabled

Definition at line 69 of file LCD.h.

4.26.2.5 LCD_CNF_CURSOR_BLINK_OFF

```
#define LCD_CNF_CURSOR_BLINK_OFF 0
```

Cursor blinking is off, bit is set to 0

Definition at line 58 of file LCD.h.

4.26.2.6 LCD_CNF_CURSOR_BLINK_ON

```
#define LCD_CNF_CURSOR_BLINK_ON 1
```

Cursor blinking is on, bit is set to 1

Definition at line 57 of file LCD.h.

4.26.2.7 LCD_CNF_CURSOR_OFF

```
#define LCD_CNF_CURSOR_OFF 0
```

Cursor is off, bit is set to 0

Definition at line 54 of file LCD.h.

4.26.2.8 LCD_CNF_CURSOR_ON

```
#define LCD_CNF_CURSOR_ON 1
```

Cursor is on, bit is set to 1

Definition at line 53 of file LCD.h.

4.26.2.9 LCD_CNF_DISPLAY_OFF

```
#define LCD_CNF_DISPLAY_OFF 0
```

Display is off, bit is set to 0

Definition at line 50 of file LCD.h.

4.26.2.10 LCD_CNF_DISPLAY_ON

```
#define LCD_CNF_DISPLAY_ON 1
```

Display is on, bit is set to 1

Definition at line 49 of file LCD.h.

4.26.2.11 LCD_CNF_ENTRY_MODE_DIRECTION_LEFT

```
#define LCD_CNF_ENTRY_MODE_DIRECTION_LEFT 0
```

Direction of shift is left, bit is set to 0

Definition at line 62 of file LCD.h.

4.26.2.12 LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT

```
#define LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT 1
```

Direction of shift is right, bit is set to 1

Definition at line 61 of file LCD.h.

4.26.2.13 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF

```
#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF 0
```

Display shift is not performed, bit is set to 0

Definition at line 66 of file LCD.h.

4.26.2.14 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON

```
#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON 1
```

Display shift is performed, bit is set to 1

Definition at line 65 of file LCD.h.

4.26.2.15 LCD_CNF_FONT_5_11

```
#define LCD_CNF_FONT_5_11 1
```

Two-line configuration, bit is set to 1

Definition at line 46 of file LCD.h.

4.26.2.16 LCD_CNF_FONT_5_8

```
#define LCD_CNF_FONT_5_8 0
```

One-line configuration, bit is set to 0

Definition at line 45 of file LCD.h.

4.26.2.17 LCD_CNF_ONE_LINE

```
#define LCD_CNF_ONE_LINE 0
```

One-line configuration, bit is set to 0

Definition at line 41 of file LCD.h.

4.26.2.18 LCD_CNF_SHIFT_ID

```
#define LCD_CNF_SHIFT_ID 1
```

Field ID (increment or decrement) of command "entry mode set" is on bit DB1

Definition at line 37 of file LCD.h.

4.26.2.19 LCD_CNF_SHIFT_SH

```
#define LCD_CNF_SHIFT_SH 0
```

Field SH (shift of display) of command "entry mode set" is on bit DB1

Definition at line 38 of file LCD.h.

4.26.2.20 LCD_CNF_TWO_LINE

```
#define LCD_CNF_TWO_LINE 1
```

Two-line configuration, bit is set to 1

Definition at line 42 of file LCD.h.

4.26.2.21 LCD_DISPLAY_CTRL_FIELD_B

```
#define LCD_DISPLAY_CTRL_FIELD_B 0
```

Field B (cursor blink) of command "display control" is on bit DB0

Definition at line 34 of file LCD.h.

4.26.2.22 LCD_DISPLAY_CTRL_FIELD_C

```
#define LCD_DISPLAY_CTRL_FIELD_C 1
```

Field C (cursor on/off) of command "display control" is on bit DB1

Definition at line 33 of file LCD.h.

4.26.2.23 LCD_DISPLAY_CTRL_FIELD_D

```
#define LCD_DISPLAY_CTRL_FIELD_D 2
```

Field D (display on/off) of command "display control" is on bit DB2

Definition at line 32 of file LCD.h.

4.26.2.24 LCD_FCT_SET_FIELD_DL

```
#define LCD_FCT_SET_FIELD_DL 4
```

Field DL (data length) of command "function set" is on bit DB4

Definition at line 27 of file LCD.h.

4.26.2.25 LCD_FCT_SET_FIELD_F

```
#define LCD_FCT_SET_FIELD_F 2
```

Field F (font type) of command "function set" is on bit DB2

Definition at line 29 of file LCD.h.

4.26.2.26 LCD_FCT_SET_FIELD_N

```
#define LCD_FCT_SET_FIELD_N 3
```

Field N (number of lines) of command "function set" is on bit DB3

Definition at line 28 of file LCD.h.

4.26.2.27 LCD_INST_CLR_DISPLAY_BIT

```
#define LCD_INST_CLR_DISPLAY_BIT 0
```

Instruction bit for "clear display" is DB0

Definition at line 20 of file LCD.h.

4.26.2.28 LCD_INST_DISPLAY_CTRL

```
#define LCD_INST_DISPLAY_CTRL 3
```

Instruction bit for "display control" is DB3

Definition at line 22 of file LCD.h.

4.26.2.29 LCD_INST_ENTRY_MODE_SET

```
#define LCD_INST_ENTRY_MODE_SET 2
```

Instruction bit for "entry mode" is DB2

Definition at line 23 of file LCD.h.

4.26.2.30 LCD_INST_FUNCTION_SET

```
#define LCD_INST_FUNCTION_SET 5
```

Instruction bit for "function set" is DB5

Definition at line 21 of file LCD.h.

4.26.2.31 LCD_INST_SET_DDRAM_ADDR

```
#define LCD_INST_SET_DDRAM_ADDR 7
```

Instruction bit for "set DDRAM address" is DB7

Definition at line 24 of file LCD.h.

4.26.2.32 LCD_RAM_1_LINE_MAX

```
#define LCD_RAM_1_LINE_MAX 0x4F
```

Maximum address value in 1-line mode

Definition at line 74 of file LCD.h.

4.26.2.33 LCD_RAM_1_LINE_MIN

```
#define LCD_RAM_1_LINE_MIN 0
```

Minimum address value in 1-line mode

Definition at line 73 of file LCD.h.

4.26.2.34 LCD_RAM_2_LINES_MAX_1

```
#define LCD_RAM_2_LINES_MAX_1 0x27
```

Maximum address value in 2-lines mode for line 1

Definition at line 76 of file LCD.h.

4.26.2.35 LCD_RAM_2_LINES_MAX_2

```
#define LCD_RAM_2_LINES_MAX_2 0x67
```

Maximum address value in 2-lines mode for line 2

Definition at line 78 of file LCD.h.

4.26.2.36 LCD_RAM_2_LINES_MIN_1

```
#define LCD_RAM_2_LINES_MIN_1 0
```

Minimum address value in 2-lines mode for line 1

Definition at line 75 of file LCD.h.

4.26.2.37 LCD_RAM_2_LINES_MIN_2

```
#define LCD_RAM_2_LINES_MIN_2 0x40
```

Minimum address value in 2-lines mode for line 2

Definition at line 77 of file LCD.h.

4.26.2.38 LCD_SIZE_NB_CHAR_PER_LINE

```
#define LCD_SIZE_NB_CHAR_PER_LINE 20
```

LCD screen has 20 characters per line

Definition at line 85 of file LCD.h.

4.26.2.39 LCD_SIZE_NB_LINES

```
#define LCD_SIZE_NB_LINES 4
```

LCD screen has 4 lines

Definition at line 86 of file LCD.h.

4.26.2.40 LCD_WAIT_CLR_RETURN

```
#define LCD_WAIT_CLR_RETURN 1600
```

Waiting time after clear display and return home operations is at least 1520 us

Definition at line 81 of file LCD.h.

4.26.2.41 LCD_WAIT_OTHER_MODES

```
#define LCD_WAIT_OTHER_MODES 40
```

Waiting time after all other modes is at least 38 us

Definition at line 82 of file LCD.h.

4.26.2.42 RS_PIN

```
#define RS_PIN 0
```

RS pin is on P0

Definition at line 16 of file LCD.h.

4.26.2.43 RW_PIN

```
#define RW_PIN 1
```

RW pin is on P1

Definition at line 15 of file LCD.h.

4.26.3 Enumeration Type Documentation

4.26.3.1 T_LCD_command

```
enum T_LCD_command
```

LCD commands enumeration.

This enumeration defines all command modes available for [LCD](#) configuration

Enumerator

LCD_CMD_FUNCTION_SET	
LCD_CMD_CLEAR_DISPLAY	
LCD_CMD_DISPLAY_CTRL	
LCD_CMD_ENTRY_MODE_SET	
LCD_CMD_SET_DDRAM_ADDR	

Definition at line 93 of file LCD.h.

4.26.3.2 T_LCD_config_mode

```
enum T_LCD_config_mode
```

LCD modes enumeration.

This enumeration defines the possible modes for communication with [LCD](#). Two modes are possible, DATA for writing data in RAM and INSTRUCTION for configuring the display

Enumerator

LCD_MODE_INSTRUCTION	
LCD_MODE_DATA	

Definition at line 107 of file LCD.h.

4.26.3.3 T_LCD_ram_area

```
enum T_LCD_ram_area
```

Screen RAM definition.

This enumeration defines the RAM areas of the [LCD](#) screen : DDRAM for display, CGRAM for characters generation


Enumerator

LCD_DATA_DDRAM	
LCD_DATA_CGRAM	

Definition at line 118 of file LCD.h.

4.27 LinkedList.cpp File Reference


```
#include <stdlib.h>
#include <avr/io.h>
#include "LinkedList.h"
Include dependency graph for LinkedList.cpp:
```

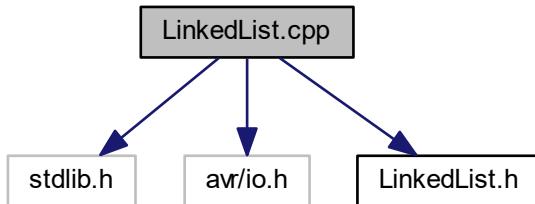

4.28 LinkedList.h File Reference

Linked List library header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [LinkedList](#)
Linked list class.
- struct [LinkedList::T_LL_element](#)
Type defining a linked list element.

Typedefs

- typedef bool(* [CompareFctPtr_t](#)) (void *LLElement, void *CompareElement)

4.28.1 Detailed Description

Linked List library header file.

Date

27 avr. 2019

Author

nicls67

4.28.2 Typedef Documentation

4.28.2.1 CompareFctPtr_t

```
typedef bool(* CompareFctPtr_t) (void *LLElement, void *CompareElement)
```

Type defining a pointer to the comparison function

Definition at line 14 of file [LinkedList.h](#).

4.29 main.cpp File Reference

Background task file.

```
#include <stdlib.h>
#include <avr/io.h>
#include <util/delay.h>
#include <avr/interrupt.h>
#include "lib/LinkedList/LinkedList.h"
#include "lib/string/String.h"
#include "scheduler/scheduler.h"
#include "bsw/usart/usart.h"
#include "bsw/timer/timer.h"
#include "bsw/I2C/I2C.h"
#include "bsw/lcd/LCD.h"
#include "bsw/dio/dio.h"
#include "bsw/dht22/dht22.h"
#include "bsw/cpuLoad/CpuLoad.h"
#include "bsw/bsw.h"
#include "asw/debug_ift/DebugInterface.h"
#include "asw/debug_mgt/DebugManagement.h"
#include "asw/TempSensor/TempSensor.h"
#include "asw/display_ift/DisplayInterface.h"
#include "asw/display_mgt/DisplayManagement.h"
#include "asw/keepAliveLed/keepAliveLed.h"
#include "asw/asw.h"
#include "main.h"
```

Include dependency graph for main.cpp:



Functions

- **ISR (TIMER1_COMPA_vect)**
Main software interrupt.
- **ISR (USART0_RX_vect)**
USART Rx Complete interrupt.
- int **main (void)**
Background task of program.

4.29.1 Detailed Description

Background task file.

Date

12 mars 2018

Author

nicls67

4.29.2 Function Documentation

4.29.2.1 ISR() [1/2]

```
ISR (
    TIMER1_COMPA_vect )
```

Main software interrupt.


This function handles the interrupt raised by Timer #1. It wakes up the software every 500 ms to perform applications.

Returns

Nothing

Definition at line 46 of file main.cpp.

Here is the call graph for this function:

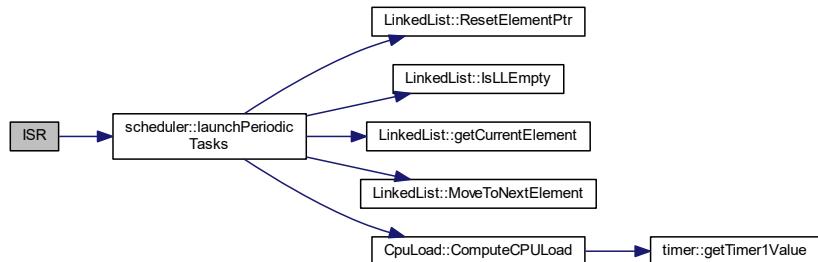

4.29.2.2 ISR() [2/2]

```
ISR (
    USART0_RX_vect )
```

USART Rx Complete interrupt.


This function handles the interrupt raised when a frame has been received by USART. If debug mode mode is active, it calls debug mode management function. If inactive, it calls debug mode activation function if the received character is 'a'

Returns

Nothing

Definition at line 58 of file main.cpp.

Here is the call graph for this function:

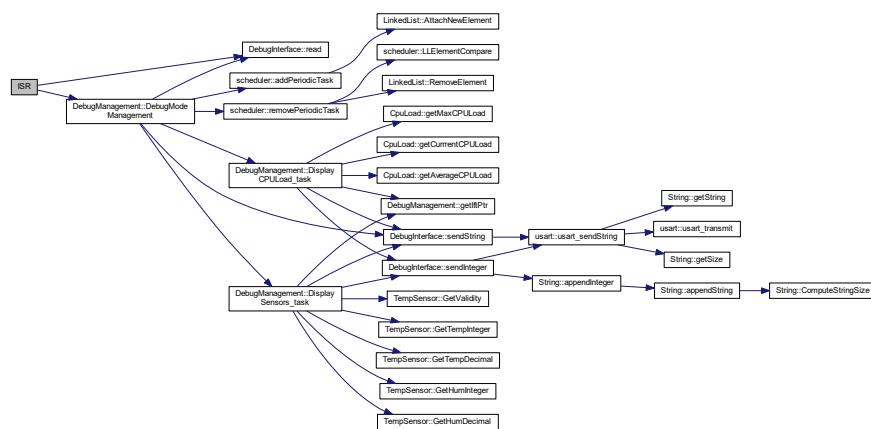**4.29.2.3 main()**


```
int main (
    void )
```

Background task of program.

This function initializes all the software and then goes into an infinite loop. Periodic interrupt will wake up the software to perform application

Definition at line 84 of file main.cpp.


Here is the call graph for this function:

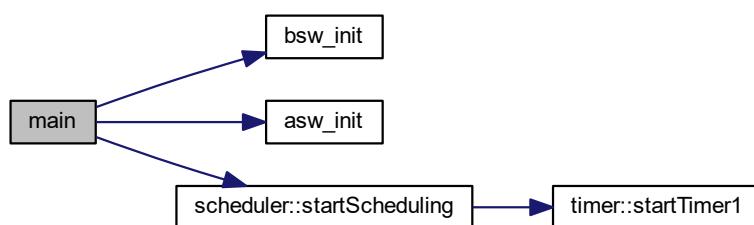

4.30 main.h File Reference

Background task header file.

This graph shows which files directly or indirectly include this file:



Macros

- `#define DEBUG_MODE`

4.30.1 Detailed Description

Background task header file.

Date

17 mars 2018

Author

nicls67

4.30.2 Macro Definition Documentation

4.30.2.1 DEBUG_MODE

```
#define DEBUG_MODE
```


Definition at line 13 of file main.h.

4.31 operators.cpp File Reference

c++ operators definitions

```
#include <stdlib.h>
#include "operators.h"
```

Include dependency graph for operators.cpp:

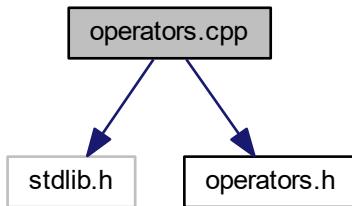

Functions

- void * [operator new](#) (size_t a_size)
Operator new.
- void [operator delete](#) (void *ptr)
Operator delete.

4.31.1 Detailed Description

c++ operators definitions

Date

14 mars 2018

Author

nicls67

4.31.2 Function Documentation

4.31.2.1 operator delete()

```
void operator delete (
    void * ptr )
```

Operator delete.

Equivalent to free function in C Free the memory zone at address ptr

Parameters

in	<i>ptr</i>	Pointer to the start of memory zone to free
----	------------	---

Returns

Nothing

Definition at line 18 of file operators.cpp.

4.31.2.2 operator new()

```
void* operator new (  
    size_t a_size )
```

Operator new.

Equivalent to malloc function in C Allocates a memory zone of size a_size

Parameters

in	<i>a_size</i>	memory size to allocate
----	---------------	-------------------------

Returns


Pointer to the start of allocated memory zone

Definition at line 13 of file operators.cpp.

4.32 operators.h File Reference

c++ operators definitions header file

This graph shows which files directly or indirectly include this file:

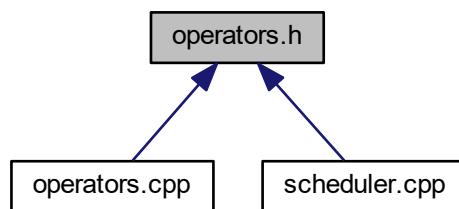

Functions

- `void * operator new (size_t a_size)`
Operator new.
- `void operator delete (void *ptr)`
Operator delete.

4.32.1 Detailed Description

c++ operators definitions header file

Date

14 mars 2018

Author

nicls67

4.32.2 Function Documentation

4.32.2.1 operator delete()

```
void operator delete (
    void * ptr )
```

Operator delete.

Equivalent to free function in C Free the memory zone at address ptr

Parameters

in	<code>ptr</code>	Pointer to the start of memory zone to free
----	------------------	---

Returns

Nothing

Definition at line 18 of file operators.cpp.

4.32.2.2 operator new()

```
void* operator new (
    size_t a_size )
```

Operator new.

Equivalent to malloc function in C Allocates a memory zone of size a_size

Parameters

in	<i>a_size</i>	memory size to allocate
----	---------------	-------------------------

Returns

Pointer to the start of allocated memory zone

Definition at line 13 of file operators.cpp.

4.33 scheduler.cpp File Reference

Defines scheduler class.

```
#include <stdlib.h>
#include <avr/io.h>
#include "../lib/LinkedList/LinkedList.h"
#include "../lib/string/String.h"
#include "../lib/operators/operators.h"
#include "../bsw/usart/usart.h"
#include "../bsw/timer/timer.h"
#include "../bsw/I2C/I2C.h"
#include "../bsw/lcd/LCD.h"
#include "../bsw/dio/dio.h"
#include "../bsw/dht22/dht22.h"
#include "../bsw/cpuLoad/CpuLoad.h"
#include "../bsw-bsw.h"
#include "../asw/debug_ift/DebugInterface.h"
#include "../asw/debug_mgt/DebugManagement.h"
#include "../asw/display_ift/DisplayInterface.h"
#include "../asw/keepAliveLed/keepAliveLed.h"
#include "../asw/TempSensor/TempSensor.h"
#include "../asw/display_mgt/DisplayManagement.h"
#include "../asw/asw.h"
#include "scheduler.h"
```

Include dependency graph for scheduler.cpp:



Variables

- `scheduler * p_scheduler`

4.33.1 Detailed Description

Defines scheduler class.

Date

16 mars 2018

Author

nicls67

4.33.2 Variable Documentation

4.33.2.1 p_scheduler

`scheduler* p_scheduler`


Pointer to scheduler object

Definition at line 38 of file scheduler.cpp.

4.34 scheduler.h File Reference

Scheduler class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class `scheduler`
Scheduler class.
- struct `scheduler::Task_t`
Type defining a task structure.

Macros

- `#define SW_PERIOD_MS 500`
- `#define PRESCALER_PERIODIC_TIMER 256`
- `#define TIMER_CTC_VALUE ((F_CPU/PRESCALER_PERIODIC_TIMER)/(1000/SW_PERIOD_MS))`

Typedefs

- `typedef void(* TaskPtr_t) (void)`
Type defining a pointer to function.

Variables

- `scheduler * p_scheduler`

4.34.1 Detailed Description

Scheduler class header file.

Date

16 mars 2018

Author

nicls67

4.34.2 Macro Definition Documentation

4.34.2.1 PRESCALER_PERIODIC_TIMER

```
#define PRESCALER_PERIODIC_TIMER 256
```

Value of prescaler to use for periodic timer

Definition at line 16 of file scheduler.h.

4.34.2.2 SW_PERIOD_MS

```
#define SW_PERIOD_MS 500
```

Software period, used to define periodic timer interrupt

Definition at line 15 of file scheduler.h.

4.34.2.3 TIMER_CTC_VALUE

```
#define TIMER_CTC_VALUE ((F_CPU/PRESCALER_PERIODIC_TIMER)/(1000/SW_PERIOD_MS))
```

Compare value for periodic timer

Definition at line 17 of file scheduler.h.

4.34.3 Typedef Documentation

4.34.3.1 TaskPtr_t

```
typedef void(* TaskPtr_t) (void)
```

Type defining a pointer to function.

Definition at line 22 of file scheduler.h.

4.34.4 Variable Documentation

4.34.4.1 p_scheduler

```
scheduler* p_scheduler
```


Pointer to scheduler object

Definition at line 38 of file scheduler.cpp.

4.35 String.cpp File Reference

[String](#) class source file.

```
#include <stdlib.h>
#include <avr/io.h>
#include "String.h"
Include dependency graph for String.cpp:
```

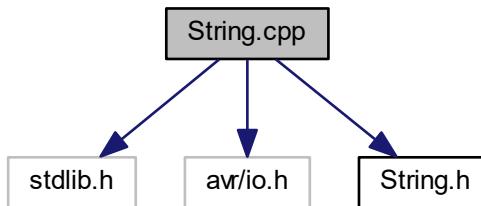

4.35.1 Detailed Description

[String](#) class source file.

Date

2 mai 2019


Author

nicls67

4.36 String.h File Reference

[String](#) class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [String](#)

String management class.

4.36.1 Detailed Description

[String](#) class header file.

Date

2 mai 2019

Author

nicls67

4.37 TempSensor.cpp File Reference

Defines function of class [TempSensor](#).

```

#include <avr/io.h>
#include "../lib/LinkedList/LinkedList.h"
#include "../lib/string/String.h"
#include "../scheduler/scheduler.h"
#include "../bsw/usart/usart.h"
#include "../bsw/timer/timer.h"
#include "../bsw/I2C/I2C.h"
#include "../bsw/lcd/LCD.h"
#include "../bsw/dio/dio.h"
#include "../bsw/dht22/dht22.h"
#include "../bsw/cpuLoad/CpuLoad.h"
#include "../bsw/bsw.h"
#include "../debug_ift/DebugInterface.h"
#include "../debug_mgt/DebugManagement.h"
#include "../TempSensor/TempSensor.h"
#include "../display_ift/DisplayInterface.h"
#include "../display_mgt/DisplayManagement.h"
#include "../keepAliveLed/keepAliveLed.h"
#include "../asw.h"
  
```

Include dependency graph for TempSensor.cpp:



Macros

- `#define PIT_BEFORE_INVALID 60`

4.37.1 Detailed Description

Defines function of class [TempSensor](#).

Date

23 mars 2018

Author

nicls67

4.37.2 Macro Definition Documentation

4.37.2.1 PIT_BEFORE_INVALID


```
#define PIT_BEFORE_INVALID 60
```

Definition at line 35 of file [TempSensor.cpp](#).

4.38 TempSensor.h File Reference

Class [TempSensor](#) header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [TempSensor](#)
Class for temperature sensor.

Macros

- `#define PERIOD_MS_TASK_TEMP_SENSOR 5000`

4.38.1 Detailed Description

Class [TempSensor](#) header file.

Date

23 mars 2018

Author

nicls67

4.38.2 Macro Definition Documentation

4.38.2.1 PERIOD_MS_TASK_TEMP_SENSOR

```
#define PERIOD_MS_TASK_TEMP_SENSOR 5000
```


Period for reading temperature data

Definition at line 13 of file TempSensor.h.

4.39 timer.cpp File Reference

Defines function for class timer.

```
#include <avr/io.h>
#include "timer.h"
Include dependency graph for timer.cpp:
```



4.39.1 Detailed Description

Defines function for class timer.

Date

15 mars 2018


Author

nicls67

4.40 timer.h File Reference

Timer class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [timer](#)

Class defining a timer.

4.40.1 Detailed Description

Timer class header file.

Date

15 mars 2018


Author

nicls67

4.41 usart.cpp File Reference

BSW library for USART.

```
#include <avr/io.h>
#include "../lib/string/String.h"
#include "usart.h"
Include dependency graph for usart.cpp:
```

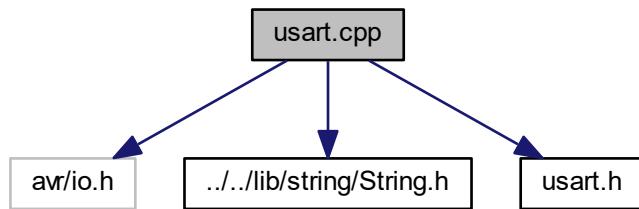

4.41.1 Detailed Description

BSW library for USART.

Date

13 mars 2018


Author

nicls67

4.42 usart.h File Reference

Header file for USART library.

This graph shows which files directly or indirectly include this file:



Classes

- class [usart](#)

USART serial bus class.

4.42.1 Detailed Description

Header file for USART library.

Date

13 mars 2018

Author

nicls67

Index

~LinkedList
 LinkedList, 73

~String
 String, 87

ASW_cnf_struct
 asw.cpp, 126
 asw.h, 128

addPeriodicTask
 scheduler, 80

appendBool
 String, 88

appendChar
 String, 89

appendInteger
 String, 90

appendString
 String, 90

asw.cpp, 125
 ASW_cnf_struct, 126
 asw_init, 126

asw.h, 127
 ASW_cnf_struct, 128
 asw_init, 128

asw_init
 asw.cpp, 126
 asw.h, 128

AttachNewElement
 LinkedList, 74

avg_load
 CpuLoad, 8

BACKLIGHT_PIN
 LCD.h, 160

BSW_cnf_struct
 bsw.cpp, 130
 bsw.h, 132

backlight_en
 T_LCD_conf_struct, 103

backlight_enable
 LCD, 69

BaudRate
 uart, 124

bitrate
 I2C, 52

blinkLed_task
 keepAliveLed, 53

bsw.cpp, 129
 BSW_cnf_struct, 130
 bsw_init, 129

bsw.h, 130
 BSW_cnf_struct, 132
 bsw_init, 131

bsw_init
 bsw.cpp, 129
 bsw.h, 131

Clear
 String, 91

ClearFullScreen
 DisplayInterface, 35

ClearLine
 DisplayInterface, 36

ClearStringInDataStruct
 DisplayInterface, 37

cnfCursorBlink
 LCD, 69

cnfCursorOnOff
 LCD, 69

cnfDisplayOnOff
 LCD, 69

cnfEntryModeDir
 LCD, 69

cnfEntryModeShift
 LCD, 69

cnfFontType
 LCD, 70

cnfI2C_addr
 LCD, 70

cnfLineNumber
 LCD, 70

command
 LCD, 57

CompareFctPtr_t
 LinkedList.h, 171

ComputeCPULoad
 CpuLoad, 6

ComputeStringSize
 String, 92

ConfigureBacklight
 LCD, 58

ConfigureCursorBlink
 LCD, 58

ConfigureCursorOnOff
 LCD, 59

ConfigureDisplayOnOff
 LCD, 60

ConfigureEntryModeDir
 LCD, 60

ConfigureEntryModeShift

LCD, 61
 ConfigureFontType
 LCD, 62
 ConfigureI2CAddr
 LCD, 62
 ConfigureLineNumber
 LCD, 63
 configureTimer1
 timer, 117
 CpuLoad, 5
 avg_load, 8
 ComputeCPUload, 6
 CpuLoad, 6
 current_load, 8
 getAverageCPUload, 6
 getCurrentCPUload, 7
 getMaxCPUload, 7
 last_sum_value, 8
 max_load, 9
 sample_cnt, 9
 sample_idx, 9
 sample_mem, 9
 CpuLoad.cpp, 132
 CpuLoad.h, 133
 NB_OF_SAMPLES, 133
 curElement_ptr
 LinkedList, 77
 current_load
 CpuLoad, 8
 cursor_en
 T_LCD_conf_struct, 103
 cursorBlink_en
 T_LCD_conf_struct, 103

 DATA_ACK
 I2C.h, 155
 DDRA_PTR
 dio_reg_atm2560.h, 145
 DDRB_PTR
 dio_reg_atm2560.h, 145
 DDRC_PTR
 dio_reg_atm2560.h, 145
 DDRD_PTR
 dio_reg_atm2560.h, 145
 DEBUG_MODE
 main.h, 175
 DECODE_PIN
 dio.h, 141
 DECODE_PORT
 dio.h, 141
 DHT22_PORT
 dht22.h, 139
 DISPLAY_LINE_SHIFT_PERIOD_MS
 DisplayInterface.h, 149
 DISPLAY_LINE_SHIFT_TEMPO_TIME
 DisplayInterface.h, 149
 DISPLAY_MGT_I2C_BITRATE
 DisplayManagement.h, 152
 DISPLAY_MGT_LCD_I2C_ADDR
 DisplayManagement.h, 152
 DISPLAY_MGT_LINE_HUM
 DisplayManagement.h, 152
 DISPLAY_MGT_LINE_TEMP
 DisplayManagement.h, 152
 DISPLAY_MGT_PERIOD_TASK_SENSOR
 DisplayManagement.h, 152
 DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOTE
 VAL
 DisplayManagement.h, 152
 data_ptr
 LinkedList::T_LL_element, 105
 ddram_addr
 LCD, 70
 debug_ift_ptr
 DebugManagement, 20
 debug_state
 DebugManagement, 20
 debug_state_t
 DebugManagement.h, 137
 DebugInterface, 10
 DebugInterface, 11
 read, 11
 sendBool, 11
 sendInteger, 12
 sendString, 13, 14
 uart_drv_ptr, 15
 DebugInterface.cpp, 134
 DebugInterface.h, 134
 USART_BAUDRATE, 134
 DebugManagement, 15
 debug_ift_ptr, 20
 debug_state, 20
 DebugManagement, 16
 DebugModeManagement, 17
 DisplayCPUload_task, 18
 DisplaySensors_task, 18
 getIfPtr, 19
 DebugManagement.cpp, 135
 str_debug_main_menu, 136
 DebugManagement.h, 136
 debug_state_t, 137
 PERIOD_MS_TASK_DISPLAY_CPU_LOAD, 137
 PERIOD_MS_TASK_DISPLAY_SENSORS, 137
 DebugModeManagement
 DebugManagement, 17
 dht22, 20
 dht22, 21
 initializeCommunication, 22
 read, 22
 dht22.cpp, 138
 MAX_WAIT_TIME_US, 138
 dht22.h, 139
 DHT22_PORT, 139
 dio, 23
 dio, 24
 dio_changePortPinCnf, 25
 dio_getPort, 26

dio_getPort_fast, 27
dio_invertPort, 27
dio_memorizePINaddress, 28
dio_setPort, 29
getDDRxAddress, 30
getPINxAddress, 30
getPORTxAddress, 31
PINx_addr_mem, 32
PINx_idx_mem, 32
ports_init, 32
dio.cpp, 140
dio.h, 140
 DECODE_PIN, 141
 DECODE_PORT, 141
 ENCODE_PORT, 142
 PORT_CNF_IN, 142
 PORT_CNF_OUT, 143
 PORT_A, 142
 PORT_B, 142
 PORT_C, 142
 PORT_D, 143
dio_changePortPinCnf
 dio, 25
dio_getPort
 dio, 26
dio_getPort_fast
 dio, 27
dio_invertPort
 dio, 27
dio_memorizePINaddress
 dio, 28
dio_port_cnf.h, 143
 PORTB_CNF_DDRB, 144
 PORTB_CNF_PORTB, 144
dio_reg_atm2560.h, 144
 DDRA_PTR, 145
 DDRB_PTR, 145
 DDRC_PTR, 145
 DDRD_PTR, 145
 PINA_PTR, 145
 PINB_PTR, 145
 PINC_PTR, 146
 PIND_PTR, 146
 PORTA_PTR, 146
 PORTB_PTR, 146
 PORTC_PTR, 146
 PORTD_PTR, 147
dio_setPort
 dio, 29
display_data
 DisplayInterface, 41
display_en
 T_LCD_conf_struct, 103
display_str
 T_display_data, 99
DisplayCPULoad_task
 DebugManagement, 18
DisplayFullLine
 DisplayInterface, 37
 DisplayInterface, 33
 ClearFullScreen, 35
 ClearLine, 36
 ClearStringInDataStruct, 37
 display_data, 41
 DisplayFullLine, 37
 DisplayInterface, 34
 dummy, 42
 FindFirstCharAddr, 38
 getDisplayDataPtr, 39
 IsLineEmpty, 39
 isShiftInProgress, 42
 p_lcd, 42
 RefreshLine, 40
 shiftLine_task, 41
 DisplayInterface.cpp, 147
 DisplayInterface.h, 148
 DISPLAY_LINE_SHIFT_PERIOD_MS, 149
 DISPLAY_LINE_SHIFT_TEMPO_TIME, 149
 T_DisplayInterface_LineDisplayMode, 149
DisplayManagement, 43
 DisplayManagement, 44
 DisplaySensorData_Task, 45
 GetIftPointer, 45
 GetTempSensorPtr, 46
 p_display_ift, 47
 p_tempSensor, 48
 RemoveWelcomeMessage_Task, 46
DisplayManagement.cpp, 150
DisplayManagement.h, 151
 DISPLAY_MGT_I2C_BITRATE, 152
 DISPLAY_MGT_LCD_I2C_ADDR, 152
 DISPLAY_MGT_LINE_HUM, 152
 DISPLAY_MGT_LINE_TEMP, 152
 DISPLAY_MGT_PERIOD_TASK_SENSOR, 152
 DISPLAY_MGT_PERIOD_WELCOME_MSG_R←
 EMOVAL, 152
 humidityDisplayString, 153
 LCD_init_cnf, 153
 tempDisplayString, 153
 welcomeMessageString, 154
DisplaySensorData_Task
 DisplayManagement, 45
DisplaySensors_task
 DebugManagement, 18
dummy
 DisplayInterface, 42
EN_PIN
 LCD.h, 160
ENCODE_PORT
 dio.h, 142
entryModeDir
 T_LCD_conf_struct, 103
entryModeShift
 T_LCD_conf_struct, 103
FindFirstCharAddr

DisplayInterface, 38
 firstElement
 LinkedList, 77
 fontType_cnf
 T_LCD_conf_struct, 104

 getAverageCPUload
 CpuLoad, 6
 getCurrentElement
 LinkedList, 74
 getCurrentCPUload
 CpuLoad, 7
 GetDDRAMAddress
 LCD, 64
 getDDRxAddress
 dio, 30
 getDisplayDataPtr
 DisplayInterface, 39
 GetHumDecimal
 TempSensor, 108
 GetHumInteger
 TempSensor, 109
 getHumPtr
 TempSensor, 109
 getHumidity
 TempSensor, 108
 GetIftPointer
 DisplayManagement, 45
 getIftPtr
 DebugManagement, 19
 GetLineNumberCnf
 LCD, 64
 getMaxCPUload
 CpuLoad, 7
 getPINxAddress
 dio, 30
 getPORTxAddress
 dio, 31
 getPitNumber
 scheduler, 81
 getSize
 String, 92
 getString
 String, 93
 getTemp
 TempSensor, 110
 GetTempDecimal
 TempSensor, 110
 GetTempInteger
 TempSensor, 111
 getTempPtr
 TempSensor, 111
 GetTempSensorPtr
 DisplayManagement, 46
 getTimer1Value
 timer, 118
 GetValidity
 TempSensor, 112

 humidityDisplayString
 DisplayManagement.h, 153

 I2C.cpp, 154
 I2C.h, 155
 DATA_ACK, 155
 SLA_ACK, 155
 START, 156
 I2C, 48
 bitrate, 52
 I2C, 49
 initializeBus, 49
 setBitRate, 50
 setTxAddress, 50
 tx_address, 52
 writeByte, 51
 i2c_addr
 T_LCD_conf_struct, 104
 i2c_bitrate
 T_LCD_conf_struct, 104
 i2c_drv_ptr
 LCD, 70
 ISR
 main.cpp, 173
 initializeBus
 I2C, 49
 initializeCommunication
 dht22, 22
 InitializeScreen
 LCD, 64
 isEmpty
 T_display_data, 100
 IsLLEmpty
 LinkedList, 75
 IsLineEmpty
 DisplayInterface, 39
 isShiftInProgress
 DisplayInterface, 42

 keepAliveLed, 52
 blinkLed_task, 53
 keepAliveLed, 53
 keepAliveLed.cpp, 156
 keepAliveLed.h, 157
 LED_PORT, 157
 PERIOD_MS_TASK_LED, 157

 LCD.cpp, 158
 LCD.h, 158
 BACKLIGHT_PIN, 160
 EN_PIN, 160
 LCD_CNF_BACKLIGHT_OFF, 160
 LCD_CNF_BACKLIGHT_ON, 161
 LCD_CNF_CURSOR_BLINK_OFF, 161
 LCD_CNF_CURSOR_BLINK_ON, 161
 LCD_CNF_CURSOR_OFF, 161
 LCD_CNF_CURSOR_ON, 161
 LCD_CNF_DISPLAY_OFF, 162
 LCD_CNF_DISPLAY_ON, 162

LCD_CNF_ENTRY_MODE_DIRECTION_LEFT,
162
LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT,
162
LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_↔
OFF, 162
LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_↔
ON, 163
LCD_CNF_FONT_5_11, 163
LCD_CNF_FONT_5_8, 163
LCD_CNF_ONE_LINE, 163
LCD_CNF_SHIFT_ID, 163
LCD_CNF_SHIFT_SH, 164
LCD_CNF_TWO_LINE, 164
LCD_DISPLAY_CTRL_FIELD_B, 164
LCD_DISPLAY_CTRL_FIELD_C, 164
LCD_DISPLAY_CTRL_FIELD_D, 164
LCD_FCT_SET_FIELD_DL, 165
LCD_FCT_SET_FIELD_F, 165
LCD_FCT_SET_FIELD_N, 165
LCD_INST_CLR_DISPLAY_BIT, 165
LCD_INST_DISPLAY_CTRL, 165
LCD_INST_ENTRY_MODE_SET, 166
LCD_INST_FUNCTION_SET, 166
LCD_INST_SET_DDRAM_ADDR, 166
LCD_RAM_1_LINE_MAX, 166
LCD_RAM_1_LINE_MIN, 166
LCD_RAM_2_LINES_MAX_1, 167
LCD_RAM_2_LINES_MAX_2, 167
LCD_RAM_2_LINES_MIN_1, 167
LCD_RAM_2_LINES_MIN_2, 167
LCD_SIZE_NB_CHAR_PER_LINE, 167
LCD_SIZE_NB_LINES, 168
LCD_WAIT_CLR_RETURN, 168
LCD_WAIT_OTHER_MODES, 168
RS_PIN, 168
RW_PIN, 168
T_LCD_command, 169
T_LCD_config_mode, 169
T_LCD_ram_area, 169
LCD_CNF_BACKLIGHT_OFF
LCD.h, 160
LCD_CNF_BACKLIGHT_ON
LCD.h, 161
LCD_CNF_CURSOR_BLINK_OFF
LCD.h, 161
LCD_CNF_CURSOR_BLINK_ON
LCD.h, 161
LCD_CNF_CURSOR_OFF
LCD.h, 161
LCD_CNF_CURSOR_ON
LCD.h, 161
LCD_CNF_DISPLAY_OFF
LCD.h, 162
LCD_CNF_DISPLAY_ON
LCD.h, 162
LCD_CNF_ENTRY_MODE_DIRECTION_LEFT
LCD.h, 162
LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT
LCD.h, 162
LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF
LCD.h, 162
LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON
LCD.h, 163
LCD_CNF_FONT_5_11
LCD.h, 163
LCD_CNF_FONT_5_8
LCD.h, 163
LCD_CNF_ONE_LINE
LCD.h, 163
LCD_CNF_SHIFT_ID
LCD.h, 163
LCD_CNF_SHIFT_SH
LCD.h, 164
LCD_CNF_TWO_LINE
LCD.h, 164
LCD_DISPLAY_CTRL_FIELD_B
LCD.h, 164
LCD_DISPLAY_CTRL_FIELD_C
LCD.h, 164
LCD_DISPLAY_CTRL_FIELD_D
LCD.h, 164
LCD_FCT_SET_FIELD_DL
LCD.h, 165
LCD_FCT_SET_FIELD_F
LCD.h, 165
LCD_FCT_SET_FIELD_N
LCD.h, 165
LCD_INST_CLR_DISPLAY_BIT
LCD.h, 165
LCD_INST_DISPLAY_CTRL
LCD.h, 165
LCD_INST_ENTRY_MODE_SET
LCD.h, 166
LCD_INST_FUNCTION_SET
LCD.h, 166
LCD_INST_SET_DDRAM_ADDR
LCD.h, 166
LCD_RAM_1_LINE_MAX
LCD.h, 166
LCD_RAM_1_LINE_MIN
LCD.h, 166
LCD_RAM_2_LINES_MAX_1
LCD.h, 167
LCD_RAM_2_LINES_MAX_2
LCD.h, 167
LCD_RAM_2_LINES_MIN_1
LCD.h, 167
LCD_RAM_2_LINES_MIN_2
LCD.h, 167
LCD_SIZE_NB_CHAR_PER_LINE
LCD.h, 167
LCD_SIZE_NB_LINES
LCD.h, 168
LCD_WAIT_CLR_RETURN
LCD.h, 168

LCD_WAIT_OTHER_MODES
 LCD.h, 168

LCD_init_cnf
 DisplayManagement.h, 153

LCD, 54
 backlight_enable, 69
 cnfCursorBlink, 69
 cnfCursorOnOff, 69
 cnfDisplayOnOff, 69
 cnfEntryModeDir, 69
 cnfEntryModeShift, 69
 cnfFontType, 70
 cnfI2C_addr, 70
 cnfLineNumber, 70
 command, 57
 ConfigureBacklight, 58
 ConfigureCursorBlink, 58
 ConfigureCursorOnOff, 59
 ConfigureDisplayOnOff, 60
 ConfigureEntryModeDir, 60
 ConfigureEntryModeShift, 61
 ConfigureFontType, 62
 ConfigureI2CAddr, 62
 ConfigureLineNumber, 63
 ddram_addr, 70
 GetDDRAMAddress, 64
 GetLineNumberCnf, 64
 i2c_drv_ptr, 70
 InitializeScreen, 64
 LCD, 56
 SetDDRAMAddress, 65
 write, 66
 write4bits, 67
 WriteInRam, 68

LED_PORT
 keepAliveLed.h, 157

LLElementCompare
 scheduler, 82

last_sum_value
 CpuLoad, 8

launchPeriodicTasks
 scheduler, 81

lineNumber_cnf
 T_LCD_conf_struct, 104

LinkedList, 71
 ~LinkedList, 73
 AttachNewElement, 74
 curElement_ptr, 77
 firstElement, 77
 getCurrentElement, 74
 IsLLEmpty, 75
 LinkedList, 73
 MoveToNextElement, 75
 RemoveElement, 76
 ResetElementPtr, 77
 T_LL_element, 72

LinkedList.cpp, 170

LinkedList.h, 170

CompareFctPtr_t, 171

LinkedList::T_LL_element, 105
 data_ptr, 105
 nextElement, 105

MAX_WAIT_TIME_US
 dht22.cpp, 138

main
 main.cpp, 174
 main.cpp, 172
 ISR, 173
 main, 174
 main.h, 175
 DEBUG_MODE, 175

max_load
 CpuLoad, 9

mode
 T_display_data, 100

MoveToNextElement
 LinkedList, 75

NB_OF_SAMPLES
 CpuLoad.h, 133

nextElement
 LinkedList::T_LL_element, 105

operator delete
 operators.cpp, 176
 operators.h, 178

operator new
 operators.cpp, 177
 operators.h, 178

operators.cpp, 176
 operator delete, 176
 operator new, 177

operators.h, 177
 operator delete, 178
 operator new, 178

p_DebugInterface
 T_ASW_cnf_struct, 95

p_DebugManagement
 T_ASW_cnf_struct, 95

p_DisplayInterface
 T_ASW_cnf_struct, 95

p_DisplayManagement
 T_ASW_cnf_struct, 95

p_TempSensor
 T_ASW_cnf_struct, 96

p_cpuload
 T_BSW_cnf_struct, 97

p_dht22
 T_BSW_cnf_struct, 97

p_dio
 T_BSW_cnf_struct, 97

p_display_ift
 DisplayManagement, 47

p_i2c
 T_BSW_cnf_struct, 97

p_keepAliveLed
 T_ASW_cnf_struct, 96

p_lcd
 DisplayInterface, 42
 T_BSW_cnf_struct, 98

p_scheduler
 scheduler.cpp, 181
 scheduler.h, 183

p_tempSensor
 DisplayManagement, 48

p_timer
 T_BSW_cnf_struct, 98

p_usart
 T_BSW_cnf_struct, 98

PERIOD_MS_TASK_DISPLAY_CPU_LOAD
 DebugManagement.h, 137

PERIOD_MS_TASK_DISPLAY_SENSORS
 DebugManagement.h, 137

PERIOD_MS_TASK_LED
 keepAliveLed.h, 157

PERIOD_MS_TASK_TEMP_SENSOR
 TempSensor.h, 186

PINA_PTR
 dio_reg_atm2560.h, 145

PINB_PTR
 dio_reg_atm2560.h, 145

PINC_PTR
 dio_reg_atm2560.h, 146

PIND_PTR
 dio_reg_atm2560.h, 146

PINx_addr_mem
 dio, 32

PINx_idx_mem
 dio, 32

PIT_BEFORE_INVALID
 TempSensor.cpp, 185

PORT_CNF_IN
 dio.h, 142

PORT_CNF_OUT
 dio.h, 143

PORT_A
 dio.h, 142

PORT_B
 dio.h, 142

PORT_C
 dio.h, 142

PORT_D
 dio.h, 143

PORTA_PTR
 dio_reg_atm2560.h, 146

PORTB_CNF_DDRB
 dio_port_cnf.h, 144

PORTB_CNF_PORTB
 dio_port_cnf.h, 144

PORTB_PTR
 dio_reg_atm2560.h, 146

PORTC_PTR
 dio_reg_atm2560.h, 146

PORTD_PTR
 dio_reg_atm2560.h, 147

PRESCALER_PERIODIC_TIMER
 scheduler.h, 182

period
 scheduler::Task_t, 106

pit_number
 scheduler, 85

ports_init
 dio, 32

prescaler
 timer, 119

RS_PIN
 LCD.h, 168

RW_PIN
 LCD.h, 168

read
 DebugInterface, 11
 dht22, 22

read_humidity
 TempSensor, 114

read_temperature
 TempSensor, 115

readTempSensor_task
 TempSensor, 112

RefreshLine
 DisplayInterface, 40

RemoveElement
 LinkedList, 76

removePeriodicTask
 scheduler, 83

RemoveWelcomeMessage_Task
 DisplayManagement, 46

ResetElementPtr
 LinkedList, 77

SLA_ACK
 I2C.h, 155

START
 I2C.h, 156

SW_PERIOD_MS
 scheduler.h, 182

sample_cnt
 CpuLoad, 9

sample_idx
 CpuLoad, 9

sample_mem
 CpuLoad, 9

scheduler, 78
 addPeriodicTask, 80
 getPitNumber, 81
 LLElementCompare, 82
 launchPeriodicTasks, 81
 pit_number, 85
 removePeriodicTask, 83
 scheduler, 80
 startScheduling, 84
 Task_t, 79

TasksLL_ptr, 85
 scheduler.cpp, 180
 p_scheduler, 181
 scheduler.h, 181
 p_scheduler, 183
 PRESCALER_PERIODIC_TIMER, 182
 SW_PERIOD_MS, 182
 TIMER_CTC_VALUE, 182
 TaskPtr_t, 182
 scheduler::Task_t, 106
 period, 106
 TaskPtr, 106
 sendBool
 DebugInterface, 11
 sendInteger
 DebugInterface, 12
 sendString
 DebugInterface, 13, 14
 setBaudRate
 usart, 121
 setBitRate
 I2C, 50
 SetDDRAMAddress
 LCD, 65
 setTxAddress
 I2C, 50
 setValidity
 TempSensor, 113
 shift_data
 T_display_data, 100
 shiftLine_task
 DisplayInterface, 41
 size
 String, 94
 startScheduling
 scheduler, 84
 startTimer1
 timer, 118
 stopTimer1
 timer, 119
 str_cur_ptr
 T_Display_shift_data, 101
 str_debug_main_menu
 DebugManagement.cpp, 136
 str_ptr
 T_Display_shift_data, 101
 String, 86
 ~String, 87
 appendBool, 88
 appendChar, 89
 appendInteger, 90
 appendString, 90
 Clear, 91
 ComputeStringSize, 92
 getSize, 92
 getString, 93
 size, 94
 String, 87
 string, 94
 String, 94
 String.cpp, 183
 String.h, 184
 T_ASW_cnf_struct, 94
 p_DebugInterface, 95
 p_DebugManagement, 95
 p_DisplayInterface, 95
 p_DisplayManagement, 95
 p_TempSensor, 96
 p_keepAliveLed, 96
 T_BSW_cnf_struct, 96
 p_cpupload, 97
 p_dht22, 97
 p_dio, 97
 p_i2c, 97
 p_lcd, 98
 p_timer, 98
 p_usart, 98
 T_Display_shift_data, 101
 str_cur_ptr, 101
 str_ptr, 101
 temporization, 102
 T_DisplayInterface_LineDisplayMode
 DisplayInterface.h, 149
 T_LCD_command
 LCD.h, 169
 T_LCD_conf_struct, 102
 backlight_en, 103
 cursor_en, 103
 cursorBlink_en, 103
 display_en, 103
 entryModeDir, 103
 entryModeShift, 103
 fontType_cnf, 104
 i2c_addr, 104
 i2c_bitrate, 104
 lineNumber_cnf, 104
 T_LCD_config_mode
 LCD.h, 169
 T_LCD_ram_area
 LCD.h, 169
 T_LL_element
 LinkedList, 72
 T_display_data, 99
 display_str, 99
 isEmpty, 100
 mode, 100
 shift_data, 100
 TIMER_CTC_VALUE
 scheduler.h, 182
 Task_t
 scheduler, 79
 TaskPtr
 scheduler::Task_t, 106
 TaskPtr_t
 scheduler.h, 182

TasksLL_ptr
scheduler, 85
tempDisplayString
 DisplayManagement.h, 153
TempSensor, 106
 GetHumDecimal, 108
 GetHumInteger, 109
 getHumPtr, 109
 getHumidity, 108
 getTemp, 110
 GetTempDecimal, 110
 GetTempInteger, 111
 getTempPtr, 111
 GetValidity, 112
 read_humidity, 114
 read_temperature, 115
 readTempSensor_task, 112
 setValidity, 113
 TempSensor, 108
 updateLastValidValues, 114
 valid_hum, 115
 valid_pit, 115
 valid_temp, 115
 validity, 115
 validity_last_read, 116
TempSensor.cpp, 184
 PIT_BEFORE_INVALID, 185
TempSensor.h, 185
 PERIOD_MS_TASK_TEMP_SENSOR, 186
temporization
 T_Display_shift_data, 102
timer, 116
 configureTimer1, 117
 getTimer1Value, 118
 prescaler, 119
 startTimer1, 118
 stopTimer1, 119
 timer, 117
timer.cpp, 186
timer.h, 187
tx_address
 I2C, 52

USART_BAUDRATE
 DebugInterface.h, 134
updateLastValidValues
 TempSensor, 114
usart, 120
 BaudRate, 124
 setBaudRate, 121
 usart, 120
 usart_init, 121
 usart_read, 122
 usart_sendString, 122
 usart_transmit, 123
usart.cpp, 188
usart.h, 188
usart_drv_ptr
 DebugInterface, 15