

Arduino

1.0

Generated by Doxygen 1.8.14

Contents

1	Class Index	1
1.1	Class List	1
2	File Index	3
2.1	File List	3
3	Class Documentation	5
3.1	CpuLoad Class Reference	5
3.1.1	Detailed Description	5
3.1.2	Constructor & Destructor Documentation	6
3.1.2.1	CpuLoad()	6
3.1.3	Member Function Documentation	6
3.1.3.1	ComputeCPULoad()	6
3.1.3.2	getAverageCPULoad()	7
3.1.3.3	getCurrentCPULoad()	7
3.1.3.4	getMaxCPULoad()	8
3.1.4	Member Data Documentation	8
3.1.4.1	avg_load	8
3.1.4.2	current_load	8
3.1.4.3	last_sum_value	9
3.1.4.4	max_load	9
3.1.4.5	sample_cnt	9
3.1.4.6	sample_idx	9
3.1.4.7	sample_mem	9

3.2	dht22 Class Reference	10
3.2.1	Detailed Description	10
3.2.2	Constructor & Destructor Documentation	10
3.2.2.1	dht22()	10
3.2.3	Member Function Documentation	11
3.2.3.1	initializeCommunication()	11
3.2.3.2	read()	11
3.3	dio Class Reference	12
3.3.1	Detailed Description	13
3.3.2	Constructor & Destructor Documentation	13
3.3.2.1	dio()	14
3.3.3	Member Function Documentation	14
3.3.3.1	dio_changePortPinCnf()	14
3.3.3.2	dio_getPort()	15
3.3.3.3	dio_getPort_fast()	16
3.3.3.4	dio_invertPort()	16
3.3.3.5	dio_memorizePINaddress()	17
3.3.3.6	dio_setPort()	18
3.3.3.7	getDDRxAddress()	19
3.3.3.8	getPINxAddress()	20
3.3.3.9	getPORTxAddress()	20
3.3.3.10	ports_init()	21
3.3.4	Member Data Documentation	21
3.3.4.1	PINx_addr_mem	21
3.3.4.2	PINx_idx_mem	22
3.4	DisplayInterface Class Reference	22
3.4.1	Detailed Description	22
3.4.2	Constructor & Destructor Documentation	23
3.4.2.1	DisplayInterface()	23
3.4.3	Member Data Documentation	23

3.4.3.1	<code>p_lcd</code>	23
3.5	I2C Class Reference	23
3.5.1	Detailed Description	24
3.5.2	Constructor & Destructor Documentation	24
3.5.2.1	<code>I2C()</code>	24
3.5.3	Member Function Documentation	25
3.5.3.1	<code>initializeBus()</code>	25
3.5.3.2	<code>setBitRate()</code>	25
3.5.3.3	<code>setTxAddress()</code>	26
3.5.3.4	<code>writeByte()</code>	26
3.5.4	Member Data Documentation	27
3.5.4.1	<code>bitrate</code>	27
3.5.4.2	<code>tx_address</code>	27
3.6	keepAliveLed Class Reference	27
3.6.1	Detailed Description	28
3.6.2	Constructor & Destructor Documentation	28
3.6.2.1	<code>keepAliveLed()</code>	28
3.6.3	Member Function Documentation	28
3.6.3.1	<code>blinkLed_task()</code>	29
3.7	LCD Class Reference	29
3.7.1	Detailed Description	31
3.7.2	Constructor & Destructor Documentation	31
3.7.2.1	<code>LCD()</code>	31
3.7.3	Member Function Documentation	32
3.7.3.1	<code>command()</code>	32
3.7.3.2	<code>ConfigureBacklight()</code>	33
3.7.3.3	<code>ConfigureCursorBlink()</code>	34
3.7.3.4	<code>ConfigureCursorOnOff()</code>	35
3.7.3.5	<code>ConfigureDisplayOnOff()</code>	36
3.7.3.6	<code>ConfigureEntryModeDir()</code>	36

3.7.3.7	ConfigureEntryModeShift()	37
3.7.3.8	ConfigureFontType()	37
3.7.3.9	ConfigureLineNumber()	38
3.7.3.10	GetDDRAMAddress()	39
3.7.3.11	InitializeScreen()	39
3.7.3.12	SetDDRAMAddress()	40
3.7.3.13	write()	41
3.7.3.14	write4bits()	42
3.7.3.15	WriteInRam()	43
3.7.4	Member Data Documentation	44
3.7.4.1	backlight_enable	44
3.7.4.2	cnfCursorBlink	44
3.7.4.3	cnfCursorOnOff	44
3.7.4.4	cnfDisplayOnOff	45
3.7.4.5	cnfEntryModeDir	45
3.7.4.6	cnfEntryModeShift	45
3.7.4.7	cnfFontType	45
3.7.4.8	cnfLineNumber	45
3.7.4.9	ddram_addr	46
3.8	scheduler Class Reference	46
3.8.1	Detailed Description	47
3.8.2	Member Typedef Documentation	47
3.8.2.1	Task_t	47
3.8.3	Constructor & Destructor Documentation	48
3.8.3.1	scheduler()	48
3.8.4	Member Function Documentation	48
3.8.4.1	addPeriodicTask()	48
3.8.4.2	getPitNumber()	49
3.8.4.3	launchPeriodicTasks()	50
3.8.4.4	removePeriodicTask()	50

3.8.4.5	startScheduling()	51
3.8.5	Member Data Documentation	52
3.8.5.1	pit_number	52
3.8.5.2	Task_cnf_struct	52
3.9	T_ASW_cnf_struct Struct Reference	52
3.9.1	Detailed Description	53
3.9.2	Member Data Documentation	53
3.9.2.1	p_DisplayInterface	53
3.9.2.2	p_keepAliveLed	53
3.9.2.3	p_TempSensor	53
3.9.2.4	p_usartDebug	54
3.10	T_BSW_cnf_struct Struct Reference	54
3.10.1	Detailed Description	54
3.10.2	Member Data Documentation	55
3.10.2.1	p_cpuload	55
3.10.2.2	p_dht22	55
3.10.2.3	p_dio	55
3.10.2.4	p_i2c	55
3.10.2.5	p_lcd	55
3.10.2.6	p_timer	56
3.10.2.7	p_usart	56
3.11	T_LCD_conf_struct Struct Reference	56
3.11.1	Detailed Description	56
3.11.2	Member Data Documentation	56
3.11.2.1	backlight_en	57
3.11.2.2	cursor_en	57
3.11.2.3	cursorBlink_en	57
3.11.2.4	display_en	57
3.11.2.5	entryModeDir	57
3.11.2.6	entryModeShift	57

3.11.2.7	fontType_cnf	58
3.11.2.8	lineNumber_cnf	58
3.12	scheduler::Task_cnf_struct_t Struct Reference	58
3.12.1	Detailed Description	58
3.12.2	Member Data Documentation	59
3.12.2.1	firstTask	59
3.12.2.2	task_nb	59
3.13	scheduler::Task_t Struct Reference	59
3.13.1	Detailed Description	60
3.13.2	Member Data Documentation	60
3.13.2.1	nextTask	60
3.13.2.2	period	60
3.13.2.3	TaskPtr	60
3.14	TempSensor Class Reference	60
3.14.1	Detailed Description	61
3.14.2	Constructor & Destructor Documentation	61
3.14.2.1	TempSensor()	62
3.14.3	Member Function Documentation	62
3.14.3.1	getHumidity()	62
3.14.3.2	getHumPtr()	63
3.14.3.3	getTemp()	63
3.14.3.4	getTempPtr()	64
3.14.3.5	readTempSensor_task()	64
3.14.3.6	setValidity()	65
3.14.3.7	updateLastValidValues()	66
3.14.4	Member Data Documentation	66
3.14.4.1	read_humidity	66
3.14.4.2	read_temperature	67
3.14.4.3	valid_hum	67
3.14.4.4	valid_pit	67

3.14.4.5	valid_temp	67
3.14.4.6	validity	67
3.14.4.7	validity_last_read	68
3.15	timer Class Reference	68
3.15.1	Detailed Description	68
3.15.2	Constructor & Destructor Documentation	68
3.15.2.1	timer()	69
3.15.3	Member Function Documentation	69
3.15.3.1	configureTimer1()	69
3.15.3.2	getTimer1Value()	70
3.15.3.3	startTimer1()	70
3.15.3.4	stopTimer1()	71
3.15.4	Member Data Documentation	71
3.15.4.1	prescaler	71
3.16	usart Class Reference	71
3.16.1	Detailed Description	72
3.16.2	Constructor & Destructor Documentation	72
3.16.2.1	usart()	72
3.16.3	Member Function Documentation	73
3.16.3.1	setBaudRate()	73
3.16.3.2	usart_init()	73
3.16.3.3	usart_read()	74
3.16.3.4	usart_sendString()	74
3.16.3.5	usart_transmit()	75
3.16.4	Member Data Documentation	76
3.16.4.1	BaudRate	76
3.17	UsartDebug Class Reference	76
3.17.1	Detailed Description	77
3.17.2	Constructor & Destructor Documentation	77
3.17.2.1	UsartDebug()	77
3.17.3	Member Function Documentation	77
3.17.3.1	activateDebugMode()	78
3.17.3.2	DebugModeManagement()	78
3.17.3.3	DisplayCPULoad_task()	79
3.17.3.4	DisplaySensors_task()	80
3.17.3.5	isDebugModeActive()	81
3.17.3.6	sendBool()	81
3.17.3.7	sendData()	82
3.17.3.8	sendInteger()	83
3.17.4	Member Data Documentation	84
3.17.4.1	debug_state	84
3.17.4.2	debugModeActive_F	84

4 File Documentation	85
4.1 asw.cpp File Reference	85
4.1.1 Detailed Description	86
4.1.2 Function Documentation	86
4.1.2.1 asw_init()	86
4.1.3 Variable Documentation	86
4.1.3.1 ASW_cnf_struct	87
4.2 asw.h File Reference	87
4.2.1 Detailed Description	88
4.2.2 Function Documentation	88
4.2.2.1 asw_init()	88
4.2.3 Variable Documentation	89
4.2.3.1 ASW_cnf_struct	89
4.3 bsw.cpp File Reference	89
4.3.1 Detailed Description	89
4.3.2 Function Documentation	90
4.3.2.1 bsw_init()	90
4.3.3 Variable Documentation	90
4.3.3.1 BSW_cnf_struct	90
4.4 bsw.h File Reference	91
4.4.1 Detailed Description	92
4.4.2 Macro Definition Documentation	92
4.4.2.1 I2C_BITRATE	92
4.4.2.2 USART_BAUDRATE	92
4.4.3 Function Documentation	92
4.4.3.1 bsw_init()	93
4.4.4 Variable Documentation	93
4.4.4.1 BSW_cnf_struct	93
4.5 CpuLoad.cpp File Reference	94
4.5.1 Detailed Description	94

4.6	CpuLoad.h File Reference	94
4.6.1	Detailed Description	95
4.6.2	Macro Definition Documentation	96
4.6.2.1	NB_OF_SAMPLES	96
4.7	debug.cpp File Reference	96
4.7.1	Detailed Description	97
4.7.2	Variable Documentation	97
4.7.2.1	str_debug_main_menu	97
4.8	debug.h File Reference	97
4.8.1	Detailed Description	98
4.8.2	Macro Definition Documentation	99
4.8.2.1	PERIOD_MS_TASK_DISPLAY_CPU_LOAD	99
4.8.2.2	PERIOD_MS_TASK_DISPLAY_SENSORS	99
4.8.3	Enumeration Type Documentation	99
4.8.3.1	debug_state_t	99
4.9	dht22.cpp File Reference	99
4.9.1	Detailed Description	100
4.9.2	Macro Definition Documentation	100
4.9.2.1	MAX_WAIT_TIME_US	100
4.10	dht22.h File Reference	101
4.10.1	Detailed Description	102
4.10.2	Macro Definition Documentation	102
4.10.2.1	DHT22_PORT	102
4.11	dio.cpp File Reference	102
4.11.1	Detailed Description	103
4.12	dio.h File Reference	103
4.12.1	Detailed Description	104
4.12.2	Macro Definition Documentation	104
4.12.2.1	DECODE_PIN	104
4.12.2.2	DECODE_PORT	105

4.12.2.3	ENCODE_PORT	105
4.12.2.4	PORT_A	105
4.12.2.5	PORT_B	105
4.12.2.6	PORT_C	105
4.12.2.7	PORT_CNF_IN	106
4.12.2.8	PORT_CNF_OUT	106
4.12.2.9	PORT_D	106
4.13	dio_port_cnf.h File Reference	106
4.13.1	Detailed Description	107
4.13.2	Macro Definition Documentation	107
4.13.2.1	PORTB_CNF_DDRB	107
4.13.2.2	PORTB_CNF_PORTB	108
4.14	dio_reg_atm2560.h File Reference	108
4.14.1	Macro Definition Documentation	109
4.14.1.1	DDRA_PTR	109
4.14.1.2	DDRB_PTR	109
4.14.1.3	DDRC_PTR	109
4.14.1.4	DDRD_PTR	109
4.14.1.5	PINA_PTR	110
4.14.1.6	PINB_PTR	110
4.14.1.7	PINC_PTR	110
4.14.1.8	PIND_PTR	110
4.14.1.9	PORTA_PTR	110
4.14.1.10	PORTB_PTR	111
4.14.1.11	PORTC_PTR	111
4.14.1.12	PORTD_PTR	111
4.15	DisplayInterface.cpp File Reference	111
4.15.1	Detailed Description	112
4.16	DisplayInterface.h File Reference	112
4.16.1	Detailed Description	113

4.16.2	Variable Documentation	113
4.16.2.1	LCD_init_cnf	114
4.17	I2C.cpp File Reference	114
4.17.1	Detailed Description	114
4.18	I2C.h File Reference	115
4.18.1	Detailed Description	116
4.18.2	Macro Definition Documentation	116
4.18.2.1	DATA_ACK	116
4.18.2.2	SLA_ACK	116
4.18.2.3	START	116
4.19	keepAliveLed.cpp File Reference	117
4.19.1	Detailed Description	117
4.20	keepAliveLed.h File Reference	117
4.20.1	Detailed Description	119
4.20.2	Macro Definition Documentation	119
4.20.2.1	LED_PORT	119
4.20.2.2	PERIOD_MS_TASK_LED	119
4.21	LCD.cpp File Reference	119
4.21.1	Detailed Description	120
4.22	LCD.h File Reference	120
4.22.1	Detailed Description	122
4.22.2	Macro Definition Documentation	122
4.22.2.1	BACKLIGHT_PIN	122
4.22.2.2	EN_PIN	122
4.22.2.3	I2C_ADDR	123
4.22.2.4	LCD_CNF_BACKLIGHT_OFF	123
4.22.2.5	LCD_CNF_BACKLIGHT_ON	123
4.22.2.6	LCD_CNF_CURSOR_BLINK_OFF	123
4.22.2.7	LCD_CNF_CURSOR_BLINK_ON	123
4.22.2.8	LCD_CNF_CURSOR_OFF	124

4.22.2.9 LCD_CNF_CURSOR_ON	124
4.22.2.10 LCD_CNF_DISPLAY_OFF	124
4.22.2.11 LCD_CNF_DISPLAY_ON	124
4.22.2.12 LCD_CNF_ENTRY_MODE_DIRECTION_LEFT	124
4.22.2.13 LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT	125
4.22.2.14 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF	125
4.22.2.15 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON	125
4.22.2.16 LCD_CNF_FONT_5_11	125
4.22.2.17 LCD_CNF_FONT_5_8	125
4.22.2.18 LCD_CNF_ONE_LINE	126
4.22.2.19 LCD_CNF_SHIFT_ID	126
4.22.2.20 LCD_CNF_SHIFT_SH	126
4.22.2.21 LCD_CNF_TWO_LINE	126
4.22.2.22 LCD_DISPLAY_CTRL_FIELD_B	126
4.22.2.23 LCD_DISPLAY_CTRL_FIELD_C	127
4.22.2.24 LCD_DISPLAY_CTRL_FIELD_D	127
4.22.2.25 LCD_FCT_SET_FIELD_DL	127
4.22.2.26 LCD_FCT_SET_FIELD_F	127
4.22.2.27 LCD_FCT_SET_FIELD_N	127
4.22.2.28 LCD_INST_CLR_DISPLAY_BIT	128
4.22.2.29 LCD_INST_DISPLAY_CTRL	128
4.22.2.30 LCD_INST_ENTRY_MODE_SET	128
4.22.2.31 LCD_INST_FUNCTION_SET	128
4.22.2.32 LCD_INST_SET_DDRAM_ADDR	128
4.22.2.33 LCD_RAM_1_LINE_MAX	129
4.22.2.34 LCD_RAM_1_LINE_MIN	129
4.22.2.35 LCD_RAM_2_LINES_MAX_1	129
4.22.2.36 LCD_RAM_2_LINES_MAX_2	129
4.22.2.37 LCD_RAM_2_LINES_MIN_1	129
4.22.2.38 LCD_RAM_2_LINES_MIN_2	130

4.22.2.39 LCD_WAIT_CLR_RETURN	130
4.22.2.40 LCD_WAIT_OTHER_MODES	130
4.22.2.41 RS_PIN	130
4.22.2.42 RW_PIN	130
4.22.3 Enumeration Type Documentation	130
4.22.3.1 T_LCD_command	130
4.22.3.2 T_LCD_config_mode	131
4.22.3.3 T_LCD_ram_area	131
4.23 main.cpp File Reference	131
4.23.1 Detailed Description	132
4.23.2 Function Documentation	132
4.23.2.1 ISR() [1/2]	133
4.23.2.2 ISR() [2/2]	133
4.23.2.3 main()	134
4.24 main.h File Reference	134
4.24.1 Detailed Description	135
4.25 operators.cpp File Reference	135
4.25.1 Detailed Description	136
4.25.2 Function Documentation	136
4.25.2.1 operator delete()	136
4.25.2.2 operator new()	137
4.26 operators.h File Reference	137
4.26.1 Detailed Description	138
4.26.2 Function Documentation	138
4.26.2.1 operator delete()	139
4.26.2.2 operator new()	139
4.27 scheduler.cpp File Reference	139
4.27.1 Detailed Description	140
4.27.2 Variable Documentation	140
4.27.2.1 p_scheduler	140

4.28 scheduler.h File Reference	141
4.28.1 Detailed Description	142
4.28.2 Macro Definition Documentation	142
4.28.2.1 PRESCALER_PERIODIC_TIMER	142
4.28.2.2 SW_PERIOD_MS	142
4.28.2.3 TIMER_CTC_VALUE	142
4.28.3 Typedef Documentation	142
4.28.3.1 TaskPtr_t	143
4.28.4 Variable Documentation	143
4.28.4.1 p_scheduler	143
4.29 TempSensor.cpp File Reference	143
4.29.1 Detailed Description	144
4.29.2 Macro Definition Documentation	144
4.29.2.1 PIT_BEFORE_INVALID	144
4.30 TempSensor.h File Reference	144
4.30.1 Detailed Description	145
4.30.2 Macro Definition Documentation	145
4.30.2.1 PERIOD_MS_TASK_TEMP_SENSOR	146
4.31 timer.cpp File Reference	146
4.31.1 Detailed Description	146
4.32 timer.h File Reference	147
4.32.1 Detailed Description	147
4.33 usart.cpp File Reference	148
4.33.1 Detailed Description	148
4.34 usart.h File Reference	148
4.34.1 Detailed Description	149

Chapter 1

Class Index

1.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

CpuLoad	Class defining CPU load libraries	5
dht22	DHT 22 driver class	10
dio	DIO class	12
DisplayInterface	Display interface services class	22
I2C	Two-wire serial interface (I2C) class definition	23
keepAliveLed	Class for keep-alive LED blinking	27
LCD	Class for LCD S2004A display driver	29
scheduler	Scheduler class	46
T_ASW_cnf_struct	ASW configuration structure	52
T_BSW_cnf_struct	BSW configuration structure	54
T_LCD_cnf_struct	56
scheduler::Task_cnf_struct_t	Task configuration structure	58
scheduler::Task_t	Type defining a task structure	59
TempSensor	Class for temperature sensor	60
timer	Class defining a timer	68
usart	USART serial bus class	71
UsartDebug	Class used for debugging on usart link	76

Chapter 2

File Index

2.1 File List

Here is a list of all files with brief descriptions:

asw.cpp	ASW main file	85
asw.h	ASW main header file	87
bsw.cpp	BSW main file	89
bsw.h	BSW main header file	91
CpuLoad.cpp	Defines functions of class CpuLoad	94
CpuLoad.h	CpuLoad class header file	94
debug.cpp	This file defines classes for log and debug data transmission on USART link	96
debug.h	Header file for debug and logging functions	97
dht22.cpp	This file defines classes for DHT22 driver	99
dht22.h	DHT22 driver header file	101
dio.cpp	DIO library	102
dio.h	DIO library header file	103
dio_port_cnf.h	Digital ports configuration file	106
dio_reg_atm2560.h	108
DisplayInterface.cpp	Source code file for display services	111
DisplayInterface.h	DisplayInterface class header file	112
I2C.cpp	Two-wire interface (I2C) source file	114
I2C.h	I2C class header file	115

keepAliveLed.cpp	
Definition of function for class keepAliveLed	117
keepAliveLed.h	
Class keepAliveLed header file	117
LCD.cpp	
LCD class source file	119
LCD.h	
LCD class header file	120
main.cpp	
Background task file	131
main.h	
Background task header file	134
operators.cpp	
C++ operators definitions	135
operators.h	
C++ operators definitions header file	137
scheduler.cpp	
Defines scheduler class	139
scheduler.h	
Scheduler class header file	141
TempSensor.cpp	
Defines function of class TempSensor	143
TempSensor.h	
Class TempSensor header file	144
timer.cpp	
Defines function for class timer	146
timer.h	
Timer class header file	147
usart.cpp	
BSW library for USART	148
usart.h	
Header file for USART library	148

Chapter 3

Class Documentation

3.1 CpuLoad Class Reference

Class defining CPU load libraries.

```
#include <CpuLoad.h>
```

Public Member Functions

- [CpuLoad \(\)](#)
CpuLoad class constructor.
- void [ComputeCPULoad \(\)](#)
Computes current CPU load.
- uint8_t [getCurrentCPULoad \(\)](#)
Get current CPU load value.
- uint8_t [getAverageCPULoad \(\)](#)
Get average CPU load value.
- uint8_t [getMaxCPULoad \(\)](#)
Get maximum CPU load value.

Private Attributes

- uint8_t [current_load](#)
- uint8_t [avg_load](#)
- uint8_t [max_load](#)
- uint8_t [sample_cnt](#)
- uint8_t [sample_mem](#) [NB_OF_SAMPLES]
- uint8_t [sample_idx](#)
- uint16_t [last_sum_value](#)

3.1.1 Detailed Description

Class defining CPU load libraries.

This class defines tools to compute and monitor CPU load.

Definition at line 19 of file CpuLoad.h.

3.1.2 Constructor & Destructor Documentation

3.1.2.1 CpuLoad()

```
CpuLoad::CpuLoad ( )
```

[CpuLoad](#) class constructor.

This function initializes class [CpuLoad](#)

Returns

Nothing

Definition at line 13 of file CpuLoad.cpp.

3.1.3 Member Function Documentation

3.1.3.1 ComputeCPULoad()

```
void CpuLoad::ComputeCPULoad ( )
```

Computes current CPU load.

This function computes the current CPU load using value of the timer used by the scheduler at the end of the periodic cycle. This value is divided by the PIT period to obtain CPU load;

Returns


Nothing

Definition at line 27 of file CpuLoad.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.1.3.2 getAverageCPULoad()

```
uint8_t CpuLoad::getAverageCPULoad ( ) [inline]
```

Get average CPU load value.

This function returns the average CPU load value

Returns

Average CPU load value

Definition at line 56 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.3.3 getCurrrrentCPULoad()

```
uint8_t CpuLoad::getCurrrrentCPULoad ( ) [inline]
```

Get current CPU load value.

This function returns the current CPU load value

Returns

Current CPU load value

Definition at line 45 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.3.4 getMaxCPULoad()

```
uint8_t CpuLoad::getMaxCPULoad ( ) [inline]
```

Get maximum CPU load value.

This function returns the maximum CPU load value

Returns

Maximum CPU load value

Definition at line 67 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.4 Member Data Documentation

3.1.4.1 avg_load

```
uint8_t CpuLoad::avg_load [private]
```

Average CPU load based on the last 50 cycles

Definition at line 74 of file CpuLoad.h.

3.1.4.2 current_load

```
uint8_t CpuLoad::current_load [private]
```

Current CPU load (load of last cycle)

Definition at line 73 of file CpuLoad.h.

3.1.4.3 last_sum_value

```
uint16_t CpuLoad::last_sum_value [private]
```

Value of the last computed sum (it will reduce the number of samples to sum and speed up execution time)

Definition at line 79 of file CpuLoad.h.

3.1.4.4 max_load

```
uint8_t CpuLoad::max_load [private]
```

Maximum CPU load since power on

Definition at line 75 of file CpuLoad.h.

3.1.4.5 sample_cnt

```
uint8_t CpuLoad::sample_cnt [private]
```

Number of samples used to compute average load

Definition at line 76 of file CpuLoad.h.

3.1.4.6 sample_idx

```
uint8_t CpuLoad::sample_idx [private]
```

Current measurement index (used to memorize the current measure at the correct location in table)

Definition at line 78 of file CpuLoad.h.

3.1.4.7 sample_mem

```
uint8_t CpuLoad::sample_mem[NB_OF_SAMPLES] [private]
```

Memorization of the last NB_OF_SAMPLES measures

Definition at line 77 of file CpuLoad.h.

The documentation for this class was generated from the following files:

- [CpuLoad.h](#)
- [CpuLoad.cpp](#)

3.2 dht22 Class Reference

DHT 22 driver class.

```
#include <dht22.h>
```

Public Member Functions

- [dht22](#) ()
dht22 class constructor
- bool [read](#) (uint16_t *raw_humidity, uint16_t *raw_temperature)
Reads the data from DHT22.

Private Member Functions

- void [initializeCommunication](#) ()
Initializes the communication.

3.2.1 Detailed Description

DHT 22 driver class.

This class defines all useful functions for DHT22 temperature and humidity sensor

Definition at line 22 of file dht22.h.

3.2.2 Constructor & Destructor Documentation

3.2.2.1 dht22()

```
dht22::dht22 ( )
```

[dht22](#) class constructor


Initializes the class [dht22](#)

Returns

Nothing

Definition at line 22 of file dht22.cpp.

Here is the call graph for this function:



3.2.3 Member Function Documentation

3.2.3.1 initializeCommunication()

```
void dht22::initializeCommunication ( ) [private]
```

Initializes the communication.


This function initializes the communication with DHT22 using 1-wire protocol

Returns


Nothing

Definition at line 198 of file dht22.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.2.3.2 read()

```
bool dht22::read (
    uint16_t * raw_humidity,
    uint16_t * raw_temperature )
```

Reads the data from DHT22.

This function communicates with DHT22 using 1-wire protocol to read raw values of temperature and humidity. A checksum check is done when communication is finished to validate the received data

Parameters


out	<i>raw_humidity</i>	Raw humidity value received from sensor
out	<i>raw_temperature</i>	Raw temperature value received from sensor

Returns


Validity of the read value

Definition at line 27 of file dht22.cpp.

Here is the call graph for this function:

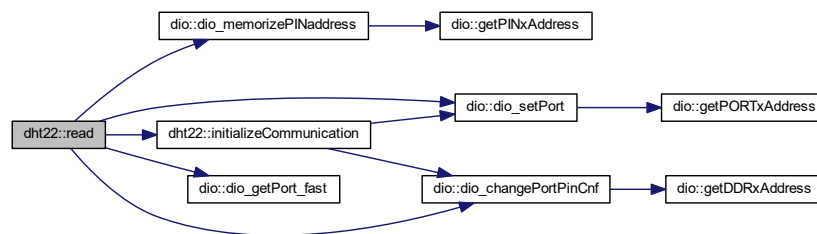

Here is the caller graph for this function:



The documentation for this class was generated from the following files:

- [dht22.h](#)
- [dht22.cpp](#)

3.3 dio Class Reference

DIO class.

```
#include <dio.h>
```

Public Member Functions

- [dio](#) ()
dio class constructor
- void [dio_setPort](#) (uint8_t portcode, bool state)
Port setting function.
- void [dio_invertPort](#) (uint8_t portcode)
Inverts the state of output port.
- bool [dio_getPort](#) (uint8_t portcode)
Gets the logical state of selected pin.
- bool [dio_getPort_fast](#) (void)
Gets the logical state of the memorized pin.
- void [dio_changePortPinCnf](#) (uint8_t portcode, uint8_t cnf)
Changes the IO configuration of the selected pin.
- void [dio_memorizePINaddress](#) (uint8_t portcode)
Memorizes PINx register address and pin index.

Private Member Functions

- void [ports_init](#) ()
Digital ports hardware initialization function.
- uint8_t * [getPORTxAddress](#) (uint8_t portcode)
Gets the physical address of the requested register PORTx.
- uint8_t * [getPINxAddress](#) (uint8_t portcode)
Gets the physical address of the requested register PINx.
- uint8_t * [getDDRxAddress](#) (uint8_t portcode)
Gets the physical address of the requested register DDRx.

Private Attributes

- uint8_t * [PINx_addr_mem](#)
- uint8_t * [PINx_idx_mem](#)

3.3.1 Detailed Description

DIO class.

This class defines all useful functions for digital input/output ports

Definition at line 31 of file dio.h.

3.3.2 Constructor & Destructor Documentation

3.3.2.1 dio()

```
dio::dio ( )
```

dio class constructor


Initializes class dio and calls DIO hardware initialization function

Returns

Nothing

Definition at line 112 of file dio.cpp.

Here is the call graph for this function:

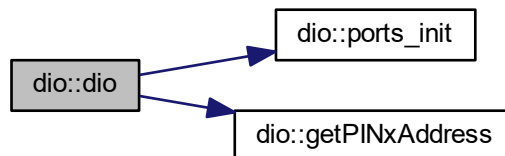

3.3.3 Member Function Documentation

3.3.3.1 dio_changePortPinCnf()

```
void dio::dio_changePortPinCnf (
    uint8_t portcode,
    uint8_t cnf )
```

Changes the IO configuration of the selected pin.

This function configures the selected pin as input or output according to parameter *cnf*. The corresponding port and pin index is extracted from parameter *portcode*.

Parameters

in	<i>portcode</i>	Encoded pin and register index
in	<i>cnf</i>	Requested configuration for the selected pin PORT_CNF_OUT (1) : pin configured as output PORT_CNF_IN (0) : pin configured as input

Returns

Nothing

Definition at line 149 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.3.3.2 dio_getPort()**

```
bool dio::dio_getPort (
    uint8_t portcode )
```

Gets the logical state of selected pin.

This function gets the logical value of the selected pin. The corresponding port and pin index is extracted from parameter `portcode`.

Parameters

in	<i>portcode</i>	Encoded pin and register index
----	-----------------	--------------------------------

Returns

Logical state of selected pin

Definition at line 139 of file dio.cpp.

Here is the call graph for this function:



3.3.3.3 dio_getPort_fast()

```
bool dio::dio_getPort_fast (
    void )
```

Gets the logical state of the memorized pin.


This function gets the logical value of the memorized pin. The corresponding port and pin index are stored in class members `PINx_addr_mem` and `PINx_idx_mem`. This mechanism is used to speed up reading time as this function no longer needs to extract register address and pin index from portcode.

Returns

Logical state of selected pin

Definition at line 171 of file `dio.cpp`.

Here is the caller graph for this function:



3.3.3.4 dio_invertPort()

```
void dio::dio_invertPort (
    uint8_t portcode )
```

Inverts the state of output port.

This function inverts the state of the chosen pin. The corresponding port and pin index is extracted from parameter `portcode`.

Parameters

in	<i>portcode</i>	Encoded pin and register index
----	-----------------	--------------------------------

Returns


Nothing

Definition at line 131 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.3.3.5 dio_memorizePINaddress()

```
void dio::dio_memorizePINaddress (
    uint8_t portcode )
```

Memorizes PINx register address and pin index.

This function is used to speed up reading of register PINx. Register address and pin index are decoded from portcode parameter and stored for later use by function `dio_getPort_fast`.

Parameters

in	<i>portcode</i>	Encoded pin and register index
----	-----------------	--------------------------------

Returns


Nothing

Definition at line 165 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.3.3.6 dio_setPort()**

```
void dio::dio_setPort (
    uint8_t portcode,
    bool state )
```

Port setting function.

This function sets the requested digital output to the requested state. The corresponding port and pin index is extracted from parameter portcode.

Parameters


in	<i>portcode</i>	Encoded pin and register index
in	<i>state</i>	Requested state to set pin

Returns


Nothing

Definition at line 121 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.3.3.7 getDDRxAAddress()

```
uint8_t * dio::getDDRxAAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register DDRx.

This function retrieves the address of the register DDRx where x is encoded into the parameter portcode.

Parameters


in	<i>portcode</i>	Encoded port code
----	-----------------	-------------------

Returns

Pointer to the DDRx register

Definition at line 83 of file dio.cpp.

Here is the caller graph for this function:



3.3.3.8 getPINxAddress()

```
uint8_t * dio::getPINxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register PINx.

This function retrieves the address of the register PINx where x is encoded into the parameter portcode.

Parameters

in	<i>portcode</i>	Encoded port code
----	-----------------	-------------------

Returns

Pointer to the PINx register

Definition at line 54 of file dio.cpp.

Here is the caller graph for this function:



3.3.3.9 getPORTxAddress()

```
uint8_t * dio::getPORTxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register PORTx.

This function retrieves the address of the register PORTx where x is encoded into the parameter portcode.

Parameters

in	<i>portcode</i>	Encoded port code
----	-----------------	-------------------

Returns

Pointer to the PORTx register

Definition at line 25 of file dio.cpp.

Here is the caller graph for this function:



3.3.3.10 ports_init()

```
void dio::ports_init ( ) [private]
```

Digital ports hardware initialization function.

This function initializes digital ports as input or output and sets their initial values

Returns

Nothing

Definition at line 16 of file dio.cpp.

Here is the caller graph for this function:



3.3.4 Member Data Documentation

3.3.4.1 PINx_addr_mem

```
uint8_t* dio::PINx_addr_mem [private]
```

Memorizes physical address of register PINx in order to speed up register reading time in function dio_getPort_fast

Definition at line 146 of file dio.h.

3.3.4.2 PINx_idx_mem

```
uint8_t dio::PINx_idx_mem [private]
```

Memorizes pin index of register PINx in order to speed up register reading time in function `dio_getPort_fast`

Definition at line 147 of file `dio.h`.

The documentation for this class was generated from the following files:


- [dio.h](#)
- [dio.cpp](#)

3.4 DisplayInterface Class Reference

Display interface services class.

```
#include <DisplayInterface.h>
```

Collaboration diagram for DisplayInterface:



Public Member Functions

- [DisplayInterface](#) ()
Class constructor.

Private Attributes

- [LCD](#) * `p_lcd`

3.4.1 Detailed Description

Display interface services class.

This class defines the services used for interfacing display management services and [LCD](#) screen driver

Definition at line 30 of file `DisplayInterface.h`.

3.4.2 Constructor & Destructor Documentation

3.4.2.1 DisplayInterface()


```
DisplayInterface::DisplayInterface ( )
```

Class constructor.

This function initializes all class variables and instantiates the [LCD](#) driver according to the defined configuration.

Definition at line 15 of file `DisplayInterface.cpp`.

Here is the call graph for this function:



3.4.3 Member Data Documentation

3.4.3.1 p_lcd

```
LCD* DisplayInterface::p_lcd [private]
```

Pointer to the attached [LCD](#) driver object

Definition at line 42 of file `DisplayInterface.h`.

The documentation for this class was generated from the following files:

- [DisplayInterface.h](#)
- [DisplayInterface.cpp](#)

3.5 I2C Class Reference

Two-wire serial interface ([I2C](#)) class definition.

```
#include <I2C.h>
```

Public Member Functions

- [I2C](#) (uint32_t l_bitrate)
I2C class constructor.
- bool [writeByte](#) (uint8_t *data)
Byte sending function.
- void [setTxAddress](#) (uint8_t address)
Setting function for Tx I2C address.
- void [setBitRate](#) (uint32_t l_bitrate)
Variable bitrate setting function.

Private Member Functions

- void [initializeBus](#) ()
I2C bus initialization.

Private Attributes

- uint8_t [tx_address](#)
- uint32_t [bitrate](#)

3.5.1 Detailed Description

Two-wire serial interface ([I2C](#)) class definition.

This class manages [I2C](#) driver.

Definition at line 23 of file I2C.h.

3.5.2 Constructor & Destructor Documentation

3.5.2.1 I2C()

```
I2C::I2C (
    uint32_t l_bitrate )
```

[I2C](#) class constructor.

This function initializes the [I2C](#) class and calls bus initialization function

Parameters

in	l_bitrate	Requested bitrate for I2C bus (in Hz)
----	---------------------------	---

Returns

Nothing

Definition at line 15 of file I2C.cpp.

Here is the call graph for this function:



3.5.3 Member Function Documentation

3.5.3.1 initializeBus()

```
void I2C::initializeBus ( ) [private]
```

I2C bus initialization.

This function initializes the I2C bus, it resets the bus and configure the bitrate as requested. Bitrate is configured according to formula in the ATMEGA2560 datasheet : $SCL\ freq = F_CPU / (16 + 2 * TWBR * (4^{TWPS}))$. Prescaler value is fixed to 1 ($TWPS1 = 0$ and $TWPS0 = 0$), then only $TWBR$ value shall be computed.

Returns

Nothing

Definition at line 76 of file I2C.cpp.

Here is the caller graph for this function:



3.5.3.2 setBitRate()

```
void I2C::setBitRate (
    uint32_t l_bitrate )
```

Variable bitrate setting function.

This function sets the class variable bitrate as requested in parameter.

Parameters

in	<i>l_bitrate</i>	Requested bitrate (in Hz)
----	------------------	---------------------------

Returns

Nothing

Definition at line 71 of file I2C.cpp.

3.5.3.3 setTxAddress()

```
void I2C::setTxAddress (
    uint8_t address )
```

Setting function for Tx [I2C](#) address.

This function sets the given Tx [I2C](#) address in the internal class variable.

Parameters


in	<i>address</i>	Requested Tx address
----	----------------	----------------------

Returns

Nothing

Definition at line 66 of file I2C.cpp.

Here is the caller graph for this function:

**3.5.3.4 writeByte()**

```
bool I2C::writeByte (
    uint8_t * data )
```

Byte sending function.

This function sends one byte on [I2C](#) bus

Parameters


in	<i>data</i>	Pointer to the data to send
----	-------------	-----------------------------

Returns

True if transmission is completed, False if an error has occurred

Definition at line 23 of file I2C.cpp.

Here is the caller graph for this function:

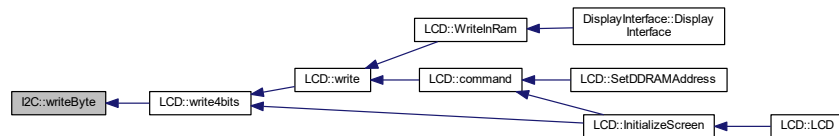

3.5.4 Member Data Documentation

3.5.4.1 bitrate

```
uint32_t I2C::bitrate [private]
```

Definition at line 63 of file I2C.h.

3.5.4.2 tx_address

```
uint8_t I2C::tx_address [private]
```

Definition at line 62 of file I2C.h.

The documentation for this class was generated from the following files:

- [I2C.h](#)
- [I2C.cpp](#)

3.6 keepAliveLed Class Reference

Class for keep-alive LED blinking.

```
#include <keepAliveLed.h>
```

Public Member Functions

- [keepAliveLed \(\)](#)
Class constructor.

Static Public Member Functions

- static void [blinkLed_task \(\)](#)
Task for LED blinking.

3.6.1 Detailed Description

Class for keep-alive LED blinking.

This class defines all functions to make keep-alive LED blink

Definition at line 22 of file keepAliveLed.h.

3.6.2 Constructor & Destructor Documentation

3.6.2.1 keepAliveLed()

```
keepAliveLed::keepAliveLed ( )
```

Class constructor.


This function initializes the class keppAliveLed

Returns

Nothing

Definition at line 15 of file keepAliveLed.cpp.

Here is the call graph for this function:



3.6.3 Member Function Documentation

3.6.3.1 blinkLed_task()

```
void keepAliveLed::blinkLed_task ( ) [static]
```

Task for LED blinking.


This function is inserted into the scheduler. It changes the state of the LED output to make it blink

Returns

Nothing

Definition at line 21 of file keepAliveLed.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



The documentation for this class was generated from the following files:

- [keepAliveLed.h](#)
- [keepAliveLed.cpp](#)

3.7 LCD Class Reference

Class for [LCD](#) S2004A display driver.

```
#include <LCD.h>
```

Public Member Functions

- [LCD](#) (const [T_LCD_conf_struct](#) *init_conf)
LCD class constructor.
- void [command](#) ([T_LCD_command](#) cmd)
LCD command management function.
- void [ConfigureBacklight](#) (bool enable)
Backlight configuration function.
- void [ConfigureLineNumber](#) (bool param)
Line type configuration function.
- void [ConfigureFontType](#) (bool param)
Font configuration function.
- void [ConfigureDisplayOnOff](#) (bool param)
Display configuration function.
- void [ConfigureCursorOnOff](#) (bool param)
Cursor configuration function.
- void [ConfigureCursorBlink](#) (bool param)
Cursor blinking configuration function.
- void [ConfigureEntryModeDir](#) (bool param)
Entry mode direction configuration function.
- void [ConfigureEntryModeShift](#) (bool param)
Entry mode shift configuration function.
- void [SetDDRAMAddress](#) (uint8_t addr)
DDRAM address setting function.
- uint8_t [GetDDRAMAddress](#) ()
DDRAM address get function.
- void [WriteInRam](#) (uint8_t a_char, [T_LCD_ram_area](#) area)
Screen RAM write function.

Private Member Functions

- void [write4bits](#) (uint8_t data)
I2C write function for 4-bits mode.
- void [write](#) (uint8_t data, [T_LCD_config_mode](#) mode)
I2C write function.
- void [InitializeScreen](#) ()
Screen configuration function.

Private Attributes

- bool [backlight_enable](#)
- bool [cnfLineNumber](#)
- bool [cnfFontType](#)
- bool [cnfDisplayOnOff](#)
- bool [cnfCursorOnOff](#)
- bool [cnfCursorBlink](#)
- bool [cnfEntryModeDir](#)
- bool [cnfEntryModeShift](#)
- uint8_t [ddram_addr](#)

3.7.1 Detailed Description

Class for [LCD](#) S2004A display driver.

This class handles functions managing [LCD](#) display S2004a on [I2C](#) bus

Definition at line 141 of file LCD.h.

3.7.2 Constructor & Destructor Documentation

3.7.2.1 LCD()

```
LCD::LCD (
    const T\_LCD\_conf\_struct * init_conf )
```

[LCD](#) class constructor.

This constructor function initializes the class [LCD](#) and calls screen configuration function.

Parameters


in	<i>init_conf</i>	Initial configuration structure
----	------------------	---------------------------------

Returns

Nothing

Definition at line 14 of file LCD.cpp.

Here is the call graph for this function:

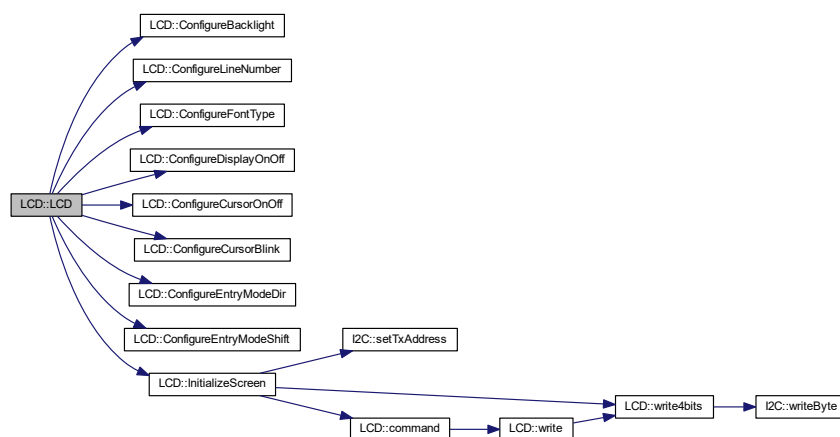

3.7.3 Member Function Documentation

3.7.3.1 `command()`

```
void LCD::command (
    T_LCD_command cmd )
```

LCD command management function.

This function sends the requested command to the LCD screen. It builds the 8-bit command word and sends it on I2C bus.

Parameters

in	<i>cmd</i>	Requested command
----	------------	-------------------

Returns


Nothing

Definition at line 114 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.7.3.2 ConfigureBacklight()

```
void LCD::ConfigureBacklight (
    bool enable ) [inline]
```

Backlight configuration function.

This function configures the screen backlight (enable or disable) according to the parameter *enable*.

Parameters

in	<i>enable</i>	True if backlight shall be on, False otherwise
----	---------------	--

Returns

Nothing

Definition at line 171 of file LCD.h.

Here is the caller graph for this function:

**3.7.3.3 ConfigureCursorBlink()**

```
void LCD::ConfigureCursorBlink (  
    bool param ) [inline]
```

Cursor blinking configuration function.

This function configures the cursor blinking (on or off mode) according to the parameter.

Parameters

in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 231 of file LCD.h.

Here is the caller graph for this function:

**3.7.3.4 ConfigureCursorOnOff()**

```
void LCD::ConfigureCursorOnOff (  
    bool param ) [inline]
```

Cursor configuration function.

This function configures the cursor (on or off mode) according to the parameter.

Parameters


in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 219 of file LCD.h.

Here is the caller graph for this function:



3.7.3.5 ConfigureDisplayOnOff()

```
void LCD::ConfigureDisplayOnOff (
    bool param ) [inline]
```

Display configuration function.

This function configures the display (on or off mode) according to the parameter.

Parameters


in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 207 of file LCD.h.

Here is the caller graph for this function:



3.7.3.6 ConfigureEntryModeDir()

```
void LCD::ConfigureEntryModeDir (
    bool param ) [inline]
```

Entry mode direction configuration function.

This function configures the direction of entry mode (right or left) according to the parameter.

Parameters

in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 243 of file LCD.h.

Here is the caller graph for this function:



3.7.3.7 ConfigureEntryModeShift()

```
void LCD::ConfigureEntryModeShift (
    bool param ) [inline]
```

Entry mode shift configuration function.

This function configures the display shift of entry mode (enable or disable) according to the parameter.

Parameters


in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 255 of file LCD.h.

Here is the caller graph for this function:



3.7.3.8 ConfigureFontType()

```
void LCD::ConfigureFontType (
    bool param ) [inline]
```

Font configuration function.

This function configures the font type of the screen (5*8 or 5*11 dots) according to the parameter.

Parameters


in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 195 of file LCD.h.

Here is the caller graph for this function:

**3.7.3.9 ConfigureLineNumber()**

```
void LCD::ConfigureLineNumber (
    bool param ) [inline]
```

Line type configuration function.

This function configures the line number configuration of the screen (1 or 2 lines mode) according to the parameter.

Parameters


in	<i>param</i>	Configuration value
----	--------------	---------------------

Returns

Nothing

Definition at line 183 of file LCD.h.

Here is the caller graph for this function:

**3.7.3.10 GetDDRAMAddress()**

```
uint8_t LCD::GetDDRAMAddress ( ) [inline]
```

DDRAM address get function.

This function return the value of the current DDRAM address stored in internal variable `ddram_addr`.

Returns

Current DDRAM address

Definition at line 275 of file LCD.h.

3.7.3.11 InitializeScreen()

```
void LCD::InitializeScreen ( ) [private]
```

Screen configuration function.


This function configures the [LCD](#) screen. It's must be called during initialization phase, or the screen won't be usable. The configuration process is described in [LCD](#) datasheet J2004A-GFDN-DYNC

Returns

Nothing

Definition at line 62 of file LCD.cpp.

Here is the call graph for this function:

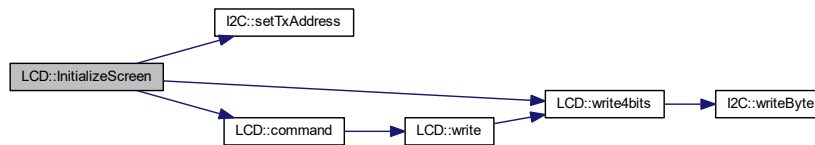

Here is the caller graph for this function:

**3.7.3.12 SetDDRAMAddress()**

```
void LCD::SetDDRAMAddress (
    uint8_t addr )
```

DDRAM address setting function.

This function updates the DDRAM address according to the given parameter. The parameter is checked against limits to be sure the address stays always coherent. It also calls the command function to update screen accordingly.

Parameters

in	<i>addr</i>	New DDRAM address
----	-------------	-------------------

Returns

Nothing

Definition at line 157 of file LCD.cpp.

Here is the call graph for this function:



3.7.3.13 write()

```
void LCD::write (
    uint8_t data,
    T_LCD_config_mode mode ) [private]
```

I2C write function.

This function writes the requested data on I2C bus. It's assumed we only perform write operation so the R/W bit is forced LOW. It's also assumed we work in 4-bit mode, then two calls of write4bits are performed, first with bits 4-7 of data, second with bits 0-3.

Parameters


in	<i>data</i>	8-bit data for D0-7 pins of screen
in	<i>mode</i>	Requested mode for LCD communication

Returns


Nothing

Definition at line 51 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

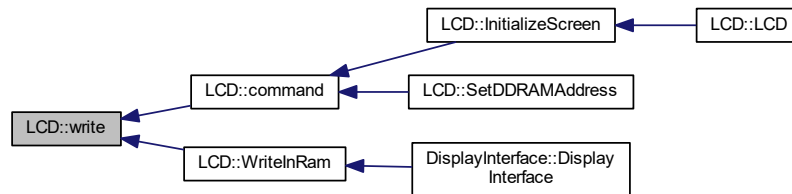

3.7.3.14 write4bits()

```
void LCD::write4bits (
    uint8_t data ) [private]
```

[I2C](#) write function for 4-bits mode.

This function sends the requested 8-bits data on the [I2C](#) bus. The backlight pin is also set/clear according to the configuration. The function sends the data a first time with EN pin set, then a second time with EN bit clear.

Parameters

in	<i>data</i>	8-bit data to send
----	-------------	--------------------

Returns


Nothing

Definition at line 34 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

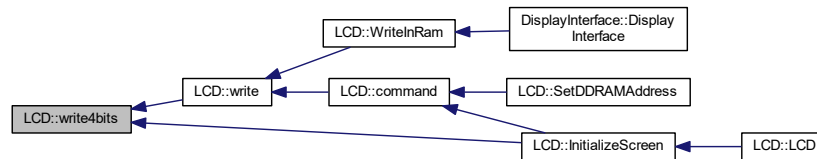

3.7.3.15 WriteInRam()

```
void LCD::WriteInRam (
    uint8_t a_char,
    T_LCD_ram_area area )
```

Screen RAM write function.

This function writes in the memorized RAM address the character given as parameter. After a write the screen automatically increment/decrement the RAM address, so we do the same in the function to stay coherent. Currently only DDRAM write is implemented.

Parameters

in	data	Dta byte to write in RAM
----	------	--------------------------

Returns

Nothing

Definition at line 179 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.7.4 Member Data Documentation

3.7.4.1 backlight_enable

```
bool LCD::backlight_enable [private]
```

Backlight enable flag

Definition at line 293 of file LCD.h.

3.7.4.2 cnfCursorBlink

```
bool LCD::cnfCursorBlink [private]
```

Cursor blinking configuration : 1 = cursor blink is on, 0 = cursor blink is off

Definition at line 298 of file LCD.h.

3.7.4.3 cnfCursorOnOff

```
bool LCD::cnfCursorOnOff [private]
```

Cursor configuration : 1 = cursor on, 0 = cursor off

Definition at line 297 of file LCD.h.

3.7.4.4 cnfDisplayOnOff

```
bool LCD::cnfDisplayOnOff [private]
```

Display configuration : 1 = display on, 0 = display off

Definition at line 296 of file LCD.h.

3.7.4.5 cnfEntryModeDir

```
bool LCD::cnfEntryModeDir [private]
```

Entry mode direction configuration : 1 = cursor moves to right when DDRAM address is incremented, 0 = cursor moves to left when DDRAM address is incremented

Definition at line 299 of file LCD.h.

3.7.4.6 cnfEntryModeShift

```
bool LCD::cnfEntryModeShift [private]
```

Entry mode configuration : 0 = no display shift is performed after a DDRAM read, 1 = a shift is performed

Definition at line 300 of file LCD.h.

3.7.4.7 cnfFontType

```
bool LCD::cnfFontType [private]
```

Font type configuration, 0 = 5*8 dots, 1 = 5*11 dots

Definition at line 295 of file LCD.h.

3.7.4.8 cnfLineNumber

```
bool LCD::cnfLineNumber [private]
```

Display line number configuration, 0 = 1-line mode, 1 = 2-line mode

Definition at line 294 of file LCD.h.

3.7.4.9 ddram_addr

```
uint8_t LCD::ddram_addr [private]
```

Screen DDRAM address

Definition at line 302 of file LCD.h.

The documentation for this class was generated from the following files:


- [LCD.h](#)
- [LCD.cpp](#)

3.8 scheduler Class Reference

Scheduler class.

```
#include <scheduler.h>
```

Collaboration diagram for scheduler:

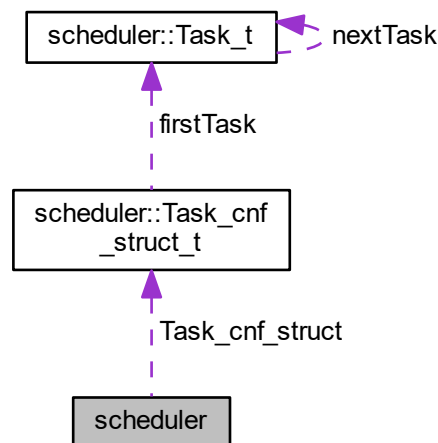

Classes

- struct [Task_conf_struct_t](#)
Task configuration structure.
- struct [Task_t](#)
Type defining a task structure.

Public Member Functions

- [scheduler](#) ()
scheduler class constructor
- void [launchPeriodicTasks](#) ()
Main scheduler function.
- void [startScheduling](#) ()
Starts the tasks scheduling.
- void [addPeriodicTask](#) ([TaskPtr_t](#) task_ptr, [uint16_t](#) a_period)
Add a task into the scheduler.
- bool [removePeriodicTask](#) ([TaskPtr_t](#) task_ptr)
Remove a task from the scheduler.
- [uint32_t](#) [getPitNumber](#) ()
Get function for PIT number.

Private Types

- typedef struct [scheduler::Task_t](#) [Task_t](#)
Type defining a task structure.

Private Attributes

- [Task_cnf_struct_t](#) [Task_cnf_struct](#)
- [uint32_t](#) [pit_number](#)

3.8.1 Detailed Description

Scheduler class.

This class defines the scheduler of the system. It is called by the main interrupt and calls successively all applicative functions according to their recurrence time.

Definition at line 28 of file scheduler.h.

3.8.2 Member Typedef Documentation

3.8.2.1 Task_t

```
typedef struct scheduler::Task\_t scheduler::Task\_t [private]
```

Type defining a task structure.

This structure defines a task. A task is defined by a function to call (defined by its pointer), an ID and a period.

3.8.3 Constructor & Destructor Documentation

3.8.3.1 scheduler()

```
scheduler::scheduler ( )
```

scheduler class constructor

This function initializes the class scheduler

Returns

Nothing

Definition at line 19 of file scheduler.cpp.

Here is the call graph for this function:



3.8.4 Member Function Documentation

3.8.4.1 addPeriodicTask()

```
void scheduler::addPeriodicTask (
    TaskPtr_t task_ptr,
    uint16_t a_period )
```

Add a task into the scheduler.

This function create a new task in the scheduler linked to the function task_ptr with a period a_period and an ID a_task_id

Parameters


in	<i>task_ptr</i>	Pointer to the task which will be added
in	<i>a_period</i>	Period of the new task

Returns

Nothing

Definition at line 66 of file scheduler.cpp.

Here is the caller graph for this function:

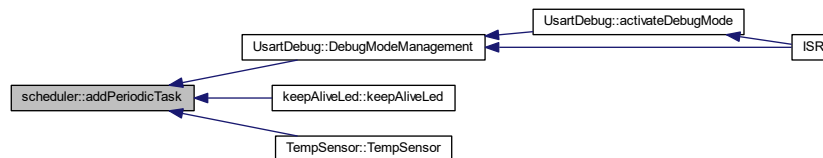**3.8.4.2 getPitNumber()**

```
uint32_t scheduler::getPitNumber ( )
```

Get function for PIT number.

This function returns the PIT number

Returns

PIT number

Definition at line 96 of file scheduler.cpp.

Here is the caller graph for this function:



3.8.4.3 launchPeriodicTasks()

```
void scheduler::launchPeriodicTasks ( )
```

Main scheduler function.


This function launches the scheduled tasks according to current software time and task configuration

Returns


Nothing

Definition at line 32 of file scheduler.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.8.4.4 removePeriodicTask()

```
bool scheduler::removePeriodicTask (
    TaskPtr_t task_ptr )
```

Remove a task from the scheduler.

This function finds the task defined by `task_ptr` in the scheduler and removes it.

Parameters

in	<i>task_ptr</i>	address of the task to remove from scheduler
----	-----------------	--

Returns

TRUE if the task has been removed, FALSE if the task does not exist in the scheduler

Definition at line 102 of file scheduler.cpp.

Here is the caller graph for this function:

**3.8.4.5 startScheduling()**

```
void scheduler::startScheduling ( )
```

Starts the tasks scheduling.


This function starts the timer which will trigger an interrupt every software period. When the interrupt is raised the scheduler will launch applications

Returns


Nothing

Definition at line 60 of file scheduler.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.8.5 Member Data Documentation

3.8.5.1 pit_number

```
uint32_t scheduler::pit_number [private]
```

Counter of periodic interrupts

Definition at line 115 of file scheduler.h.

3.8.5.2 Task_cnf_struct

```
Task_cnf_struct_t scheduler::Task_cnf_struct [private]
```

Declaration of task configuration structure

Definition at line 113 of file scheduler.h.

The documentation for this class was generated from the following files:


- [scheduler.h](#)
- [scheduler.cpp](#)

3.9 T_ASW_cnf_struct Struct Reference

ASW configuration structure.

```
#include <asw.h>
```

Collaboration diagram for T_ASW_cnf_struct:

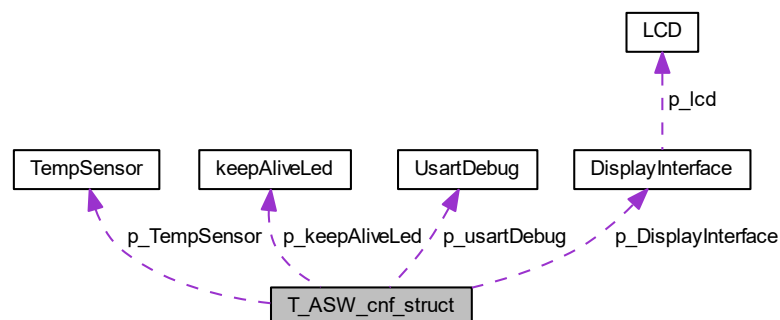

Public Attributes

- [UsartDebug](#) * [p_usartDebug](#)
- [keepAliveLed](#) * [p_keepAliveLed](#)
- [TempSensor](#) * [p_TempSensor](#)
- [DisplayInterface](#) * [p_DisplayInterface](#)

3.9.1 Detailed Description

ASW configuration structure.

This structure contains all pointers to instanced applicative objects

Definition at line 24 of file asw.h.

3.9.2 Member Data Documentation

3.9.2.1 p_DisplayInterface

[DisplayInterface](#)* [T_ASW_cnf_struct::p_DisplayInterface](#)

Pointer to [DisplayInterface](#) object

Definition at line 29 of file asw.h.

3.9.2.2 p_keepAliveLed

[keepAliveLed](#)* [T_ASW_cnf_struct::p_keepAliveLed](#)

Pointer to [keepAliveLed](#) object

Definition at line 27 of file asw.h.

3.9.2.3 p_TempSensor

[TempSensor](#)* [T_ASW_cnf_struct::p_TempSensor](#)

Pointer to [TempSensor](#) object

Definition at line 28 of file asw.h.

3.9.2.4 p_usartDebug

UsartDebug* T_ASW_cnf_struct::p_usartDebug

Pointer to usart debug object

Definition at line 26 of file asw.h.

The documentation for this struct was generated from the following file:


- [asw.h](#)

3.10 T_BSW_cnf_struct Struct Reference

BSW configuration structure.

```
#include <bsw.h>
```

Collaboration diagram for T_BSW_cnf_struct:

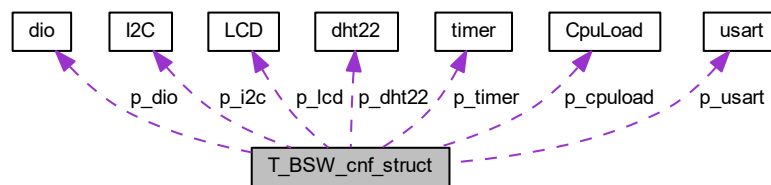

Public Attributes

- [usart](#) * [p_usart](#)
- [dio](#) * [p_dio](#)
- [timer](#) * [p_timer](#)
- [dht22](#) * [p_dht22](#)
- [CpuLoad](#) * [p_cpuload](#)
- [I2C](#) * [p_i2c](#)
- [LCD](#) * [p_lcd](#)

3.10.1 Detailed Description

BSW configuration structure.

This structure contains all pointers to instanced drivers objects

Definition at line 33 of file bsw.h.

3.10.2 Member Data Documentation

3.10.2.1 p_cpuload

`CpuLoad* T_BSW_cnf_struct::p_cpuload`

Pointer to cpu load library object

Definition at line 39 of file bsw.h.

3.10.2.2 p_dht22

`dht22* T_BSW_cnf_struct::p_dht22`

Pointer to [dht22](#) driver object

Definition at line 38 of file bsw.h.

3.10.2.3 p_dio

`dio* T_BSW_cnf_struct::p_dio`

Pointer to dio driver object

Definition at line 36 of file bsw.h.

3.10.2.4 p_i2c

`I2C* T_BSW_cnf_struct::p_i2c`

Pointer to [I2C](#) driver object

Definition at line 40 of file bsw.h.

3.10.2.5 p_lcd

`LCD* T_BSW_cnf_struct::p_lcd`

Pointer to [LCD](#) driver object

Definition at line 41 of file bsw.h.

3.10.2.6 p_timer

```
timer* T_BSW_cnf_struct::p_timer
```

Pointer to timer driver object

Definition at line 37 of file bsw.h.

3.10.2.7 p_usart

```
usart* T_BSW_cnf_struct::p_usart
```

Pointer to usart driver object

Definition at line 35 of file bsw.h.

The documentation for this struct was generated from the following file:

- [bsw.h](#)

3.11 T_LCD_conf_struct Struct Reference

```
#include <LCD.h>
```

Public Attributes

- bool [backlight_en](#)
- bool [lineNumber_cnf](#)
- bool [fontType_cnf](#)
- bool [display_en](#)
- bool [cursor_en](#)
- bool [cursorBlink_en](#)
- bool [entryModeDir](#)
- bool [entryModeShift](#)

3.11.1 Detailed Description

Definition at line 124 of file LCD.h.

3.11.2 Member Data Documentation

3.11.2.1 backlight_en

```
bool T_LCD_conf_struct::backlight_en
```

Definition at line 126 of file LCD.h.

3.11.2.2 cursor_en

```
bool T_LCD_conf_struct::cursor_en
```

Definition at line 130 of file LCD.h.

3.11.2.3 cursorBlink_en

```
bool T_LCD_conf_struct::cursorBlink_en
```

Definition at line 131 of file LCD.h.

3.11.2.4 display_en

```
bool T_LCD_conf_struct::display_en
```

Definition at line 129 of file LCD.h.

3.11.2.5 entryModeDir

```
bool T_LCD_conf_struct::entryModeDir
```

Definition at line 132 of file LCD.h.

3.11.2.6 entryModeShift

```
bool T_LCD_conf_struct::entryModeShift
```

Definition at line 133 of file LCD.h.

3.11.2.7 fontType_cnf

```
bool T_LCD_conf_struct::fontType_cnf
```

Definition at line 128 of file LCD.h.

3.11.2.8 lineNumber_cnf

```
bool T_LCD_conf_struct::lineNumber_cnf
```

Definition at line 127 of file LCD.h.


The documentation for this struct was generated from the following file:

- [LCD.h](#)

3.12 scheduler::Task_cnf_struct_t Struct Reference

Task configuration structure.

Collaboration diagram for scheduler::Task_cnf_struct_t:

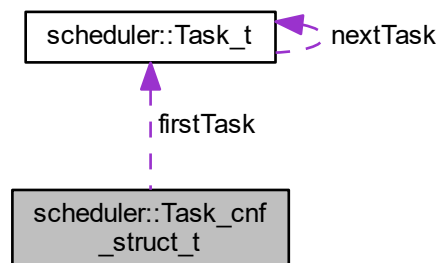

Public Attributes

- [Task_t](#) * [firstTask](#)
- [uint8_t](#) [task_nb](#)

3.12.1 Detailed Description

Task configuration structure.

This structure contains task list and memorizes the number of current tasks launched

Definition at line 106 of file scheduler.h.

3.12.2 Member Data Documentation

3.12.2.1 firstTask

```
Task_t* scheduler::Task_conf_struct_t::firstTask
```

Pointer to the first task to launch

Definition at line 108 of file scheduler.h.

3.12.2.2 task_nb

```
uint8_t scheduler::Task_conf_struct_t::task_nb
```

Number of task

Definition at line 109 of file scheduler.h.


The documentation for this struct was generated from the following file:

- [scheduler.h](#)

3.13 scheduler::Task_t Struct Reference

Type defining a task structure.

Collaboration diagram for scheduler::Task_t:



Public Attributes

- [TaskPtr_t](#) TaskPtr
- [uint16_t](#) period
- [Task_t](#) * nextTask

3.13.1 Detailed Description

Type defining a task structure.

This structure defines a task. A task is defined by a function to call (defined by its pointer), an ID and a period.

Definition at line 94 of file scheduler.h.

3.13.2 Member Data Documentation

3.13.2.1 nextTask

```
Task_t* scheduler::Task_t::nextTask
```

Pointer to the next task to launch

Definition at line 98 of file scheduler.h.

3.13.2.2 period

```
uint16_t scheduler::Task_t::period
```

Period of the task

Definition at line 97 of file scheduler.h.

3.13.2.3 TaskPtr

```
TaskPtr_t scheduler::Task_t::TaskPtr
```

Pointer to the task

Definition at line 96 of file scheduler.h.

The documentation for this struct was generated from the following file:

- [scheduler.h](#)

3.14 TempSensor Class Reference

Class for temperature sensor.

```
#include <TempSensor.h>
```

Public Member Functions

- [TempSensor](#) ()
Class constructor.
- uint16_t * [getTempPtr](#) ()
Get pointer to data raw_temperature.
- uint16_t * [getHumPtr](#) ()
Get pointer to data raw_humidity.
- bool [getTemp](#) (uint16_t *temp)
Get temperature data.
- bool [getHumidity](#) (uint16_t *hum)
Get humidity data.
- void [setValidity](#) (bool validity)
Set data val_validity.
- void [updateLastValidValues](#) ()

Static Public Member Functions

- static void [readTempSensor_task](#) ()
Task for reading temperature and humidity values.

Private Attributes

- uint16_t [read_temperature](#)
- uint16_t [read_humidity](#)
- bool [validity_last_read](#)
- bool [validity](#)
- uint32_t [valid_pit](#)
- uint16_t [valid_temp](#)
- uint16_t [valid_hum](#)

3.14.1 Detailed Description

Class for temperature sensor.

This class defines all functions used to read data from temperature sensor and monitor it

Definition at line 19 of file TempSensor.h.

3.14.2 Constructor & Destructor Documentation

3.14.2.1 TempSensor()

```
TempSensor::TempSensor ( )
```

Class constructor.


This function initializes all data of the class [TempSensor](#)

Returns

Nothing

Definition at line 16 of file TempSensor.cpp.

Here is the call graph for this function:

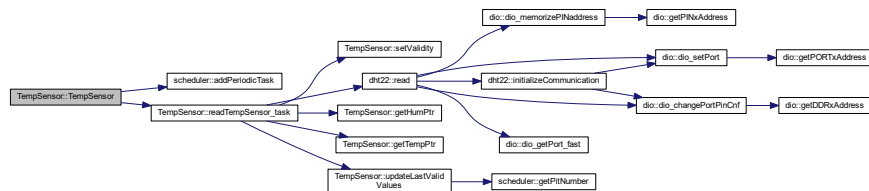

3.14.3 Member Function Documentation

3.14.3.1 getHumidity()

```
bool TempSensor::getHumidity (
    uint16_t * hum )
```

Get humidity data.

This function returns the value of the humidity. If the official value is not valid, the function return false.

Parameters

out	<i>hum</i>	Humidity value
-----	------------	----------------

Returns

Validity of humidity

Definition at line 66 of file TempSensor.cpp.

Here is the caller graph for this function:



3.14.3.2 getHumPtr()

```
uint16_t * TempSensor::getHumPtr ( )
```

Get pointer to data raw_humidity.


This function returns a pointer to the class member raw_humidity

Returns

Pointer to raw_humidity

Definition at line 41 of file TempSensor.cpp.

Here is the caller graph for this function:



3.14.3.3 getTemp()

```
bool TempSensor::getTemp (
    uint16_t * temp )
```

Get temperature data.

This function returns the value of the temperature. If the official value is not valid, the function return false.

Parameters

out	<i>temp</i>	Temperature value
-----	-------------	-------------------

Returns

Validity of temperature

Definition at line 72 of file TempSensor.cpp.

Here is the caller graph for this function:

**3.14.3.4 getTempPtr()**

```
uint16_t * TempSensor::getTempPtr ( )
```

Get pointer to data raw_temperature.


This function returns a pointer to the class member raw_temperature

Returns

Pointer to raw_temperature

Definition at line 46 of file TempSensor.cpp.

Here is the caller graph for this function:

**3.14.3.5 readTempSensor_task()**

```
void TempSensor::readTempSensor_task ( ) [static]
```

Task for reading temperature and humidity values.


This task reads temperature and humidity data using DHT22 driver. It is called every 5 seconds.

Returns


Nothing

Definition at line 30 of file TempSensor.cpp.

Here is the call graph for this function:

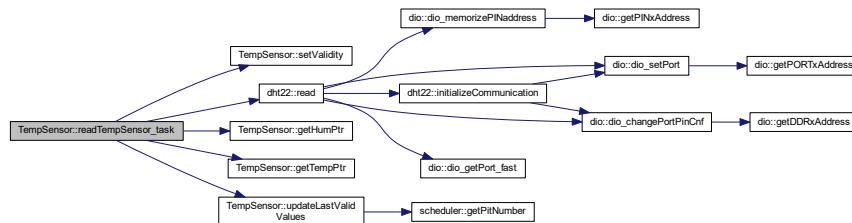

Here is the caller graph for this function:

**3.14.3.6 setValidity()**

```
void TempSensor::setValidity (
    bool validity )
```

Set data val_validity.

This function sets the class member val_validity

Parameters


in	<i>validity</i>	Value of validity
----	-----------------	-------------------

Returns

Nothing

Definition at line 36 of file TempSensor.cpp.

Here is the caller graph for this function:




3.14.3.7 updateLastValidValues()


```
void TempSensor::updateLastValidValues ( )
```

Definition at line 51 of file `TempSensor.cpp`.

Here is the call graph for this function:



Here is the caller graph for this function:



3.14.4 Member Data Documentation

3.14.4.1 read_humidity

```
uint16_t TempSensor::read_humidity [private]
```

Raw value of humidity read from DHT22 (= real humidity *10)

Definition at line 86 of file `TempSensor.h`.

3.14.4.2 read_temperature

```
uint16_t TempSensor::read_temperature [private]
```

Raw value of temperature read from DHT22 (= real temperature *10)

Definition at line 85 of file TempSensor.h.

3.14.4.3 valid_hum

```
uint16_t TempSensor::valid_hum [private]
```

Valid value of humidity

Definition at line 93 of file TempSensor.h.

3.14.4.4 valid_pit

```
uint32_t TempSensor::valid_pit [private]
```

pit number of the last time when data were valid

Definition at line 90 of file TempSensor.h.

3.14.4.5 valid_temp

```
uint16_t TempSensor::valid_temp [private]
```

Valid value of temperature

Definition at line 92 of file TempSensor.h.

3.14.4.6 validity

```
bool TempSensor::validity [private]
```

validity of official temperature and humidity data

Definition at line 89 of file TempSensor.h.

3.14.4.7 validity_last_read

```
bool TempSensor::validity_last_read [private]
```

Validity of last read temperature and humidity data

Definition at line 87 of file TempSensor.h.

The documentation for this class was generated from the following files:

- [TempSensor.h](#)
- [TempSensor.cpp](#)

3.15 timer Class Reference

Class defining a timer.

```
#include <timer.h>
```

Public Member Functions

- [timer](#) ()
Class constructor.
- void [configureTimer1](#) (uint16_t a_prescaler, uint16_t a_ctcValue)
Configures Timer #1.
- void [startTimer1](#) ()
Start Timer #1.
- void [stopTimer1](#) ()
Stops Timer #1.
- uint16_t [getTimer1Value](#) ()
Reads current value of timer #1.

Private Attributes

- uint8_t [prescaler](#)

3.15.1 Detailed Description

Class defining a timer.

This class defines a timer/counter. The selected timer is configured in CTC mode and interrupts are enabled. The prescaler value and CTC value can both be configured by user.

Definition at line 22 of file timer.h.

3.15.2 Constructor & Destructor Documentation

3.15.2.1 timer()

```
timer::timer ( )
```

Class constructor.

This function initializes class attributes

Returns

Nothing

Definition at line 13 of file timer.cpp.

3.15.3 Member Function Documentation

3.15.3.1 configureTimer1()

```
void timer::configureTimer1 (
    uint16_t a_prescaler,
    uint16_t a_ctcValue )
```

Configures Timer #1.

This function configures hardware timer #1 in CTC mode, enables its interrupts, sets prescaler to `a_prescaler` and CTC value to `a_ctcValue`

Parameters

in	<code>a_prescaler</code>	prescaler value
in	<code>a_ctcValue</code>	Value to which the counter will compare before raising an interrupt

Returns

Nothing

Definition at line 18 of file timer.cpp.

Here is the caller graph for this function:



3.15.3.2 getTimer1Value()

```
uint16_t timer::getTimer1Value ( ) [inline]
```

Reads current value of timer #1.


This function reads the value of of timer #1 using register TCNT1. The function is inlined to speed up SW execution.

Returns

Current timer value

Definition at line 61 of file timer.h.

Here is the caller graph for this function:



3.15.3.3 startTimer1()

```
void timer::startTimer1 ( )
```

Start Timer #1.


This functions starts Timer #1. Timer shall be initialized before this function is called.

Returns

Nothing

Definition at line 56 of file timer.cpp.

Here is the caller graph for this function:



3.15.3.4 stopTimer1()

```
void timer::stopTimer1 ( )
```

Stops Timer #1.

This functions stops timer #1 by resetting bits 0-2 of TCCR1B

Returns

Nothing

Definition at line 67 of file timer.cpp.

3.15.4 Member Data Documentation

3.15.4.1 prescaler

```
uint8_t timer::prescaler [private]
```

Definition at line 67 of file timer.h.

The documentation for this class was generated from the following files:

- [timer.h](#)
- [timer.cpp](#)

3.16 usart Class Reference

USART serial bus class.

```
#include <usart.h>
```

Public Member Functions

- [usart](#) (uint16_t a_BaudRate)
Class usart constructor.
- void [usart_sendString](#) (uint8_t *str)
Sending a string on USART link.
- void [setBaudRate](#) (uint16_t a_BaudRate)
Setting baud rate.
- void [usart_init](#) ()
USART hardware initialization.
- uint8_t [usart_read](#) ()
USART read function.

Static Private Member Functions

- static void `usart_transmit` (uint8_t Data)
USART Transmit data.

Private Attributes

- uint16_t `BaudRate`

3.16.1 Detailed Description

USART serial bus class.

This class defines all useful functions for USART serial bus

Definition at line 16 of file usart.h.

3.16.2 Constructor & Destructor Documentation

3.16.2.1 `usart()`

```
usart::usart (
    uint16_t a_BaudRate )
```

Class usart constructor.

Initializes the class and call hardware initialization function

Parameters

in	<code>a_BaudRate</code>	Desired Baud Rate (16 bit) - up to 57600
----	-------------------------	--

Returns

Nothing.

Definition at line 14 of file usart.cpp.

Here is the call graph for this function:

**3.16.3 Member Function Documentation****3.16.3.1 setBaudRate()**

```
void usart::setBaudRate (
    uint16_t a_BaudRate ) [inline]
```

Setting baud rate.

This function sets the attribute BaudRate of the class usart

Parameters

in	<i>a_BaudRate</i>	Desired Baud Rate (16 bit) - up to 57600
----	-------------------	--

Returns

Nothing

Definition at line 63 of file usart.cpp.

3.16.3.2 usart_init()

```
void usart::usart_init ( )
```

USART hardware initialization.


This function will initialize the USART using selected baudrate. User must pay attention to select one of the usually used Baud Rate (9600, 19200, 38400, 57600). Note that since an uint16 is used as argument, Baud rate cannot be more than 57600.

Returns

Nothing.

Definition at line 21 of file usart.cpp.

Here is the caller graph for this function:

**3.16.3.3 usart_read()**

```
uint8_t usart::usart_read ( )
```

USART read function.


This function will read reception register of USART

Returns

The function returns the 8 bits read from reception buffer

Definition at line 79 of file usart.cpp.

Here is the caller graph for this function:

**3.16.3.4 usart_sendString()**

```
void usart::usart_sendString (
    uint8_t * str )
```

Sending a string on USART link.

Just write data to the Serial link using `usart_trabsmit` function

Parameters

in	<i>str</i>	Pointer to the string being sent
----	------------	----------------------------------

Returns


Nothing.

Definition at line 44 of file usart.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.16.3.5 usart_transmit()

```
void usart::usart_transmit (
    uint8_t Data ) [static], [private]
```

USART Transmit data.

Nothing Special. It just wait for the transmit buffer is empty before writing it again.

Parameters


in	<i>Data</i>	Desired data char to transmit
----	-------------	-------------------------------

Returns

Nothing.

Definition at line 70 of file usart.cpp.

Here is the caller graph for this function:



3.16.4 Member Data Documentation

3.16.4.1 BaudRate

```
uint16_t usart::BaudRate [private]
```

Defines the baud rate used by driver

Definition at line 70 of file usart.h.

The documentation for this class was generated from the following files:

- [usart.h](#)
- [usart.cpp](#)

3.17 UsartDebug Class Reference

Class used for debugging on usart link.

```
#include <debug.h>
```

Public Member Functions

- [UsartDebug](#) ()
Class [UsartDebug](#) constructor.
- void [sendInteger](#) (uint16_t data, uint8_t base)
Send a integer data on USART link.
- void [sendBool](#) (bool data)
Send a boolean data on USART link.
- bool [isDebugModeActive](#) ()
Check is debug mode is active or not.
- void [activateDebugMode](#) ()
Activates debug mode.
- void [DebugModeManagement](#) (uint8_t rcv_char)
Management of debug mode.

Static Public Member Functions

- static void [DisplaySensors_task](#) ()
Displays sensors data on usart link.
- static void [DisplayCPULoad_task](#) ()
Displays CPU load data on usart link.

Private Member Functions

- void [sendData](#) (char *str)
Send a string on USART link.

Private Attributes

- [debug_state_t](#) [debug_state](#)
- bool [debugModeActive_F](#)

3.17.1 Detailed Description

Class used for debugging on usart link.

This class defines functions used for sending debug data on USART link.

Definition at line 33 of file debug.h.

3.17.2 Constructor & Destructor Documentation

3.17.2.1 UsartDebug()

```
UsartDebug::UsartDebug ( )
```

Class [UsartDebug](#) constructor.

Initializes the class [UsartDebug](#)

Returns

Nothing

Definition at line 31 of file debug.cpp.

3.17.3 Member Function Documentation

3.17.3.1 activateDebugMode()

```
void UsartDebug::activateDebugMode ( )
```

Activates debug mode.


This function activates USART debug mode.

Returns


Nothing

Definition at line 126 of file debug.cpp.

Here is the call graph for this function:

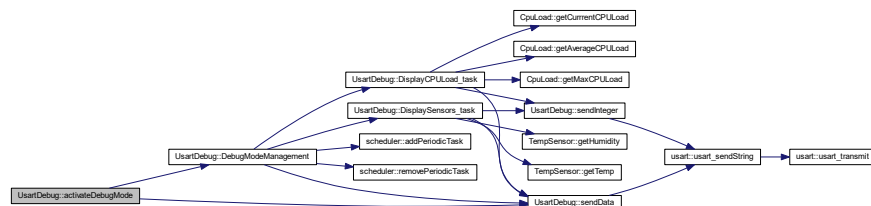

Here is the caller graph for this function:



3.17.3.2 DebugModeManagement()

```
void UsartDebug::DebugModeManagement (
    uint8_t rcv_char )
```

Management of debug mode.

This function manages the debug mode according to the following state machine :

- init state : display main menu
- WAIT_INIT state : handles user choice in main menu and selects next state
- DISPLAY_DATA state : display sensor data periodically
- DISPLAY CPU LOAD : display CPU load periodically

It is called each time a data is received on USART and debug mode is active

Parameters


in	<i>rcv_char</i>	8 bits character received on USART
----	-----------------	------------------------------------

Returns


Nothing

Definition at line 134 of file debug.cpp.

Here is the call graph for this function:

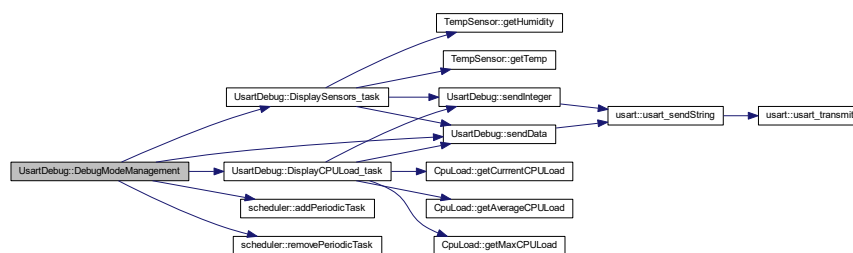

Here is the caller graph for this function:



3.17.3.3 DisplayCPULoad_task()

```
void UsartDebug::DisplayCPULoad_task ( ) [static]
```

Displays CPU load data on usart link.


This task sends CPU load data (current and average load) on usart link every 5 seconds

Returns


Nothing

Definition at line 110 of file debug.cpp.

Here is the call graph for this function:

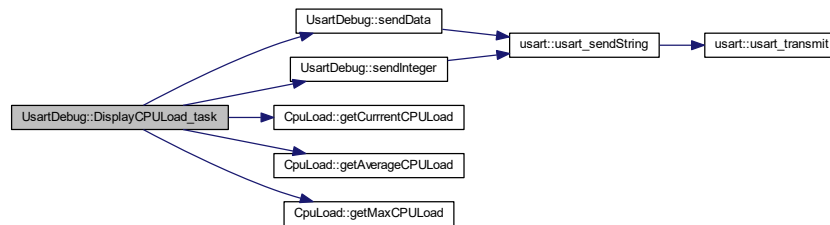

Here is the caller graph for this function:

**3.17.3.4 DisplaySensors_task()**

```
void UsartDebug::DisplaySensors_task ( ) [static]
```

Displays sensors data on usart link.


This task sends sensors data (temperature and humidity) on usart link every 5 seconds

Returns

Nothing

Definition at line 69 of file debug.cpp.

Here is the call graph for this function:

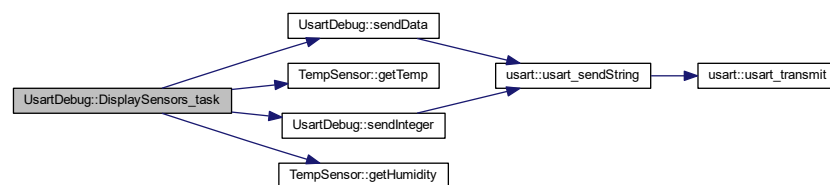

Here is the caller graph for this function:



3.17.3.5 isDebugModeActive()

```
bool UsartDebug::isDebugModeActive ( )
```

Check is debug mode is active or not.


This function checks if debug mode is active or not.

Returns

TRUE is debug mode is active, FALSE otherwise

Definition at line 121 of file debug.cpp.

Here is the caller graph for this function:



3.17.3.6 sendBool()

```
void UsartDebug::sendBool (
    bool data )
```

Send a boolean data on USART link.

This functions sends the requested boolean on USART link by calling driver's transmission function. The boolean data is first converted into a string and then sent

Parameters


in	<i>data</i>	boolean data to be sent
----	-------------	-------------------------

Returns

Nothing

Definition at line 57 of file debug.cpp.

Here is the call graph for this function:

**3.17.3.7 sendData()**

```
void UsartDebug::sendData (  
    char * str ) [private]
```

Send a string on USART link.

This functions sends the requested string on USART link by calling driver's transmission function

Parameters


in	<i>str</i>	Pointer to the string being sent
----	------------	----------------------------------

Returns


Nothing

Definition at line 37 of file debug.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.17.3.8 sendInteger()

```
void UsartDebug::sendInteger (
    uint16_t data,
    uint8_t base )
```

Send a integer data on USART link.

This functions sends the requested integer on USART link by calling driver's transmission function. The integer is first converted into a string and then sent

Parameters


in	<i>data</i>	integer data to be sent
in	<i>base</i>	numerical base used to convert integer into string (between 2 and 36)

Returns


Nothing

Definition at line 43 of file debug.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.17.4 Member Data Documentation

3.17.4.1 `debug_state`

`debug_state_t` UsartDebug::debug_state [private]

Definition at line 116 of file debug.h.

3.17.4.2 `debugModeActive_F`

`bool` UsartDebug::debugModeActive_F [private]

Debug mode activation flag

Definition at line 117 of file debug.h.


The documentation for this class was generated from the following files:

- [debug.h](#)
- [debug.cpp](#)

File Documentation

ASW main file.

Include dependency graph for asw.cpp:

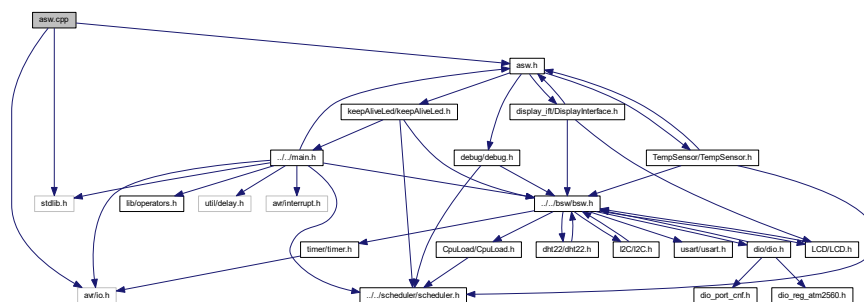

- void `asw_init ()`
Initialization of ASW.

- T_ASW_cnf_struct ASW_cnf_struct

4.1.1 Detailed Description

ASW main file.

Date

15 mars 2018

Author

nicls67

4.1.2 Function Documentation

4.1.2.1 asw_init()

```
void asw_init ( )
```

Initialization of ASW.

This function instantiates all applicative objects. The addresses of objects are then stored in ASW_cnf_struct structure. This function shall be called after BSW initialization function.

Returns

Nothing

Definition at line 19 of file asw.cpp.

Here is the caller graph for this function:



4.1.3 Variable Documentation

4.1.3.1 ASW_cnf_struct

[T_ASW_cnf_struct](#) ASW_cnf_struct

ASW configuration structure


Definition at line 16 of file asw.cpp.

4.2 asw.h File Reference


ASW main header file.

```
#include "debug/debug.h"
#include "keepAliveLed/keepAliveLed.h"
#include "TempSensor/TempSensor.h"
#include "display_if/DisplayInterface.h"
```

Include dependency graph for asw.h:

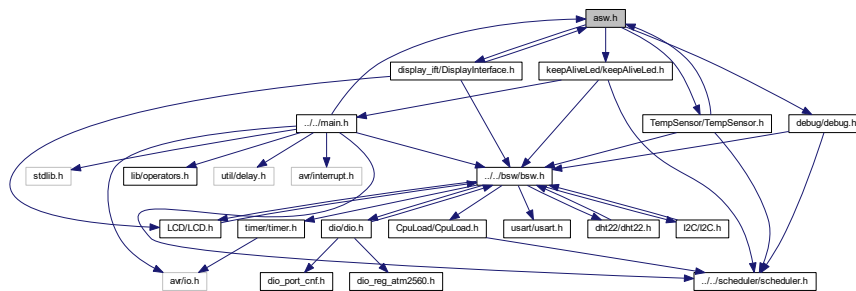

This graph shows which files directly or indirectly include this file:

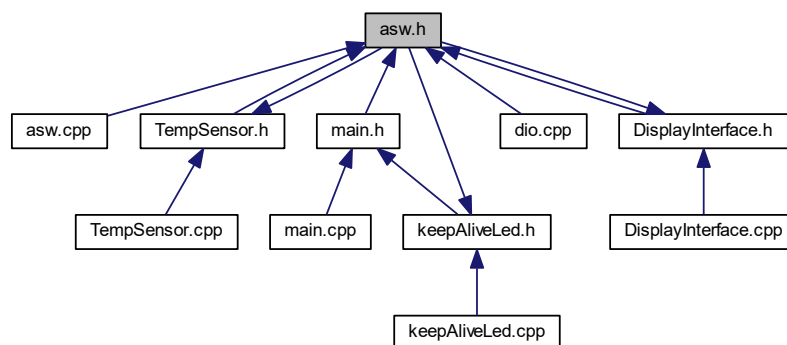

Classes

- struct [T_ASW_cnf_struct](#)
ASW configuration structure.

Functions

- void `asw_init()`
Initialization of ASW.

Variables

- `T_ASW_cnf_struct ASW_cnf_struct`

4.2.1 Detailed Description

ASW main header file.

Date

15 mars 2018

Author

nicls67

4.2.2 Function Documentation

4.2.2.1 `asw_init()`

```
void asw_init ( )
```

Initialization of ASW.

This function instantiates all applicative objects. The addresses of objects are then stored in `ASW_cnf_struct` structure. This function shall be called after BSW initialization function.

Returns

Nothing

Definition at line 19 of file `asw.cpp`.

Here is the caller graph for this function:



4.2.3 Variable Documentation

4.2.3.1 ASW_cnf_struct

[T_ASW_cnf_struct](#) ASW_cnf_struct

ASW configuration structure


Definition at line 16 of file asw.cpp.

4.3 bsw.cpp File Reference

BSW main file.

```
#include <avr/io.h>
#include <stdlib.h>
#include "bsw.h"
```

Include dependency graph for bsw.cpp:

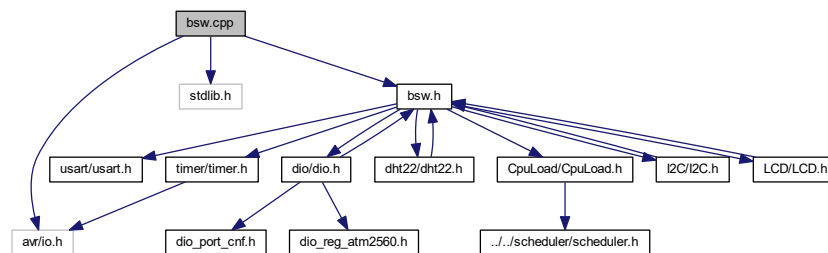

Functions

- void [bsw_init](#) ()
Initialization of BSW.

Variables

- [T_BSW_cnf_struct](#) BSW_cnf_struct

4.3.1 Detailed Description

BSW main file.

Date

13 mars 2018

Author

nicls67

4.3.2 Function Documentation

4.3.2.1 bsw_init()

```
void bsw_init ( )
```

Initialization of BSW.

This function instantiates all driver objects, leading hardware initialization. The addresses of driver objects are then stored in BSW_cnf_struct structure.

Returns

Nothing

Definition at line 18 of file bsw.cpp.

Here is the caller graph for this function:



4.3.3 Variable Documentation

4.3.3.1 BSW_cnf_struct

```
T_BSW_cnf_struct BSW_cnf_struct
```

BSW configuration structure


Definition at line 16 of file bsw.cpp.

4.4 bsw.h File Reference


BSW main header file.

```
#include "usart/usart.h"
#include "dio/dio.h"
#include "timer/timer.h"
#include "dht22/dht22.h"
#include "CpuLoad/CpuLoad.h"
#include "I2C/I2C.h"
#include "LCD/LCD.h"
```

Include dependency graph for bsw.h:

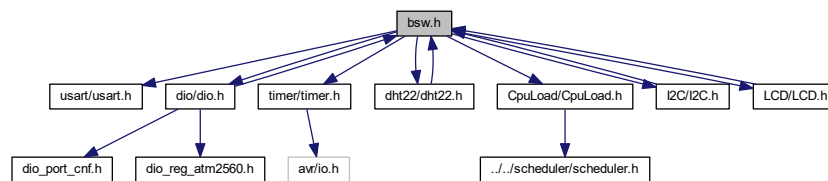

This graph shows which files directly or indirectly include this file:

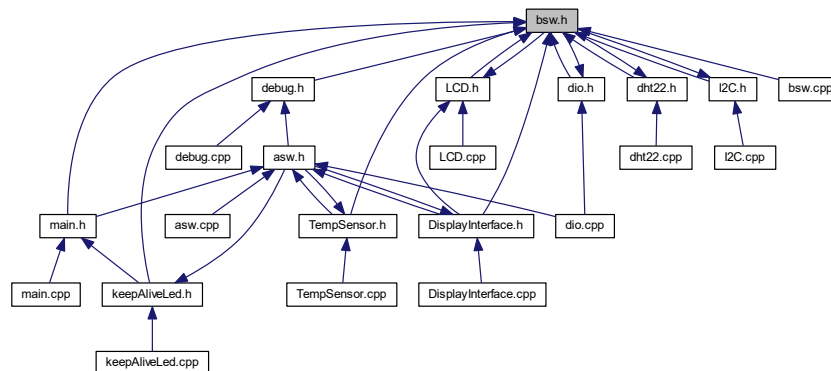

Classes

- struct [T_BSW_cnf_struct](#)
BSW configuration structure.

Macros

- `#define USART_BAUDRATE (uint16_t)9600`
- `#define I2C_BITRATE (uint32_t)100000`

Functions

- void `bsw_init()`
Initialization of BSW.

Variables

- `T_BSW_cnf_struct BSW_cnf_struct`

4.4.1 Detailed Description

BSW main header file.

Date

13 mars 2018

Author

nicls67

4.4.2 Macro Definition Documentation

4.4.2.1 I2C_BITRATE

```
#define I2C_BITRATE (uint32_t)100000
```

`I2C` bus bitrate is 100 kHz

Definition at line 27 of file bsw.h.

4.4.2.2 USART_BAUDRATE

```
#define USART_BAUDRATE (uint16_t)9600
```

usart connection to PC uses a baud rate of 9600

Definition at line 26 of file bsw.h.

4.4.3 Function Documentation

4.4.3.1 bsw_init()

```
void bsw_init ( )
```

Initialization of BSW.

This function instantiates all driver objects, leading hardware initialization. The addresses of driver objects are then stored in BSW_cnf_struct structure.

Returns

Nothing

Definition at line 18 of file bsw.cpp.

Here is the caller graph for this function:



4.4.4 Variable Documentation

4.4.4.1 BSW_cnf_struct

```
T_BSW_cnf_struct BSW_cnf_struct
```


BSW configuration structure

Definition at line 16 of file bsw.cpp.

4.5 CpuLoad.cpp File Reference

Defines functions of class [CpuLoad](#).

```
#include <avr/io.h>
#include "CpuLoad.h"
Include dependency graph for CpuLoad.cpp:
```

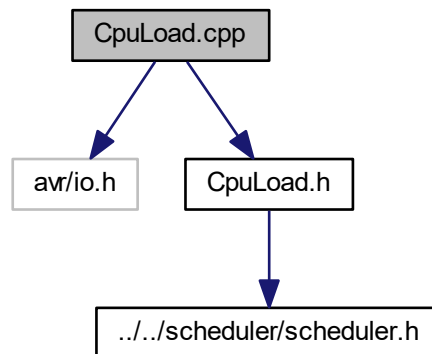

4.5.1 Detailed Description

Defines functions of class [CpuLoad](#).

Date

21 mars 2019

Author


nicls67

4.6 CpuLoad.h File Reference


[CpuLoad](#) class header file.

```
#include "../scheduler/scheduler.h"
```

Include dependency graph for CpuLoad.h:

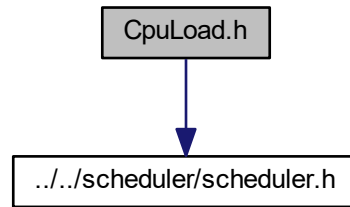

This graph shows which files directly or indirectly include this file:

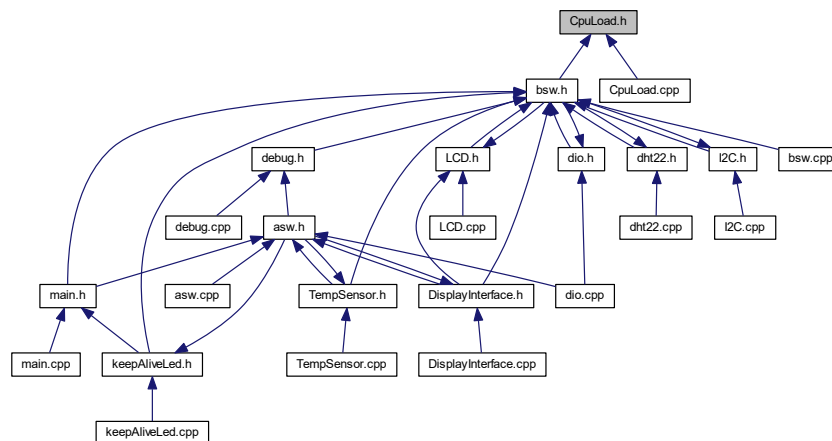

Classes

- class [CpuLoad](#)
Class defining CPU load libraries.

Macros

- `#define` [NB_OF_SAMPLES](#) 50

4.6.1 Detailed Description

[CpuLoad](#) class header file.

Date

21 mars 2019

Author

nics67

4.6.2 Macro Definition Documentation**4.6.2.1 NB_OF_SAMPLES**


```
#define NB_OF_SAMPLES 50
```

Definition at line 13 of file CpuLoad.h.

4.7 debug.cpp File Reference

This file defines classes for log and debug data transmission on USART link.

```
#include <avr/io.h>
#include <stdlib.h>
#include "debug.h"
Include dependency graph for debug.cpp:
```

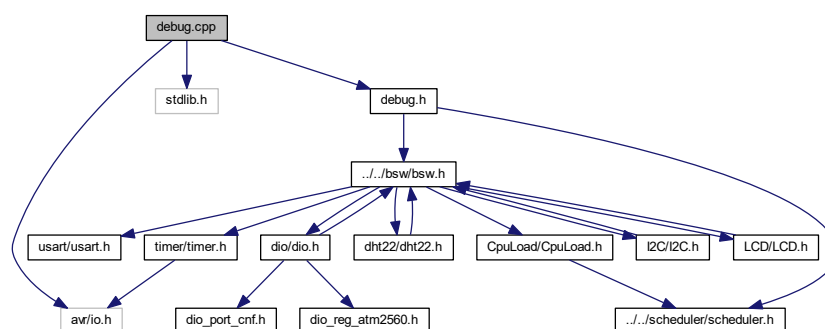**Variables**

- const char [str_debug_main_menu](#) []
Main menu of debug mode.

4.7.1 Detailed Description

This file defines classes for log and debug data transmission on USART link.

Date

15 mars 2018

Author

nicls67

4.7.2 Variable Documentation

4.7.2.1 str_debug_main_menu

```
const char str_debug_main_menu[ ]
```

Initial value:

```
=
    "\n\n"
    "Menu principal : \n"
    "1 : Afficher donnees capteurs\n"
    "2 : Afficher charge CPU\n"
    "\n"
    "s : Quitter debug\n"
```


Main menu of debug mode.

Definition at line 20 of file debug.cpp.


4.8 debug.h File Reference

Header file for debug and logging functions.

```
#include "../bws/bws.h"
#include "../scheduler/scheduler.h"
Include dependency graph for debug.h:
```

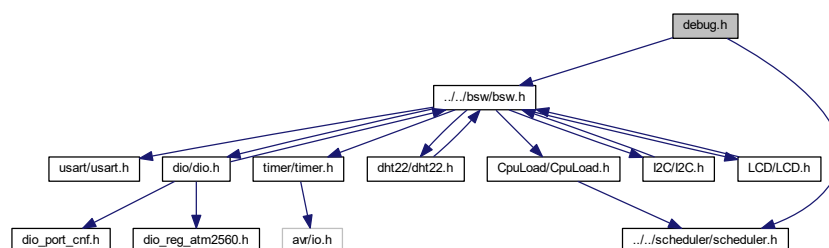

This graph shows which files directly or indirectly include this file:

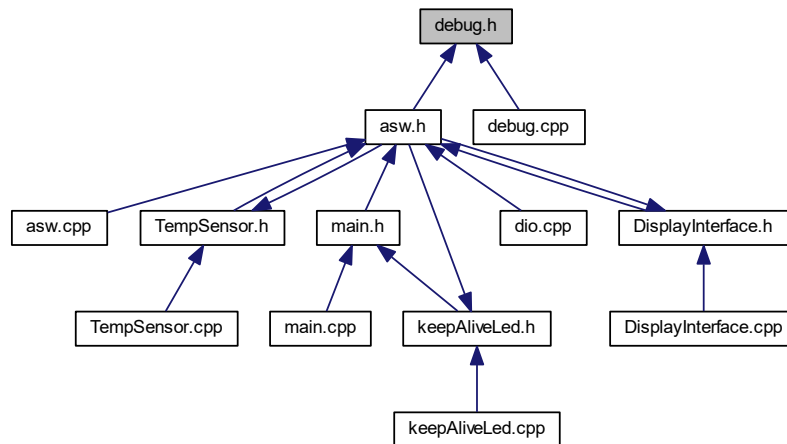

Classes

- class [UsartDebug](#)
Class used for debugging on usart link.

Macros

- `#define` [PERIOD_MS_TASK_DISPLAY_SENSORS](#) 5000
- `#define` [PERIOD_MS_TASK_DISPLAY_CPU_LOAD](#) 5000

Enumerations

- enum [debug_state_t](#) { [INIT](#), [WAIT_INIT](#), [DISPLAY_DATA](#), [DISPLAY_CPU_LOAD](#) }
Defines the debug states.

4.8.1 Detailed Description

Header file for debug and logging functions.

Date

15 mars 2018

Author

nicls67

4.8.2 Macro Definition Documentation

4.8.2.1 PERIOD_MS_TASK_DISPLAY_CPU_LOAD

```
#define PERIOD_MS_TASK_DISPLAY_CPU_LOAD 5000
```

Period for displaying CPU load data

Definition at line 14 of file debug.h.

4.8.2.2 PERIOD_MS_TASK_DISPLAY_SENSORS

```
#define PERIOD_MS_TASK_DISPLAY_SENSORS 5000
```

Period for displaying temperature and humidity data

Definition at line 13 of file debug.h.

4.8.3 Enumeration Type Documentation

4.8.3.1 debug_state_t

```
enum debug_state_t
```

Defines the debug states.

Enumerator

INIT	Init state : display the main menu
WAIT_INIT	Wait for a received character in init state
DISPLAY_DATA	Display sensor data in continuous
DISPLAY_CPU_LOAD	Display CPU load in continuous


Definition at line 20 of file debug.h.

4.9 dht22.cpp File Reference

This file defines classes for DHT22 driver.

```
#include <avr/io.h>
#include <util/delay.h>
#include <avr/interrupt.h>
#include "dht22.h"
```

Include dependency graph for dht22.cpp:

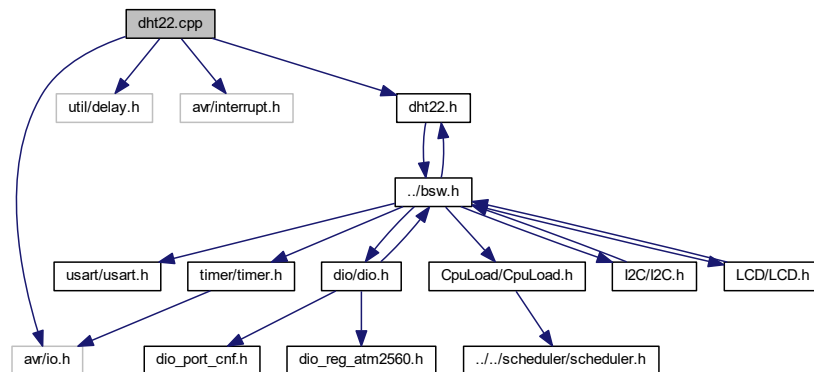

Macros

- `#define MAX_WAIT_TIME_US 100`

4.9.1 Detailed Description

This file defines classes for DHT22 driver.

Date

23 mars 2018

Author

nicls67

4.9.2 Macro Definition Documentation

4.9.2.1 MAX_WAIT_TIME_US

```
#define MAX_WAIT_TIME_US 100
```


Definition at line 20 of file dht22.cpp.

4.10 dht22.h File Reference


DHT22 driver header file.

```
#include "../bsw.h"
```

Include dependency graph for dht22.h:

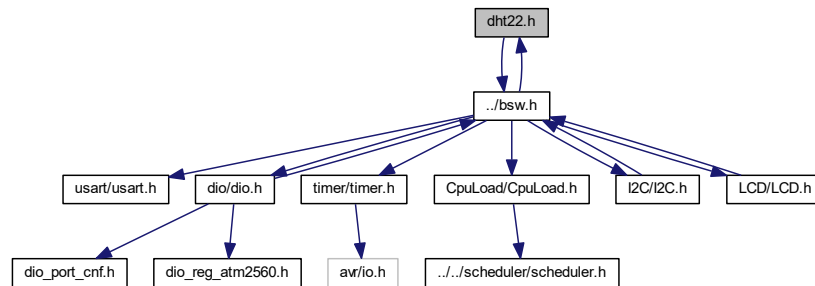

This graph shows which files directly or indirectly include this file:

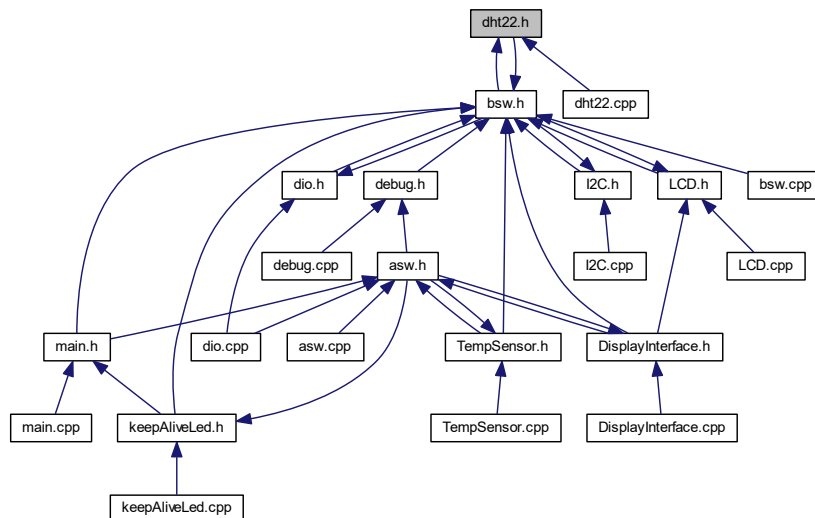

Classes

- class [dht22](#)
DHT 22 driver class.

Macros

- `#define DHT22_PORT_ENCODE_PORT(PORT_B, 6)`

4.11.1 Detailed Description

DIO library.

Date

13 mars 2018


Author

nicls67


4.12 dio.h File Reference

DIO library header file.

```
#include "../bsw.h"
#include "dio_port_cnf.h"
#include "dio_reg_atm2560.h"
Include dependency graph for dio.h:
```

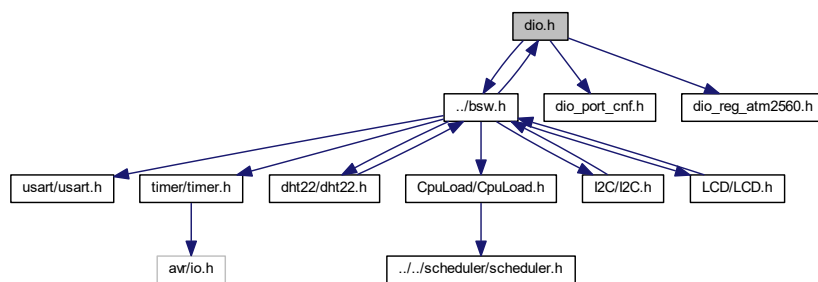

This graph shows which files directly or indirectly include this file:

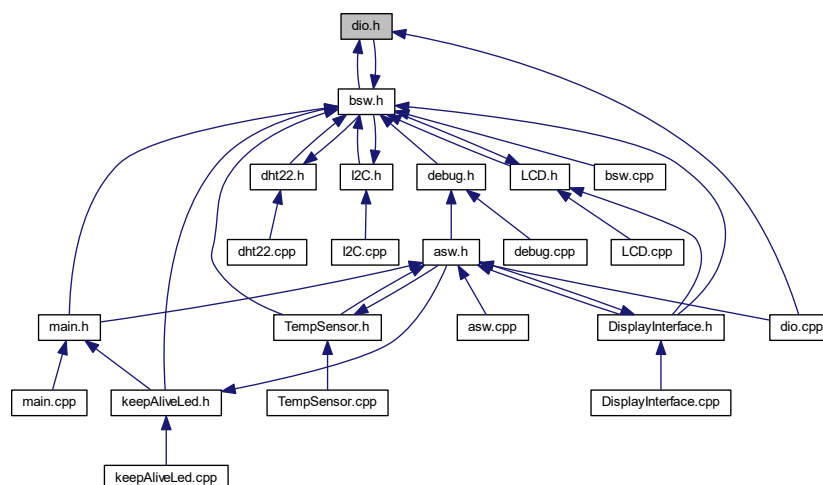

Classes

- class `dio`
DIO class.

Macros

- #define `PORT_CNF_OUT` 1
- #define `PORT_CNF_IN` 0
- #define `ENCODE_PORT`(port, pin) (uint8_t)((((uint8_t)(port & 0xF)) << 3) | (uint8_t)(pin & 0x7))
- #define `DECODE_PORT`(portcode) (uint8_t)((portcode >> 3) & 0xF)
- #define `DECODE_PIN`(portcode) (uint8_t)(portcode & 0x7)
- #define `PORT_A` 0
- #define `PORT_B` 1
- #define `PORT_C` 2
- #define `PORT_D` 3

4.12.1 Detailed Description

DIO library header file.

Date

13 mars 2018

Author

nicls67

4.12.2 Macro Definition Documentation

4.12.2.1 DECODE_PIN

```
#define DECODE_PIN(  
    portcode ) (uint8_t)(portcode & 0x7)
```

Macro used to extract pin index

Definition at line 19 of file dio.h.

4.12.2.2 DECODE_PORT

```
#define DECODE_PORT(  
    portcode ) (uint8_t)((portcode >> 3) & 0xF)
```

Macro used to extract port index

Definition at line 18 of file dio.h.

4.12.2.3 ENCODE_PORT

```
#define ENCODE_PORT(  
    port,  
    pin ) (uint8_t)((((uint8_t)(port & 0xF)) << 3) | (uint8_t)(pin & 0x7))
```

Macro used to encode port and pin indexes into one single byte

Definition at line 17 of file dio.h.

4.12.2.4 PORT_A

```
#define PORT_A 0
```

PORTA index

Definition at line 21 of file dio.h.

4.12.2.5 PORT_B

```
#define PORT_B 1
```

PORTB index

Definition at line 22 of file dio.h.

4.12.2.6 PORT_C

```
#define PORT_C 2
```

PORTC index

Definition at line 23 of file dio.h.

4.12.2.7 PORT_CNF_IN

```
#define PORT_CNF_IN 0
```

Pin is configured as input

Definition at line 15 of file dio.h.

4.12.2.8 PORT_CNF_OUT

```
#define PORT_CNF_OUT 1
```

Pin is configured as output

Definition at line 14 of file dio.h.

4.12.2.9 PORT_D

```
#define PORT_D 3
```


PORTD index

Definition at line 24 of file dio.h.

4.13 dio_port_conf.h File Reference

Digital ports configuration file.

This graph shows which files directly or indirectly include this file:

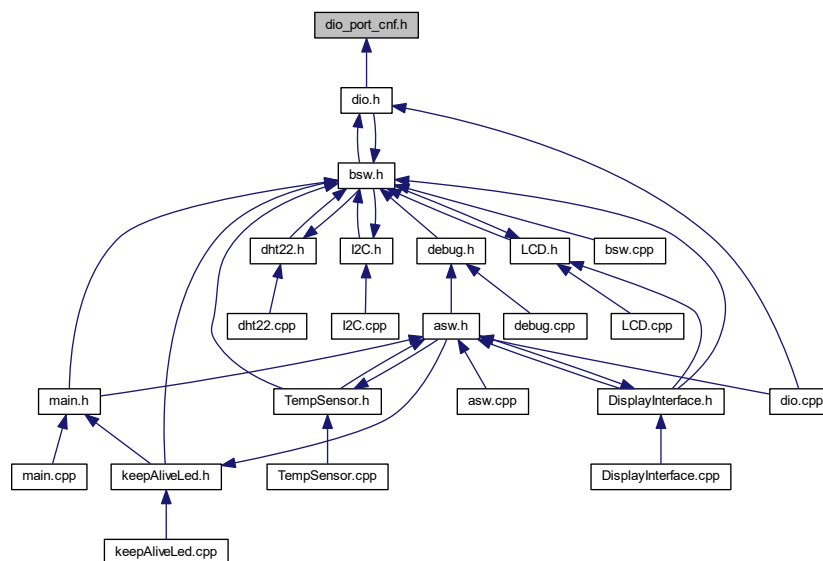

Macros

- `#define PORTB_CNF_DDRB (uint8_t)0b11000000`
Defines the configuration of DDRB register.
- `#define PORTB_CNF_PORTB (uint8_t)0b11000000`
Defines the configuration of PORTB register.

4.13.1 Detailed Description

Digital ports configuration file.

Date

19 mars 2019

Author

nicls67

4.13.2 Macro Definition Documentation

4.13.2.1 PORTB_CNF_DDRB

```
#define PORTB_CNF_DDRB (uint8_t)0b11000000
```

Defines the configuration of DDRB register.

This constant defines the direction of IO pins of PORT B. It will configure register DDRB.

PB0 : N/A
PB1 : N/A
PB2 : N/A
PB3 : N/A
PB4 : N/A
PB5 : N/A
PB6 : OUT
PB7 : OUT

Definition at line 25 of file dio_port_cnf.h.

4.13.2.2 PORTB_CNF_PORTB

```
#define PORTB_CNF_PORTB (uint8_t)0b11000000
```

Defines the configuration of PORTB register.

This constant defines the initial value of IO pins for PORT B. It will configure register PORTB. Pins configured as input shall not be configured here.

PB0 : N/A

PB1 : N/A

PB2 : N/A

PB3 : N/A

PB4 : N/A

PB5 : N/A


PB6 : HIGH

PB7 : HIGH

Definition at line 40 of file dio_port_cnf.h.

4.14 dio_reg_atm2560.h File Reference

This graph shows which files directly or indirectly include this file:

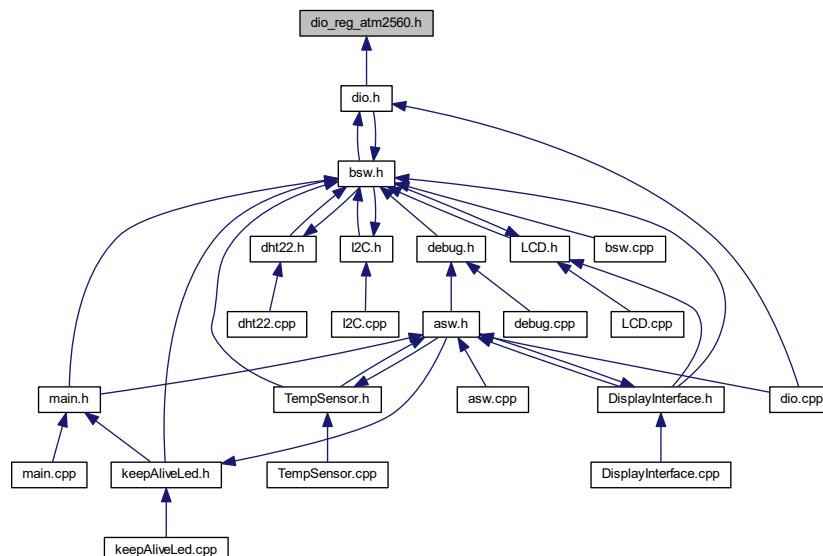

Macros

- #define [PORTA_PTR](#) (volatile uint8_t *) (0x02 + 0x20)
- #define [PORTB_PTR](#) (volatile uint8_t *) (0x05 + 0x20)
- #define [PORTC_PTR](#) (volatile uint8_t *) (0x08 + 0x20)
- #define [PORTD_PTR](#) (volatile uint8_t *) (0x0B + 0x20)
- #define [PINA_PTR](#) (volatile uint8_t *) (0x00 + 0x20)

- `#define PINB_PTR (volatile uint8_t *) (0x03 + 0x20)`
- `#define PINC_PTR (volatile uint8_t *) (0x06 + 0x20)`
- `#define PIND_PTR (volatile uint8_t *) (0x09 + 0x20)`
- `#define DDRA_PTR (volatile uint8_t *) (0x01 + 0x20)`
- `#define DDRB_PTR (volatile uint8_t *) (0x04 + 0x20)`
- `#define DDRC_PTR (volatile uint8_t *) (0x07 + 0x20)`
- `#define DDRD_PTR (volatile uint8_t *) (0x0A + 0x20)`

4.14.1 Macro Definition Documentation

4.14.1.1 DDRA_PTR

```
#define DDRA_PTR (volatile uint8_t *) (0x01 + 0x20)
```

Macro defining pointer to DDR A register

Definition at line 24 of file dio_reg_atm2560.h.

4.14.1.2 DDRB_PTR

```
#define DDRB_PTR (volatile uint8_t *) (0x04 + 0x20)
```

Macro defining pointer to DDR B register

Definition at line 25 of file dio_reg_atm2560.h.

4.14.1.3 DDRC_PTR

```
#define DDRC_PTR (volatile uint8_t *) (0x07 + 0x20)
```

Macro defining pointer to DDR C register

Definition at line 26 of file dio_reg_atm2560.h.

4.14.1.4 DDRD_PTR

```
#define DDRD_PTR (volatile uint8_t *) (0x0A + 0x20)
```

Macro defining pointer to DDR D register

Definition at line 27 of file dio_reg_atm2560.h.

4.14.1.5 PINA_PTR

```
#define PINA_PTR (volatile uint8_t *) (0x00 + 0x20)
```

Macro defining pointer to PIN A register

Definition at line 19 of file dio_reg_atm2560.h.

4.14.1.6 PINB_PTR

```
#define PINB_PTR (volatile uint8_t *) (0x03 + 0x20)
```

Macro defining pointer to PIN B register

Definition at line 20 of file dio_reg_atm2560.h.

4.14.1.7 PINC_PTR

```
#define PINC_PTR (volatile uint8_t *) (0x06 + 0x20)
```

Macro defining pointer to PIN C register

Definition at line 21 of file dio_reg_atm2560.h.

4.14.1.8 PIND_PTR

```
#define PIND_PTR (volatile uint8_t *) (0x09 + 0x20)
```

Macro defining pointer to PIN D register

Definition at line 22 of file dio_reg_atm2560.h.

4.14.1.9 PORTA_PTR

```
#define PORTA_PTR (volatile uint8_t *) (0x02 + 0x20)
```

Macro defining pointer to PORT A register

Definition at line 14 of file dio_reg_atm2560.h.

4.14.1.10 PORTB_PTR

```
#define PORTB_PTR (volatile uint8_t *) (0x05 + 0x20)
```

Macro defining pointer to PORT B register

Definition at line 15 of file dio_reg_atm2560.h.

4.14.1.11 PORTC_PTR

```
#define PORTC_PTR (volatile uint8_t *) (0x08 + 0x20)
```

Macro defining pointer to PORT C register

Definition at line 16 of file dio_reg_atm2560.h.

4.14.1.12 PORTD_PTR

```
#define PORTD_PTR (volatile uint8_t *) (0x0B + 0x20)
```


Macro defining pointer to PORT D register

Definition at line 17 of file dio_reg_atm2560.h.

4.15 DisplayInterface.cpp File Reference

Source code file for display services.

```
#include <stdlib.h>
#include <avr/io.h>
#include "DisplayInterface.h"
Include dependency graph for DisplayInterface.cpp:
```

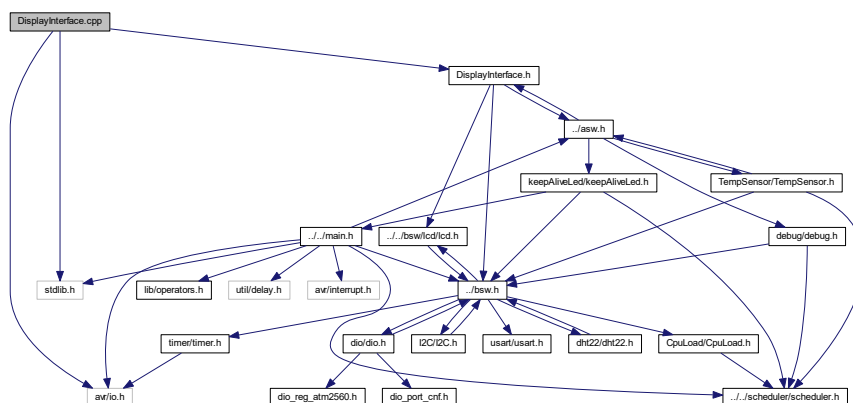

4.15.1 Detailed Description

Source code file for display services.

Date

23 avr. 2019

Author

nicls67

4.16 DisplayInterface.h File Reference


[DisplayInterface](#) class header file.

```
#include "../bws/lcd/lcd.h"
```


```
#include "../bws/bws.h"
```

```
#include "../asw.h"
```

Include dependency graph for DisplayInterface.h:

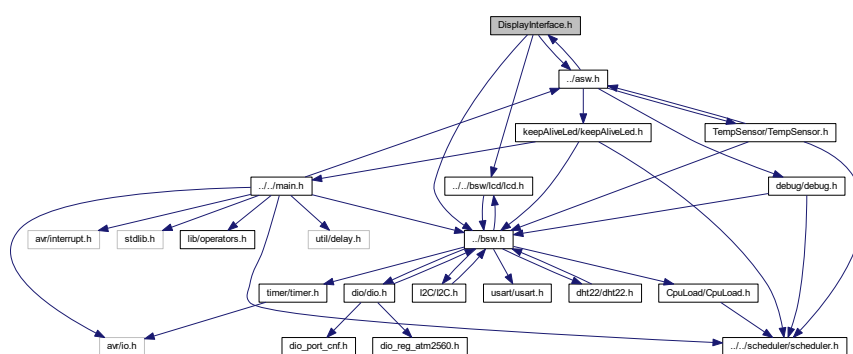

This graph shows which files directly or indirectly include this file:

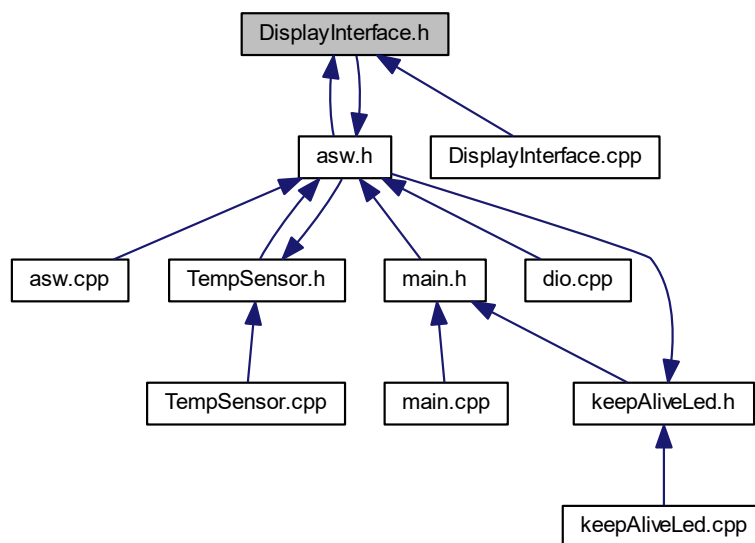

Classes

- class [DisplayInterface](#)
Display interface services class.

Variables

- const [T_LCD_conf_struct LCD_init_cnf](#)

4.16.1 Detailed Description

[DisplayInterface](#) class header file.

Date

23 avr. 2019

Author

nicls67

4.16.2 Variable Documentation

4.16.2.1 LCD_init_cnf

```
const T_LCD_conf_struct LCD_init_cnf
```

Initial value:

```
= {
    LCD_CNF_BACKLIGHT_ON,
    LCD_CNF_TWO_LINE,
    LCD_CNF_FONT_5_8,
    LCD_CNF_DISPLAY_ON,
    LCD_CNF_CURSOR_ON,
    LCD_CNF_CURSOR_BLINK_ON,
    LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT,
    LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF
}
```


Definition at line 15 of file DisplayInterface.h.

4.17 I2C.cpp File Reference

Two-wire interface ([I2C](#)) source file.

```
#include <avr/io.h>
#include "I2C.h"
```

Include dependency graph for I2C.cpp:

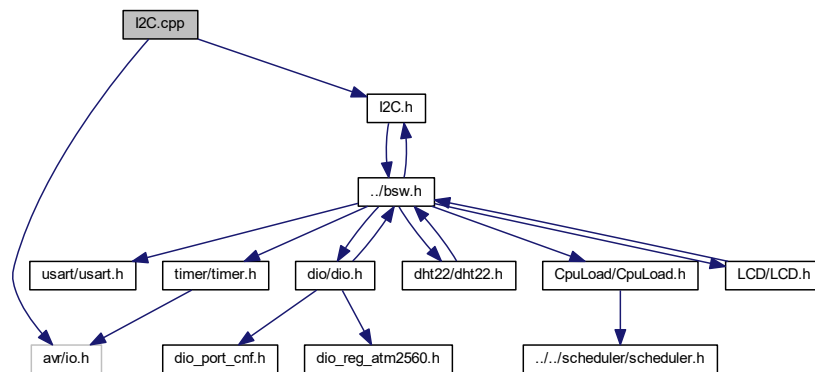

4.17.1 Detailed Description

Two-wire interface ([I2C](#)) source file.

Date

19 avr. 2019

Author


nicls67

4.18 I2C.h File Reference


I2C class header file.

```
#include "../bsw.h"
```

Include dependency graph for I2C.h:

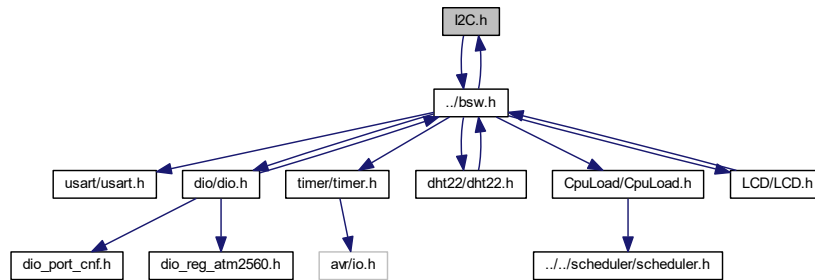

This graph shows which files directly or indirectly include this file:

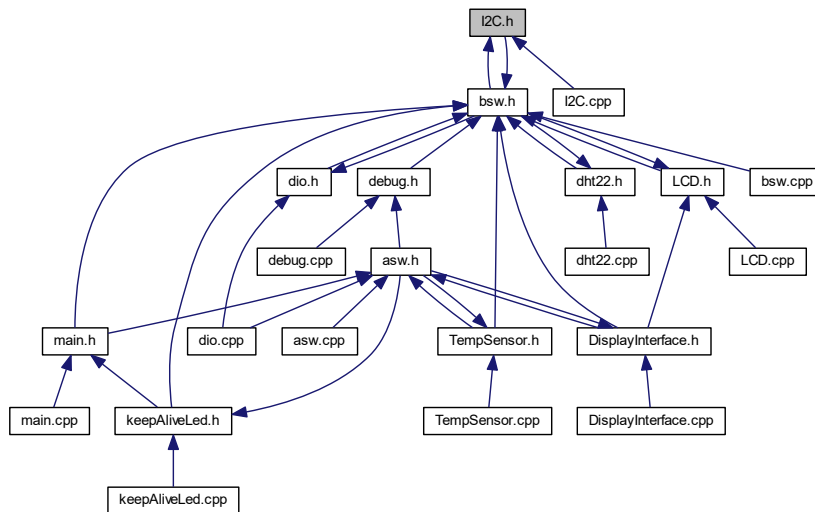

Classes

- class [I2C](#)
Two-wire serial interface (I2C) class definition.

Macros

- #define [START](#) 0x08
- #define [SLA_ACK](#) 0x18
- #define [DATA_ACK](#) 0x28

4.18.1 Detailed Description

I2C class header file.

Date

19 avr. 2019

Author

nicls67

4.18.2 Macro Definition Documentation

4.18.2.1 DATA_ACK

```
#define DATA_ACK 0x28
```

TWSR status code : DATA has been transmitted and ACK has been received

Definition at line 15 of file I2C.h.

4.18.2.2 SLA_ACK

```
#define SLA_ACK 0x18
```

TWSR status code : SLA has been transmitted and ACK has been received

Definition at line 14 of file I2C.h.

4.18.2.3 START

```
#define START 0x08
```


TWSR status code : START condition transmitted

Definition at line 13 of file I2C.h.

4.19 keepAliveLed.cpp File Reference

Definition of function for class [keepAliveLed](#).

```
#include <avr/io.h>
#include "keepAliveLed.h"
Include dependency graph for keepAliveLed.cpp:
```

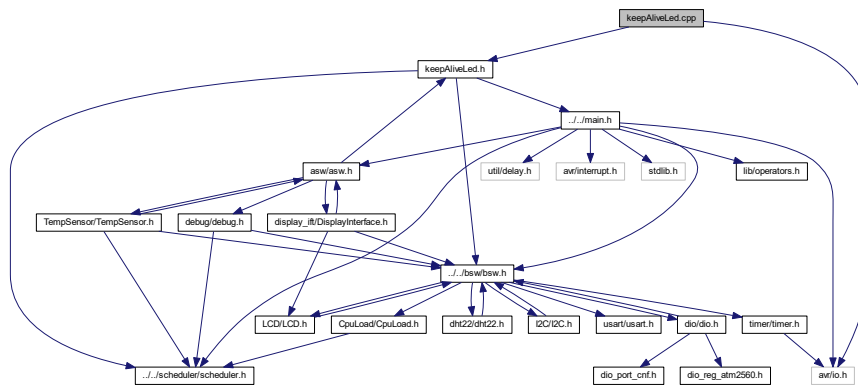

4.19.1 Detailed Description

Definition of function for class [keepAliveLed](#).

Date

17 mars 2018

Author

nicls67

4.20 keepAliveLed.h File Reference

Class [keepAliveLed](#) header file.

```
#include "../bws/bsw.h"
#include "../scheduler/scheduler.h"
```


4.20.1 Detailed Description

Class [keepAliveLed](#) header file.

Date

17 mars 2018

Author

nicls67

4.20.2 Macro Definition Documentation

4.20.2.1 LED_PORT

```
#define LED_PORT ENCODE_PORT(PORT_B, 7)
```

LED is connected to port PB7

Definition at line 16 of file [keepAliveLed.h](#).

4.20.2.2 PERIOD_MS_TASK_LED

```
#define PERIOD_MS_TASK_LED SW_PERIOD_MS
```

Period for led blinking


Definition at line 15 of file [keepAliveLed.h](#).

4.21 LCD.cpp File Reference

[LCD](#) class source file.

```
#include <util/delay.h>
#include "LCD.h"
```

Include dependency graph for LCD.cpp:

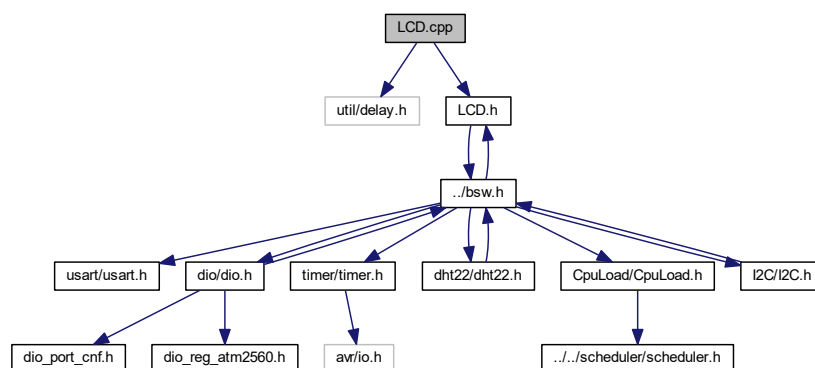

4.21.1 Detailed Description

[LCD](#) class source file.

Date

20 avr. 2019

Author


nicls67

4.22 LCD.h File Reference


[LCD](#) class header file.

```
#include "../bsw.h"
```

Include dependency graph for LCD.h:

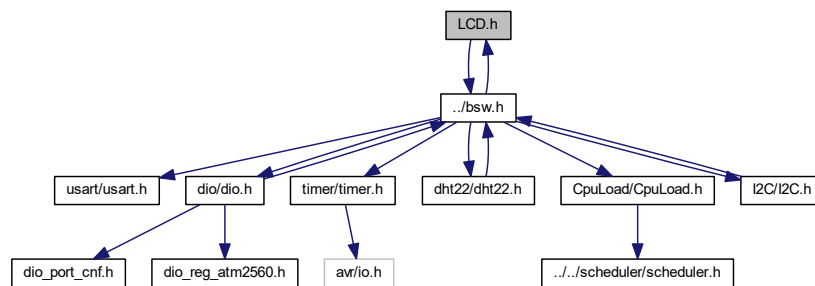

This graph shows which files directly or indirectly include this file:

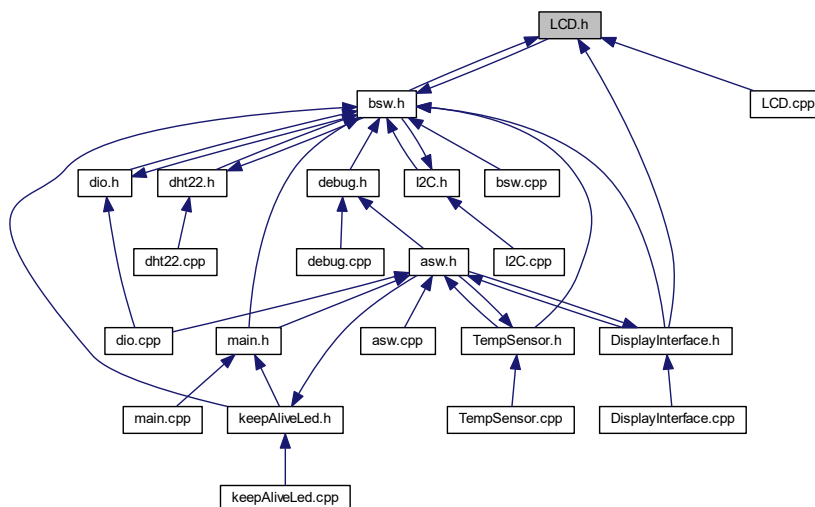

Classes

- struct [T_LCD_conf_struct](#)
- class [LCD](#)

Class for [LCD S2004A](#) display driver.

Macros

- #define [I2C_ADDR](#) 0x27
- #define [EN_PIN](#) 2
- #define [RW_PIN](#) 1
- #define [RS_PIN](#) 0
- #define [BACKLIGHT_PIN](#) 3
- #define [LCD_INST_CLR_DISPLAY_BIT](#) 0
- #define [LCD_INST_FUNCTION_SET](#) 5
- #define [LCD_INST_DISPLAY_CTRL](#) 3
- #define [LCD_INST_ENTRY_MODE_SET](#) 2
- #define [LCD_INST_SET_DDRAM_ADDR](#) 7
- #define [LCD_FCT_SET_FIELD_DL](#) 4
- #define [LCD_FCT_SET_FIELD_N](#) 3
- #define [LCD_FCT_SET_FIELD_F](#) 2
- #define [LCD_DISPLAY_CTRL_FIELD_D](#) 2
- #define [LCD_DISPLAY_CTRL_FIELD_C](#) 1
- #define [LCD_DISPLAY_CTRL_FIELD_B](#) 0
- #define [LCD_CNF_SHIFT_ID](#) 1
- #define [LCD_CNF_SHIFT_SH](#) 0
- #define [LCD_CNF_ONE_LINE](#) 0
- #define [LCD_CNF_TWO_LINE](#) 1
- #define [LCD_CNF_FONT_5_8](#) 0
- #define [LCD_CNF_FONT_5_11](#) 1
- #define [LCD_CNF_DISPLAY_ON](#) 1
- #define [LCD_CNF_DISPLAY_OFF](#) 0
- #define [LCD_CNF_CURSOR_ON](#) 1
- #define [LCD_CNF_CURSOR_OFF](#) 0
- #define [LCD_CNF_CURSOR_BLINK_ON](#) 1
- #define [LCD_CNF_CURSOR_BLINK_OFF](#) 0
- #define [LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT](#) 1
- #define [LCD_CNF_ENTRY_MODE_DIRECTION_LEFT](#) 0
- #define [LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON](#) 1
- #define [LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF](#) 0
- #define [LCD_CNF_BACKLIGHT_ON](#) 1
- #define [LCD_CNF_BACKLIGHT_OFF](#) 0
- #define [LCD_RAM_1_LINE_MIN](#) 0
- #define [LCD_RAM_1_LINE_MAX](#) 0x4F
- #define [LCD_RAM_2_LINES_MIN_1](#) 0
- #define [LCD_RAM_2_LINES_MAX_1](#) 0x27
- #define [LCD_RAM_2_LINES_MIN_2](#) 0x40
- #define [LCD_RAM_2_LINES_MAX_2](#) 0x67
- #define [LCD_WAIT_CLR_RETURN](#) 1600
- #define [LCD_WAIT_OTHER_MODES](#) 40

Enumerations

- enum `T_LCD_command` {
 `LCD_CMD_FUNCTION_SET`, `LCD_CMD_CLEAR_DISPLAY`, `LCD_CMD_DISPLAY_CTRL`, `LCD_CMD_ENTRY_MODE_SET`,
 `LCD_CMD_SET_DDRAM_ADDR` }
 LCD commands enumeration.
- enum `T_LCD_config_mode` { `LCD_MODE_INSTRUCTION` = 0, `LCD_MODE_DATA` = 1 }
 LCD modes enumeration.
- enum `T_LCD_ram_area` { `LCD_DATA_DDRAM`, `LCD_DATA_CGRAM` }
 Screen RAM definition.

4.22.1 Detailed Description

`LCD` class header file.

Date

20 avr. 2019

Author

nicls67

4.22.2 Macro Definition Documentation

4.22.2.1 BACKLIGHT_PIN

```
#define BACKLIGHT_PIN 3
```

Backlight pin is on P3

Definition at line 19 of file LCD.h.

4.22.2.2 EN_PIN

```
#define EN_PIN 2
```

EN bit is on P2

Definition at line 16 of file LCD.h.

4.22.2.3 I2C_ADDR

```
#define I2C_ADDR 0x27
```

I2C address of LCD display

Definition at line 13 of file LCD.h.

4.22.2.4 LCD_CNF_BACKLIGHT_OFF

```
#define LCD_CNF_BACKLIGHT_OFF 0
```

Backlight is disabled

Definition at line 72 of file LCD.h.

4.22.2.5 LCD_CNF_BACKLIGHT_ON

```
#define LCD_CNF_BACKLIGHT_ON 1
```

Backlight is enabled

Definition at line 71 of file LCD.h.

4.22.2.6 LCD_CNF_CURSOR_BLINK_OFF

```
#define LCD_CNF_CURSOR_BLINK_OFF 0
```

Cursor blinking is off, bit is set to 0

Definition at line 60 of file LCD.h.

4.22.2.7 LCD_CNF_CURSOR_BLINK_ON

```
#define LCD_CNF_CURSOR_BLINK_ON 1
```

Cursor blinking is on, bit is set to 1

Definition at line 59 of file LCD.h.

4.22.2.8 LCD_CNF_CURSOR_OFF

```
#define LCD_CNF_CURSOR_OFF 0
```

Cursor is off, bit is set to 0

Definition at line 56 of file LCD.h.

4.22.2.9 LCD_CNF_CURSOR_ON

```
#define LCD_CNF_CURSOR_ON 1
```

Cursor is on, bit is set to 1

Definition at line 55 of file LCD.h.

4.22.2.10 LCD_CNF_DISPLAY_OFF

```
#define LCD_CNF_DISPLAY_OFF 0
```

Display is off, bit is set to 0

Definition at line 52 of file LCD.h.

4.22.2.11 LCD_CNF_DISPLAY_ON

```
#define LCD_CNF_DISPLAY_ON 1
```

Display is on, bit is set to 1

Definition at line 51 of file LCD.h.

4.22.2.12 LCD_CNF_ENTRY_MODE_DIRECTION_LEFT

```
#define LCD_CNF_ENTRY_MODE_DIRECTION_LEFT 0
```

Direction of shift is left, bit is set to 0

Definition at line 64 of file LCD.h.

4.22.2.13 LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT

```
#define LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT 1
```

Direction of shift is right, bit is set to 1

Definition at line 63 of file LCD.h.

4.22.2.14 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF

```
#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF 0
```

Display shift is not performed, bit is set to 0

Definition at line 68 of file LCD.h.

4.22.2.15 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON

```
#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON 1
```

Display shift is performed, bit is set to 1

Definition at line 67 of file LCD.h.

4.22.2.16 LCD_CNF_FONT_5_11

```
#define LCD_CNF_FONT_5_11 1
```

Two-line configuration, bit is set to 1

Definition at line 48 of file LCD.h.

4.22.2.17 LCD_CNF_FONT_5_8

```
#define LCD_CNF_FONT_5_8 0
```

One-line configuration, bit is set to 0

Definition at line 47 of file LCD.h.

4.22.2.18 LCD_CNF_ONE_LINE

```
#define LCD_CNF_ONE_LINE 0
```

One-line configuration, bit is set to 0

Definition at line 43 of file LCD.h.

4.22.2.19 LCD_CNF_SHIFT_ID

```
#define LCD_CNF_SHIFT_ID 1
```

Field ID (increment or decrement) of command "entry mode set" is on bit DB1

Definition at line 39 of file LCD.h.

4.22.2.20 LCD_CNF_SHIFT_SH

```
#define LCD_CNF_SHIFT_SH 0
```

Field SH (shift of display) of command "entry mode set" is on bit DB1

Definition at line 40 of file LCD.h.

4.22.2.21 LCD_CNF_TWO_LINE

```
#define LCD_CNF_TWO_LINE 1
```

Two-line configuration, bit is set to 1

Definition at line 44 of file LCD.h.

4.22.2.22 LCD_DISPLAY_CTRL_FIELD_B

```
#define LCD_DISPLAY_CTRL_FIELD_B 0
```

Field B (cursor blink) of command "display control" is on bit DB0

Definition at line 36 of file LCD.h.

4.22.2.23 LCD_DISPLAY_CTRL_FIELD_C

```
#define LCD_DISPLAY_CTRL_FIELD_C 1
```

Field C (cursor on/off) of command "display control" is on bit DB1

Definition at line 35 of file LCD.h.

4.22.2.24 LCD_DISPLAY_CTRL_FIELD_D

```
#define LCD_DISPLAY_CTRL_FIELD_D 2
```

Field D (display on/off) of command "display control" is on bit DB2

Definition at line 34 of file LCD.h.

4.22.2.25 LCD_FCT_SET_FIELD_DL

```
#define LCD_FCT_SET_FIELD_DL 4
```

Field DL (data length) of command "function set" is on bit DB4

Definition at line 29 of file LCD.h.

4.22.2.26 LCD_FCT_SET_FIELD_F

```
#define LCD_FCT_SET_FIELD_F 2
```

Field F (font type) of command "function set" is on bit DB2

Definition at line 31 of file LCD.h.

4.22.2.27 LCD_FCT_SET_FIELD_N

```
#define LCD_FCT_SET_FIELD_N 3
```

Field N (number of lines) of command "function set" is on bit DB3

Definition at line 30 of file LCD.h.

4.22.2.28 LCD_INST_CLR_DISPLAY_BIT

```
#define LCD_INST_CLR_DISPLAY_BIT 0
```

Instruction bit for "clear display" is DB0

Definition at line 22 of file LCD.h.

4.22.2.29 LCD_INST_DISPLAY_CTRL

```
#define LCD_INST_DISPLAY_CTRL 3
```

Instruction bit for "display control" is DB3

Definition at line 24 of file LCD.h.

4.22.2.30 LCD_INST_ENTRY_MODE_SET

```
#define LCD_INST_ENTRY_MODE_SET 2
```

Instruction bit for "entry mode" is DB2

Definition at line 25 of file LCD.h.

4.22.2.31 LCD_INST_FUNCTION_SET

```
#define LCD_INST_FUNCTION_SET 5
```

Instruction bit for "function set" is DB5

Definition at line 23 of file LCD.h.

4.22.2.32 LCD_INST_SET_DDRAM_ADDR

```
#define LCD_INST_SET_DDRAM_ADDR 7
```

Instruction bit for "set DDRAM address" is DB7

Definition at line 26 of file LCD.h.

4.22.2.33 LCD_RAM_1_LINE_MAX

```
#define LCD_RAM_1_LINE_MAX 0x4F
```

Maximum address value in 1-line mode

Definition at line 76 of file LCD.h.

4.22.2.34 LCD_RAM_1_LINE_MIN

```
#define LCD_RAM_1_LINE_MIN 0
```

Minimum address value in 1-line mode

Definition at line 75 of file LCD.h.

4.22.2.35 LCD_RAM_2_LINES_MAX_1

```
#define LCD_RAM_2_LINES_MAX_1 0x27
```

Maximum address value in 2-lines mode for line 1

Definition at line 78 of file LCD.h.

4.22.2.36 LCD_RAM_2_LINES_MAX_2

```
#define LCD_RAM_2_LINES_MAX_2 0x67
```

Maximum address value in 2-lines mode for line 2

Definition at line 80 of file LCD.h.

4.22.2.37 LCD_RAM_2_LINES_MIN_1

```
#define LCD_RAM_2_LINES_MIN_1 0
```

Minimum address value in 2-lines mode for line 1

Definition at line 77 of file LCD.h.

4.22.2.38 LCD_RAM_2_LINES_MIN_2

```
#define LCD_RAM_2_LINES_MIN_2 0x40
```

Minimum address value in 2-lines mode for line 2

Definition at line 79 of file LCD.h.

4.22.2.39 LCD_WAIT_CLR_RETURN

```
#define LCD_WAIT_CLR_RETURN 1600
```

Waiting time after clear display and return home operations is at least 1520 us

Definition at line 83 of file LCD.h.

4.22.2.40 LCD_WAIT_OTHER_MODES

```
#define LCD_WAIT_OTHER_MODES 40
```

Waiting time after all other modes is at least 38 us

Definition at line 84 of file LCD.h.

4.22.2.41 RS_PIN

```
#define RS_PIN 0
```

RS pin is on P0

Definition at line 18 of file LCD.h.

4.22.2.42 RW_PIN

```
#define RW_PIN 1
```

RW pin is on P1

Definition at line 17 of file LCD.h.

4.22.3 Enumeration Type Documentation

4.22.3.1 T_LCD_command

```
enum T_LCD_command
```

LCD commands enumeration.

This enumeration defines all command modes available for LCD configuration

Enumerator

LCD_CMD_FUNCTION_SET	
LCD_CMD_CLEAR_DISPLAY	
LCD_CMD_DISPLAY_CTRL	
LCD_CMD_ENTRY_MODE_SET	
LCD_CMD_SET_DDGRAM_ADDR	

Definition at line 92 of file LCD.h.

4.22.3.2 T_LCD_config_mode

enum [T_LCD_config_mode](#)

[LCD](#) modes enumeration.

This enumeration defines the possible modes for communication with [LCD](#). Two modes are possible, DATA for writing data in RAM and INSTRUCTION for configuring the display

Enumerator

LCD_MODE_INSTRUCTION	
LCD_MODE_DATA	

Definition at line 106 of file LCD.h.

4.22.3.3 T_LCD_ram_area

enum [T_LCD_ram_area](#)

Screen RAM definition.

This enumeration defines the RAM areas of the [LCD](#) screen : DDRAM for display, CGRAM for characters generation

Enumerator

LCD_DATA_DDRAM	
LCD_DATA_CGRAM	

Definition at line 117 of file LCD.h.

4.23 main.cpp File Reference

Background task file.

4.23.2.1 ISR() [1/2]

```
ISR (
    TIMER1_COMPA_vect )
```

Main software interrupt.


This function handles the interrupt raised by Timer #1. It wakes up the software every 500 ms to perform applications.

Returns

Nothing

Definition at line 19 of file main.cpp.

Here is the call graph for this function:



4.23.2.2 ISR() [2/2]

```
ISR (
    USART0_RX_vect )
```

USART Rx Complete interrupt.


This function handles the interrupt raised when a frame has been received by USART. If debug mode mode is active, it calls debug mode management function. If inactive, it calls debug mode activation function if the received character is 'a'

Returns

Nothing

Definition at line 31 of file main.cpp.

Here is the call graph for this function:

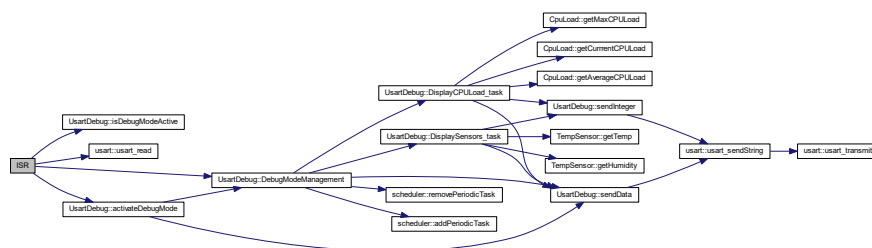

4.23.2.3 main()


```
int main (
    void )
```

Background task of program.

This function initializes all the software and then goes into an infinite loop. Periodic interrupt will wake up the software to perform application

Definition at line 51 of file main.cpp.

Here is the call graph for this function:

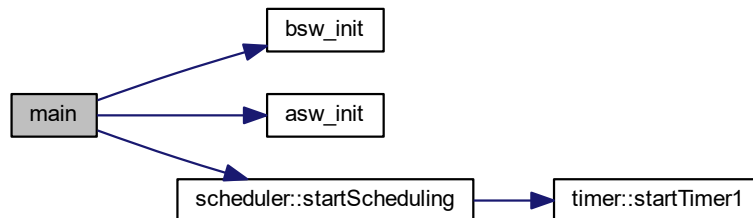


4.24 main.h File Reference


Background task header file.

```
#include <avr/io.h>
#include <util/delay.h>
#include <avr/interrupt.h>
#include <stdlib.h>
#include "lib/operators.h"
#include "asw/asw.h"
#include "bsw/bsw.h"
#include "scheduler/scheduler.h"
```

Include dependency graph for main.h:

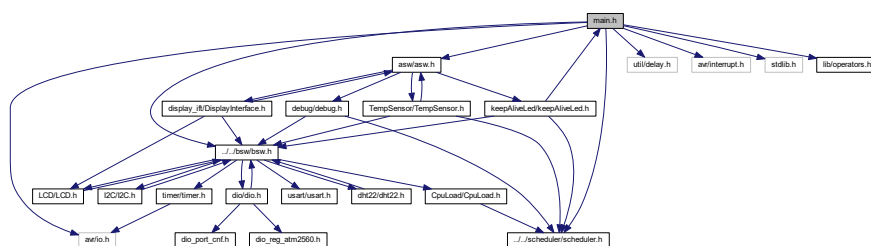

This graph shows which files directly or indirectly include this file:

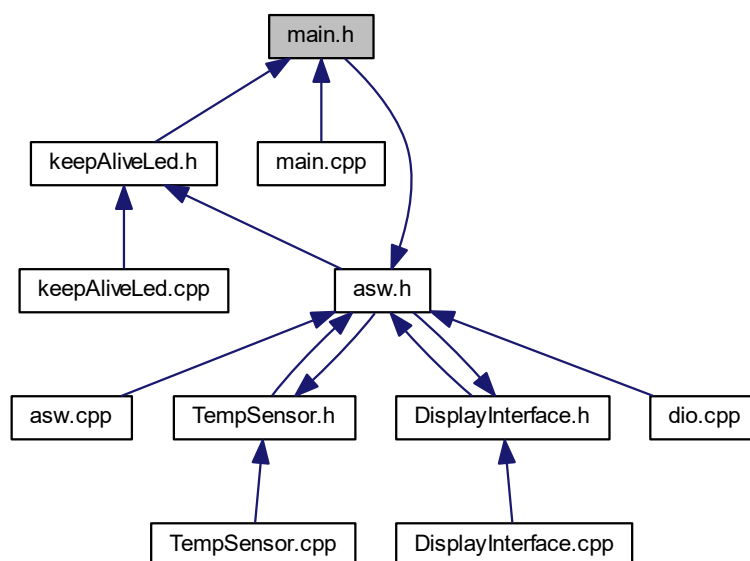

4.24.1 Detailed Description

Background task header file.

Date

17 mars 2018

Author


nicls67

4.25 operators.cpp File Reference

c++ operators definitions

```
#include <stdlib.h>
#include "operators.h"
```

Include dependency graph for operators.cpp:

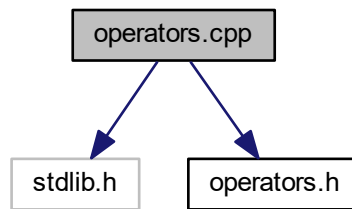

Functions

- void * `operator new` (size_t a_size)
Operator new.
- void `operator delete` (void *ptr)
Operator delete.

4.25.1 Detailed Description

c++ operators definitions

Date

14 mars 2018

Author

nicls67

4.25.2 Function Documentation

4.25.2.1 operator delete()

```
void operator delete (  
    void * ptr )
```

Operator delete.

Equivalent to free function in C Free the memory zone at address ptr

Parameters

in	<i>ptr</i>	Pointer to the start of memory zone to free
----	------------	---

Returns

Nothing

Definition at line 18 of file operators.cpp.

4.25.2.2 operator new()

```
void* operator new (  
    size_t a_size )
```

Operator new.

Equivalent to malloc function in C Allocates a memory zone of size a_size

Parameters

in	<i>a_size</i>	memory size to allocate
----	---------------	-------------------------

Returns


Pointer to the start of allocated memory zone

Definition at line 13 of file operators.cpp.

4.26 operators.h File Reference

c++ operators definitions header file

This graph shows which files directly or indirectly include this file:

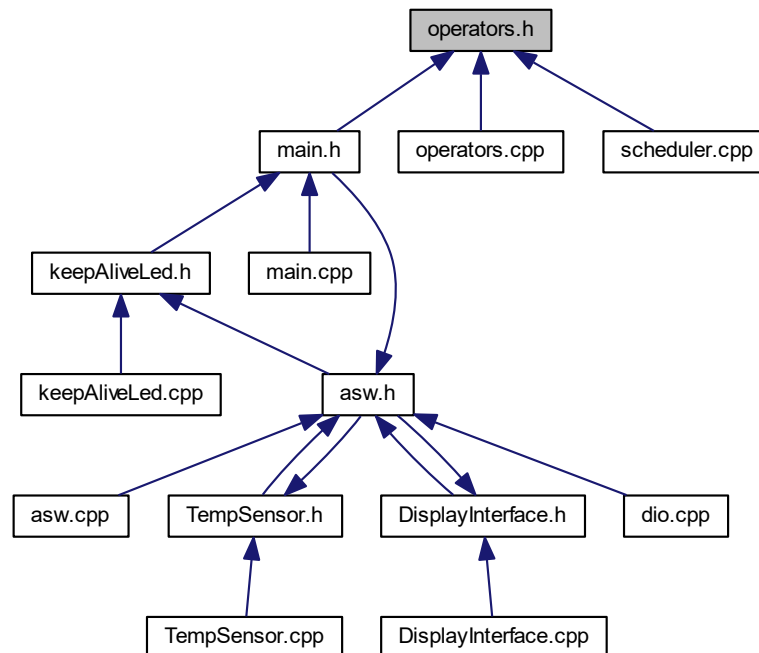

Functions

- void * [operator new](#) (size_t a_size)
Operator new.
- void [operator delete](#) (void *ptr)
Operator delete.

4.26.1 Detailed Description

c++ operators definitions header file

Date

14 mars 2018

Author

nicls67

4.26.2 Function Documentation

4.26.2.1 operator delete()

```
void operator delete (
    void * ptr )
```

Operator delete.

Equivalent to free function in C Free the memory zone at address ptr

Parameters

in	<i>ptr</i>	Pointer to the start of memory zone to free
----	------------	---

Returns

Nothing

Definition at line 18 of file operators.cpp.

4.26.2.2 operator new()

```
void* operator new (
    size_t a_size )
```

Operator new.

Equivalent to malloc function in C Allocates a memory zone of size a_size

Parameters

in	<i>a_size</i>	memory size to allocate
----	---------------	-------------------------

Returns

Pointer to the start of allocated memory zone

Definition at line 13 of file operators.cpp.


4.27 scheduler.cpp File Reference

Defines scheduler class.

```
#include <stdlib.h>
#include <avr/io.h>
#include "../lib/operators.h"
```

```
#include "scheduler.h"
```

Include dependency graph for scheduler.cpp:

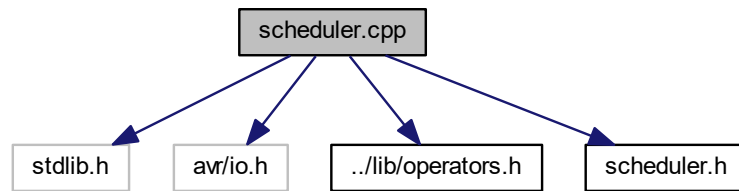

Variables

- `scheduler * p_scheduler`

4.27.1 Detailed Description

Defines scheduler class.

Date

16 mars 2018

Author

nicls67

4.27.2 Variable Documentation

4.27.2.1 p_scheduler

```
scheduler* p_scheduler
```


Pointer to scheduler object

Definition at line 17 of file scheduler.cpp.

4.28 scheduler.h File Reference

Scheduler class header file.

This graph shows which files directly or indirectly include this file:

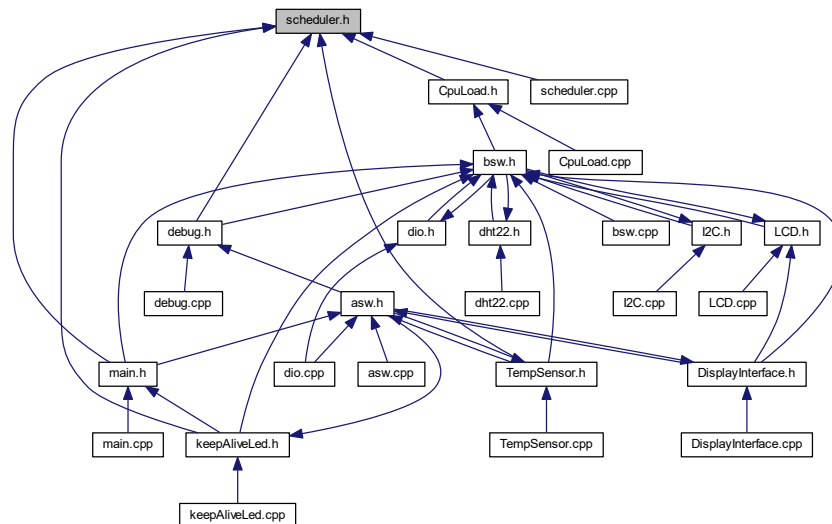

Classes

- class [scheduler](#)
Scheduler class.
- struct [scheduler::Task_t](#)
Type defining a task structure.
- struct [scheduler::Task_cnf_struct_t](#)
Task configuration structure.

Macros

- `#define` [SW_PERIOD_MS](#) 500
- `#define` [PRESCALER_PERIODIC_TIMER](#) 256
- `#define` [TIMER CTC_VALUE](#) $((F_CPU/PRESCALER_PERIODIC_TIMER)/(1000/SW_PERIOD_MS))$

Typedefs

- typedef void(* [TaskPtr_t](#)) (void)
Type defining a pointer to function.

Variables

- [scheduler](#) * [p_scheduler](#)

4.28.1 Detailed Description

Scheduler class header file.

Date

16 mars 2018

Author

nicls67

4.28.2 Macro Definition Documentation

4.28.2.1 PRESCALER_PERIODIC_TIMER

```
#define PRESCALER_PERIODIC_TIMER 256
```

Value of prescaler to use for periodic timer

Definition at line 15 of file scheduler.h.

4.28.2.2 SW_PERIOD_MS

```
#define SW_PERIOD_MS 500
```

Software period, used to define periodic timer interrupt

Definition at line 14 of file scheduler.h.

4.28.2.3 TIMER_CTC_VALUE


```
#define TIMER_CTC_VALUE ((F_CPU/PRESCALER_PERIODIC_TIMER)/(1000/SW_PERIOD_MS))
```

Compare value for periodic timer

Definition at line 16 of file scheduler.h.

4.28.3 Typedef Documentation

This graph shows which files directly or indirectly include this file:

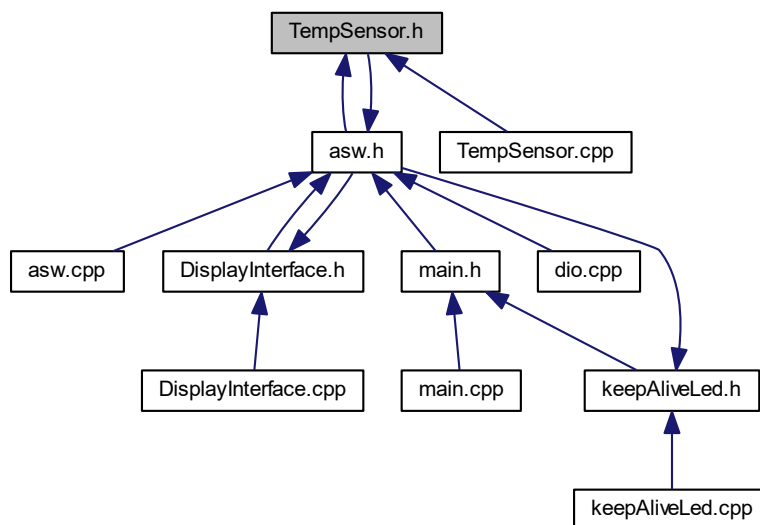

Classes

- class [TempSensor](#)
Class for temperature sensor.

Macros

- `#define PERIOD_MS_TASK_TEMP_SENSOR 5000`

4.30.1 Detailed Description

Class [TempSensor](#) header file.

Date

23 mars 2018

Author

nicls67

4.30.2 Macro Definition Documentation

4.30.2.1 PERIOD_MS_TASK_TEMP_SENSOR

```
#define PERIOD_MS_TASK_TEMP_SENSOR 5000
```

Period for reading temperature data


Definition at line 13 of file TempSensor.h.

4.31 timer.cpp File Reference

Defines function for class timer.

```
#include <avr/io.h>  
#include "timer.h"
```

Include dependency graph for timer.cpp:

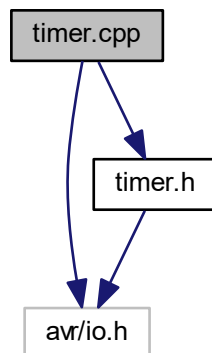

4.31.1 Detailed Description

Defines function for class timer.

Date

15 mars 2018

Author


nicls67

4.32 timer.h File Reference


Timer class header file.

```
#include <avr/io.h>
```

Include dependency graph for timer.h:



This graph shows which files directly or indirectly include this file:

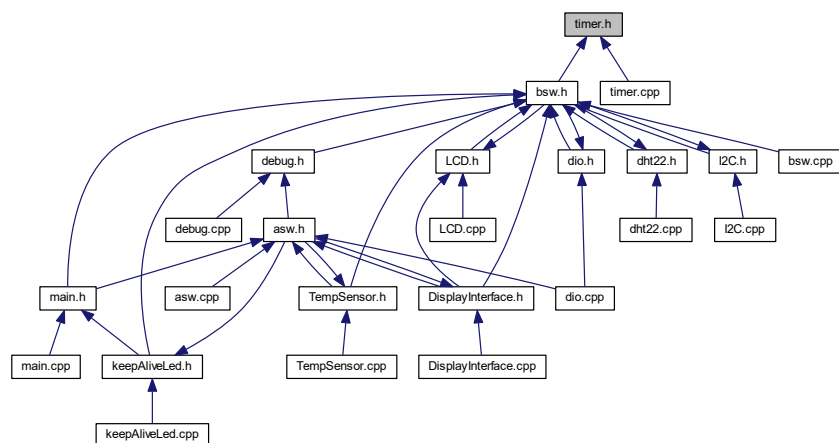

Classes

- class [timer](#)
Class defining a timer.

4.32.1 Detailed Description

Timer class header file.

Date

15 mars 2018

Author


nicls67

4.33 usart.cpp File Reference

BSW library for USART.

```
#include <avr/io.h>
#include "usart.h"
```

Include dependency graph for usart.cpp:



4.33.1 Detailed Description

BSW library for USART.

Date

13 mars 2018


Author

nicls67

4.34 usart.h File Reference

Header file for USART library.

This graph shows which files directly or indirectly include this file:

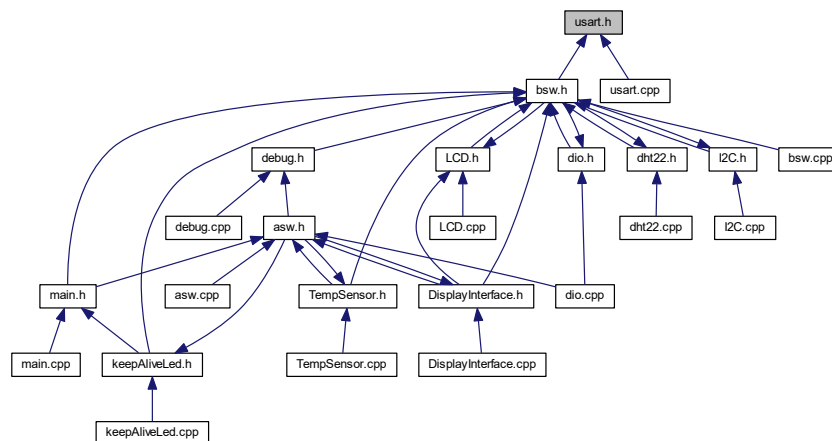

Classes

- class [usart](#)
USART serial bus class.

4.34.1 Detailed Description

Header file for USART library.

Date

13 mars 2018

Author

nicls67

Index

- ASW_cnf_struct
 - asw.cpp, [86](#)
 - asw.h, [89](#)
- activateDebugMode
 - UsartDebug, [77](#)
- addPeriodicTask
 - scheduler, [48](#)
- asw.cpp, [85](#)
 - ASW_cnf_struct, [86](#)
 - asw_init, [86](#)
- asw.h, [87](#)
 - ASW_cnf_struct, [89](#)
 - asw_init, [88](#)
- asw_init
 - asw.cpp, [86](#)
 - asw.h, [88](#)
- avg_load
 - CpuLoad, [8](#)
- BACKLIGHT_PIN
 - LCD.h, [122](#)
- BSW_cnf_struct
 - bsw.cpp, [90](#)
 - bsw.h, [93](#)
- backlight_en
 - T_LCD_conf_struct, [56](#)
- backlight_enable
 - LCD, [44](#)
- BaudRate
 - usart, [76](#)
- bitrate
 - I2C, [27](#)
- blinkLed_task
 - keepAliveLed, [28](#)
- bsw.cpp, [89](#)
 - BSW_cnf_struct, [90](#)
 - bsw_init, [90](#)
- bsw.h, [91](#)
 - BSW_cnf_struct, [93](#)
 - bsw_init, [92](#)
 - I2C_BITRATE, [92](#)
 - USART_BAUDRATE, [92](#)
- bsw_init
 - bsw.cpp, [90](#)
 - bsw.h, [92](#)
- cnfCursorBlink
 - LCD, [44](#)
- cnfCursorOnOff
 - LCD, [44](#)
- cnfDisplayOnOff
 - LCD, [44](#)
- cnfEntryModeDir
 - LCD, [45](#)
- cnfEntryModeShift
 - LCD, [45](#)
- cnfFontType
 - LCD, [45](#)
- cnfLineNumber
 - LCD, [45](#)
- command
 - LCD, [32](#)
- ComputeCPULoad
 - CpuLoad, [6](#)
- ConfigureBacklight
 - LCD, [32](#)
- ConfigureCursorBlink
 - LCD, [34](#)
- ConfigureCursorOnOff
 - LCD, [35](#)
- ConfigureDisplayOnOff
 - LCD, [35](#)
- ConfigureEntryModeDir
 - LCD, [36](#)
- ConfigureEntryModeShift
 - LCD, [37](#)
- ConfigureFontType
 - LCD, [37](#)
- ConfigureLineNumber
 - LCD, [38](#)
- configureTimer1
 - timer, [69](#)
- CpuLoad, [5](#)
 - avg_load, [8](#)
 - ComputeCPULoad, [6](#)
 - CpuLoad, [6](#)
 - current_load, [8](#)
 - getAverageCPULoad, [6](#)
 - getCurrrentCPULoad, [7](#)
 - getMaxCPULoad, [7](#)
 - last_sum_value, [8](#)
 - max_load, [9](#)
 - sample_cnt, [9](#)
 - sample_idx, [9](#)
 - sample_mem, [9](#)
- CpuLoad.cpp, [94](#)
- CpuLoad.h, [94](#)
 - NB_OF_SAMPLES, [96](#)
- current_load

- CpuLoad, 8
- cursor_en
 - T_LCD_conf_struct, 57
- cursorBlink_en
 - T_LCD_conf_struct, 57
- DATA_ACK
 - I2C.h, 116
- DDRA_PTR
 - dio_reg_atm2560.h, 109
- DDRB_PTR
 - dio_reg_atm2560.h, 109
- DDRC_PTR
 - dio_reg_atm2560.h, 109
- DDRD_PTR
 - dio_reg_atm2560.h, 109
- DECODE_PIN
 - dio.h, 104
- DECODE_PORT
 - dio.h, 104
- DHT22_PORT
 - dht22.h, 102
- ddram_addr
 - LCD, 45
- debug.cpp, 96
 - str_debug_main_menu, 97
- debug.h, 97
 - debug_state_t, 99
 - PERIOD_MS_TASK_DISPLAY_CPU_LOAD, 99
 - PERIOD_MS_TASK_DISPLAY_SENSORS, 99
- debug_state
 - UsartDebug, 84
- debug_state_t
 - debug.h, 99
- debugModeActive_F
 - UsartDebug, 84
- DebugModeManagement
 - UsartDebug, 78
- dht22, 10
 - dht22, 10
 - initializeCommunication, 11
 - read, 11
- dht22.cpp, 99
 - MAX_WAIT_TIME_US, 100
- dht22.h, 101
 - DHT22_PORT, 102
- dio, 12
 - dio, 13
 - dio_changePortPinCnf, 14
 - dio_getPort, 15
 - dio_getPort_fast, 16
 - dio_invertPort, 16
 - dio_memorizePINaddress, 17
 - dio_setPort, 18
 - getDDRxAAddress, 19
 - getPINxAAddress, 19
 - getPORTxAAddress, 20
 - PINx_addr_mem, 21
 - PINx_idx_mem, 21
 - ports_init, 21
- dio.cpp, 102
- dio.h, 103
 - DECODE_PIN, 104
 - DECODE_PORT, 104
 - ENCODE_PORT, 105
 - PORT_CNF_IN, 105
 - PORT_CNF_OUT, 106
 - PORT_A, 105
 - PORT_B, 105
 - PORT_C, 105
 - PORT_D, 106
- dio_changePortPinCnf
 - dio, 14
- dio_getPort
 - dio, 15
- dio_getPort_fast
 - dio, 16
- dio_invertPort
 - dio, 16
- dio_memorizePINaddress
 - dio, 17
- dio_port_cnf.h, 106
 - PORTB_CNF_DDBR, 107
 - PORTB_CNF_PORTB, 107
- dio_reg_atm2560.h, 108
 - DDRA_PTR, 109
 - DDRB_PTR, 109
 - DDRC_PTR, 109
 - DDRD_PTR, 109
 - PINA_PTR, 109
 - PINB_PTR, 110
 - PINC_PTR, 110
 - PIND_PTR, 110
 - PORTA_PTR, 110
 - PORTB_PTR, 110
 - PORTC_PTR, 111
 - PORTD_PTR, 111
- dio_setPort
 - dio, 18
- display_en
 - T_LCD_conf_struct, 57
- DisplayCPUload_task
 - UsartDebug, 79
- DisplayInterface, 22
 - DisplayInterface, 23
 - p_lcd, 23
- DisplayInterface.cpp, 111
- DisplayInterface.h, 112
 - LCD_init_cnf, 113
- DisplaySensors_task
 - UsartDebug, 80
- EN_PIN
 - LCD.h, 122
- ENCODE_PORT
 - dio.h, 105
- entryModeDir
 - T_LCD_conf_struct, 57

- entryModeShift
 - T_LCD_conf_struct, [57](#)
- firstTask
 - scheduler::Task_cnf_struct_t, [59](#)
- fontType_cnf
 - T_LCD_conf_struct, [57](#)
- getAverageCPULoad
 - CpuLoad, [6](#)
- getCurrrentCPULoad
 - CpuLoad, [7](#)
- GetDDRAddress
 - LCD, [39](#)
- getDDRAddress
 - dio, [19](#)
- getHumPtr
 - TempSensor, [63](#)
- getHumidity
 - TempSensor, [62](#)
- getMaxCPULoad
 - CpuLoad, [7](#)
- getPINxAddress
 - dio, [19](#)
- getPORTxAddress
 - dio, [20](#)
- getPitNumber
 - scheduler, [49](#)
- getTemp
 - TempSensor, [63](#)
- getTempPtr
 - TempSensor, [64](#)
- getTimer1Value
 - timer, [70](#)
- I2C.cpp, [114](#)
- I2C.h, [115](#)
 - DATA_ACK, [116](#)
 - SLA_ACK, [116](#)
 - START, [116](#)
- I2C_ADDR
 - LCD.h, [122](#)
- I2C_BITRATE
 - bsw.h, [92](#)
- I2C, [23](#)
 - bitrate, [27](#)
 - I2C, [24](#)
 - initializeBus, [25](#)
 - setBitRate, [25](#)
 - setTxAddress, [26](#)
 - tx_address, [27](#)
 - writeByte, [26](#)
- ISR
 - main.cpp, [132](#), [133](#)
- initializeBus
 - I2C, [25](#)
- initializeCommunication
 - dht22, [11](#)
- InitializeScreen
 - LCD, [39](#)
- isDebugModeActive
 - UsartDebug, [81](#)
- keepAliveLed, [27](#)
 - blinkLed_task, [28](#)
 - keepAliveLed, [28](#)
- keepAliveLed.cpp, [117](#)
- keepAliveLed.h, [117](#)
 - LED_PORT, [119](#)
 - PERIOD_MS_TASK_LED, [119](#)
- LCD.cpp, [119](#)
- LCD.h, [120](#)
 - BACKLIGHT_PIN, [122](#)
 - EN_PIN, [122](#)
 - I2C_ADDR, [122](#)
 - LCD_CNF_BACKLIGHT_OFF, [123](#)
 - LCD_CNF_BACKLIGHT_ON, [123](#)
 - LCD_CNF_CURSOR_BLINK_OFF, [123](#)
 - LCD_CNF_CURSOR_BLINK_ON, [123](#)
 - LCD_CNF_CURSOR_OFF, [123](#)
 - LCD_CNF_CURSOR_ON, [124](#)
 - LCD_CNF_DISPLAY_OFF, [124](#)
 - LCD_CNF_DISPLAY_ON, [124](#)
 - LCD_CNF_ENTRY_MODE_DIRECTION_LEFT, [124](#)
 - LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT, [124](#)
 - LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_↵ OFF, [125](#)
 - LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_↵ ON, [125](#)
 - LCD_CNF_FONT_5_11, [125](#)
 - LCD_CNF_FONT_5_8, [125](#)
 - LCD_CNF_ONE_LINE, [125](#)
 - LCD_CNF_SHIFT_ID, [126](#)
 - LCD_CNF_SHIFT_SH, [126](#)
 - LCD_CNF_TWO_LINE, [126](#)
 - LCD_DISPLAY_CTRL_FIELD_B, [126](#)
 - LCD_DISPLAY_CTRL_FIELD_C, [126](#)
 - LCD_DISPLAY_CTRL_FIELD_D, [127](#)
 - LCD_FCT_SET_FIELD_DL, [127](#)
 - LCD_FCT_SET_FIELD_F, [127](#)
 - LCD_FCT_SET_FIELD_N, [127](#)
 - LCD_INST_CLR_DISPLAY_BIT, [127](#)
 - LCD_INST_DISPLAY_CTRL, [128](#)
 - LCD_INST_ENTRY_MODE_SET, [128](#)
 - LCD_INST_FUNCTION_SET, [128](#)
 - LCD_INST_SET_DDRAM_ADDR, [128](#)
 - LCD_RAM_1_LINE_MAX, [128](#)
 - LCD_RAM_1_LINE_MIN, [129](#)
 - LCD_RAM_2_LINES_MAX_1, [129](#)
 - LCD_RAM_2_LINES_MAX_2, [129](#)
 - LCD_RAM_2_LINES_MIN_1, [129](#)
 - LCD_RAM_2_LINES_MIN_2, [129](#)
 - LCD_WAIT_CLR_RETURN, [130](#)
 - LCD_WAIT_OTHER_MODES, [130](#)
 - RS_PIN, [130](#)

- RW_PIN, [130](#)
- T_LCD_command, [130](#)
- T_LCD_config_mode, [131](#)
- T_LCD_ram_area, [131](#)
- LCD_CNF_BACKLIGHT_OFF
 - LCD.h, [123](#)
- LCD_CNF_BACKLIGHT_ON
 - LCD.h, [123](#)
- LCD_CNF_CURSOR_BLINK_OFF
 - LCD.h, [123](#)
- LCD_CNF_CURSOR_BLINK_ON
 - LCD.h, [123](#)
- LCD_CNF_CURSOR_OFF
 - LCD.h, [123](#)
- LCD_CNF_CURSOR_ON
 - LCD.h, [124](#)
- LCD_CNF_DISPLAY_OFF
 - LCD.h, [124](#)
- LCD_CNF_DISPLAY_ON
 - LCD.h, [124](#)
- LCD_CNF_ENTRY_MODE_DIRECTION_LEFT
 - LCD.h, [124](#)
- LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT
 - LCD.h, [124](#)
- LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF
 - LCD.h, [125](#)
- LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON
 - LCD.h, [125](#)
- LCD_CNF_FONT_5_11
 - LCD.h, [125](#)
- LCD_CNF_FONT_5_8
 - LCD.h, [125](#)
- LCD_CNF_ONE_LINE
 - LCD.h, [125](#)
- LCD_CNF_SHIFT_ID
 - LCD.h, [126](#)
- LCD_CNF_SHIFT_SH
 - LCD.h, [126](#)
- LCD_CNF_TWO_LINE
 - LCD.h, [126](#)
- LCD_DISPLAY_CTRL_FIELD_B
 - LCD.h, [126](#)
- LCD_DISPLAY_CTRL_FIELD_C
 - LCD.h, [126](#)
- LCD_DISPLAY_CTRL_FIELD_D
 - LCD.h, [127](#)
- LCD_FCT_SET_FIELD_DL
 - LCD.h, [127](#)
- LCD_FCT_SET_FIELD_F
 - LCD.h, [127](#)
- LCD_FCT_SET_FIELD_N
 - LCD.h, [127](#)
- LCD_INST_CLR_DISPLAY_BIT
 - LCD.h, [127](#)
- LCD_INST_DISPLAY_CTRL
 - LCD.h, [128](#)
- LCD_INST_ENTRY_MODE_SET
 - LCD.h, [128](#)
- LCD_INST_FUNCTION_SET
 - LCD.h, [128](#)
- LCD_INST_SET_DDRAM_ADDR
 - LCD.h, [128](#)
- LCD_RAM_1_LINE_MAX
 - LCD.h, [128](#)
- LCD_RAM_1_LINE_MIN
 - LCD.h, [129](#)
- LCD_RAM_2_LINES_MAX_1
 - LCD.h, [129](#)
- LCD_RAM_2_LINES_MAX_2
 - LCD.h, [129](#)
- LCD_RAM_2_LINES_MIN_1
 - LCD.h, [129](#)
- LCD_RAM_2_LINES_MIN_2
 - LCD.h, [129](#)
- LCD_WAIT_CLR_RETURN
 - LCD.h, [130](#)
- LCD_WAIT_OTHER_MODES
 - LCD.h, [130](#)
- LCD_init_cnf
 - DisplayInterface.h, [113](#)
- LCD, [29](#)
 - backlight_enable, [44](#)
 - cnfCursorBlink, [44](#)
 - cnfCursorOnOff, [44](#)
 - cnfDisplayOnOff, [44](#)
 - cnfEntryModeDir, [45](#)
 - cnfEntryModeShift, [45](#)
 - cnfFontType, [45](#)
 - cnfLineNumber, [45](#)
 - command, [32](#)
 - ConfigureBacklight, [32](#)
 - ConfigureCursorBlink, [34](#)
 - ConfigureCursorOnOff, [35](#)
 - ConfigureDisplayOnOff, [35](#)
 - ConfigureEntryModeDir, [36](#)
 - ConfigureEntryModeShift, [37](#)
 - ConfigureFontType, [37](#)
 - ConfigureLineNumber, [38](#)
 - ddram_addr, [45](#)
 - GetDDRAMAddress, [39](#)
 - InitializeScreen, [39](#)
 - LCD, [31](#)
 - SetDDRAMAddress, [40](#)
 - write, [41](#)
 - write4bits, [42](#)
 - WriteInRam, [43](#)
- LED_PORT
 - keepAliveLed.h, [119](#)
- last_sum_value
 - CpuLoad, [8](#)
- launchPeriodicTasks
 - scheduler, [49](#)
- lineNumber_cnf
 - T_LCD_conf_struct, [58](#)
- MAX_WAIT_TIME_US
 - dht22.cpp, [100](#)

- main
 - main.cpp, [133](#)
- main.cpp, [131](#)
 - ISR, [132](#), [133](#)
 - main, [133](#)
- main.h, [134](#)
- max_load
 - CpuLoad, [9](#)
- NB_OF_SAMPLES
 - CpuLoad.h, [96](#)
- nextTask
 - scheduler::Task_t, [60](#)
- operator delete
 - operators.cpp, [136](#)
 - operators.h, [138](#)
- operator new
 - operators.cpp, [137](#)
 - operators.h, [139](#)
- operators.cpp, [135](#)
 - operator delete, [136](#)
 - operator new, [137](#)
- operators.h, [137](#)
 - operator delete, [138](#)
 - operator new, [139](#)
- p_DisplayInterface
 - T_ASW_cnf_struct, [53](#)
- p_TempSensor
 - T_ASW_cnf_struct, [53](#)
- p_cpuload
 - T_BSW_cnf_struct, [55](#)
- p_dht22
 - T_BSW_cnf_struct, [55](#)
- p_dio
 - T_BSW_cnf_struct, [55](#)
- p_i2c
 - T_BSW_cnf_struct, [55](#)
- p_keepAliveLed
 - T_ASW_cnf_struct, [53](#)
- p_lcd
 - DisplayInterface, [23](#)
 - T_BSW_cnf_struct, [55](#)
- p_scheduler
 - scheduler.cpp, [140](#)
 - scheduler.h, [143](#)
- p_timer
 - T_BSW_cnf_struct, [55](#)
- p_usart
 - T_BSW_cnf_struct, [56](#)
- p_usartDebug
 - T_ASW_cnf_struct, [53](#)
- PERIOD_MS_TASK_DISPLAY_CPU_LOAD
 - debug.h, [99](#)
- PERIOD_MS_TASK_DISPLAY_SENSORS
 - debug.h, [99](#)
- PERIOD_MS_TASK_LED
 - keepAliveLed.h, [119](#)
- PERIOD_MS_TASK_TEMP_SENSOR
 - TempSensor.h, [145](#)
- PINA_PTR
 - dio_reg_atm2560.h, [109](#)
- PINB_PTR
 - dio_reg_atm2560.h, [110](#)
- PINC_PTR
 - dio_reg_atm2560.h, [110](#)
- PIND_PTR
 - dio_reg_atm2560.h, [110](#)
- PINx_addr_mem
 - dio, [21](#)
- PINx_idx_mem
 - dio, [21](#)
- PIT_BEFORE_INVALID
 - TempSensor.cpp, [144](#)
- PORT_CNF_IN
 - dio.h, [105](#)
- PORT_CNF_OUT
 - dio.h, [106](#)
- PORT_A
 - dio.h, [105](#)
- PORT_B
 - dio.h, [105](#)
- PORT_C
 - dio.h, [105](#)
- PORT_D
 - dio.h, [106](#)
- PORTA_PTR
 - dio_reg_atm2560.h, [110](#)
- PORTB_CNF_DDRB
 - dio_port_cnf.h, [107](#)
- PORTB_CNF_PORTB
 - dio_port_cnf.h, [107](#)
- PORTB_PTR
 - dio_reg_atm2560.h, [110](#)
- PORTC_PTR
 - dio_reg_atm2560.h, [111](#)
- PORTD_PTR
 - dio_reg_atm2560.h, [111](#)
- PRESCALER_PERIODIC_TIMER
 - scheduler.h, [142](#)
- period
 - scheduler::Task_t, [60](#)
- pit_number
 - scheduler, [52](#)
- ports_init
 - dio, [21](#)
- prescaler
 - timer, [71](#)
- RS_PIN
 - LCD.h, [130](#)
- RW_PIN
 - LCD.h, [130](#)
- read
 - dht22, [11](#)
- read_humidity
 - TempSensor, [66](#)

- read_temperature
 - TempSensor, 66
- readTempSensor_task
 - TempSensor, 64
- removePeriodicTask
 - scheduler, 50
- SLA_ACK
 - I2C.h, 116
- START
 - I2C.h, 116
- SW_PERIOD_MS
 - scheduler.h, 142
- sample_cnt
 - CpuLoad, 9
- sample_idx
 - CpuLoad, 9
- sample_mem
 - CpuLoad, 9
- scheduler, 46
 - addPeriodicTask, 48
 - getPitNumber, 49
 - launchPeriodicTasks, 49
 - pit_number, 52
 - removePeriodicTask, 50
 - scheduler, 48
 - startScheduling, 51
 - Task_cnf_struct, 52
 - Task_t, 47
- scheduler.cpp, 139
 - p_scheduler, 140
- scheduler.h, 141
 - p_scheduler, 143
 - PRESCALER_PERIODIC_TIMER, 142
 - SW_PERIOD_MS, 142
 - TIMER_CTC_VALUE, 142
 - TaskPtr_t, 142
- scheduler::Task_cnf_struct_t, 58
 - firstTask, 59
 - task_nb, 59
- scheduler::Task_t, 59
 - nextTask, 60
 - period, 60
 - TaskPtr, 60
- sendBool
 - UsartDebug, 81
- sendData
 - UsartDebug, 82
- sendInteger
 - UsartDebug, 83
- setBaudRate
 - usart, 73
- setBitRate
 - I2C, 25
- SetDDRAMAddress
 - LCD, 40
- setTxAddress
 - I2C, 26
- setValidity
 - TempSensor, 65
- startScheduling
 - scheduler, 51
- startTimer1
 - timer, 70
- stopTimer1
 - timer, 70
- str_debug_main_menu
 - debug.cpp, 97
- T_ASW_cnf_struct, 52
 - p_DisplayInterface, 53
 - p_TempSensor, 53
 - p_keepAliveLed, 53
 - p_usartDebug, 53
- T_BSW_cnf_struct, 54
 - p_cpuload, 55
 - p_dht22, 55
 - p_dio, 55
 - p_i2c, 55
 - p_lcd, 55
 - p_timer, 55
 - p_usart, 56
- T_LCD_command
 - LCD.h, 130
- T_LCD_conf_struct, 56
 - backlight_en, 56
 - cursor_en, 57
 - cursorBlink_en, 57
 - display_en, 57
 - entryModeDir, 57
 - entryModeShift, 57
 - fontType_cnf, 57
 - lineNumber_cnf, 58
- T_LCD_config_mode
 - LCD.h, 131
- T_LCD_ram_area
 - LCD.h, 131
- TIMER_CTC_VALUE
 - scheduler.h, 142
- Task_cnf_struct
 - scheduler, 52
- task_nb
 - scheduler::Task_cnf_struct_t, 59
- Task_t
 - scheduler, 47
- TaskPtr
 - scheduler::Task_t, 60
- TaskPtr_t
 - scheduler.h, 142
- TempSensor, 60
 - getHumPtr, 63
 - getHumidity, 62
 - getTemp, 63
 - getTempPtr, 64
 - read_humidity, 66
 - read_temperature, 66
 - readTempSensor_task, 64
 - setValidity, 65

- TempSensor, 61
- updateLastValidValues, 66
- valid_hum, 67
- valid_pit, 67
- valid_temp, 67
- validity, 67
- validity_last_read, 67
- TempSensor.cpp, 143
 - PIT_BEFORE_INVALID, 144
- TempSensor.h, 144
 - PERIOD_MS_TASK_TEMP_SENSOR, 145
- timer, 68
 - configureTimer1, 69
 - getTimer1Value, 70
 - prescaler, 71
 - startTimer1, 70
 - stopTimer1, 70
 - timer, 68
- timer.cpp, 146
- timer.h, 147
- tx_address
 - I2C, 27
- USART_BAUDRATE
 - bsw.h, 92
- updateLastValidValues
 - TempSensor, 66
- usart, 71
 - BaudRate, 76
 - setBaudRate, 73
 - usart, 72
 - usart_init, 73
 - usart_read, 74
 - usart_sendString, 74
 - usart_transmit, 75
- usart.cpp, 148
- usart.h, 148
- usart_init
 - usart, 73
- usart_read
 - usart, 74
- usart_sendString
 - usart, 74
- usart_transmit
 - usart, 75
- UsartDebug, 76
 - activateDebugMode, 77
 - debug_state, 84
 - debugModeActive_F, 84
 - DebugModeManagement, 78
 - DisplayCPULoad_task, 79
 - DisplaySensors_task, 80
 - isDebugModeActive, 81
 - sendBool, 81
 - sendData, 82
 - sendInteger, 83
 - UsartDebug, 77
- valid_hum
 - TempSensor, 67
- valid_pit
 - TempSensor, 67
- valid_temp
 - TempSensor, 67
- validity
 - TempSensor, 67
- validity_last_read
 - TempSensor, 67
- write
 - LCD, 41
- write4bits
 - LCD, 42
- writeByte
 - I2C, 26
- WriteInRam
 - LCD, 43