

Arduino

1.0

Generated by Doxygen 1.8.14

Contents

| | | |
|----------|--|----------|
| 1 | Class Index | 1 |
| 1.1 | Class List | 1 |
| 2 | File Index | 3 |
| 2.1 | File List | 3 |
| 3 | Class Documentation | 5 |
| 3.1 | CpuLoad Class Reference | 5 |
| 3.1.1 | Detailed Description | 5 |
| 3.1.2 | Constructor & Destructor Documentation | 6 |
| 3.1.2.1 | CpuLoad() | 6 |
| 3.1.3 | Member Function Documentation | 6 |
| 3.1.3.1 | ComputeCPULoad() | 6 |
| 3.1.3.2 | getAverageCPULoad() | 7 |
| 3.1.3.3 | getCurrentCPULoad() | 7 |
| 3.1.3.4 | getMaxCPULoad() | 8 |
| 3.1.4 | Member Data Documentation | 8 |
| 3.1.4.1 | avg_load | 8 |
| 3.1.4.2 | current_load | 8 |
| 3.1.4.3 | last_sum_value | 9 |
| 3.1.4.4 | max_load | 9 |
| 3.1.4.5 | sample_cnt | 9 |
| 3.1.4.6 | sample_idx | 9 |
| 3.1.4.7 | sample_mem | 9 |

| | | |
|---------|--|----|
| 3.2 | DebugInterface Class Reference | 10 |
| 3.2.1 | Detailed Description | 10 |
| 3.2.2 | Constructor & Destructor Documentation | 11 |
| 3.2.2.1 | DebugInterface() | 11 |
| 3.2.3 | Member Function Documentation | 11 |
| 3.2.3.1 | nextLine() | 11 |
| 3.2.3.2 | read() | 12 |
| 3.2.3.3 | sendBool() | 12 |
| 3.2.3.4 | sendChar() | 13 |
| 3.2.3.5 | sendInteger() | 14 |
| 3.2.3.6 | sendString() [1/2] | 14 |
| 3.2.3.7 | sendString() [2/2] | 15 |
| 3.2.4 | Member Data Documentation | 16 |
| 3.2.4.1 | uart_drv_ptr | 16 |
| 3.3 | DebugManagement Class Reference | 16 |
| 3.3.1 | Detailed Description | 18 |
| 3.3.2 | Constructor & Destructor Documentation | 18 |
| 3.3.2.1 | DebugManagement() | 18 |
| 3.3.3 | Member Function Documentation | 18 |
| 3.3.3.1 | DebugModeManagement() | 19 |
| 3.3.3.2 | DisplayData() | 20 |
| 3.3.3.3 | DisplayPeriodicData_task() | 21 |
| 3.3.3.4 | getIftPtr() | 21 |
| 3.3.3.5 | getInfoStringPtr() | 22 |
| 3.3.3.6 | getMenuStringPtr() | 22 |
| 3.3.3.7 | setInfoStringPtr() | 22 |
| 3.3.4 | Member Data Documentation | 23 |
| 3.3.4.1 | debug_ift_ptr | 23 |
| 3.3.4.2 | info_string_ptr | 23 |
| 3.3.4.3 | menu_state | 23 |

| | | |
|----------|--|----|
| 3.3.4.4 | menu_string_ptr | 23 |
| 3.3.4.5 | tempSensor_ptr | 24 |
| 3.4 | dht22 Class Reference | 24 |
| 3.4.1 | Detailed Description | 25 |
| 3.4.2 | Constructor & Destructor Documentation | 25 |
| 3.4.2.1 | dht22() | 25 |
| 3.4.3 | Member Function Documentation | 25 |
| 3.4.3.1 | initializeCommunication() | 26 |
| 3.4.3.2 | read() | 26 |
| 3.4.4 | Member Data Documentation | 27 |
| 3.4.4.1 | dht22_port | 27 |
| 3.4.4.2 | dio_ptr | 27 |
| 3.5 | dio Class Reference | 28 |
| 3.5.1 | Detailed Description | 28 |
| 3.5.2 | Constructor & Destructor Documentation | 29 |
| 3.5.2.1 | dio() | 29 |
| 3.5.3 | Member Function Documentation | 29 |
| 3.5.3.1 | dio_changePortPinCnf() | 29 |
| 3.5.3.2 | dio_getPort() | 30 |
| 3.5.3.3 | dio_getPort_fast() | 31 |
| 3.5.3.4 | dio_invertPort() | 32 |
| 3.5.3.5 | dio_memorizePINaddress() | 32 |
| 3.5.3.6 | dio_setPort() | 33 |
| 3.5.3.7 | getDDRxAddress() | 34 |
| 3.5.3.8 | getPINxAddress() | 35 |
| 3.5.3.9 | getPORTxAddress() | 35 |
| 3.5.3.10 | ports_init() | 36 |
| 3.5.4 | Member Data Documentation | 36 |
| 3.5.4.1 | PINx_addr_mem | 36 |
| 3.5.4.2 | PINx_idx_mem | 37 |

| | | |
|----------|--|----|
| 3.6 | DisplayInterface Class Reference | 37 |
| 3.6.1 | Detailed Description | 38 |
| 3.6.2 | Constructor & Destructor Documentation | 39 |
| 3.6.2.1 | DisplayInterface() | 39 |
| 3.6.3 | Member Function Documentation | 39 |
| 3.6.3.1 | ClearFullScreen() | 39 |
| 3.6.3.2 | ClearLine() | 40 |
| 3.6.3.3 | ClearStringInDataStruct() | 41 |
| 3.6.3.4 | DisplayFullLine() | 42 |
| 3.6.3.5 | FindFirstCharAddr() | 43 |
| 3.6.3.6 | getDisplayDataPtr() | 43 |
| 3.6.3.7 | IsLineEmpty() | 44 |
| 3.6.3.8 | RefreshLine() | 44 |
| 3.6.3.9 | setLineAlignment() | 45 |
| 3.6.3.10 | setLineAlignmentAndRefresh() | 46 |
| 3.6.3.11 | shiftLine_task() | 46 |
| 3.6.3.12 | updateLineAndRefresh() | 47 |
| 3.6.4 | Member Data Documentation | 48 |
| 3.6.4.1 | display_data | 48 |
| 3.6.4.2 | dummy | 48 |
| 3.6.4.3 | isShiftInProgress | 48 |
| 3.6.4.4 | p_lcd | 49 |
| 3.7 | DisplayManagement Class Reference | 49 |
| 3.7.1 | Detailed Description | 50 |
| 3.7.2 | Constructor & Destructor Documentation | 50 |
| 3.7.2.1 | DisplayManagement() | 50 |
| 3.7.3 | Member Function Documentation | 51 |
| 3.7.3.1 | DisplaySensorData_Task() | 51 |
| 3.7.3.2 | GetIftPointer() | 52 |
| 3.7.3.3 | GetTempSensorPtr() | 53 |

| | | |
|----------|--|----|
| 3.7.3.4 | RemoveWelcomeMessage_Task() | 53 |
| 3.7.4 | Member Data Documentation | 54 |
| 3.7.4.1 | p_display_ift | 54 |
| 3.7.4.2 | p_tempSensor | 54 |
| 3.8 | I2C Class Reference | 54 |
| 3.8.1 | Detailed Description | 55 |
| 3.8.2 | Constructor & Destructor Documentation | 55 |
| 3.8.2.1 | I2C() | 55 |
| 3.8.3 | Member Function Documentation | 56 |
| 3.8.3.1 | initializeBus() | 56 |
| 3.8.3.2 | setBitRate() | 56 |
| 3.8.3.3 | setTxAddress() | 57 |
| 3.8.3.4 | writeByte() | 57 |
| 3.8.4 | Member Data Documentation | 58 |
| 3.8.4.1 | bitrate | 58 |
| 3.8.4.2 | tx_address | 58 |
| 3.9 | keepAliveLed Class Reference | 58 |
| 3.9.1 | Detailed Description | 59 |
| 3.9.2 | Constructor & Destructor Documentation | 59 |
| 3.9.2.1 | keepAliveLed() | 59 |
| 3.9.3 | Member Function Documentation | 59 |
| 3.9.3.1 | blinkLed_task() | 60 |
| 3.10 | LCD Class Reference | 60 |
| 3.10.1 | Detailed Description | 62 |
| 3.10.2 | Constructor & Destructor Documentation | 62 |
| 3.10.2.1 | LCD() | 62 |
| 3.10.3 | Member Function Documentation | 63 |
| 3.10.3.1 | command() | 63 |
| 3.10.3.2 | ConfigureBacklight() | 64 |
| 3.10.3.3 | ConfigureCursorBlink() | 65 |

| | | |
|-----------|------------------------------|----|
| 3.10.3.4 | ConfigureCursorOnOff() | 65 |
| 3.10.3.5 | ConfigureDisplayOnOff() | 66 |
| 3.10.3.6 | ConfigureEntryModeDir() | 66 |
| 3.10.3.7 | ConfigureEntryModeShift() | 67 |
| 3.10.3.8 | ConfigureFontType() | 68 |
| 3.10.3.9 | ConfigureI2CAddr() | 69 |
| 3.10.3.10 | ConfigureLineNumber() | 69 |
| 3.10.3.11 | GetDDRAMAddress() | 70 |
| 3.10.3.12 | GetLineNumberCnf() | 70 |
| 3.10.3.13 | InitializeScreen() | 71 |
| 3.10.3.14 | SetDDRAMAddress() | 71 |
| 3.10.3.15 | write() | 72 |
| 3.10.3.16 | write4bits() | 73 |
| 3.10.3.17 | WriteInRam() | 74 |
| 3.10.4 | Member Data Documentation | 74 |
| 3.10.4.1 | backlight_enable | 75 |
| 3.10.4.2 | cnfCursorBlink | 75 |
| 3.10.4.3 | cnfCursorOnOff | 75 |
| 3.10.4.4 | cnfDisplayOnOff | 75 |
| 3.10.4.5 | cnfEntryModeDir | 75 |
| 3.10.4.6 | cnfEntryModeShift | 76 |
| 3.10.4.7 | cnfFontType | 76 |
| 3.10.4.8 | cnfI2C_addr | 76 |
| 3.10.4.9 | cnfLineNumber | 76 |
| 3.10.4.10 | ddram_addr | 76 |
| 3.10.4.11 | i2c_drv_ptr | 77 |
| 3.11 | LinkedList Class Reference | 77 |
| 3.11.1 | Detailed Description | 78 |
| 3.11.2 | Member Typedef Documentation | 78 |
| 3.11.2.1 | T_LL_element | 79 |

| | |
|---|----|
| 3.11.3 Constructor & Destructor Documentation | 79 |
| 3.11.3.1 <code>LinkedList()</code> | 79 |
| 3.11.3.2 <code>~LinkedList()</code> | 79 |
| 3.11.4 Member Function Documentation | 80 |
| 3.11.4.1 <code>AttachNewElement()</code> | 80 |
| 3.11.4.2 <code>FindElement()</code> | 80 |
| 3.11.4.3 <code>getCurrentElement()</code> | 81 |
| 3.11.4.4 <code>IsLLEmpty()</code> | 82 |
| 3.11.4.5 <code>MoveToNextElement()</code> | 82 |
| 3.11.4.6 <code>RemoveElement()</code> | 83 |
| 3.11.4.7 <code>ResetElementPtr()</code> | 83 |
| 3.11.5 Member Data Documentation | 84 |
| 3.11.5.1 <code>curElement_ptr</code> | 84 |
| 3.11.5.2 <code>firstElement</code> | 84 |
| 3.12 <code>scheduler</code> Class Reference | 84 |
| 3.12.1 Detailed Description | 85 |
| 3.12.2 Member Typedef Documentation | 86 |
| 3.12.2.1 <code>Task_t</code> | 86 |
| 3.12.3 Constructor & Destructor Documentation | 86 |
| 3.12.3.1 <code>scheduler()</code> | 86 |
| 3.12.4 Member Function Documentation | 86 |
| 3.12.4.1 <code>addPeriodicTask()</code> | 86 |
| 3.12.4.2 <code>getPitNumber()</code> | 87 |
| 3.12.4.3 <code>getTaskCount()</code> | 88 |
| 3.12.4.4 <code>launchPeriodicTasks()</code> | 88 |
| 3.12.4.5 <code>LLElementCompare()</code> | 89 |
| 3.12.4.6 <code>removePeriodicTask()</code> | 89 |
| 3.12.4.7 <code>startScheduling()</code> | 90 |
| 3.12.4.8 <code>updateTaskPeriod()</code> | 91 |
| 3.12.5 Member Data Documentation | 92 |

| | |
|---|-----|
| 3.12.5.1 pit_number | 92 |
| 3.12.5.2 task_count | 92 |
| 3.12.5.3 TasksLL_ptr | 93 |
| 3.13 String Class Reference | 93 |
| 3.13.1 Detailed Description | 94 |
| 3.13.2 Constructor & Destructor Documentation | 94 |
| 3.13.2.1 String() [1/2] | 94 |
| 3.13.2.2 String() [2/2] | 95 |
| 3.13.2.3 ~String() | 95 |
| 3.13.3 Member Function Documentation | 95 |
| 3.13.3.1 appendBool() | 95 |
| 3.13.3.2 appendChar() | 96 |
| 3.13.3.3 appendInteger() | 97 |
| 3.13.3.4 appendString() | 98 |
| 3.13.3.5 Clear() | 99 |
| 3.13.3.6 ComputeStringSize() | 99 |
| 3.13.3.7 getSize() | 100 |
| 3.13.3.8 getString() | 101 |
| 3.13.4 Member Data Documentation | 101 |
| 3.13.4.1 size | 101 |
| 3.13.4.2 string | 101 |
| 3.14 T_ASW_init_cnf Struct Reference | 102 |
| 3.14.1 Detailed Description | 102 |
| 3.14.2 Member Data Documentation | 102 |
| 3.14.2.1 isDebugEnabled | 102 |
| 3.14.2.2 isDisplayActivated | 102 |
| 3.14.2.3 isLEDActivated | 103 |
| 3.14.2.4 isTempSensorActivated | 103 |
| 3.15 T_display_data Struct Reference | 103 |
| 3.15.1 Detailed Description | 104 |

| | |
|--|-----|
| 3.15.2 Member Data Documentation | 104 |
| 3.15.2.1 alignment | 104 |
| 3.15.2.2 display_str | 104 |
| 3.15.2.3 isEmpty | 104 |
| 3.15.2.4 mode | 105 |
| 3.15.2.5 shift_data | 105 |
| 3.16 T_Display_shift_data Struct Reference | 105 |
| 3.16.1 Detailed Description | 106 |
| 3.16.2 Member Data Documentation | 106 |
| 3.16.2.1 str_cur_ptr | 106 |
| 3.16.2.2 str_ptr | 106 |
| 3.16.2.3 temporization | 106 |
| 3.17 T_LCD_conf_struct Struct Reference | 107 |
| 3.17.1 Detailed Description | 107 |
| 3.17.2 Member Data Documentation | 107 |
| 3.17.2.1 backlight_en | 107 |
| 3.17.2.2 cursor_en | 107 |
| 3.17.2.3 cursorBlink_en | 108 |
| 3.17.2.4 display_en | 108 |
| 3.17.2.5 entryModeDir | 108 |
| 3.17.2.6 entryModeShift | 108 |
| 3.17.2.7 fontType_cnf | 108 |
| 3.17.2.8 i2c_addr | 109 |
| 3.17.2.9 i2c_bitrate | 109 |
| 3.17.2.10 lineNumber_cnf | 109 |
| 3.18 LinkedList::T_LL_element Struct Reference | 109 |
| 3.18.1 Detailed Description | 110 |
| 3.18.2 Member Data Documentation | 110 |
| 3.18.2.1 data_ptr | 110 |
| 3.18.2.2 nextElement | 110 |

| | |
|---|-----|
| 3.19 scheduler::Task_t Struct Reference | 110 |
| 3.19.1 Detailed Description | 111 |
| 3.19.2 Member Data Documentation | 111 |
| 3.19.2.1 period | 111 |
| 3.19.2.2 TaskPtr | 111 |
| 3.20 TempSensor Class Reference | 111 |
| 3.20.1 Detailed Description | 112 |
| 3.20.2 Constructor & Destructor Documentation | 113 |
| 3.20.2.1 TempSensor() | 113 |
| 3.20.3 Member Function Documentation | 113 |
| 3.20.3.1 GetHumDecimal() | 113 |
| 3.20.3.2 getHumidity() | 114 |
| 3.20.3.3 GetHumInteger() | 114 |
| 3.20.3.4 getHumPtr() | 115 |
| 3.20.3.5 getTaskPeriod() | 115 |
| 3.20.3.6 getTemp() | 115 |
| 3.20.3.7 GetTempDecimal() | 116 |
| 3.20.3.8 GetTempInteger() | 116 |
| 3.20.3.9 getTempPtr() | 117 |
| 3.20.3.10 GetValidity() | 118 |
| 3.20.3.11 readTempSensor_task() | 118 |
| 3.20.3.12 setValidity() | 119 |
| 3.20.3.13 updateLastValidValues() | 119 |
| 3.20.3.14 updateTaskPeriod() | 120 |
| 3.20.4 Member Data Documentation | 121 |
| 3.20.4.1 read_humidity | 121 |
| 3.20.4.2 read_temperature | 121 |
| 3.20.4.3 task_period | 122 |
| 3.20.4.4 valid_hum | 122 |
| 3.20.4.5 valid_pit | 122 |

| | | |
|----------|--|-----|
| 3.20.4.6 | valid_temp | 122 |
| 3.20.4.7 | validity | 122 |
| 3.20.4.8 | validity_last_read | 123 |
| 3.21 | timer Class Reference | 123 |
| 3.21.1 | Detailed Description | 123 |
| 3.21.2 | Constructor & Destructor Documentation | 123 |
| 3.21.2.1 | timer() | 124 |
| 3.21.3 | Member Function Documentation | 124 |
| 3.21.3.1 | configureTimer1() | 124 |
| 3.21.3.2 | getTimer1Value() | 125 |
| 3.21.3.3 | startTimer1() | 125 |
| 3.21.3.4 | stopTimer1() | 126 |
| 3.21.4 | Member Data Documentation | 126 |
| 3.21.4.1 | prescaler | 126 |
| 3.22 | uart Class Reference | 126 |
| 3.22.1 | Detailed Description | 127 |
| 3.22.2 | Constructor & Destructor Documentation | 127 |
| 3.22.2.1 | uart() | 127 |
| 3.22.3 | Member Function Documentation | 128 |
| 3.22.3.1 | setBaudRate() | 128 |
| 3.22.3.2 | uart_init() | 128 |
| 3.22.3.3 | uart_read() | 129 |
| 3.22.3.4 | uart_sendByte() | 129 |
| 3.22.3.5 | uart_sendString() | 130 |
| 3.22.3.6 | uart_transmit() | 131 |
| 3.22.4 | Member Data Documentation | 132 |
| 3.22.4.1 | BaudRate | 132 |

| | |
|---|------------|
| 4 File Documentation | 133 |
| 4.1 asw.cpp File Reference | 133 |
| 4.1.1 Detailed Description | 134 |
| 4.1.2 Function Documentation | 134 |
| 4.1.2.1 asw_init() | 134 |
| 4.2 asw.h File Reference | 135 |
| 4.2.1 Detailed Description | 135 |
| 4.2.2 Function Documentation | 135 |
| 4.2.2.1 asw_init() | 136 |
| 4.3 bsw.cpp File Reference | 136 |
| 4.3.1 Detailed Description | 137 |
| 4.3.2 Function Documentation | 137 |
| 4.3.2.1 bsw_init() | 137 |
| 4.4 bsw.h File Reference | 138 |
| 4.4.1 Detailed Description | 138 |
| 4.4.2 Function Documentation | 138 |
| 4.4.2.1 bsw_init() | 139 |
| 4.5 CpuLoad.cpp File Reference | 139 |
| 4.5.1 Detailed Description | 140 |
| 4.5.2 Variable Documentation | 140 |
| 4.5.2.1 p_global_BSW_cpupload | 140 |
| 4.6 CpuLoad.h File Reference | 140 |
| 4.6.1 Detailed Description | 141 |
| 4.6.2 Macro Definition Documentation | 141 |
| 4.6.2.1 NB_OF_SAMPLES | 141 |
| 4.6.3 Variable Documentation | 141 |
| 4.6.3.1 p_global_BSW_cpupload | 141 |
| 4.7 DebugInterface.cpp File Reference | 142 |
| 4.7.1 Variable Documentation | 142 |
| 4.7.1.1 p_global_ASW_DebugInterface | 142 |

| | | |
|----------|--|-----|
| 4.8 | DebugInterface.h File Reference | 142 |
| 4.8.1 | Macro Definition Documentation | 143 |
| 4.8.1.1 | USART_BAUDRATE | 143 |
| 4.8.2 | Variable Documentation | 143 |
| 4.8.2.1 | p_global_ASW_DebugInterface | 143 |
| 4.9 | DebugManagement.cpp File Reference | 144 |
| 4.9.1 | Detailed Description | 144 |
| 4.9.2 | Variable Documentation | 144 |
| 4.9.2.1 | p_global_ASW_DebugManagement | 145 |
| 4.9.2.2 | str_debug_info_message_empty | 145 |
| 4.9.2.3 | str_debug_info_message_wrong_selection | 145 |
| 4.9.2.4 | str_debug_main_menu | 145 |
| 4.10 | DebugManagement.h File Reference | 146 |
| 4.10.1 | Detailed Description | 146 |
| 4.10.2 | Macro Definition Documentation | 147 |
| 4.10.2.1 | PERIOD_MS_TASK_DISPLAY_CPU_LOAD | 147 |
| 4.10.2.2 | PERIOD_MS_TASK_DISPLAY_DEBUG_DATA | 147 |
| 4.10.3 | Enumeration Type Documentation | 147 |
| 4.10.3.1 | debug_state_t | 147 |
| 4.10.4 | Variable Documentation | 147 |
| 4.10.4.1 | p_global_ASW_DebugManagement | 147 |
| 4.11 | dht22.cpp File Reference | 148 |
| 4.11.1 | Detailed Description | 148 |
| 4.11.2 | Macro Definition Documentation | 148 |
| 4.11.2.1 | MAX_WAIT_TIME_US | 149 |
| 4.11.3 | Variable Documentation | 149 |
| 4.11.3.1 | p_global_BSW_dht22 | 149 |
| 4.12 | dht22.h File Reference | 149 |
| 4.12.1 | Detailed Description | 150 |
| 4.12.2 | Variable Documentation | 150 |

| | |
|---|-----|
| 4.12.2.1 p_global_BSW_dht22 | 150 |
| 4.13 dio.cpp File Reference | 150 |
| 4.13.1 Detailed Description | 151 |
| 4.13.2 Variable Documentation | 151 |
| 4.13.2.1 p_global_BSW_dio | 151 |
| 4.14 dio.h File Reference | 151 |
| 4.14.1 Detailed Description | 152 |
| 4.14.2 Macro Definition Documentation | 152 |
| 4.14.2.1 DECODE_PIN | 153 |
| 4.14.2.2 DECODE_PORT | 153 |
| 4.14.2.3 ENCODE_PORT | 153 |
| 4.14.2.4 PORT_CNF_IN | 153 |
| 4.14.2.5 PORT_CNF_OUT | 153 |
| 4.14.3 Variable Documentation | 154 |
| 4.14.3.1 p_global_BSW_dio | 154 |
| 4.15 dio_port_cnf.h File Reference | 154 |
| 4.15.1 Detailed Description | 154 |
| 4.15.2 Macro Definition Documentation | 155 |
| 4.15.2.1 PORT_A | 155 |
| 4.15.2.2 PORT_B | 155 |
| 4.15.2.3 PORT_C | 155 |
| 4.15.2.4 PORT_D | 155 |
| 4.15.2.5 PORTB_CNF_DDRB | 156 |
| 4.15.2.6 PORTB_CNF_PORTB | 156 |
| 4.16 dio_reg_atm2560.h File Reference | 156 |
| 4.16.1 Macro Definition Documentation | 157 |
| 4.16.1.1 DDRA_PTR | 157 |
| 4.16.1.2 DDRB_PTR | 157 |
| 4.16.1.3 DDRC_PTR | 157 |
| 4.16.1.4 DDRD_PTR | 158 |

| | |
|---|-----|
| 4.16.1.5 PINA_PTR | 158 |
| 4.16.1.6 PINB_PTR | 158 |
| 4.16.1.7 PINC_PTR | 158 |
| 4.16.1.8 PIND_PTR | 158 |
| 4.16.1.9 PORTA_PTR | 159 |
| 4.16.1.10 PORTB_PTR | 159 |
| 4.16.1.11 PORTC_PTR | 159 |
| 4.16.1.12 PORTD_PTR | 159 |
| 4.17 DisplayInterface.cpp File Reference | 159 |
| 4.17.1 Detailed Description | 160 |
| 4.17.2 Variable Documentation | 160 |
| 4.17.2.1 p_global_ASW_DisplayInterface | 160 |
| 4.18 DisplayInterface.h File Reference | 160 |
| 4.18.1 Detailed Description | 161 |
| 4.18.2 Macro Definition Documentation | 161 |
| 4.18.2.1 DISPLAY_LINE_SHIFT_PERIOD_MS | 161 |
| 4.18.2.2 DISPLAY_LINE_SHIFT_TEMPO_TIME | 162 |
| 4.18.3 Enumeration Type Documentation | 162 |
| 4.18.3.1 T_DisplayInterface_LineAlignment | 162 |
| 4.18.3.2 T_DisplayInterface_LineDisplayMode | 162 |
| 4.18.4 Variable Documentation | 163 |
| 4.18.4.1 p_global_ASW_DisplayInterface | 163 |
| 4.19 DisplayManagement.cpp File Reference | 163 |
| 4.19.1 Detailed Description | 163 |
| 4.19.2 Variable Documentation | 164 |
| 4.19.2.1 p_global_ASW_DisplayManagement | 164 |
| 4.20 DisplayManagement.h File Reference | 164 |
| 4.20.1 Detailed Description | 165 |
| 4.20.2 Macro Definition Documentation | 165 |
| 4.20.2.1 DISPLAY_MGT_I2C_BITRATE | 165 |

| | | |
|----------|--|-----|
| 4.20.2.2 | DISPLAY_MGT_LCD_I2C_ADDR | 165 |
| 4.20.2.3 | DISPLAY_MGT_LINE_HUM | 166 |
| 4.20.2.4 | DISPLAY_MGT_LINE_TEMP | 166 |
| 4.20.2.5 | DISPLAY_MGT_PERIOD_TASK_SENSOR | 166 |
| 4.20.2.6 | DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL | 166 |
| 4.20.3 | Variable Documentation | 166 |
| 4.20.3.1 | humidityDisplayString | 166 |
| 4.20.3.2 | LCD_init_cnf | 167 |
| 4.20.3.3 | noSensorDisplayString | 167 |
| 4.20.3.4 | p_global_ASW_DisplayManagement | 167 |
| 4.20.3.5 | tempDisplayString | 167 |
| 4.20.3.6 | welcomeMessageString | 168 |
| 4.21 | I2C.cpp File Reference | 168 |
| 4.21.1 | Detailed Description | 168 |
| 4.21.2 | Variable Documentation | 168 |
| 4.21.2.1 | p_global_BSW_i2c | 169 |
| 4.22 | I2C.h File Reference | 169 |
| 4.22.1 | Detailed Description | 169 |
| 4.22.2 | Macro Definition Documentation | 170 |
| 4.22.2.1 | DATA_ACK | 170 |
| 4.22.2.2 | SLA_ACK | 170 |
| 4.22.2.3 | START | 170 |
| 4.22.3 | Variable Documentation | 170 |
| 4.22.3.1 | p_global_BSW_i2c | 170 |
| 4.23 | int.cpp File Reference | 171 |
| 4.23.1 | Detailed Description | 171 |
| 4.23.2 | Function Documentation | 171 |
| 4.23.2.1 | ISR() [1/2] | 172 |
| 4.23.2.2 | ISR() [2/2] | 172 |
| 4.24 | keepAliveLed.cpp File Reference | 173 |

| | | |
|-----------|--------------------------------------|-----|
| 4.24.1 | Detailed Description | 174 |
| 4.24.2 | Variable Documentation | 174 |
| 4.24.2.1 | p_global_ASW_keepAliveLed | 174 |
| 4.25 | keepAliveLed.h File Reference | 174 |
| 4.25.1 | Detailed Description | 175 |
| 4.25.2 | Macro Definition Documentation | 175 |
| 4.25.2.1 | LED_PORT | 175 |
| 4.25.2.2 | PERIOD_MS_TASK_LED | 175 |
| 4.25.3 | Variable Documentation | 175 |
| 4.25.3.1 | p_global_ASW_keepAliveLed | 176 |
| 4.26 | LCD.cpp File Reference | 176 |
| 4.26.1 | Detailed Description | 176 |
| 4.26.2 | Variable Documentation | 177 |
| 4.26.2.1 | p_global_BSW_lcd | 177 |
| 4.27 | LCD.h File Reference | 177 |
| 4.27.1 | Detailed Description | 179 |
| 4.27.2 | Macro Definition Documentation | 179 |
| 4.27.2.1 | BACKLIGHT_PIN | 179 |
| 4.27.2.2 | EN_PIN | 179 |
| 4.27.2.3 | LCD_CNF_BACKLIGHT_OFF | 179 |
| 4.27.2.4 | LCD_CNF_BACKLIGHT_ON | 180 |
| 4.27.2.5 | LCD_CNF_CURSOR_BLINK_OFF | 180 |
| 4.27.2.6 | LCD_CNF_CURSOR_BLINK_ON | 180 |
| 4.27.2.7 | LCD_CNF_CURSOR_OFF | 180 |
| 4.27.2.8 | LCD_CNF_CURSOR_ON | 180 |
| 4.27.2.9 | LCD_CNF_DISPLAY_OFF | 181 |
| 4.27.2.10 | LCD_CNF_DISPLAY_ON | 181 |
| 4.27.2.11 | LCD_CNF_ENTRY_MODE_DIRECTION_LEFT | 181 |
| 4.27.2.12 | LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT | 181 |
| 4.27.2.13 | LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF | 181 |

| | |
|---|-----|
| 4.27.2.14 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON | 182 |
| 4.27.2.15 LCD_CNF_FONT_5_11 | 182 |
| 4.27.2.16 LCD_CNF_FONT_5_8 | 182 |
| 4.27.2.17 LCD_CNF_ONE_LINE | 182 |
| 4.27.2.18 LCD_CNF_SHIFT_ID | 182 |
| 4.27.2.19 LCD_CNF_SHIFT_SH | 183 |
| 4.27.2.20 LCD_CNF_TWO_LINE | 183 |
| 4.27.2.21 LCD_DISPLAY_CTRL_FIELD_B | 183 |
| 4.27.2.22 LCD_DISPLAY_CTRL_FIELD_C | 183 |
| 4.27.2.23 LCD_DISPLAY_CTRL_FIELD_D | 183 |
| 4.27.2.24 LCD_FCT_SET_FIELD_DL | 184 |
| 4.27.2.25 LCD_FCT_SET_FIELD_F | 184 |
| 4.27.2.26 LCD_FCT_SET_FIELD_N | 184 |
| 4.27.2.27 LCD_INST_CLR_DISPLAY_BIT | 184 |
| 4.27.2.28 LCD_INST_DISPLAY_CTRL | 184 |
| 4.27.2.29 LCD_INST_ENTRY_MODE_SET | 185 |
| 4.27.2.30 LCD_INST_FUNCTION_SET | 185 |
| 4.27.2.31 LCD_INST_SET_DDRAM_ADDR | 185 |
| 4.27.2.32 LCD_RAM_1_LINE_MAX | 185 |
| 4.27.2.33 LCD_RAM_1_LINE_MIN | 185 |
| 4.27.2.34 LCD_RAM_2_LINES_MAX_1 | 186 |
| 4.27.2.35 LCD_RAM_2_LINES_MAX_2 | 186 |
| 4.27.2.36 LCD_RAM_2_LINES_MIN_1 | 186 |
| 4.27.2.37 LCD_RAM_2_LINES_MIN_2 | 186 |
| 4.27.2.38 LCD_SIZE_NB_CHAR_PER_LINE | 186 |
| 4.27.2.39 LCD_SIZE_NB_LINES | 187 |
| 4.27.2.40 LCD_WAIT_CLR_RETURN | 187 |
| 4.27.2.41 LCD_WAIT_OTHER_MODES | 187 |
| 4.27.2.42 RS_PIN | 187 |
| 4.27.2.43 RW_PIN | 187 |

| | |
|---|-----|
| 4.27.3 Enumeration Type Documentation | 187 |
| 4.27.3.1 T_LCD_command | 187 |
| 4.27.3.2 T_LCD_config_mode | 188 |
| 4.27.3.3 T_LCD_ram_area | 188 |
| 4.27.4 Variable Documentation | 188 |
| 4.27.4.1 p_global_BSW_lcd | 189 |
| 4.28 LinkedList.cpp File Reference | 189 |
| 4.29 LinkedList.h File Reference | 189 |
| 4.29.1 Detailed Description | 190 |
| 4.29.2 Typedef Documentation | 190 |
| 4.29.2.1 CompareFctPtr_t | 190 |
| 4.30 main.cpp File Reference | 190 |
| 4.30.1 Detailed Description | 191 |
| 4.30.2 Macro Definition Documentation | 191 |
| 4.30.2.1 DEBUG_ACTIVE_PORT | 191 |
| 4.30.3 Function Documentation | 191 |
| 4.30.3.1 main() | 192 |
| 4.30.4 Variable Documentation | 192 |
| 4.30.4.1 ASW_init_cnf | 192 |
| 4.30.4.2 isDebugModeActivated | 192 |
| 4.31 main.h File Reference | 193 |
| 4.31.1 Detailed Description | 193 |
| 4.31.2 Variable Documentation | 193 |
| 4.31.2.1 ASW_init_cnf | 193 |
| 4.31.2.2 isDebugModeActivated | 194 |
| 4.32 operators.cpp File Reference | 194 |
| 4.32.1 Detailed Description | 194 |
| 4.32.2 Function Documentation | 195 |
| 4.32.2.1 operator delete() | 195 |
| 4.32.2.2 operator new() | 195 |

| | |
|---|-----|
| 4.33 operators.h File Reference | 195 |
| 4.33.1 Detailed Description | 196 |
| 4.33.2 Function Documentation | 196 |
| 4.33.2.1 operator delete() | 196 |
| 4.33.2.2 operator new() | 197 |
| 4.34 scheduler.cpp File Reference | 197 |
| 4.34.1 Detailed Description | 198 |
| 4.34.2 Variable Documentation | 198 |
| 4.34.2.1 p_global_scheduler | 198 |
| 4.35 scheduler.h File Reference | 198 |
| 4.35.1 Detailed Description | 199 |
| 4.35.2 Macro Definition Documentation | 199 |
| 4.35.2.1 PRESCALER_PERIODIC_TIMER | 199 |
| 4.35.2.2 SW_PERIOD_MS | 199 |
| 4.35.2.3 TIMER_CTC_VALUE | 200 |
| 4.35.3 Typedef Documentation | 200 |
| 4.35.3.1 TaskPtr_t | 200 |
| 4.35.4 Variable Documentation | 200 |
| 4.35.4.1 p_global_scheduler | 200 |
| 4.36 String.cpp File Reference | 200 |
| 4.36.1 Detailed Description | 201 |
| 4.37 String.h File Reference | 201 |
| 4.37.1 Detailed Description | 201 |
| 4.38 TempSensor.cpp File Reference | 202 |
| 4.38.1 Detailed Description | 202 |
| 4.38.2 Macro Definition Documentation | 202 |
| 4.38.2.1 PIT_BEFORE_INVALID | 203 |
| 4.38.3 Variable Documentation | 203 |
| 4.38.3.1 p_global_ASW_TempSensor | 203 |
| 4.39 TempSensor.h File Reference | 203 |

| | | |
|--------------|--------------------------------|------------|
| 4.39.1 | Detailed Description | 204 |
| 4.39.2 | Macro Definition Documentation | 204 |
| 4.39.2.1 | DHT22_PORT | 204 |
| 4.39.2.2 | PERIOD_MS_TASK_TEMP_SENSOR | 204 |
| 4.39.3 | Variable Documentation | 204 |
| 4.39.3.1 | p_global_ASW_TempSensor | 204 |
| 4.40 | timer.cpp File Reference | 205 |
| 4.40.1 | Detailed Description | 205 |
| 4.40.2 | Variable Documentation | 205 |
| 4.40.2.1 | p_global_BSW_timer | 205 |
| 4.41 | timer.h File Reference | 206 |
| 4.41.1 | Detailed Description | 206 |
| 4.41.2 | Variable Documentation | 206 |
| 4.41.2.1 | p_global_BSW_timer | 206 |
| 4.42 | uart.cpp File Reference | 207 |
| 4.42.1 | Detailed Description | 207 |
| 4.42.2 | Variable Documentation | 207 |
| 4.42.2.1 | p_global_BSW_uart | 207 |
| 4.43 | uart.h File Reference | 208 |
| 4.43.1 | Detailed Description | 208 |
| 4.43.2 | Variable Documentation | 208 |
| 4.43.2.1 | p_global_BSW_uart | 208 |
| Index | | 209 |

Chapter 1

Class Index

1.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

| | | |
|--|--|-----|
| CpuLoad | Class defining CPU load libraries | 5 |
| DebugInterface | Class used for debugging on usart link | 10 |
| DebugManagement | Debug management class | 16 |
| dht22 | DHT 22 driver class | 24 |
| dio | DIO class | 28 |
| DisplayInterface | Display interface services class | 37 |
| DisplayManagement | Display management class | 49 |
| I2C | Two-wire serial interface (I2C) class definition | 54 |
| keepAliveLed | Class for keep-alive LED blinking | 58 |
| LCD | Class for LCD S2004A display driver | 60 |
| LinkedList | Linked list class | 77 |
| scheduler | Scheduler class | 84 |
| String | String management class | 93 |
| T_ASW_init_cnf | ASW initialization configuration structure | 102 |
| T_display_data | Structure containing display data | 103 |
| T_Display_shift_data | Structure containing shift data | 105 |
| T_LCD_conf_struct | Structure defining LCD configuration | 107 |
| LinkedList::T_LL_element | Type defining a linked list element | 109 |

| | | |
|-------------------|--|-----|
| scheduler::Task_t | Type defining a task structure | 110 |
| TempSensor | Class for temperature sensor | 111 |
| timer | Class defining a timer | 123 |
| usart | USART serial bus class | 126 |

Chapter 2

File Index

2.1 File List

Here is a list of all files with brief descriptions:

| | | |
|---------------------------------------|--|-----|
| asw.cpp | ASW main file | 133 |
| asw.h | ASW main header file | 135 |
| bsw.cpp | BSW main file | 136 |
| bsw.h | BSW main header file | 138 |
| CpuLoad.cpp | Defines functions of class CpuLoad | 139 |
| CpuLoad.h | CpuLoad class header file | 140 |
| DebugInterface.cpp | | 142 |
| DebugInterface.h | | 142 |
| DebugManagement.cpp | Debug management class source file | 144 |
| DebugManagement.h | Debug management class header file | 146 |
| dht22.cpp | This file defines classes for DHT22 driver | 148 |
| dht22.h | DHT22 driver header file | 149 |
| dio.cpp | DIO library | 150 |
| dio.h | DIO library header file | 151 |
| dio_port_cnf.h | Digital ports configuration file | 154 |
| dio_reg_atm2560.h | | 156 |
| DisplayInterface.cpp | Source code file for display services | 159 |
| DisplayInterface.h | DisplayInterface class header file | 160 |
| DisplayManagement.cpp | Display management source file | 163 |

| | |
|---|-----|
| DisplayManagement.h | |
| Display management class header file | 164 |
| I2C.cpp | |
| Two-wire interface (I2C) source file | 168 |
| I2C.h | |
| I2C class header file | 169 |
| int.cpp | |
| Interrupt management source file | 171 |
| keepAliveLed.cpp | |
| Definition of function for class keepAliveLed | 173 |
| keepAliveLed.h | |
| Class keepAliveLed header file | 174 |
| LCD.cpp | |
| LCD class source file | 176 |
| LCD.h | |
| LCD class header file | 177 |
| LinkedList.cpp | |
| Linked List library source file | 189 |
| LinkedList.h | |
| Linked List library header file | 189 |
| main.cpp | |
| Background task file | 190 |
| main.h | |
| Background task header file | 193 |
| operators.cpp | |
| C++ operators definitions | 194 |
| operators.h | |
| C++ operators definitions header file | 195 |
| scheduler.cpp | |
| Defines scheduler class | 197 |
| scheduler.h | |
| Scheduler class header file | 198 |
| String.cpp | |
| String class source file | 200 |
| String.h | |
| String class header file | 201 |
| TempSensor.cpp | |
| Defines function of class TempSensor | 202 |
| TempSensor.h | |
| Class TempSensor header file | 203 |
| timer.cpp | |
| Defines function for class timer | 205 |
| timer.h | |
| Timer class header file | 206 |
| usart.cpp | |
| BSW library for USART | 207 |
| usart.h | |
| Header file for USART library | 208 |

Chapter 3

Class Documentation

3.1 CpuLoad Class Reference

Class defining CPU load libraries.

```
#include <CpuLoad.h>
```

Public Member Functions

- [CpuLoad \(\)](#)
CpuLoad class constructor.
- [void ComputeCPULoad \(\)](#)
Computes current CPU load.
- [uint8_t getCurrentCPULoad \(\)](#)
Get current CPU load value.
- [uint8_t getAverageCPULoad \(\)](#)
Get average CPU load value.
- [uint8_t getMaxCPULoad \(\)](#)
Get maximum CPU load value.

Private Attributes

- [uint8_t current_load](#)
- [uint8_t avg_load](#)
- [uint8_t max_load](#)
- [uint8_t sample_cnt](#)
- [uint8_t sample_mem \[NB_OF_SAMPLES\]](#)
- [uint8_t sample_idx](#)
- [uint16_t last_sum_value](#)

3.1.1 Detailed Description

Class defining CPU load libraries.

This class defines tools to compute and monitor CPU load.

Definition at line 19 of file CpuLoad.h.

3.1.2 Constructor & Destructor Documentation

3.1.2.1 CpuLoad()

```
CpuLoad::CpuLoad ( )
```

[CpuLoad](#) class constructor.

This function initializes class [CpuLoad](#). It also creates a new object of Timer class in case it is still not created. Normally the [CpuLoad](#) class is used by the scheduler object, which should create the Timer object. Thus the initialization of Timer object in [CpuLoad](#) class should not be needed. We still do the check here to avoid any issue with null pointer.

Returns

Nothing

Definition at line 20 of file CpuLoad.cpp.

3.1.3 Member Function Documentation

3.1.3.1 ComputeCPUload()

```
void CpuLoad::ComputeCPUload ( )
```

Computes current CPU load.

This function computes the current CPU load using value of the timer used by the scheduler at the end of the periodic cycle. This value is divided by the PIT period to obtain CPU load;

Returns


Nothing

Definition at line 40 of file CpuLoad.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.1.3.2 getAverageCPULoad()

`uint8_t CpuLoad::getAverageCPULoad () [inline]`

Get average CPU load value.


This function returns the average CPU load value

Returns

Average CPU load value

Definition at line 58 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.3.3 getCurrentCPULoad()

`uint8_t CpuLoad::getCurrentCPULoad () [inline]`

Get current CPU load value.


This function returns the current CPU load value

Returns

Current CPU load value

Definition at line 47 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.3.4 getMaxCPUload()

```
uint8_t CpuLoad::getMaxCPUload ( ) [inline]
```

Get maximum CPU load value.


This function returns the maximum CPU load value

Returns

Maximum CPU load value

Definition at line 69 of file CpuLoad.h.

Here is the caller graph for this function:



3.1.4 Member Data Documentation

3.1.4.1 avg_load

```
uint8_t CpuLoad::avg_load [private]
```

Average CPU load based on the last 50 cycles

Definition at line 76 of file CpuLoad.h.

3.1.4.2 current_load

```
uint8_t CpuLoad::current_load [private]
```

Current CPU load (load of last cycle)

Definition at line 75 of file CpuLoad.h.

3.1.4.3 last_sum_value

```
uint16_t CpuLoad::last_sum_value [private]
```

Value of the last computed sum (it will reduce the number of samples to sum and speed up execution time)

Definition at line 81 of file CpuLoad.h.

3.1.4.4 max_load

```
uint8_t CpuLoad::max_load [private]
```

Maximum CPU load since power on

Definition at line 77 of file CpuLoad.h.

3.1.4.5 sample_cnt

```
uint8_t CpuLoad::sample_cnt [private]
```

Number of samples used to compute average load

Definition at line 78 of file CpuLoad.h.

3.1.4.6 sample_idx

```
uint8_t CpuLoad::sample_idx [private]
```

Current measurement index (used to memorize the current measure at the correct location in table)

Definition at line 80 of file CpuLoad.h.

3.1.4.7 sample_mem

```
uint8_t CpuLoad::sample_mem[NB_OF_SAMPLES] [private]
```

Memorization of the last NB_OF_SAMPLES measures

Definition at line 79 of file CpuLoad.h.

The documentation for this class was generated from the following files:


- [CpuLoad.h](#)
- [CpuLoad.cpp](#)

3.2 DebugInterface Class Reference

Class used for debugging on usart link.

```
#include <DebugInterface.h>
```

Collaboration diagram for DebugInterface:

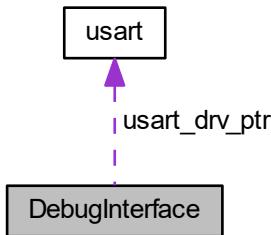

Public Member Functions

- [DebugInterface \(\)](#)
Class DebugInterface constructor.
- [void sendInteger \(uint16_t data, uint8_t base\)](#)
Send a integer data on USART link.
- [void sendBool \(bool data, bool isText\)](#)
Send a boolean data on USART link.
- [void sendString \(String *str\)](#)
Send a string on USART link.
- [void sendString \(uint8_t *str\)](#)
Send a chain of characters on USART link.
- [void sendChar \(uint8_t chr\)](#)
Send a single character on USART link.
- [uint8_t read \(\)](#)
USART read function.
- [void nextLine \(\)](#)
Go to next line function.

Private Attributes

- [uart * usart_drv_ptr](#)

3.2.1 Detailed Description

Class used for debugging on usart link.

This class defines functions used for sending debug data on USART link.

Definition at line 21 of file DebugInterface.h.

3.2.2 Constructor & Destructor Documentation

3.2.2.1 DebugInterface()

```
DebugInterface::DebugInterface ( )
```

Class [DebugInterface](#) constructor.

Initializes the class [DebugInterface](#). It creates a new instance of USART driver of needed.

Returns

Nothing

Definition at line 22 of file [DebugInterface.cpp](#).

3.2.3 Member Function Documentation

3.2.3.1 nextLine()

```
void DebugInterface::nextLine ( )
```

Go to next line function.


This function goes to the next line on the console display. It sends the two characters and on the USART line.

Returns


Nothing

Definition at line 71 of file [DebugInterface.cpp](#).

Here is the call graph for this function:



Here is the caller graph for this function:



3.2.3.2 `read()`

```
uint8_t DebugInterface::read ( ) [inline]
```

USART read function.


This function will read the last received byte on USART link

Returns

Received byte

Definition at line 82 of file DebugInterface.h.

Here is the caller graph for this function:

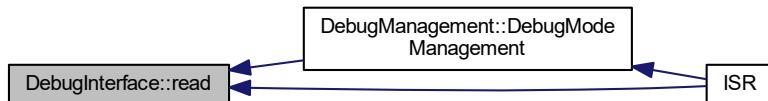

3.2.3.3 `sendBool()`

```
void DebugInterface::sendBool (
    bool data,
    bool isText )
```

Send a boolean data on USART link.

This function sends the requested boolean on USART link by calling driver's transmission function. The boolean data is first converted into a string and then sent. The parameter `isText` defines if the data is converted into a string (true/false) or an integer (1/0).

Parameters


| | | |
|-----------------|---------------------|---------------------------------|
| <code>in</code> | <code>data</code> | boolean data to be sent |
| <code>in</code> | <code>isText</code> | String conversion configuration |

Returns

Nothing

Definition at line 62 of file DebugInterface.cpp.

Here is the call graph for this function:

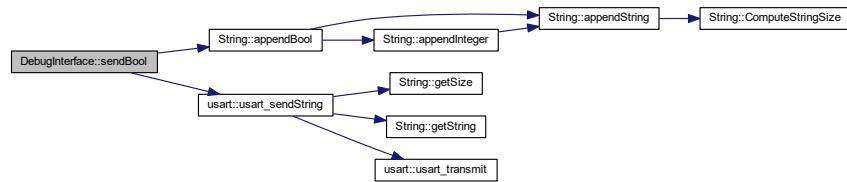

3.2.3.4 sendChar()

```
void DebugInterface::sendChar (
    uint8_t chr )
```

Send a single character on USART link.

This function sends the requested character on USART link by calling driver's transmission function.

Parameters

| | | |
|----|------------------|--------------------|
| in | <code>chr</code> | Character to send. |
|----|------------------|--------------------|

Returns


Nothing

Definition at line 44 of file `DebugInterface.cpp`.

Here is the call graph for this function:



Here is the caller graph for this function:



3.2.3.5 sendInteger()

```
void DebugInterface::sendInteger (
    uint16_t data,
    uint8_t base )
```

Send a integer data on USART link.

This function sends the requested integer on USART link by calling driver's transmission function. The integer is first converted into a string and then sent

Parameters


| | | |
|----|-------------|---|
| in | <i>data</i> | integer data to be sent |
| in | <i>base</i> | numerical base used to convert integer into string (between 2 and 36) |

Returns


Nothing

Definition at line 49 of file DebugInterface.cpp.

Here is the call graph for this function:

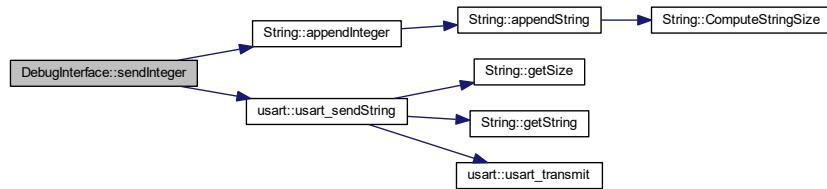

Here is the caller graph for this function:



3.2.3.6 sendString() [1/2]

```
void DebugInterface::sendString (
    String * str )
```

Send a string on USART link.

This function sends the requested string on USART link by calling driver's transmission function

Parameters


| | | |
|-----------------|------------------|----------------------------------|
| <code>in</code> | <code>str</code> | Pointer to the string being sent |
|-----------------|------------------|----------------------------------|

Returns


Nothing

Definition at line 31 of file DebugInterface.cpp.

Here is the call graph for this function:

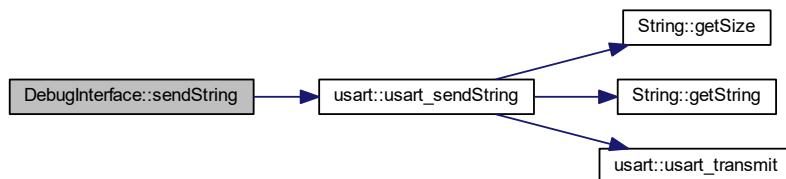

Here is the caller graph for this function:

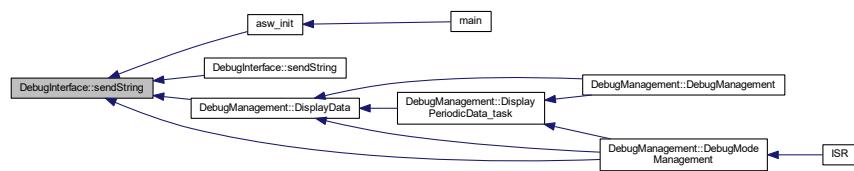**3.2.3.7 sendString() [2/2]**

```
void DebugInterface::sendString (
    uint8_t * str )
```

Send a chain of characters on USART link.

This function sends the requested chain of characters on USART link by calling driver's transmission function. The chain is first converted into a string object.

Parameters


| | | |
|-----------------|------------------|-------------------------------|
| <code>in</code> | <code>str</code> | Pointer to the chain to send. |
|-----------------|------------------|-------------------------------|

Returns

Nothing

Definition at line 37 of file DebugInterface.cpp.

Here is the call graph for this function:

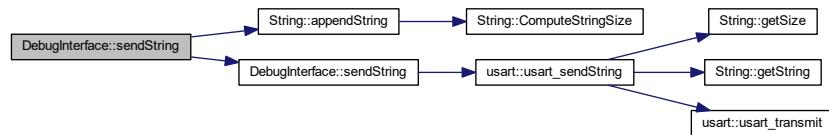

3.2.4 Member Data Documentation

3.2.4.1 usart_drv_ptr

```
usart* DebugInterface::usart_drv_ptr [private]
```

Pointer to USART driver object

Definition at line 99 of file DebugInterface.h.

The documentation for this class was generated from the following files:


- [DebugInterface.h](#)
- [DebugInterface.cpp](#)

3.3 DebugManagement Class Reference

Debug management class.

```
#include <DebugManagement.h>
```

Collaboration diagram for DebugManagement:

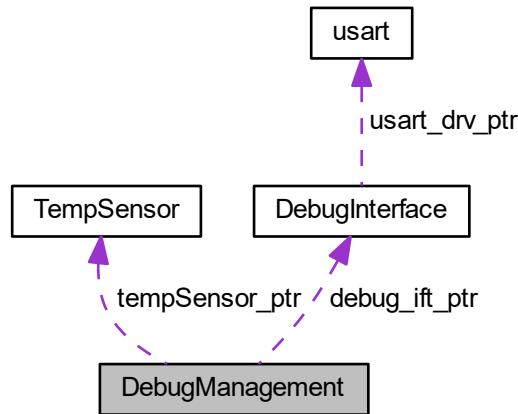

Public Member Functions

- `DebugManagement ()`
Class constructor.
- `void DisplayData ()`
Displays data on usart link.
- `bool DebugModeManagement ()`
Management of debug mode.
- `DebugInterface * getIfptPtr ()`
Interface pointer get function.
- `uint8_t * getMenuStringPtr ()`
Menu string get function.
- `uint8_t * getInfoStringPtr ()`
Info string get function.
- `void setInfoStringPtr (uint8_t *addr)`
Info message setting function.

Static Public Member Functions

- `static void DisplayPeriodicData_task ()`
Displays periodic data on usart link.

Private Attributes

- `DebugInterface * debug_ift_ptr`
- `TempSensor * tempSensor_ptr`
- `uint8_t * menu_string_ptr`
- `uint8_t * info_string_ptr`
- `debug_state_t menu_state`

3.3.1 Detailed Description

Debug management class.

This class manages the debug menu available on USART interface. It allows to display SW informations like sensors data, CPU load...

Definition at line 28 of file DebugManagement.h.

3.3.2 Constructor & Destructor Documentation

3.3.2.1 DebugManagement()

```
DebugManagement::DebugManagement ( )
```

Class constructor.


This function initializes the class. If needed, it creates a new instance of debug interface object.

Returns

Nothing

Definition at line 48 of file DebugManagement.cpp.

Here is the call graph for this function:

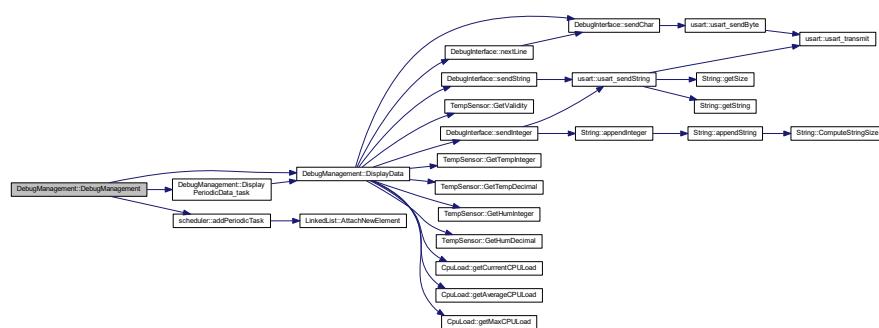

3.3.3 Member Function Documentation

3.3.3.1 DebugModeManagement()

```
bool DebugManagement::DebugModeManagement( )
```

Management of debug mode.

This function manages the debug menu according to the following state machine :


- MAIN_MENU state : handles user choice in main menu and selects next state
It is called each time a data is received on USART and debug mode is active.

Returns


True if the debug mode shall be closed, false otherwise

Definition at line 156 of file DebugManagement.cpp.

Here is the call graph for this function:

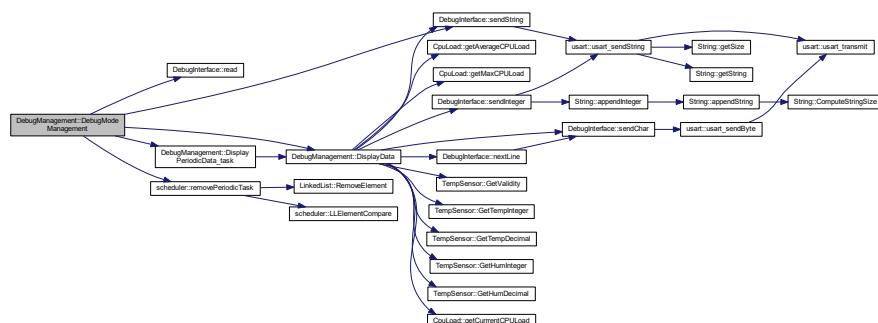

Here is the caller graph for this function:



3.3.3.2 DisplayData()

```
void DebugManagement::DisplayData ( )
```

Displays data on uart link.


This task displays the menu and periodic data (temperature, humidity and CPU load) on uart screen.

Returns


Nothing

Definition at line 74 of file DebugManagement.cpp.

Here is the call graph for this function:

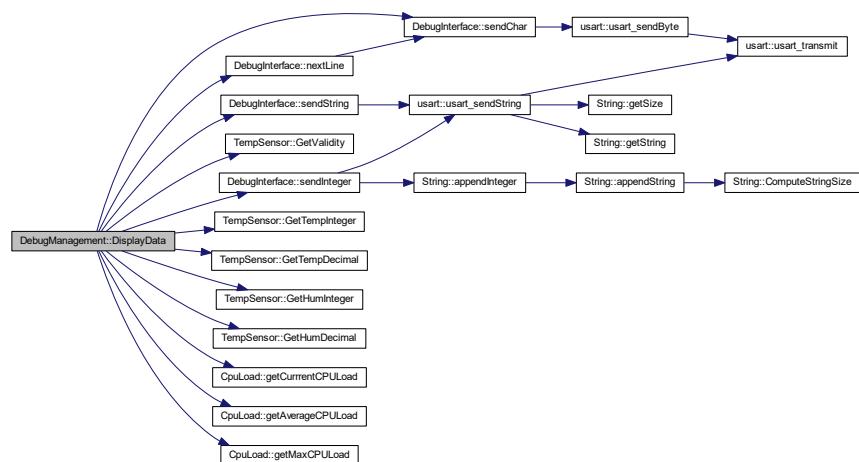

Here is the caller graph for this function:

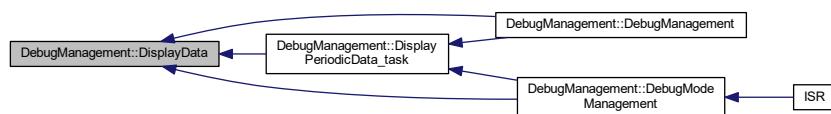

3.3.3.3 DisplayPeriodicData_task()

```
void DebugManagement::DisplayPeriodicData_task ( ) [static]
```

Displays periodic data on usart link.


This task displays the menu and periodic data (temperature, humidity and CPU load) on usart screen. It only calls the function `DisplayData`.

Returns


Nothing

Definition at line 148 of file `DebugManagement.cpp`.

Here is the call graph for this function:

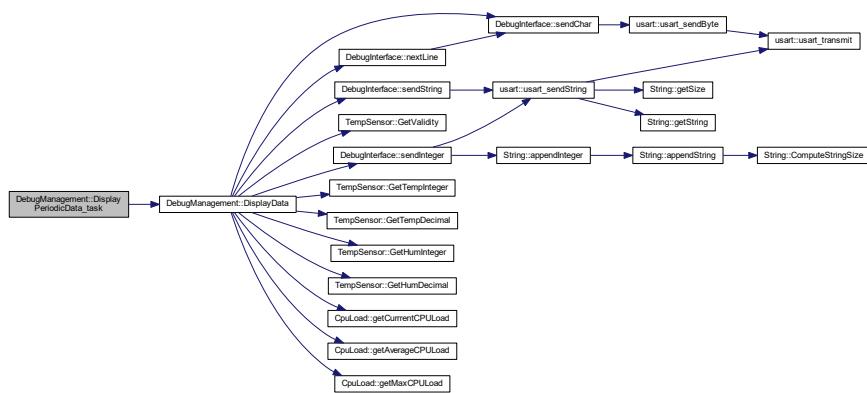

Here is the caller graph for this function:

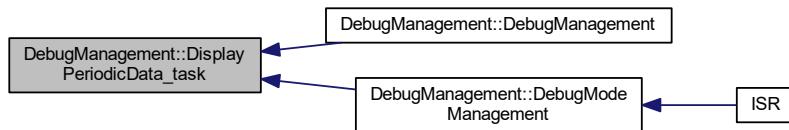

3.3.3.4 getIfptPtr()

```
DebugInterface* DebugManagement::getIfptPtr ( ) [inline]
```

Interface pointer get function.

This function returns the pointer to the debug interface object

Returns

Pointer to debug interface

Definition at line 71 of file `DebugManagement.h`.

3.3.3.5 getInfoStringPtr()

```
uint8_t* DebugManagement::getInfoStringPtr ( ) [inline]
```

Info string get function.

This function returns the pointer to the info string to display

Returns

Info string pointer

Definition at line 91 of file DebugManagement.h.

3.3.3.6 getMenuStringPtr()

```
uint8_t* DebugManagement::getMenuStringPtr ( ) [inline]
```

Menu string get function.

This function returns the pointer to the menu string to display

Returns

Menu string pointer

Definition at line 81 of file DebugManagement.h.

3.3.3.7 setInfoStringPtr()

```
void DebugManagement::setInfoStringPtr ( uint8_t * addr ) [inline]
```

Info message setting function.

This functions sets the info message pointer to the given string address

Parameters

| | | |
|----|------|----------------|
| in | addr | String address |
|----|------|----------------|

Returns

Nothing

Definition at line 102 of file DebugManagement.h.

3.3.4 Member Data Documentation

3.3.4.1 debug_ift_ptr

```
DebugInterface* DebugManagement::debug_ift_ptr [private]
```

Pointer to the debug interface object, which is used to send data on usart link

Definition at line 109 of file DebugManagement.h.

3.3.4.2 info_string_ptr

```
uint8_t* DebugManagement::info_string_ptr [private]
```

Pointer to the info message to display

Definition at line 112 of file DebugManagement.h.

3.3.4.3 menu_state

```
debug_state_t DebugManagement::menu_state [private]
```

Current debug state

Definition at line 113 of file DebugManagement.h.

3.3.4.4 menu_string_ptr

```
uint8_t* DebugManagement::menu_string_ptr [private]
```

Pointer to the current menu string to display

Definition at line 111 of file DebugManagement.h.

3.3.4.5 tempSensor_ptr

`TempSensor* DebugManagement::tempSensor_ptr [private]`

Pointer to the temperature sensor object

Definition at line 110 of file `DebugManagement.h`.

The documentation for this class was generated from the following files:


- [DebugManagement.h](#)
- [DebugManagement.cpp](#)

3.4 dht22 Class Reference

DHT 22 driver class.

```
#include <dht22.h>
```

Collaboration diagram for `dht22`:



Public Member Functions

- [`dht22` \(uint8_t port\)](#)
dht22 class constructor.
- [`bool read \(uint16_t *raw_humidity, uint16_t *raw_temperature\)`](#)
Reads the data from DHT22.

Private Member Functions

- [`void initializeCommunication \(\)`](#)
Initializes the communication.

Private Attributes

- `uint8_t dht22_port`
- `dio * dio_ptr`

3.4.1 Detailed Description

DHT 22 driver class.

This class defines all useful functions for DHT22 temperature and humidity sensor

Definition at line 22 of file dht22.h.

3.4.2 Constructor & Destructor Documentation

3.4.2.1 dht22()

```
dht22::dht22 (
    uint8_t port )
```

`dht22` class constructor.

Initializes the class `dht22`.

Parameters


| | | |
|-----------------|-------------------|--|
| <code>in</code> | <code>port</code> | Encoded configuration of the port used for 1-wire communication. |
|-----------------|-------------------|--|

Returns

Nothing

Definition at line 22 of file dht22.cpp.

Here is the call graph for this function:



3.4.3 Member Function Documentation

3.4.3.1 initializeCommunication()

```
void dht22::initializeCommunication ( ) [private]
```

Initializes the communication.


This function initializes the communication with DHT22 using 1-wire protocol

Returns


Nothing

Definition at line 201 of file dht22.cpp.

Here is the call graph for this function:

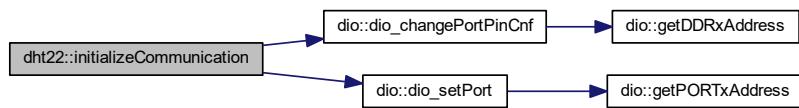

Here is the caller graph for this function:



3.4.3.2 read()

```
bool dht22::read (
    uint16_t * raw_humidity,
    uint16_t * raw_temperature )
```

Reads the data from DHT22.

This function communicates with DHT22 using 1-wire protocol to read raw values of temperature and humidity. A checksum check is done when communication is finished to validate the received data

Parameters


| | | |
|------------------|------------------------------|--|
| <code>out</code> | <code>raw_humidity</code> | Raw humidity value received from sensor |
| <code>out</code> | <code>raw_temperature</code> | Raw temperature value received from sensor |

Returns


Validity of the read value

Definition at line 30 of file dht22.cpp.

Here is the call graph for this function:

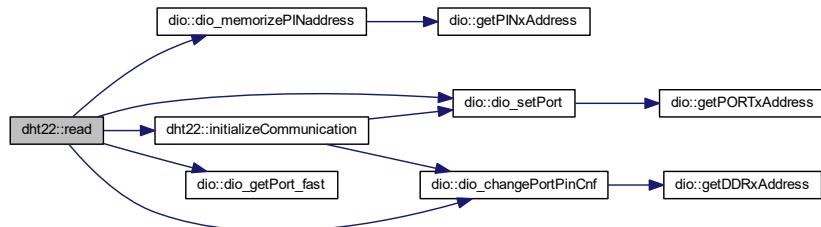

Here is the caller graph for this function:



3.4.4 Member Data Documentation

3.4.4.1 dht22_port

```
uint8_t dht22::dht22_port [private]
```

Variable containing the port used for 1-wire communication

Definition at line 48 of file dht22.h.

3.4.4.2 dio_ptr

```
dio* dht22::dio_ptr [private]
```

Pointer to the DIO object

Definition at line 49 of file dht22.h.

The documentation for this class was generated from the following files:

- [dht22.h](#)
- [dht22.cpp](#)

3.5 dio Class Reference

DIO class.

```
#include <dio.h>
```

Public Member Functions

- **dio ()**
dio class constructor
- **void dio_setPort (uint8_t portcode, bool state)**
Port setting function.
- **void dio_invertPort (uint8_t portcode)**
Inverts the state of output port.
- **bool dio_getPort (uint8_t portcode)**
Gets the logical state of selected pin.
- **bool dio_getPort_fast (void)**
Gets the logical state of the memorized pin.
- **void dio_changePortPinCnf (uint8_t portcode, uint8_t cnf)**
Changes the IO configuration of the selected pin.
- **void dio_memorizePINaddress (uint8_t portcode)**
Memorizes PINx register address and pin index.

Private Member Functions

- **void ports_init ()**
Digital ports hardware initialization function.
- **uint8_t * getPORTxAddress (uint8_t portcode)**
Gets the physical address of the requested register PORTx.
- **uint8_t * getPINxAddress (uint8_t portcode)**
Gets the physical address of the requested register PINx.
- **uint8_t * getDDRxAddress (uint8_t portcode)**
Gets the physical address of the requested register DDRx.

Private Attributes

- **uint8_t * PINx_addr_mem**
- **uint8_t PINx_idx_mem**

3.5.1 Detailed Description

DIO class.

This class defines all useful functions for digital input/output ports

Definition at line 27 of file dio.h.

3.5.2 Constructor & Destructor Documentation

3.5.2.1 dio()

```
dio::dio ( )
```

dio class constructor


Initializes class dio and calls DIO hardware initialization function

Returns

Nothing

Definition at line 112 of file dio.cpp.

Here is the call graph for this function:

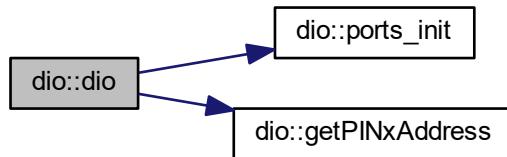

3.5.3 Member Function Documentation

3.5.3.1 dio_changePortPinCnf()

```
void dio::dio_changePortPinCnf (
    uint8_t portcode,
    uint8_t cnf )
```

Changes the IO configuration of the selected pin.

This function configures the selected pin as input or output according to parameter cnf. The corresponding port and pin index is extracted from parameter portcode.

Parameters

| | | |
|----|-----------------|--|
| in | <i>portcode</i> | Encoded pin and register index |
| in | <i>cnf</i> | Requested configuration for the selected pin PORT_CNF_OUT (1) : pin configured as output PORT_CNF_IN (0) : pin configured as input |

Returns


Nothing

Definition at line 149 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.5.3.2 dio_getPort()

```
bool dio::dio_getPort (
    uint8_t portcode )
```

Gets the logical state of selected pin.

This function gets the logical value of the selected pin. The corresponding port and pin index is extracted from parameter portcode.

Parameters

| | | |
|----|-----------------|--------------------------------|
| in | <i>portcode</i> | Encoded pin and register index |
|----|-----------------|--------------------------------|

Returns

Logical state of selected pin

Definition at line 139 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.5.3.3 dio_getPort_fast()**

```
bool dio::dio_getPort_fast (
    void )
```

Gets the logical state of the memorized pin.


This function gets the logical value of the memorized pin. The corresponding port and pin index are stored in class members PINx_addr_mem and PINx_idx_mem. This mechanism is used to speed up reading time as this function no longer needs to extract register address and pin index from portcode.

Returns

Logical state of selected pin

Definition at line 171 of file dio.cpp.

Here is the caller graph for this function:



3.5.3.4 dio_invertPort()

```
void dio::dio_invertPort (
    uint8_t portcode )
```

Inverts the state of output port.

This function inverts the state of the chosen pin. The corresponding port and pin index is extracted from parameter portcode.

Parameters

| | | |
|----|-----------------|--------------------------------|
| in | <i>portcode</i> | Encoded pin and register index |
|----|-----------------|--------------------------------|

Returns

Nothing

Definition at line 131 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.5.3.5 dio_memorizePINaddress()

```
void dio::dio_memorizePINaddress (
    uint8_t portcode )
```

Memorizes PINx register address and pin index.

This function is used to speed up reading of register PINx. Register address and pin index are decoded from portcode parameter and stored for later use by function dio_getPort_fast.

Parameters

| | | |
|----|-----------------|--------------------------------|
| in | <i>portcode</i> | Encoded pin and register index |
|----|-----------------|--------------------------------|

Returns


Nothing

Definition at line 165 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.5.3.6 dio_setPort()**

```
void dio::dio_setPort (
    uint8_t portcode,
    bool state )
```

Port setting function.

This function sets the requested digital output to the requested state. The corresponding port and pin index is extracted from parameter portcode.

Parameters


| | | |
|----|-----------------|--------------------------------|
| in | <i>portcode</i> | Encoded pin and register index |
| in | <i>state</i> | Requested state to set pin |

Returns


Nothing

Definition at line 121 of file dio.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.5.3.7 getDDRxAddress()**

```
uint8_t * dio::getDDRxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register DDRx.

This function retrieves the address of the register DDRx where x is encoded into the parameter portcode.

Parameters

| | | |
|----|-----------------|-------------------|
| in | <i>portcode</i> | Encoded port code |
|----|-----------------|-------------------|

Returns

Pointer to the DDRx register

Definition at line 83 of file dio.cpp.

Here is the caller graph for this function:



3.5.3.8 getPINxAddress()

```
uint8_t * dio::getPINxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register PINx.

This function retrieves the address of the register PINx where x is encoded into the parameter portcode.

Parameters


| | | |
|----|-----------------|-------------------|
| in | <i>portcode</i> | Encoded port code |
|----|-----------------|-------------------|

Returns

Pointer to the PINx register

Definition at line 54 of file dio.cpp.

Here is the caller graph for this function:

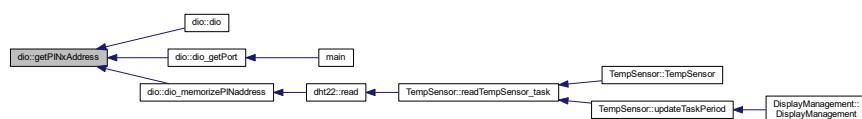

3.5.3.9 getPORTxAddress()

```
uint8_t * dio::getPORTxAddress (
    uint8_t portcode ) [private]
```

Gets the physical address of the requested register PORTx.

This function retrieves the address of the register PORTx where x is encoded into the parameter portcode.

Parameters

| | | |
|----|-----------------|-------------------|
| in | <i>portcode</i> | Encoded port code |
|----|-----------------|-------------------|

Returns

Pointer to the PORTx register

Definition at line 25 of file dio.cpp.

Here is the caller graph for this function:



3.5.3.10 ports_init()

```
void dio::ports_init ( ) [private]
```

Digital ports hardware initialization function.


This function initializes digital ports as input or output and sets their initial values

Returns

Nothing

Definition at line 16 of file dio.cpp.

Here is the caller graph for this function:



3.5.4 Member Data Documentation

3.5.4.1 PINx_addr_mem

```
uint8_t* dio::PINx_addr_mem [private]
```

Memorizes physical address of register PINx in order to speed up register reading time in function dio_getPort_fast

Definition at line 142 of file dio.h.

3.5.4.2 PINx_idx_mem

```
uint8_t dio::PINx_idx_mem [private]
```

Memorizes pin index of register PINx in order to speed up register reading time in function dio_getPort_fast

Definition at line 143 of file dio.h.

The documentation for this class was generated from the following files:


- [dio.h](#)
- [dio.cpp](#)

3.6 DisplayInterface Class Reference

Display interface services class.

```
#include <DisplayInterface.h>
```

Collaboration diagram for DisplayInterface:

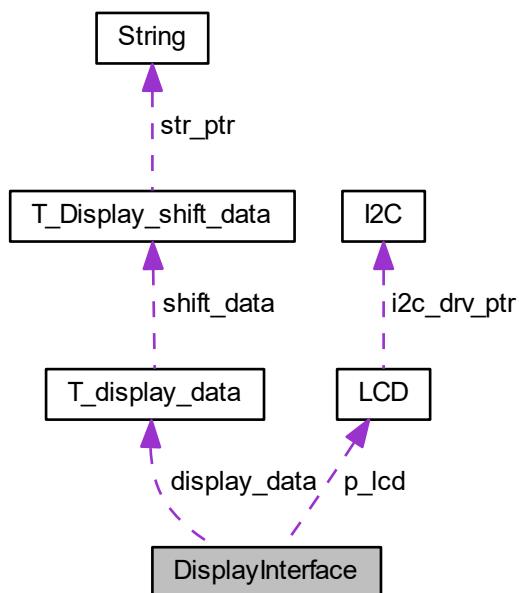

Public Member Functions

- `DisplayInterface (const T_LCD_conf_struct *LCD_init_cnf)`
Class constructor.
- `bool DisplayFullLine (uint8_t *str, uint8_t size, uint8_t line, T_DisplayInterface_LineDisplayMode mode=NORMAL, T_DisplayInterface_LineAlignment alignment=LEFT)`
Line display function.
- `bool ClearLine (uint8_t line)`
Line clearing function.
- `void ClearFullScreen ()`
Screen cleaning function.
- `bool IsLineEmpty (uint8_t line)`
Empty line get function.
- `T_display_data * getDisplayDataPtr ()`
Display data get function.
- `void setLineAlignmentAndRefresh (uint8_t line, T_DisplayInterface_LineAlignment alignment)`
Text alignment function.

Static Public Member Functions

- `static void shiftLine_task ()`
Line shifting periodic task.

Private Member Functions

- `uint8_t FindFirstCharAddr (uint8_t line)`
Finds start address of a line.
- `void RefreshLine (uint8_t line)`
Line refresh function.
- `void ClearStringInDataStruct (uint8_t line)`
String data clearing structure.
- `void setLineAlignment (uint8_t line)`
Text alignment setting function.
- `void updateLineAndRefresh (uint8_t *str, uint8_t size, uint8_t line)`
Line data string update function.

Private Attributes

- `LCD * p_lcd`
- `uint32_t dummy`
- `T_display_data display_data [LCD_SIZE_NB_LINES]`
- `bool isShiftInProgress`

3.6.1 Detailed Description

Display interface services class.

This class defines the services used for interfacing display management services and `LCD` screen driver

Definition at line 76 of file `DisplayInterface.h`.

3.6.2 Constructor & Destructor Documentation

3.6.2.1 DisplayInterface()

```
DisplayInterface::DisplayInterface (
    const T_LCD_conf_struct * LCD_init_cnf )
```

Class constructor.

This function initializes all class variables and instantiates the [LCD](#) driver according to the given configuration.

Parameters


| | | |
|----|---------------------|-------------------------------------|
| in | <i>LCD_init_cnf</i> | Initial configuration of the screen |
|----|---------------------|-------------------------------------|

Returns

Nothing

Definition at line 27 of file `DisplayInterface.cpp`.

Here is the call graph for this function:



3.6.3 Member Function Documentation

3.6.3.1 ClearFullScreen()

```
void DisplayInterface::ClearFullScreen ( )
```

Screen cleaning function.


This functions clears the entire display. It uses the `ClearLine` function on every line of the screen.

Returns

Nothing

Definition at line 265 of file DisplayInterface.cpp.

Here is the call graph for this function:

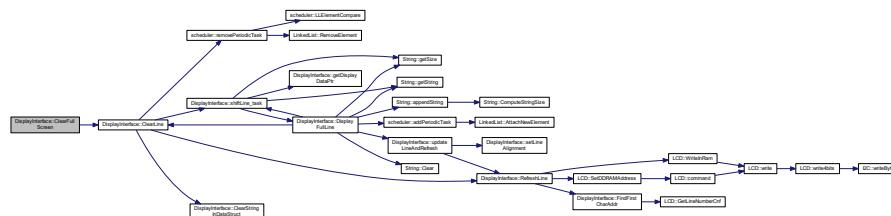

Here is the caller graph for this function:

**3.6.3.2 ClearLine()**

```
bool DisplayInterface::ClearLine (
    uint8_t line )
```

Line clearing function.

This function clears the requested line. It sets the corresponding DDRAM addresses to the ASCII value of space character. If it was the last line with a display shift in progress, it removes the periodic task from the scheduler.

Parameters


| | | |
|----|-------------|---------------|
| in | <i>line</i> | Line to clear |
|----|-------------|---------------|

Returns


True if the line has been cleared, false otherwise

Definition at line 221 of file DisplayInterface.cpp.

Here is the call graph for this function:

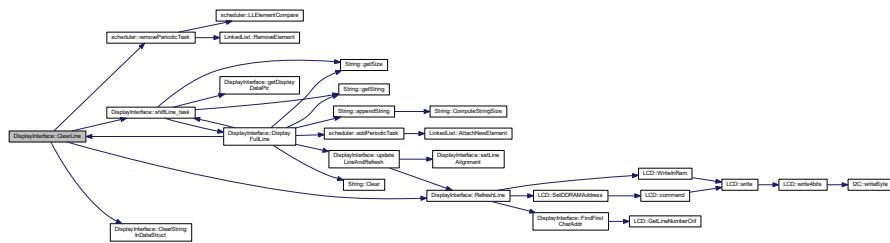

Here is the caller graph for this function:

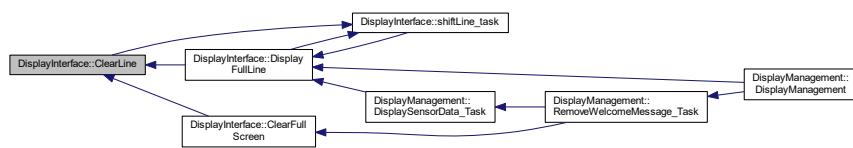

3.6.3.3 ClearStringInDataStruct()

```
void DisplayInterface::ClearStringInDataStruct (
    uint8_t line ) [private]
```

String data clearing structure.

This function clears the string contained in the display data structure. It sets all characters to space character.

Parameters


| | | |
|----|-------------|---------------|
| in | <i>line</i> | Line to clear |
|----|-------------|---------------|

Returns

Nothing

Definition at line 174 of file DisplayInterface.cpp.

Here is the caller graph for this function:

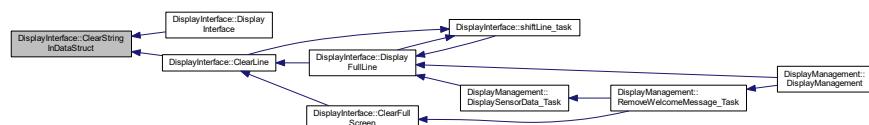

3.6.3.4 DisplayFullLine()

```
bool DisplayInterface::DisplayFullLine (
    uint8_t * str,
    uint8_t size,
    uint8_t line,
    T_DisplayInterface_LineDisplayMode mode = NORMAL,
    T_DisplayInterface_LineAlignment alignment = LEFT )
```

Line display function.

This function displays the given string on the requested line. If the string is too long to be displayed entirely, the behavior is defined by the selected mode.

Parameters


| | | |
|----|------------------|---|
| in | str | Pointer to the string to display |
| in | size | Size of the string to display |
| in | line | Index of the line where the string shall be displayed |
| in | mode | Display mode |
| in | alignment | Requested alignment for the line |

Returns


True if the line has been correctly displayed, false otherwise

Definition at line 59 of file DisplayInterface.cpp.

Here is the call graph for this function:

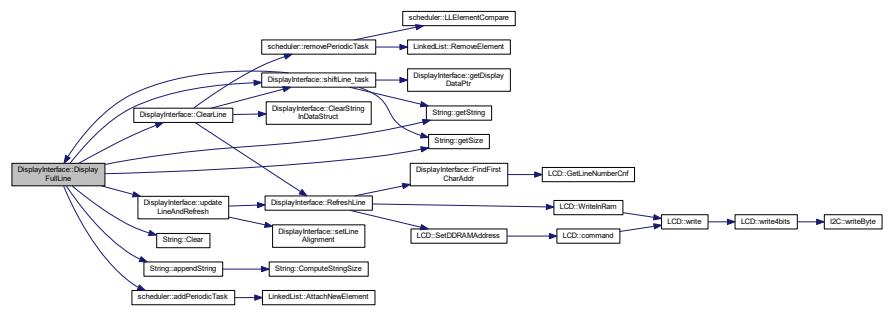

Here is the caller graph for this function:

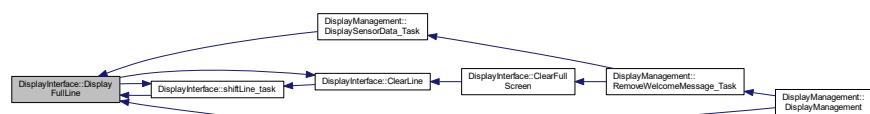

3.6.3.5 FindFirstCharAddr()

```
uint8_t DisplayInterface::FindFirstCharAddr (
    uint8_t line ) [private]
```

Finds start address of a line.

This function finds the address in DDRAM of the first character of a line.

Parameters


| | | |
|-----------------|-------------------|-----------------------------------|
| <code>in</code> | <code>line</code> | Line which address shall be found |
|-----------------|-------------------|-----------------------------------|

Returns

Address in DDRAM of the first character of the line

Definition at line 182 of file DisplayInterface.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.6.3.6 getDisplayDataPtr()

```
T_display_data* DisplayInterface::getDisplayDataPtr () [inline]
```

Display data get function.


This function returns a pointer to the display data structure.

Returns

Pointer to display data structure.

Definition at line 142 of file DisplayInterface.h.

Here is the caller graph for this function:

**3.6.3.7 IsLineEmpty()**

```
bool DisplayInterface::IsLineEmpty (
    uint8_t line )
```

Empty line get function.

This function answers if the line given in parameter is empty or not, according to the table isLineEmpty[]

Parameters

| | | |
|----|-------------|----------------|
| in | <i>line</i> | Requested line |
|----|-------------|----------------|

Returns

True if the line is empty, false otherwise

Definition at line 273 of file DisplayInterface.cpp.

3.6.3.8 RefreshLine()

```
void DisplayInterface::RefreshLine (
    uint8_t line ) [private]
```

Line refresh function.

This function refreshes the display on the requested line. It computes the screen RAM address and writes the string to display into the screen RAM. It shall be called everytime the string in display data structure is updated.

Parameters


| | | |
|----|-------------|-----------------|
| in | <i>line</i> | Line to refresh |
|----|-------------|-----------------|

Returns

Nothing

Definition at line 161 of file DisplayInterface.cpp.

Here is the call graph for this function:

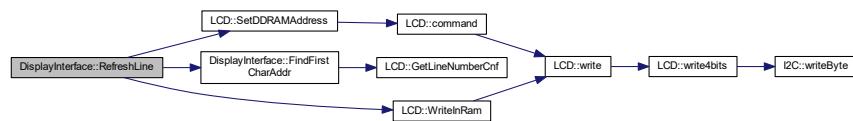

Here is the caller graph for this function:

**3.6.3.9 setLineAlignment()**

```
void DisplayInterface::setLineAlignment (
    uint8_t line) [private]
```

Text alignment setting function.

This function updates the text alignment on the requested line. The string in the data structure is updated with the new alignment. The alignment parameter in the data structure shall be updated before calling this function.

Parameters


| | | |
|----|------|----------------|
| in | line | Line to update |
|----|------|----------------|

Returns

Nothing

Definition at line 330 of file DisplayInterface.cpp.

Here is the caller graph for this function:

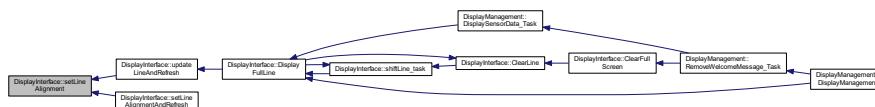

3.6.3.10 setLineAlignmentAndRefresh()

```
void DisplayInterface::setLineAlignmentAndRefresh (
    uint8_t line,
    T_DisplayInterface_LineAlignment alignment )
```

Text alignment function.

This function updates the text alignment on the requested line. It calls the private function `setLineAlignment` to update data structure and then refreshes the display. Nothing is done if the requested alignment is the same than the current one, if the line is empty or if the line is in line shift mode.

Parameters


| | | |
|----|------------------|----------------------------------|
| in | <i>line</i> | Requested line to update |
| in | <i>alignment</i> | Requested alignment for the text |

Returns

Nothing

Definition at line 448 of file `DisplayInterface.cpp`.

Here is the call graph for this function:

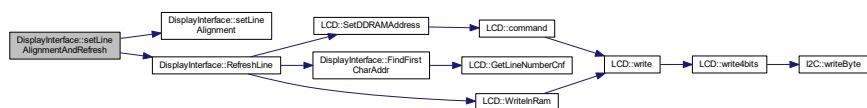

3.6.3.11 shiftLine_task()

```
void DisplayInterface::shiftLine_task ( ) [static]
```

Line shifting periodic task.


This function is called periodically by the scheduler. It shifts all the lines in line shifting mode and updates the data structures.

Returns


Nothing

Definition at line 282 of file DisplayInterface.cpp.

Here is the call graph for this function:

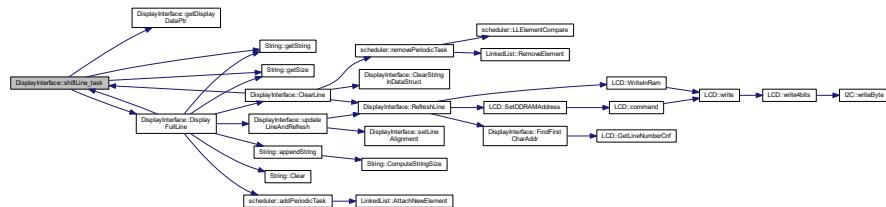

Here is the caller graph for this function:

**3.6.3.12 updateLineAndRefresh()**

```
void DisplayInterface::updateLineAndRefresh (
    uint8_t * str,
    uint8_t size,
    uint8_t line ) [private]
```

Line data string update function.

This function updates the data string and refreshes the display. The string is aligned according to the given parameter.

Parameters


| | | |
|-----------|-------------|----------------------------------|
| in | str | Pointer to the string to display |
| in | size | Size of the string |
| in | line | Line to update |

Returns


Nothing

Definition at line 145 of file DisplayInterface.cpp.

Here is the call graph for this function:

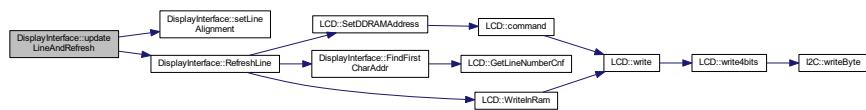

Here is the caller graph for this function:



3.6.4 Member Data Documentation

3.6.4.1 display_data

`T_display_data` `DisplayInterface::display_data[LCD_SIZE_NB_LINES]` [private]

Screen display data

Definition at line 165 of file `DisplayInterface.h`.

3.6.4.2 dummy

`uint32_t` `DisplayInterface::dummy` [private]

Needed for data alignment

Definition at line 164 of file `DisplayInterface.h`.

3.6.4.3 isShiftInProgress

`bool` `DisplayInterface::isShiftInProgress` [private]

Flag indicating if a shift is in progress on any line

Definition at line 166 of file `DisplayInterface.h`.

3.6.4.4 p_lcd

```
LCD* DisplayInterface::p_lcd [private]
```

Pointer to the attached LCD driver object

Definition at line 163 of file DisplayInterface.h.

The documentation for this class was generated from the following files:


- [DisplayInterface.h](#)
- [DisplayInterface.cpp](#)

3.7 DisplayManagement Class Reference

Display management class.

```
#include <DisplayManagement.h>
```

Collaboration diagram for DisplayManagement:

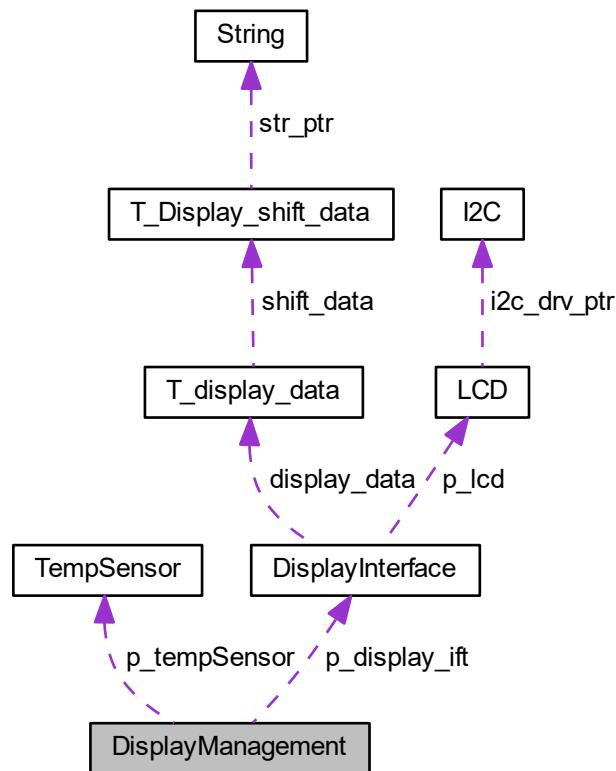

Public Member Functions

- [DisplayManagement \(\)](#)
Class constructor.
- [DisplayInterface * GetIfpPointer \(\)](#)
Interface pointer get function.
- [TempSensor * GetTempSensorPtr \(\)](#)
Sensor pointer get function.

Static Public Member Functions

- [static void DisplaySensorData_Task \(\)](#)
Periodic task for displaying sensor data.
- [static void RemoveWelcomeMessage_Task \(\)](#)
End of welcome message task.

Private Attributes

- [DisplayInterface * p_display_ift](#)
- [TempSensor * p_tempSensor](#)

3.7.1 Detailed Description

Display management class.

This class manages all displays. It is a top-level class. It retrieves the data computed by other ASW classes and displays them. It is interfaced with [DisplayInterface](#) class to display data on screens. One interface class is used for each screen.

Definition at line 53 of file [DisplayManagement.h](#).

3.7.2 Constructor & Destructor Documentation

3.7.2.1 [DisplayManagement\(\)](#)

```
DisplayManagement::DisplayManagement( )
```

Class constructor.


This class initializes display management.
It creates a display interface object and initializes all class variables.

Returns

Nothing

Definition at line 30 of file DisplayManagement.cpp.

Here is the call graph for this function:

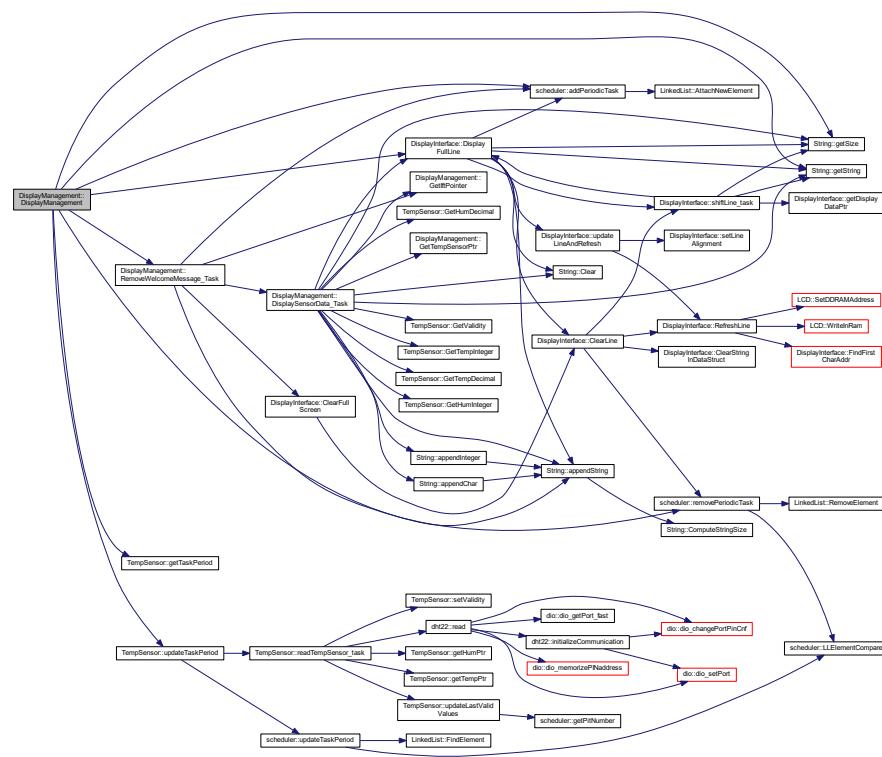

3.7.3 Member Function Documentation

3.7.3.1 DisplaySensorData_Task()

```
void DisplayManagement::DisplaySensorData_Task ( ) [static]
```

Periodic task for displaying sensor data.

This function displays the sensors data on the screen. Currently temperature and humidity data coming from `dht22` sensor are displayed.


It is called periodically by scheduler.

Returns

Nothing

Definition at line 74 of file DisplayManagement.cpp.

Here is the call graph for this function:

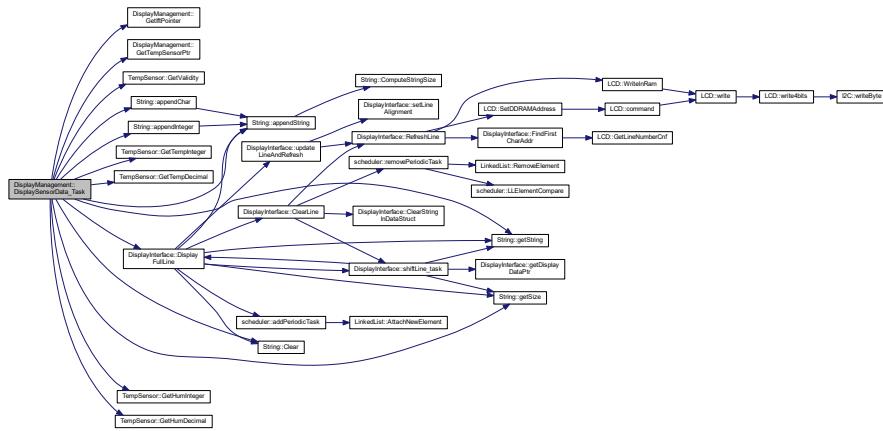

Here is the caller graph for this function:

**3.7.3.2 GetIftPointer()**

```
DisplayInterface* DisplayManagement::GetIftPointer ( ) [inline]
```

Interface pointer get function.


This function returns the pointer to the display interface object

Returns

Pointer to display interface object

Definition at line 82 of file DisplayManagement.h.

Here is the caller graph for this function:



3.7.3.3 GetTempSensorPtr()

```
TempSensor* DisplayManagement::GetTempSensorPtr ( ) [inline]
```

Sensor pointer get function.

This function returns the pointer to the temperature sensor object

Returns

Pointer to sensor object

Definition at line 93 of file DisplayManagement.h.

Here is the caller graph for this function:



3.7.3.4 RemoveWelcomeMessage_Task()

```
void DisplayManagement::RemoveWelcomeMessage_Task ( ) [static]
```

End of welcome message task.


This task clears the welcome message from the screen and start periodic display of sensor data. This task shall be added in scheduler when the welcome message is displayed on screen. As it shall be called only once, the task removes itself from the scheduler after the first call.

Returns

Nothing

Definition at line 57 of file DisplayManagement.cpp.

Here is the call graph for this function:

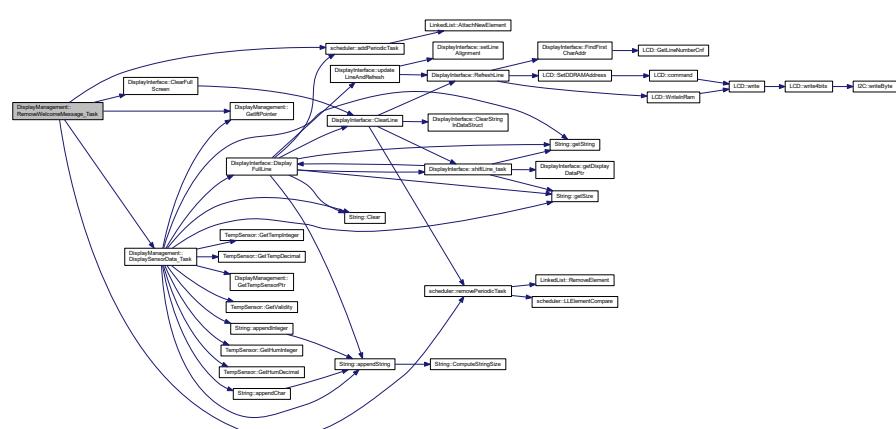

Here is the caller graph for this function:



3.7.4 Member Data Documentation

3.7.4.1 p_display_ift

```
DisplayInterface* DisplayManagement::p_display_ift [private]
```

Pointer to the display interface object

Definition at line 110 of file DisplayManagement.h.

3.7.4.2 p_tempSensor

```
TempSensor* DisplayManagement::p_tempSensor [private]
```

Pointer to the temperature sensor object

Definition at line 111 of file DisplayManagement.h.

The documentation for this class was generated from the following files:

- [DisplayManagement.h](#)
- [DisplayManagement.cpp](#)

3.8 I2C Class Reference

Two-wire serial interface ([I2C](#)) class definition.

```
#include <I2C.h>
```

Public Member Functions

- `I2C (uint32_t l_bitrate)`
I2C class constructor.
- `bool writeByte (uint8_t *data)`
Byte sending function.
- `void setTxAddress (uint8_t address)`
Setting function for Tx I2C address.
- `void setBitRate (uint32_t l_bitrate)`
Variable bitrate setting function.

Private Member Functions

- `void initializeBus ()`
I2C bus initialization.

Private Attributes

- `uint8_t tx_address`
- `uint32_t bitrate`

3.8.1 Detailed Description

Two-wire serial interface (`I2C`) class definition.

This class manages `I2C` driver.

Definition at line 23 of file I2C.h.

3.8.2 Constructor & Destructor Documentation

3.8.2.1 I2C()

```
I2C::I2C (
```

| | |
|--|-------------------------------------|
| | <code> uint32_t l_bitrate</code> |
|--|-------------------------------------|

```
)
```

`I2C` class constructor.

This function initializes the `I2C` class and calls bus initialization function

Parameters


| | | |
|----|------------------------|--|
| in | <code>l_bitrate</code> | Requested bitrate for <code>I2C</code> bus (in Hz) |
|----|------------------------|--|

Returns

Nothing

Definition at line 16 of file I2C.cpp.

Here is the call graph for this function:



3.8.3 Member Function Documentation

3.8.3.1 initializeBus()

```
void I2C::initializeBus ( ) [private]
```

I2C bus initialization.

This function initializes the **I2C** bus, it resets the bus and configure the bitrate as requested. Bitrate is configured according to formula in the ATMEGA2560 datasheet : $SCL\ freq = F_{CPU} / (16 + 2*TWBR*(4^{TWPS}))$. Prescaler value is fixed to 1 (TWPS1 = 0 and TWPS0 = 0), then only TWBR value shall be computed.

Returns

Nothing

Definition at line 77 of file I2C.cpp.

Here is the caller graph for this function:



3.8.3.2 setBitRate()

```
void I2C::setBitRate (
    uint32_t l_bitrate )
```

Variable bitrate setting function.

This function sets the class variable bitrate as requested in parameter.

Parameters

| | | |
|----|------------------|---------------------------|
| in | <i>I_bitrate</i> | Requested bitrate (in Hz) |
|----|------------------|---------------------------|

Returns

Nothing

Definition at line 72 of file I2C.cpp.

3.8.3.3 setTxAddress()

```
void I2C::setTxAddress (
    uint8_t address )
```

Setting function for Tx **I2C** address.

This function sets the given Tx **I2C** address in the internal class variable.

Parameters


| | | |
|----|----------------|----------------------|
| in | <i>address</i> | Requested Tx address |
|----|----------------|----------------------|

Returns

Nothing

Definition at line 67 of file I2C.cpp.

Here is the caller graph for this function:

**3.8.3.4 writeByte()**

```
bool I2C::writeByte (
    uint8_t * data )
```

Byte sending function.

This function sends one byte on **I2C** bus

Parameters

| | | |
|----|-------------|-----------------------------|
| in | <i>data</i> | Pointer to the data to send |
|----|-------------|-----------------------------|

Returns

True if transmission is completed, False if an error has occurred

Definition at line 24 of file I2C.cpp.

Here is the caller graph for this function:



3.8.4 Member Data Documentation

3.8.4.1 bitrate

```
uint32_t I2C::bitrate [private]
```

Definition at line 63 of file I2C.h.

3.8.4.2 tx_address

```
uint8_t I2C::tx_address [private]
```

Definition at line 62 of file I2C.h.

The documentation for this class was generated from the following files:

- [I2C.h](#)
- [I2C.cpp](#)

3.9 keepAliveLed Class Reference

Class for keep-alive LED blinking.

```
#include <keepAliveLed.h>
```

Public Member Functions

- [keepAliveLed \(\)](#)

Class constructor.

Static Public Member Functions

- [static void blinkLed_task \(\)](#)

Task for LED blinking.

3.9.1 Detailed Description

Class for keep-alive LED blinking.

This class defines all functions to make keep-alive LED blink

Definition at line 22 of file keepAliveLed.h.

3.9.2 Constructor & Destructor Documentation

3.9.2.1 keepAliveLed()

```
keepAliveLed::keepAliveLed ( )
```

Class constructor.


This function initializes the class keepAliveLed

Returns

Nothing

Definition at line 22 of file keepAliveLed.cpp.

Here is the call graph for this function:



3.9.3 Member Function Documentation

3.9.3.1 blinkLed_task()

```
void keepAliveLed::blinkLed_task ( ) [static]
```

Task for LED blinking.


This function is inserted into the scheduler. It changes the state of the LED output to make it blink

Returns

Nothing

Definition at line 28 of file `keepAliveLed.cpp`.

Here is the call graph for this function:



Here is the caller graph for this function:



The documentation for this class was generated from the following files:


- [keepAliveLed.h](#)
- [keepAliveLed.cpp](#)

3.10 LCD Class Reference

Class for [LCD](#) S2004A display driver.

```
#include <LCD.h>
```

Collaboration diagram for LCD:



Public Member Functions

- `LCD (const T_LCD_conf_struct *init_conf)`
LCD class constructor.
- `void command (T_LCD_command cmd)`
LCD command management function.
- `void ConfigureBacklight (bool enable)`
Backlight configuration function.
- `void ConfigureLineNumber (bool param)`
Line type configuration function.
- `void ConfigureFontType (bool param)`
Font configuration function.
- `void ConfigureDisplayOnOff (bool param)`
Display configuration function.
- `void ConfigureCursorOnOff (bool param)`
Cursor configuration function.
- `void ConfigureCursorBlink (bool param)`
Cursor blinking configuration function.
- `void ConfigureEntryModeDir (bool param)`
Entry mode direction configuration function.
- `void ConfigureEntryModeShift (bool param)`
Entry mode shift configuration function.
- `void ConfigureI2CAddr (uint8_t param)`
I2C address configuration function.
- `void SetDDRAMAddress (uint8_t addr)`
DDRAM address setting function.
- `uint8_t GetDDRAMAddress ()`
DDRAM address get function.
- `void WriteInRam (uint8_t a_char, T_LCD_ram_area area)`
Screen RAM write function.
- `bool GetLineNumberCnf ()`
Number of line get function.

Private Member Functions

- void `write4bits` (uint8_t data)
I2C write function for 4-bits mode.
- void `write` (uint8_t data, `T_LCD_config_mode` mode)
I2C write function.
- void `InitializeScreen` ()
Screen configuration function.

Private Attributes

- bool `backlight_enable`
- bool `cnfLineNumber`
- bool `cnfFontType`
- bool `cnfDisplayOnOff`
- bool `cnfCursorOnOff`
- bool `cnfCursorBlink`
- bool `cnfEntryModeDir`
- bool `cnfEntryModeShift`
- uint8_t `cnfI2C_addr`
- I2C * `i2c_drv_ptr`
- uint8_t `ddram_addr`

3.10.1 Detailed Description

Class for `LCD` S2004A display driver.

This class handles functions managing `LCD` display S2004a on `I2C` bus

Definition at line 147 of file LCD.h.

3.10.2 Constructor & Destructor Documentation

3.10.2.1 LCD()

```
LCD::LCD (
    const T_LCD_conf_struct * init_conf )
```

`LCD` class constructor.

This constructor function initializes the class `LCD` and calls screen configuration function. It also creates a new instance of the `I2C` driver if needed.

Parameters

| | | |
|----|------------------------|---------------------------------|
| in | <code>init_conf</code> | Initial configuration structure |
|----|------------------------|---------------------------------|

Returns

Nothing

Definition at line 18 of file LCD.cpp.

Here is the call graph for this function:



3.10.3 Member Function Documentation

3.10.3.1 command()

```
void LCD::command (
    T_LCD_command cmd )
```

LCD command management function.

This function sends the requested command to the **LCD** screen. It builds the 8-bit command word and sends it on **I₂C** bus.

Parameters

| | | |
|----|-----|-------------------|
| in | cmd | Requested command |
|----|-----|-------------------|

Returns


Nothing

Definition at line 125 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.3.2 ConfigureBacklight()

```
void LCD::ConfigureBacklight (
    bool enable ) [inline]
```

Backlight configuration function.

This function configures the screen backlight (enable or disable) according to the parameter enable.

Parameters

| | | |
|----|---------------|--|
| in | <i>enable</i> | True if backlight shall be on, False otherwise |
|----|---------------|--|

Returns

Nothing

Definition at line 178 of file LCD.h.

Here is the caller graph for this function:



3.10.3.3 ConfigureCursorBlink()

```
void LCD::ConfigureCursorBlink (
    bool param ) [inline]
```

Cursor blinking configuration function.

This function configures the cursor blinking (on or off mode) according to the parameter.

Parameters

| | | |
|----|-------|---------------------|
| in | param | Configuration value |
|----|-------|---------------------|

Returns

Nothing

Definition at line 238 of file LCD.h.

Here is the caller graph for this function:



3.10.3.4 ConfigureCursorOnOff()

```
void LCD::ConfigureCursorOnOff (
    bool param ) [inline]
```

Cursor configuration function.

This function configures the cursor (on or off mode) according to the parameter.

Parameters

| | | |
|----|-------|---------------------|
| in | param | Configuration value |
|----|-------|---------------------|

Returns

Nothing

Definition at line 226 of file LCD.h.

Here is the caller graph for this function:



3.10.3.5 ConfigureDisplayOnOff()

```
void LCD::ConfigureDisplayOnOff (   
    bool param ) [inline]
```

Display configuration function.

This function configures the display (on or off mode) according to the parameter.

Parameters

| | | |
|----|--------------|---------------------|
| in | <i>param</i> | Configuration value |
|----|--------------|---------------------|

Returns

Nothing

Definition at line 214 of file LCD.h.

Here is the caller graph for this function:



3.10.3.6 ConfigureEntryModeDir()

```
void LCD::ConfigureEntryModeDir (   
    bool param ) [inline]
```

Entry mode direction configuration function.

This function configures the direction of entry mode (right or left) according to the parameter.

Parameters

| | | |
|----|--------------|---------------------|
| in | <i>param</i> | Configuration value |
|----|--------------|---------------------|

Returns

Nothing

Definition at line 250 of file LCD.h.

Here is the caller graph for this function:



3.10.3.7 ConfigureEntryModeShift()

```
void LCD::ConfigureEntryModeShift ( bool param ) [inline]
```

Entry mode shift configuration function.

This function configures the display shift of entry mode (enable or disable) according to the parameter.

Parameters

| | | |
|----|--------------|---------------------|
| in | <i>param</i> | Configuration value |
|----|--------------|---------------------|

Returns

Nothing

Definition at line 262 of file LCD.h.

Here is the caller graph for this function:



3.10.3.8 ConfigureFontType()

```
void LCD::ConfigureFontType (  
    bool param ) [inline]
```

Font configuration function.

This function configures the font type of the screen (5*8 or 5*11 dots) according to the parameter.

Parameters

| | | |
|----|-------|---------------------|
| in | param | Configuration value |
|----|-------|---------------------|

Returns

Nothing

Definition at line 202 of file LCD.h.

Here is the caller graph for this function:



3.10.3.9 ConfigureI2CAddr()

```
void LCD::ConfigureI2CAddr (
    uint8_t param ) [inline]
```

I2C address configuration function.

This function configures the I2V address of the [LCD](#) screen according to the parameter.

Parameters

| | | |
|----|-------|-------------|
| in | param | I2C address |
|----|-------|-------------|

Returns

Nothing

Definition at line 274 of file LCD.h.

Here is the caller graph for this function:



3.10.3.10 ConfigureLineNumber()

```
void LCD::ConfigureLineNumber (
    bool param ) [inline]
```

Line type configuration function.

This function configures the line number configuration of the screen (1 or 2 lines mode) according to the parameter.

Parameters


| | | |
|----|-------|---------------------|
| in | param | Configuration value |
|----|-------|---------------------|

Returns

Nothing

Definition at line 190 of file LCD.h.

Here is the caller graph for this function:



3.10.3.11 GetDDRAMAddress()

```
uint8_t LCD::GetDDRAMAddress ( ) [inline]
```

DDRAM address get function.

This function return the value of the current DDRAM address stored in internal variable ddrum_addr.

Returns

Current DDRAM address

Definition at line 294 of file LCD.h.

3.10.3.12 GetLineNumberCnf()

```
bool LCD::GetLineNumberCnf ( ) [inline]
```

Number of line get function.


This function returns the line number configuration of the screen : 1 or 2 lines mode.

Returns

Line number configuration

Definition at line 316 of file LCD.h.

Here is the caller graph for this function:



3.10.3.13 InitializeScreen()

```
void LCD::InitializeScreen ( ) [private]
```

Screen configuration function.


This function configures the [LCD](#) screen. It's must be called during initialization phase, or the screen won't be usable. The configuration process is described in [LCD](#) datasheet J2004A-GFDN-DYNC

Returns

Nothing

Definition at line 73 of file LCD.cpp.

Here is the call graph for this function:

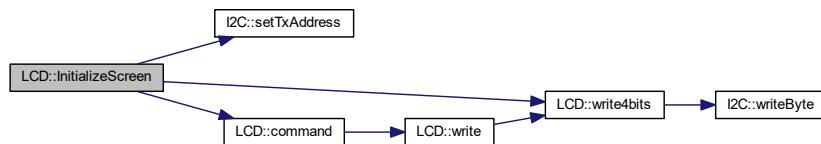

Here is the caller graph for this function:



3.10.3.14 SetDDRAMAddress()

```
void LCD::SetDDRAMAddress (
    uint8_t addr )
```

DDRAM address setting function.

This function updates the DDRAM address according to the given parameter. The parameter is checked against limits to be sure the address stays always coherent. It also calls the command function to update screen accordingly.

Parameters

| | | |
|----|-------------|-------------------|
| in | <i>addr</i> | New DDRAM address |
|----|-------------|-------------------|

Returns


Nothing

Definition at line 168 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.10.3.15 write()**

```
void LCD::write (
    uint8_t data,
    T_LCD_config_mode mode ) [private]
```

I2C write function.

This function writes the requested data on [I2C](#) bus. It's assumed we only perform write operation so the R/W bit is forced LOW. It's also assumed we work in 4-bit mode, then two calls of write4bits are performed, first with bits 4-7 of data, second with bits 0-3.

Parameters

| | | |
|----|-------------|--|
| in | <i>data</i> | 8-bit data for D0-7 pins of screen |
| in | <i>mode</i> | Requested mode for LCD communication |

Returns


Nothing

Definition at line 62 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.3.16 write4bits()

```
void LCD::write4bits (
    uint8_t data ) [private]
```

[I2C](#) write function for 4-bits mode.

This function sends the requested 8-bits data on the [I2C](#) bus. The backlight pin is also set/clear according to the configuration. The function sends the data a first time with EN pin set, then a second time with EN bit clear.

Parameters

| | | |
|----|-------------|--------------------|
| in | <i>data</i> | 8-bit data to send |
|----|-------------|--------------------|

Returns


Nothing

Definition at line 45 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.3.17 WriteInRam()

```
void LCD::WriteInRam (
    uint8_t a_char,
    T_LCD_ram_area area )
```

Screen RAM write function.

This function writes in the memorized RAM address the character given as parameter. After a write the screen automatically increment/decrement the RAM address, so we do the same in the function to stay coherent. Currently only DDRAM write is implemented.

Parameters

| | | |
|----|---------------|---|
| in | <i>a_char</i> | Data byte to write in RAM |
| in | <i>area</i> | Area in RAM where the data will be written : DDRAM or CGRAM |

Returns


Nothing

Definition at line 190 of file LCD.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.10.4 Member Data Documentation

3.10.4.1 `backlight_enable`

```
bool LCD::backlight_enable [private]
```

Backlight enable flag

Definition at line 324 of file LCD.h.

3.10.4.2 `cnfCursorBlink`

```
bool LCD::cnfCursorBlink [private]
```

Cursor blinking configuration : 1 = cursor blink is on, 0 = cursor blink is off

Definition at line 329 of file LCD.h.

3.10.4.3 `cnfCursorOnOff`

```
bool LCD::cnfCursorOnOff [private]
```

Cursor configuration : 1 = cursor on, 0 = cursor off

Definition at line 328 of file LCD.h.

3.10.4.4 `cnfDisplayOnOff`

```
bool LCD::cnfDisplayOnOff [private]
```

Display configuration : 1 = display on, 0 = display off

Definition at line 327 of file LCD.h.

3.10.4.5 `cnfEntryModeDir`

```
bool LCD::cnfEntryModeDir [private]
```

Entry mode direction configuration : 1 = cursor moves to right when DDRAM address is incremented, 0 = cursor moves to left when DDRAM address is incremented

Definition at line 330 of file LCD.h.

3.10.4.6 cnfEntryModeShift

```
bool LCD::cnfEntryModeShift [private]
```

Entry mode configuration : 0 = no display shift is performed after a DDRAM read, 1 = a shift is performed

Definition at line 331 of file LCD.h.

3.10.4.7 cnfFontType

```
bool LCD::cnfFontType [private]
```

Font type configuration, 0 = 5*8 dots, 1 = 5*11 dots

Definition at line 326 of file LCD.h.

3.10.4.8 cnfI2C_addr

```
uint8_t LCD::cnfI2C_addr [private]
```

I2C address of the [LCD](#) screen

Definition at line 332 of file LCD.h.

3.10.4.9 cnfLineNumber

```
bool LCD::cnfLineNumber [private]
```

Display line number configuration, 0 = 1-line mode, 1 = 2-line mode

Definition at line 325 of file LCD.h.

3.10.4.10 ddram_addr

```
uint8_t LCD::ddram_addr [private]
```

Screen DDRAM address

Definition at line 336 of file LCD.h.

3.10.4.11 i2c_drv_ptr

```
I2C* LCD::i2c_drv_ptr [private]
```

Pointer to the I2C driver object

Definition at line 334 of file LCD.h.

The documentation for this class was generated from the following files:


- [LCD.h](#)
- [LCD.cpp](#)

3.11 LinkedList Class Reference

Linked list class.

```
#include <LinkedList.h>
```

Collaboration diagram for LinkedList:

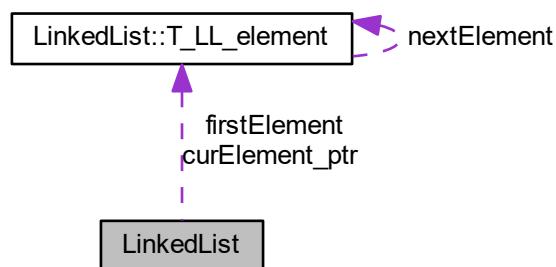

Classes

- struct [T_LL_element](#)

Type defining a linked list element.

Public Member Functions

- [LinkedList \(\)](#)
Class constructor.
- [~LinkedList \(\)](#)
Class destructor.
- [void AttachNewElement \(void *data_ptr\)](#)
Add an new element to the list.
- [bool RemoveElement \(CompareFctPtr_t comparisonFct_ptr, void *reference_ptr\)](#)
Removes an element from the chain.
- [void *getCurrentElement \(\)](#)
Current element get function.
- [bool MoveToNextElement \(\)](#)
Move to next element function.
- [void ResetElementPtr \(\)](#)
Resets element pointer.
- [bool IsLLEmpty \(\)](#)
Empty linked list.
- [bool FindElement \(CompareFctPtr_t comparisonFct_ptr, void *reference_ptr, void **chainElement_ptr\)](#)
Element finding function.

Private Types

- [typedef struct LinkedList::T_LL_element T_LL_element](#)
Type defining a linked list element.

Private Attributes

- [T_LL_element * firstElement](#)
- [T_LL_element * curElement_ptr](#)

3.11.1 Detailed Description

Linked list class.

This class defines a linked list and the associated services.

All classes using a linked list with this interface shall implement a comparison function used to find the list element to remove. This function shall have the following prototype : static bool LLElementCompare(void* LLElement, void* CompareElement);

Definition at line 22 of file [LinkedList.h](#).

3.11.2 Member Typedef Documentation

3.11.2.1 T_LL_element

```
typedef struct LinkedList::T_LL_element LinkedList::T_LL_element [private]
```

Type defining a linked list element.

This structure defines a linked list element. An element is defined by a pointer to the attached data and a pointer to the next element.

3.11.3 Constructor & Destructor Documentation

3.11.3.1 LinkedList()

```
LinkedList::LinkedList ( )
```

Class constructor.

This constructor initializes a linked list

Returns

Nothing

Definition at line 37 of file LinkedList.cpp.

3.11.3.2 ~LinkedList()

```
LinkedList::~LinkedList ( )
```

Class destructor.

This function deletes the linked list

Returns

Nothing

Definition at line 43 of file LinkedList.cpp.

Here is the call graph for this function:



3.11.4 Member Function Documentation

3.11.4.1 AttachNewElement()

```
void LinkedList::AttachNewElement (
    void * data_ptr )
```

Add an new element to the list.

This function adds a new element at the end of the list. The data pointer to attach to the element is given in parameter

Parameters


| | | |
|----|-----------------|-----------------------------|
| in | <i>data_ptr</i> | Pointer to the data element |
|----|-----------------|-----------------------------|

Returns

Nothing

Definition at line 61 of file LinkedList.cpp.

Here is the caller graph for this function:

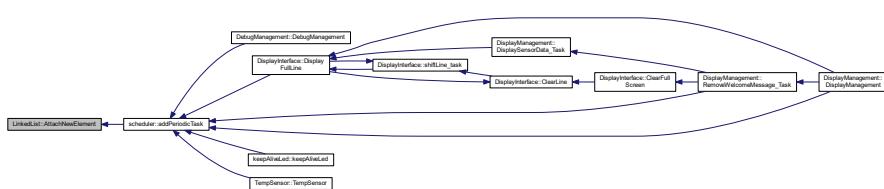

3.11.4.2 FindElement()

```
bool LinkedList::FindElement (
    CompareFctPtr_t comparisonFct_ptr,
    void * reference_ptr,
    void ** chainElement_ptr )
```

Element finding function.

This function finds the given element *reference_ptr* inside the chain. The comparison between the elements of the chain and the reference element is done using the given comparison function.

Parameters

| | | |
|-----|--------------------------|---|
| in | <i>comparisonFct_ptr</i> | Pointer to the comparison function |
| in | <i>reference_ptr</i> | Pointer to the element to find in the chain |
| out | <i>chainElement_ptr</i> | Pointer to pointer to the found element |

Returns

True if the element has been found in the chain, false otherwise

Definition at line 152 of file LinkedList.cpp.

Here is the caller graph for this function:

**3.11.4.3 getCurrentElement()**

```
void* LinkedList::getCurrentElement ( ) [inline]
```

Current element get function.


This function returns a pointer to the current pointed data in the chain.

Returns

Pointer to the current data

Definition at line 67 of file LinkedList.h.

Here is the caller graph for this function:



3.11.4.4 IsLLEmpty()

```
bool LinkedList::IsLLEmpty ( )
```

Empty linked list.


This function checks whether the linked list is empty or not (pointer to first element is equal to 0 or not).

Returns

True if the list is empty, false otherwise

Definition at line 144 of file LinkedList.cpp.

Here is the caller graph for this function:

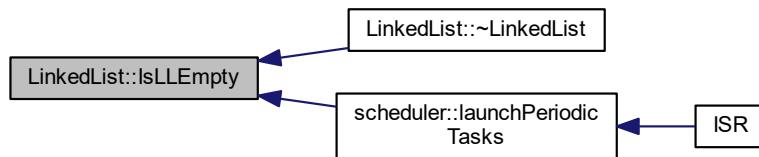

3.11.4.5 MoveToNextElement()

```
bool LinkedList::MoveToNextElement ( )
```

Move to next element function.


This function moves the element pointer to the next element of the chain.

Returns

True if the next element exists, false if there is no next element

Definition at line 130 of file LinkedList.cpp.

Here is the caller graph for this function:



3.11.4.6 RemoveElement()

```
bool LinkedList::RemoveElement (
    CompareFctPtr_t comparisonFct_ptr,
    void * reference_ptr )
```

Removes an element from the chain.

This function removes an element from the chain. To know which element shall be removed, we use the comparison function given in parameter. This function is called with two parameters : the data pointer from the chain and the reference pointer given as parameter.

Parameters


| | | |
|----|--------------------------|---|
| in | <i>comparisonFct_ptr</i> | Pointer to the comparison function to use |
| in | <i>reference_ptr</i> | Pointer to the reference data used for comparison |

Returns

True if the element has been correctly removed from the chain, false otherwise

Definition at line 86 of file LinkedList.cpp.

Here is the caller graph for this function:

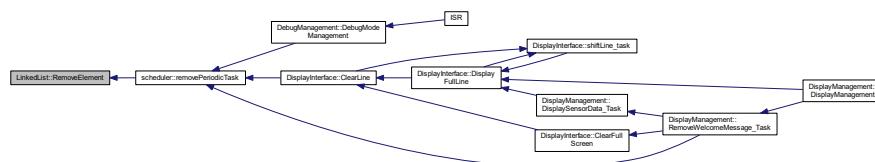

3.11.4.7 ResetElementPtr()

```
void LinkedList::ResetElementPtr ( ) [inline]
```

Resets element pointer.


This function sets the element pointer to the first element of the chain.

Returns

Nothing

Definition at line 86 of file LinkedList.h.

Here is the caller graph for this function:



3.11.5 Member Data Documentation

3.11.5.1 curElement_ptr

`T_LL_element* LinkedList::curElement_ptr [private]`

Pointer to the current element of the list

Definition at line 125 of file `LinkedList.h`.

3.11.5.2 firstElement

`T_LL_element* LinkedList::firstElement [private]`

Pointer to the first element of the list

Definition at line 124 of file `LinkedList.h`.

The documentation for this class was generated from the following files:


- [LinkedList.h](#)
- [LinkedList.cpp](#)

3.12 scheduler Class Reference

Scheduler class.

```
#include <scheduler.h>
```

Collaboration diagram for scheduler:

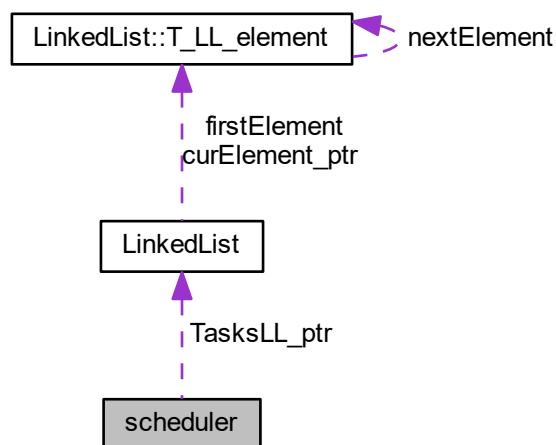

Classes

- struct [Task_t](#)
Type defining a task structure.

Public Member Functions

- [scheduler \(\)](#)
scheduler class constructor
- void [launchPeriodicTasks \(\)](#)
Main scheduler function.
- void [startScheduling \(\)](#)
Starts the tasks scheduling.
- void [addPeriodicTask \(TaskPtr_t task_ptr, uint16_t a_period\)](#)
Add a task into the scheduler.
- bool [removePeriodicTask \(TaskPtr_t task_ptr\)](#)
Remove a task from the scheduler.
- uint32_t [getPitNumber \(\)](#)
Get function for PIT number.
- bool [updateTaskPeriod \(TaskPtr_t task_ptr, uint16_t period\)](#)
Task period update function.
- uint8_t [getTaskCount \(\)](#)
Task count get function.

Static Public Member Functions

- static bool [LLElementCompare \(void *LLElement, void *CompareElement\)](#)
Linked list comparison function.

Private Types

- typedef struct [scheduler::Task_t Task_t](#)
Type defining a task structure.

Private Attributes

- uint8_t [task_count](#)
- [LinkedList * TasksLL_ptr](#)
- uint32_t [pit_number](#)

3.12.1 Detailed Description

Scheduler class.

This class defines the scheduler of the system.

It is called by the main interrupt and calls successively all applicative functions according to their recurrence time.
All tasks called by the scheduler shall have the following prototype : static void task();

Definition at line 30 of file scheduler.h.

3.12.2 Member Typedef Documentation

3.12.2.1 Task_t

```
typedef struct scheduler::Task_t scheduler::Task_t [private]
```

Type defining a task structure.

This structure defines a task. A task is defined by a function to call (defined by its pointer) and a period.

3.12.3 Constructor & Destructor Documentation

3.12.3.1 scheduler()

```
scheduler::scheduler ( )
```

scheduler class constructor

This function initializes the class scheduler

Returns

Nothing

Definition at line 28 of file scheduler.cpp.

Here is the call graph for this function:



3.12.4 Member Function Documentation

3.12.4.1 addPeriodicTask()

```
void scheduler::addPeriodicTask (
    TaskPtr_t task_ptr,
    uint16_t a_period )
```

Add a task into the scheduler.

This function create a new task in the scheduler linked to the function task_ptr with a period a_period and an ID a_task_id

Parameters

| | | |
|----|-----------------|---|
| in | <i>task_ptr</i> | Pointer to the task which will be added |
| in | <i>a_period</i> | Period of the new task |

Returns


Nothing

Definition at line 95 of file scheduler.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

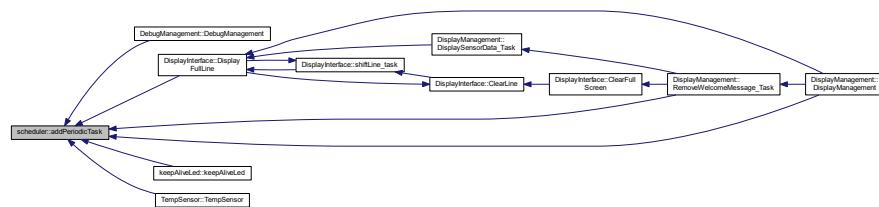**3.12.4.2 getPitNumber()**

```
uint32_t scheduler::getPitNumber ( )
```

Get function for PIT number.

This function returns the PIT number

Returns

PIT number

Definition at line 109 of file scheduler.cpp.

Here is the caller graph for this function:



3.12.4.3 getTaskCount()

```
uint8_t scheduler::getTaskCount ( ) [inline]
```

Task count get function.

This function returns the current number of tasks managed by scheduler.

Returns

Number of tasks

Definition at line 115 of file scheduler.h.

3.12.4.4 launchPeriodicTasks()

```
void scheduler::launchPeriodicTasks ( )
```

Main scheduler function.


This function launches the scheduled tasks according to current software time and task configuration

Returns


Nothing

Definition at line 53 of file scheduler.cpp.

Here is the call graph for this function:

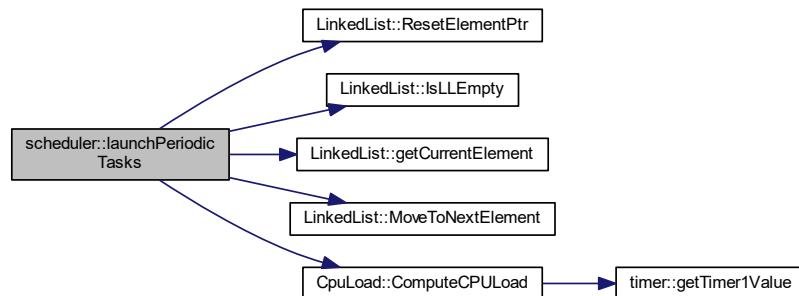

Here is the caller graph for this function:



3.12.4.5 LLElementCompare()

```
bool scheduler::LLElementCompare (
    void * LLElement,
    void * CompareElement ) [static]
```

Linked list comparison function.

This function is called by the linked list class to compare one element of the list to a given element. In the class scheduler, the LLElement is a task pointer (containing a function pointer and a period), and the compareElement a function pointer. The comparison will be done between the two function pointer.

Parameters


| | | |
|----|-----------------------|---------------------------------------|
| in | <i>LLElement</i> | Pointer to the linked list element |
| in | <i>CompareElement</i> | Pointer to the element to the compare |

Returns

True if both elements are identical, false otherwise

Definition at line 127 of file scheduler.cpp.

Here is the caller graph for this function:

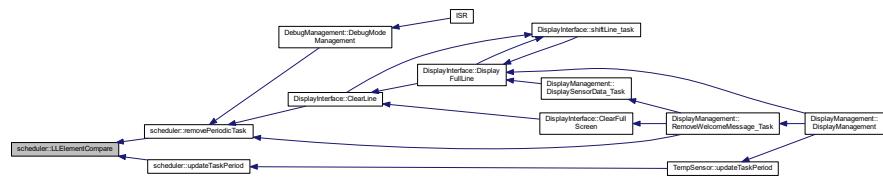

3.12.4.6 removePeriodicTask()

```
bool scheduler::removePeriodicTask (
    TaskPtr_t task_ptr )
```

Remove a task from the scheduler.

This function finds the task defined by *task_ptr* in the scheduler and removes it.

Parameters


| | | |
|----|-----------------|--|
| in | <i>task_ptr</i> | address of the task to remove from scheduler |
|----|-----------------|--|

Returns


TRUE if the task has been removed, FALSE if the task does not exist in the scheduler

Definition at line 115 of file scheduler.cpp.

Here is the call graph for this function:

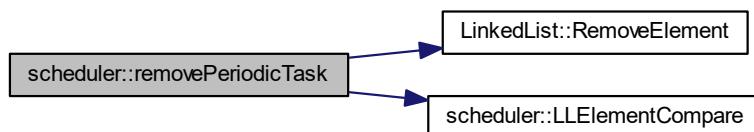

Here is the caller graph for this function:

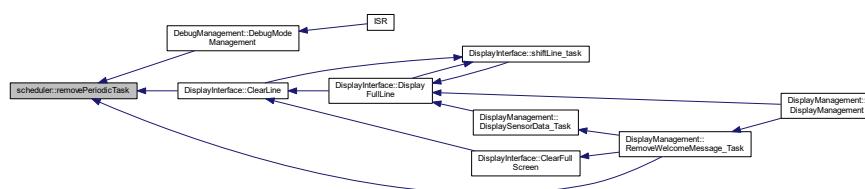**3.12.4.7 startScheduling()**

```
void scheduler::startScheduling ( )
```

Starts the tasks scheduling.

This function starts the timer which will trigger an interrupt every software period. When the interrupt is raised the scheduler will launch applications

Returns

Nothing

Definition at line 89 of file scheduler.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:



3.12.4.8 updateTaskPeriod()

```
bool scheduler::updateTaskPeriod (
    TaskPtr_t task_ptr,
    uint16_t period )
```

Task period update function.

This function updates the period of the given task. The task is never stopped during the process, only the period value is updated.

Parameters


| | | |
|----|-----------------|-------------------------------|
| in | <i>task_ptr</i> | Pointer of the task to update |
| in | <i>period</i> | New period of the task |

Returns

True if the update has been correctly done, false otherwise

Definition at line 138 of file scheduler.cpp.

Here is the call graph for this function:

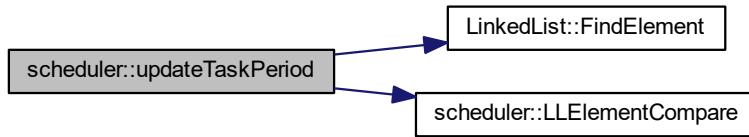

Here is the caller graph for this function:



3.12.5 Member Data Documentation

3.12.5.1 pit_number

```
uint32_t scheduler::pit_number [private]
```

Counter of periodic interrupts

Definition at line 140 of file `scheduler.h`.

3.12.5.2 task_count

```
uint8_t scheduler::task_count [private]
```

Number of task in scheduler

Definition at line 136 of file `scheduler.h`.

3.12.5.3 TasksLL_ptr

```
LinkedList* scheduler::TasksLL_ptr [private]
```

Pointer to the linked list object containing the tasks

Definition at line 138 of file scheduler.h.

The documentation for this class was generated from the following files:

- [scheduler.h](#)
- [scheduler.cpp](#)

3.13 String Class Reference

[String](#) management class.

```
#include <String.h>
```

Public Member Functions

- [String \(const uint8_t *str\)](#)
Class constructor.
- [String \(\)](#)
Class constructor.
- [~String \(\)](#)
Class destructor.
- [uint8_t * getString \(\)](#)
String pointer get function.
- [uint8_t getSize \(\)](#)
Size get function.
- [void appendString \(uint8_t *str\)](#)
String adding function.
- [void appendInteger \(uint16_t value, uint8_t base\)](#)
Integer adding function.
- [void appendBool \(bool data, bool isText\)](#)
Boolean adding function.
- [void appendChar \(uint8_t data\)](#)
Character adding function.
- [void Clear \(\)](#)
String clear function.

Private Member Functions

- [uint8_t ComputeStringSize \(uint8_t *str\)](#)
String size computation function.

Private Attributes

- `uint8_t * string`
- `uint8_t size`

3.13.1 Detailed Description

`String` management class.

This class defines string object. It implements some functions to manage chains of characters. The string is limited to 255 characters. It must finish by the character '\0'.

Definition at line 18 of file String.h.

3.13.2 Constructor & Destructor Documentation

3.13.2.1 `String()` [1/2]

```
String::String (
    const uint8_t * str )
```

Class constructor.

This function initializes the class. The string is initialized with the data given in parameter.

Parameters

| | | |
|----|------------------|----------------------------------|
| in | <code>str</code> | Pointer to initialization string |
|----|------------------|----------------------------------|

Returns

Nothing

Definition at line 15 of file String.cpp.

Here is the call graph for this function:



3.13.2.2 `String()` [2/2]

```
String::String ( )
```

Class constructor.

This function initializes the class with an empty string. The size is set to 0.

Returns

Nothing

Definition at line 33 of file String.cpp.

3.13.2.3 `~String()`

```
String::~String ( )
```

Class destructor.

This function frees the memory used to contain the string when the object is deleted

Returns

Nothing

Definition at line 39 of file String.cpp.

Here is the call graph for this function:



3.13.3 Member Function Documentation

3.13.3.1 `appendBool()`

```
void String::appendBool (
    bool data,
    bool isText )
```

Boolean adding function.

This functions adds the given boolean data at the end of the main string. The string size is updated accordingly. According to the input parameter isText, the boolean parameter is converted into a string (true/false) or an integer (0/1).

Parameters


| | | |
|----|---------------|---|
| in | <i>data</i> | Boolean data to add |
| in | <i>isText</i> | Defines the conversion mode : text or integer |

Returns

Nothing

Definition at line 121 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.13.3.2 appendChar()**

```
void String::appendChar (
    uint8_t data )
```

Character adding function.

This functions adds the given character at the end of the main string. The string size is updated by 1.

Parameters

| | | |
|----|-------------|-------------------------|
| in | <i>data</i> | 1-byte character to add |
|----|-------------|-------------------------|

Returns

Nothing

Definition at line 139 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.13.3.3 appendInteger()**

```
void String::appendInteger (
    uint16_t value,
    uint8_t base )
```

Integer adding function.

This functions adds the given integer at the end of the main string. The string size is updated accordingly. The integer parameter is first converted into a chain of character according to the base and then added to the string.

Parameters


| | | |
|-----------|--------------|---|
| in | value | Integer to add |
| in | base | Base of computation of the integer (between 2 and 36) |

Returns


Nothing

Definition at line 95 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

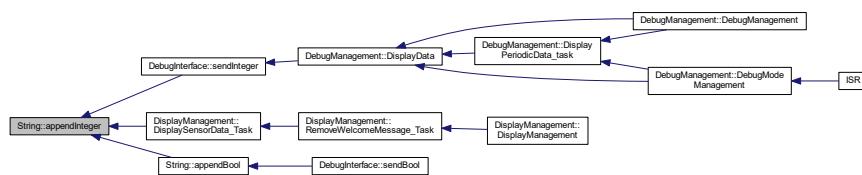

3.13.3.4 appendString()

```
void String::appendString (
    uint8_t * str )
```

[String](#) adding function.

This functions adds the given string at the end of the main string. The string size is updated accordingly.

Parameters

| | | |
|----|------------|-------------------|
| in | <i>str</i> | New string to add |
|----|------------|-------------------|

Returns


Nothing

Definition at line 57 of file String.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

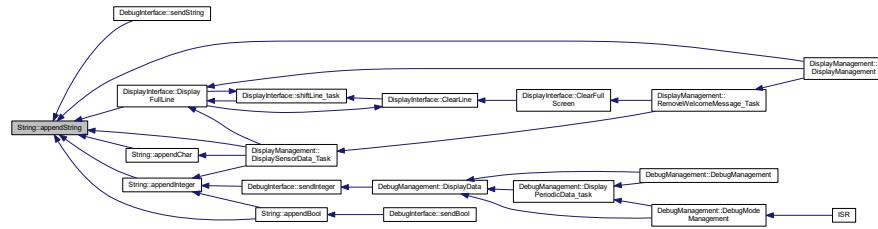

3.13.3.5 Clear()

```
void String::Clear ( )
```

[String](#) clear function.


This function clears the string. Size is set to 0 and the memory is freed.

Returns

Nothing

Definition at line 113 of file `String.cpp`.

Here is the caller graph for this function:

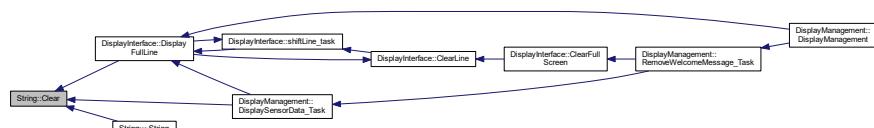

3.13.3.6 ComputeStringSize()

```
uint8_t String::ComputeStringSize (
    uint8_t * str ) [private]
```

[String](#) size computation function.

This function computes the sizes of the given string. It counts the number of character between the start of the string given in parameter and the next \0 character.

Parameters


| | | |
|-----------------|------------------|--|
| <code>in</code> | <code>str</code> | Pointer to the beginning of the string |
|-----------------|------------------|--|

Returns

Number of character of the string (the \0 is excluded)

Definition at line 44 of file String.cpp.

Here is the caller graph for this function:

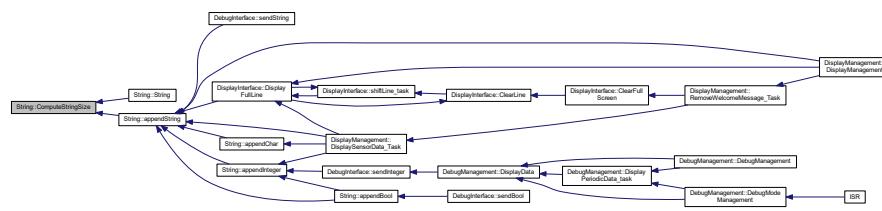**3.13.3.7 getSize()**

```
uint8_t String::getSize ( ) [inline]
```

Size get function.


This function returns the size of the string.

Returns

Size of the string

Definition at line 64 of file String.h.

Here is the caller graph for this function:

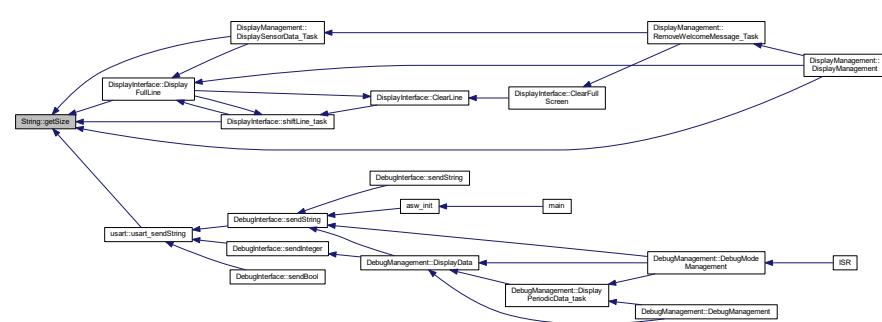

3.13.3.8 getString()

```
uint8_t* String::getString ( ) [inline]
```

[String](#) pointer get function.


This function returns the pointer to the beginning of the string.

Returns

[String](#) pointer

Definition at line 53 of file String.h.

Here is the caller graph for this function:

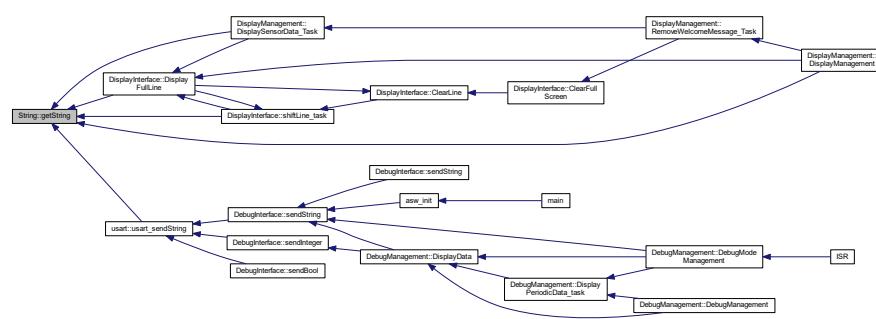

3.13.4 Member Data Documentation

3.13.4.1 size

```
uint8_t String::size [private]
```

Size of the string (the '\0' at the end of the string is not taken into account)

Definition at line 121 of file String.h.

3.13.4.2 string

```
uint8_t* String::string [private]
```

Pointer to the start of the string

Definition at line 120 of file String.h.

The documentation for this class was generated from the following files:

- [String.h](#)
- [String.cpp](#)

3.14 T_ASW_init_cnf Struct Reference

ASW initialization configuration structure.

```
#include <asw.h>
```

Public Attributes

- bool `isDebugActivated`
- bool `isLEDActivated`
- bool `isTempSensorActivated`
- bool `isDisplayActivated`

3.14.1 Detailed Description

ASW initialization configuration structure.

This structure is used to define which ASW services shall be started at SW start-up.

Definition at line 17 of file asw.h.

3.14.2 Member Data Documentation

3.14.2.1 `isDebugActivated`

```
bool T_ASW_init_cnf::isDebugActivated
```

Debug services activation flag

Definition at line 19 of file asw.h.

3.14.2.2 `isDisplayActivated`

```
bool T_ASW_init_cnf::isDisplayActivated
```

LCD display activation flag

Definition at line 22 of file asw.h.

3.14.2.3 isLEDActivated

```
bool T_ASW_init_cnf::isLEDActivated
```

Keep-alive LED activation flag

Definition at line 20 of file asw.h.

3.14.2.4 isTempSensorActivated

```
bool T_ASW_init_cnf::isTempSensorActivated
```

Temperature sensor activation flag

Definition at line 21 of file asw.h.

The documentation for this struct was generated from the following file:


- [asw.h](#)

3.15 T_display_data Struct Reference

Structure containing display data.

```
#include <DisplayInterface.h>
```

Collaboration diagram for T_display_data:

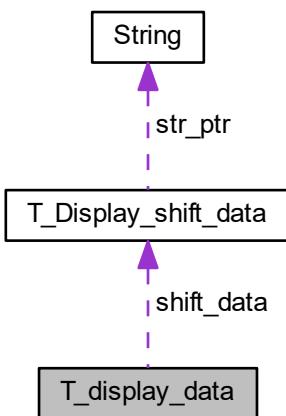

Public Attributes

- bool `isEmpty`
- `T_DisplayInterface_LineDisplayMode mode`
- `T_DisplayInterface_LineAlignment alignment`
- `T_Display_shift_data shift_data`
- `uint8_t display_str [LCD_SIZE_NB_CHAR_PER_LINE]`

3.15.1 Detailed Description

Structure containing display data.

This structure contains all data used for screen display

Definition at line 57 of file `DisplayInterface.h`.

3.15.2 Member Data Documentation

3.15.2.1 alignment

`T_DisplayInterface_LineAlignment T_display_data::alignment`

Line alignment

Definition at line 61 of file `DisplayInterface.h`.

3.15.2.2 display_str

`uint8_t T_display_data::display_str[LCD_SIZE_NB_CHAR_PER_LINE]`

Current string displayed on the screen

Definition at line 63 of file `DisplayInterface.h`.

3.15.2.3 isEmpty

`bool T_display_data::isEmpty`

Flag indicating if the line is empty or not

Definition at line 59 of file `DisplayInterface.h`.

3.15.2.4 mode

`T_DisplayInterface_LineDisplayMode T_display_data::mode`

Current display mode

Definition at line 60 of file DisplayInterface.h.

3.15.2.5 shift_data

`T_Display_shift_data T_display_data::shift_data`

Shift data for the current line

Definition at line 62 of file DisplayInterface.h.

The documentation for this struct was generated from the following file:


- [DisplayInterface.h](#)

3.16 T_Display_shift_data Struct Reference

Structure containing shift data.

```
#include <DisplayInterface.h>
```

Collaboration diagram for T_Display_shift_data:

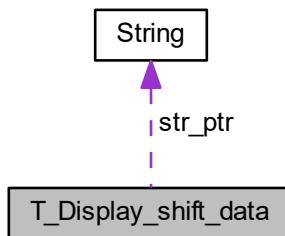

Public Attributes

- `String * str_ptr`
- `uint8_t * str_cur_ptr`
- `uint8_t temporization`

3.16.1 Detailed Description

Structure containing shift data.

This structure contains all useful data for line shifting. These data need to be kept between each call of the periodic function.

Definition at line 45 of file DisplayInterface.h.

3.16.2 Member Data Documentation

3.16.2.1 str_cur_ptr

```
uint8_t* T_Display_shift_data::str_cur_ptr
```

Pointer to the address of the first displayed character

Definition at line 48 of file DisplayInterface.h.

3.16.2.2 str_ptr

```
String* T_Display_shift_data::str_ptr
```

Pointer to the start address of the string

Definition at line 47 of file DisplayInterface.h.

3.16.2.3 temporization

```
uint8_t T_Display_shift_data::temporization
```

Shifting period

Definition at line 49 of file DisplayInterface.h.

The documentation for this struct was generated from the following file:

- [DisplayInterface.h](#)

3.17 T_LCD_conf_struct Struct Reference

Structure defining [LCD](#) configuration.

```
#include <LCD.h>
```

Public Attributes

- `uint32_t i2c_bitrate`
- `uint8_t i2c_addr`
- `bool backlight_en`
- `bool lineNumber_cnf`
- `bool fontType_cnf`
- `bool display_en`
- `bool cursor_en`
- `bool cursorBlink_en`
- `bool entryModeDir`
- `bool entryModeShift`

3.17.1 Detailed Description

Structure defining [LCD](#) configuration.

Definition at line 128 of file LCD.h.

3.17.2 Member Data Documentation

3.17.2.1 `backlight_en`

```
bool T_LCD_conf_struct::backlight_en
```

Screen backlight enable flag

Definition at line 132 of file LCD.h.

3.17.2.2 `cursor_en`

```
bool T_LCD_conf_struct::cursor_en
```

Screen cursor enable flag

Definition at line 136 of file LCD.h.

3.17.2.3 cursorBlink_en

```
bool T_LCD_conf_struct::cursorBlink_en
```

Screen cursor blinking enable flag

Definition at line 137 of file LCD.h.

3.17.2.4 display_en

```
bool T_LCD_conf_struct::display_en
```

Screen display enable flag

Definition at line 135 of file LCD.h.

3.17.2.5 entryModeDir

```
bool T_LCD_conf_struct::entryModeDir
```

Entry mode direction configuration

Definition at line 138 of file LCD.h.

3.17.2.6 entryModeShift

```
bool T_LCD_conf_struct::entryModeShift
```

Entry mode shift configuration

Definition at line 139 of file LCD.h.

3.17.2.7 fontType_cnf

```
bool T_LCD_conf_struct::fontType_cnf
```

Font configuration

Definition at line 134 of file LCD.h.

3.17.2.8 i2c_addr

```
uint8_t T_LCD_conf_struct::i2c_addr
```

I²C address if the screen

Definition at line 131 of file LCD.h.

3.17.2.9 i2c_bitrate

```
uint32_t T_LCD_conf_struct::i2c_bitrate
```

I²C bitrate needed by the LCD screen

Definition at line 130 of file LCD.h.

3.17.2.10 lineNumber_cnf

```
bool T_LCD_conf_struct::lineNumber_cnf
```

Screen line number configuration (1 or 2 lines)

Definition at line 133 of file LCD.h.

The documentation for this struct was generated from the following file:

- [LCD.h](#)

3.18 LinkedList::T_LL_element Struct Reference

Type defining a linked list element.

Collaboration diagram for LinkedList::T_LL_element:



Public Attributes

- `void * data_ptr`
- `T_LL_element * nextElement`

3.18.1 Detailed Description

Type defining a linked list element.

This structure defines a linked list element. An element is defined by a pointer to the attached data and a pointer to the next element.

Definition at line 117 of file `LinkedList.h`.

3.18.2 Member Data Documentation

3.18.2.1 `data_ptr`

```
void* LinkedList::T_LL_element::data_ptr
```

Definition at line 119 of file `LinkedList.h`.

3.18.2.2 `nextElement`

```
T_LL_element* LinkedList::T_LL_element::nextElement
```

Definition at line 120 of file `LinkedList.h`.

The documentation for this struct was generated from the following file:

- [LinkedList.h](#)

3.19 `scheduler::Task_t` Struct Reference

Type defining a task structure.

Public Attributes

- `TaskPtr_t TaskPtr`
- `uint16_t period`

3.19.1 Detailed Description

Type defining a task structure.

This structure defines a task. A task is defined by a function to call (defined by its pointer) and a period.

Definition at line 129 of file scheduler.h.

3.19.2 Member Data Documentation

3.19.2.1 period

```
uint16_t scheduler::Task_t::period
```

Period of the task

Definition at line 132 of file scheduler.h.

3.19.2.2 TaskPtr

```
TaskPtr_t scheduler::Task_t::TaskPtr
```

Pointer to the task

Definition at line 131 of file scheduler.h.

The documentation for this struct was generated from the following file:

- [scheduler.h](#)

3.20 TempSensor Class Reference

Class for temperature sensor.

```
#include <TempSensor.h>
```

Public Member Functions

- **TempSensor ()**
Class constructor.
- **uint16_t * getTempPtr ()**
Get pointer to data raw_temperature.
- **uint16_t * getHumPtr ()**
Get pointer to data raw_humidity.
- **bool getTemp (uint16_t *temp)**
Get temperature data.
- **bool getHumidity (uint16_t *hum)**
Get humidity data.
- **void setValidity (bool validity)**
Set data val_validity.
- **void updateLastValidValues ()**
- **uint8_t GetTempInteger ()**
Temperature formatting function - Integer part.
- **uint8_t GetTempDecimal ()**
Temperature formatting function - Decimal part.
- **uint8_t GetHumInteger ()**
Humidity formatting function - Integer part.
- **uint8_t GetHumDecimal ()**
Humidity formatting function - Decimal part.
- **bool GetValidity ()**
Data validity get function.
- **bool updateTaskPeriod (uint16_t period)**
Task period update.
- **uint16_t getTaskPeriod ()**
Task period get function.

Static Public Member Functions

- **static void readTempSensor_task ()**
Task for reading temperature and humidity values.

Private Attributes

- **uint16_t read_temperature**
- **uint16_t read_humidity**
- **bool validity_last_read**
- **bool validity**
- **uint32_t valid_pit**
- **uint16_t valid_temp**
- **uint16_t valid_hum**
- **uint16_t task_period**

3.20.1 Detailed Description

Class for temperature sensor.

This class defines all functions used to read data from temperature sensor and monitor it

Definition at line 21 of file TempSensor.h.

3.20.2 Constructor & Destructor Documentation

3.20.2.1 TempSensor()

```
TempSensor::TempSensor ( )
```

Class constructor.


This function initializes all data of the class [TempSensor](#). If needed, it creates a new instance of the DHT22 sensor object. It also adds the periodic task in the scheduler.

Returns

Nothing

Definition at line 24 of file [TempSensor.cpp](#).

Here is the call graph for this function:

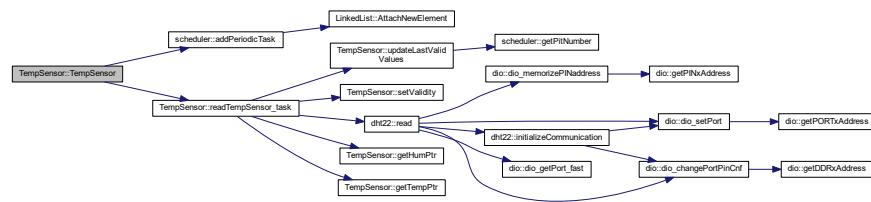

3.20.3 Member Function Documentation

3.20.3.1 GetHumDecimal()

```
uint8_t TempSensor::GetHumDecimal ( ) [inline]
```

Humidity formatting function - Decimal part.


This function return the decimal part of the humidity

Returns

Decimal value of the humidity

Definition at line 124 of file [TempSensor.h](#).

Here is the caller graph for this function:

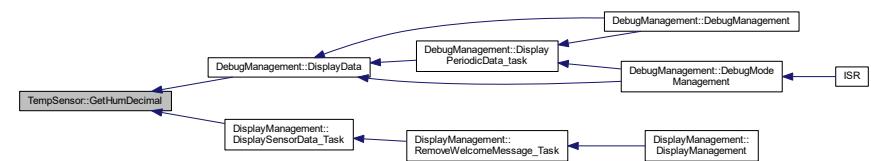

3.20.3.2 getHumidity()

```
bool TempSensor::getHumidity (
    uint16_t * hum )
```

Get humidity data.

This function returns the value of the humidity. If the official value is not valid, the function return false.

Parameters

| | | |
|-----|-----|----------------|
| out | hum | Humidity value |
|-----|-----|----------------|

Returns

Validity of humidity

Definition at line 80 of file TempSensor.cpp.

3.20.3.3 GetHumInteger()

```
uint8_t TempSensor::GetHumInteger ( ) [inline]
```

Humidity formatting function - Integer part.


This function return the integer part of the humidity

Returns

Integer value of the humidity

Definition at line 113 of file TempSensor.h.

Here is the caller graph for this function:

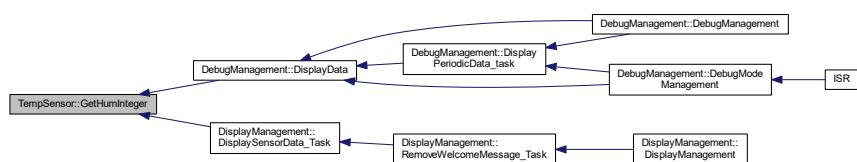

3.20.3.4 getHumPtr()

```
uint16_t * TempSensor::getHumPtr ( )
```

Get pointer to data raw_humidity.


This function returns a pointer to the class member raw_humidity

Returns

Pointer to raw_humidity

Definition at line 55 of file TempSensor.cpp.

Here is the caller graph for this function:



3.20.3.5 getTaskPeriod()

```
uint16_t TempSensor::getTaskPeriod ( ) [inline]
```

Task period get function.


This function returns the period of the sensor task

Returns

Period of the task (ms)

Definition at line 155 of file TempSensor.h.

Here is the caller graph for this function:



3.20.3.6 getTemp()

```
bool TempSensor::getTemp (
    uint16_t * temp )
```

Get temperature data.

This function returns the value of the temperature. If the official value is not valid, the function return false.

Parameters

| | | |
|------------------|-------------------|-------------------|
| <code>out</code> | <code>temp</code> | Temperature value |
|------------------|-------------------|-------------------|

Returns

Validity of temperature

Definition at line 86 of file TempSensor.cpp.

3.20.3.7 GetTempDecimal()

```
uint8_t TempSensor::GetTempDecimal ( ) [inline]
```

Temperature formatting function - Decimal part.


This function return the decimal part of the temperature

Returns

Decimal value of the temperature

Definition at line 102 of file TempSensor.h.

Here is the caller graph for this function:

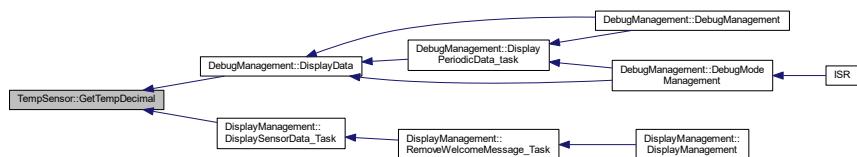**3.20.3.8 GetTempInteger()**

```
uint8_t TempSensor::GetTempInteger ( ) [inline]
```

Temperature formatting function - Integer part.


This function return the integer part of the temperature

Returns

Integer value of the temperature

Definition at line 91 of file TempSensor.h.

Here is the caller graph for this function:

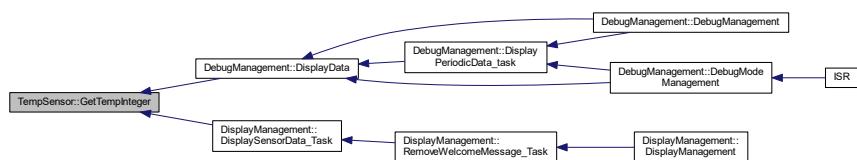**3.20.3.9 getTempPtr()**

```
uint16_t * TempSensor::getTempPtr ( )
```

Get pointer to data `raw_temperature`.


This function returns a pointer to the class member `raw_temperature`

Returns

Pointer to `raw_temperature`

Definition at line 60 of file TempSensor.cpp.

Here is the caller graph for this function:



3.20.3.10 GetValidity()

```
bool TempSensor::GetValidity ( ) [inline]
```

Data validity get function.


This function returns the validity of the sensor data

Returns

True if the sensor values are valid, false otherwise

Definition at line 135 of file TempSensor.h.

Here is the caller graph for this function:

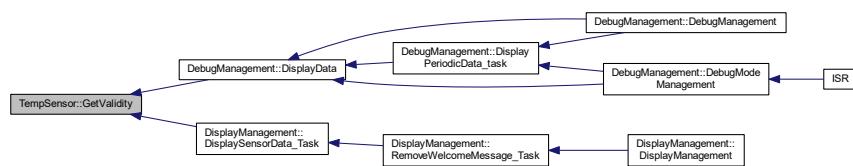

3.20.3.11 readTempSensor_task()

```
void TempSensor::readTempSensor_task ( ) [static]
```

Task for reading temperature and humidity values.


This task reads temperature and humidity data using DHT22 driver. It is called every 5 seconds.

Returns


Nothing

Definition at line 44 of file TempSensor.cpp.

Here is the call graph for this function:

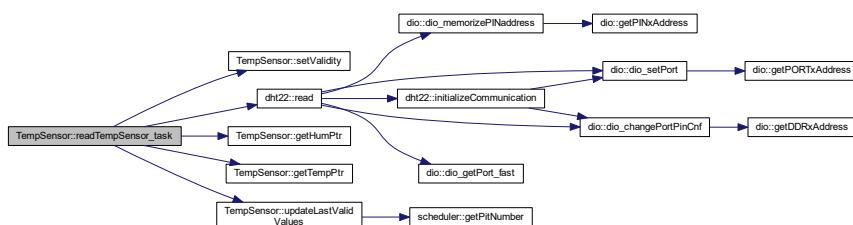

Here is the caller graph for this function:

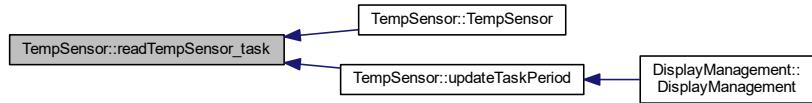

3.20.3.12 `setValidity()`

```
void TempSensor::setValidity (
    bool validity )
```

Set data `val_validity`.

This function sets the class member `val_validity`

Parameters


| | | |
|----|-----------------------|-------------------|
| in | <code>validity</code> | Value of validity |
|----|-----------------------|-------------------|

Returns

Nothing

Definition at line 50 of file `TempSensor.cpp`.

Here is the caller graph for this function:




3.20.3.13 `updateLastValidValues()`


```
void TempSensor::updateLastValidValues ( )
```

Definition at line 65 of file `TempSensor.cpp`.

Here is the call graph for this function:



Here is the caller graph for this function:



3.20.3.14 updateTaskPeriod()

```
bool TempSensor::updateTaskPeriod (  
    uint16_t period )
```

Task period update.

This function updates the period of the temperature task.

Parameters


| | | |
|----|---------------|------------------------|
| in | <i>period</i> | New period of the task |
|----|---------------|------------------------|

Returns


True if the period has been updated, false otherwise

Definition at line 92 of file TempSensor.cpp.

Here is the call graph for this function:

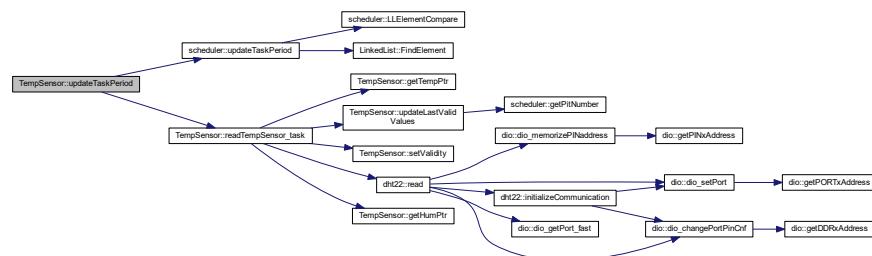

Here is the caller graph for this function:



3.20.4 Member Data Documentation

3.20.4.1 `read_humidity`

```
uint16_t TempSensor::read_humidity [private]
```

Raw value of humidity read from DHT22 (= real humidity *10)

Definition at line 163 of file TempSensor.h.

3.20.4.2 `read_temperature`

```
uint16_t TempSensor::read_temperature [private]
```

Raw value of temperature read from DHT22 (= real temperature *10)

Definition at line 162 of file TempSensor.h.

3.20.4.3 task_period

```
uint16_t TempSensor::task_period [private]
```

Task period

Definition at line 172 of file TempSensor.h.

3.20.4.4 valid_hum

```
uint16_t TempSensor::valid_hum [private]
```

Valid value of humidity

Definition at line 170 of file TempSensor.h.

3.20.4.5 valid坑

```
uint32_t TempSensor::valid坑 [private]
```

pit number of the last time when data were valid

Definition at line 167 of file TempSensor.h.

3.20.4.6 valid_temp

```
uint16_t TempSensor::valid_temp [private]
```

Valid value of temperature

Definition at line 169 of file TempSensor.h.

3.20.4.7 validity

```
bool TempSensor::validity [private]
```

validity of official temperature and humidity data

Definition at line 166 of file TempSensor.h.

3.20.4.8 validity_last_read

```
bool TempSensor::validity_last_read [private]
```

Validity of last read temperature and humidity data

Definition at line 164 of file TempSensor.h.

The documentation for this class was generated from the following files:

- [TempSensor.h](#)
- [TempSensor.cpp](#)

3.21 timer Class Reference

Class defining a timer.

```
#include <timer.h>
```

Public Member Functions

- [timer \(\)](#)
Class constructor.
- void [configureTimer1 \(uint16_t a_prescaler, uint16_t a_ctcValue\)](#)
Configures Timer #1.
- void [startTimer1 \(\)](#)
Start Timer #1.
- void [stopTimer1 \(\)](#)
Stops Timer #1.
- uint16_t [getTimer1Value \(\)](#)
Reads current value of timer #1.

Private Attributes

- uint8_t [prescaler](#)

3.21.1 Detailed Description

Class defining a timer.

This class defines a timer/counter. The selected timer is configured in CTC mode and interrupts are enabled. The prescaler value and CTC value can both be configured by user.

Definition at line 19 of file timer.h.

3.21.2 Constructor & Destructor Documentation

3.21.2.1 timer()

```
timer::timer ( )
```

Class constructor.

This function initializes class attributes

Returns

Nothing

Definition at line 15 of file timer.cpp.

3.21.3 Member Function Documentation

3.21.3.1 configureTimer1()

```
void timer::configureTimer1 (
    uint16_t a_prescaler,
    uint16_t a_ctcValue )
```

Configures Timer #1.

This function configures hardware timer #1 in CTC mode, enables its interrupts, sets prescaler to *a_prescaler* and CTC value to *a_ctcValue*

Parameters

| | | |
|----|--------------------|---|
| in | <i>a_prescaler</i> | prescaler value |
| in | <i>a_ctcValue</i> | Value to which the counter will compare before raising an interrupt |

Returns

Nothing

Definition at line 20 of file timer.cpp.

Here is the caller graph for this function:



3.21.3.2 getTimer1Value()

```
uint16_t timer::getTimer1Value ( ) [inline]
```

Reads current value of timer #1.

This function reads the value of of timer #1 using register TCNT1. The function is inlined to speed up SW execution.

Returns

Current timer value

Definition at line 58 of file timer.h.

Here is the caller graph for this function:



3.21.3.3 startTimer1()

```
void timer::startTimer1 ( )
```

Start Timer #1.


This functions starts Timer #1. Timer shall be initialized before this function is called.

Returns

Nothing

Definition at line 58 of file timer.cpp.

Here is the caller graph for this function:



3.21.3.4 stopTimer1()

```
void timer::stopTimer1 ( )
```

Stops Timer #1.

This functions stops timer #1 by resetting bits 0-2 of TCCR1B

Returns

Nothing

Definition at line 69 of file timer.cpp.

3.21.4 Member Data Documentation

3.21.4.1 prescaler

```
uint8_t timer::prescaler [private]
```

Definition at line 64 of file timer.h.

The documentation for this class was generated from the following files:

- [timer.h](#)
- [timer.cpp](#)

3.22 usart Class Reference

USART serial bus class.

```
#include <usart.h>
```

Public Member Functions

- [**usart** \(uint16_t a_BaudRate\)](#)
Class usart constructor.
- [**void usart_sendString \(String *str\)**](#)
Send a string on USART link.
- [**void usart_sendByte \(uint8_t data\)**](#)
Send a single byte on USART link.
- [**void setBaudRate \(uint16_t a_BaudRate\)**](#)
Setting baud rate.
- [**void usart_init \(\)**](#)
USART hardware initialization.
- [**uint8_t usart_read \(\)**](#)
USART read function.

Private Member Functions

- void **uart_transmit** (uint8_t Data)
USART Transmit data.

Private Attributes

- uint16_t **BaudRate**

3.22.1 Detailed Description

USART serial bus class.

This class defines all useful functions for USART serial bus

Definition at line 16 of file usart.h.

3.22.2 Constructor & Destructor Documentation

3.22.2.1 usart()

```
usart::usart (
    uint16_t a_BaudRate )
```

Class usart constructor.

Initializes the class and call hardware initialization function

Parameters

| | | |
|----|-------------------|--|
| in | <i>a_BaudRate</i> | Desired Baud Rate (16 bit) - up to 57600 |
|----|-------------------|--|

Returns

Nothing.

Definition at line 18 of file usart.cpp.

Here is the call graph for this function:



3.22.3 Member Function Documentation

3.22.3.1 setBaudRate()

```
void usart::setBaudRate (
    uint16_t a_BaudRate ) [inline]
```

Setting baud rate.

This function sets the attribute BaudRate of the class usart

Parameters

| | | |
|----|-------------------|--|
| in | <i>a_BaudRate</i> | Desired Baud Rate (16 bit) - up to 57600 |
|----|-------------------|--|

Returns

Nothing

Definition at line 74 of file usart.cpp.

3.22.3.2 usart_init()

```
void usart::usart_init ( )
```

USART hardware initialization.


This function will initialize the USART using selected baudrate. User must pay attention to select one of the usually used Baud Rate (9600, 19200, 38400, 57600). Note that since an uint16 is used as argument, Baud rate cannot be more than 57600.

Returns

Nothing.

Definition at line 25 of file usart.cpp.

Here is the caller graph for this function:



3.22.3.3 usart_read()

```
uint8_t usart::usart_read ( )
```

USART read function.

This function will read reception register of USART

Returns

The function returns the 8 bits read from reception buffer

Definition at line 90 of file usart.cpp.

3.22.3.4 usart_sendByte()

```
void usart::usart_sendByte (   
    uint8_t data )
```

Send a single byte on USART link.

This function writes the given byte to the serial link using usart_transmit function

Parameters

| | | |
|----|-------------|----------------------|
| in | <i>data</i> | Data byte being sent |
|----|-------------|----------------------|

Returns

Nothing.

Definition at line 68 of file usart.cpp.

Here is the call graph for this function:



Here is the caller graph for this function:

**3.22.3.5 usart_sendString()**

```
void usart::uart_sendString (
    String * str )
```

Send a string on USART link.

This function writes the string object data to the serial link using usart_transmit function

Parameters


| | | |
|----|------------|----------------------------------|
| in | <i>str</i> | Pointer to the string being sent |
|----|------------|----------------------------------|

Returns


Nothing.

Definition at line 48 of file usart.cpp.

Here is the call graph for this function:

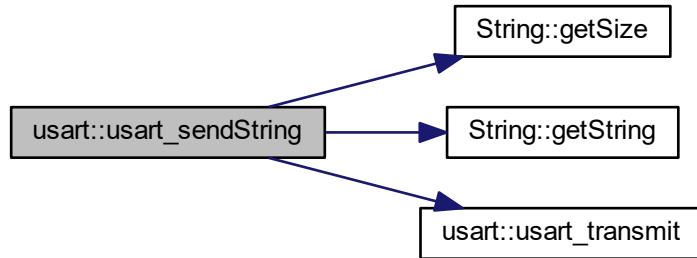

Here is the caller graph for this function:

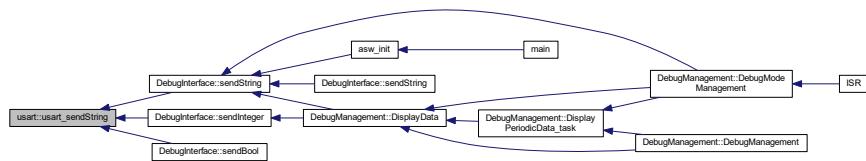

3.22.3.6 usart_transmit()

```
void usart::uart_transmit (
    uint8_t Data ) [private]
```

USART Transmit data.

Nothing Special. It just wait for the transmit buffer is empty before writing it again.

Parameters


| | | |
|----|------|-------------------------------|
| in | Data | Desired data char to transmit |
|----|------|-------------------------------|

Returns

Nothing.

Definition at line 81 of file `uart.cpp`.

Here is the caller graph for this function:

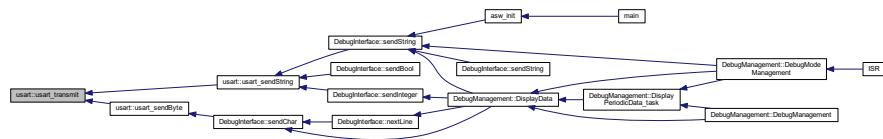

3.22.4 Member Data Documentation

3.22.4.1 BaudRate

```
uint16_t usart::BaudRate [private]
```

Defines the baud rate used by driver

Definition at line 77 of file usart.h.

The documentation for this class was generated from the following files:

- [usart.h](#)
- [usart.cpp](#)

Chapter 4


File Documentation

4.1 asw.cpp File Reference

ASW main file.

```
#include <stdlib.h>
#include <avr/io.h>
#include "../lib/LinkedList/LinkedList.h"
#include "../lib/string/String.h"
#include "../bsw/usart/usart.h"
#include "../bsw/I2C/I2C.h"
#include "../bsw/lcd/LCD.h"
#include "../bsw/dio/dio.h"
#include "../bsw/dht22/dht22.h"
#include "../bsw/bsw.h"
#include "TempSensor/TempSensor.h"
#include "debug_ift/DebugInterface.h"
#include "debug_mgt/DebugManagement.h"
#include "display_ift/DisplayInterface.h"
#include "display_mgt/DisplayManagement.h"
#include "keepAliveLed/keepAliveLed.h"
#include "asw.h"
#include "../main.h"
```

Include dependency graph for asw.cpp:



Functions

- void **asw_init ()**

Initialization of ASW.

4.1.1 Detailed Description

ASW main file.

Date

15 mars 2018

Author

nicls67

4.1.2 Function Documentation

4.1.2.1 asw_init()

```
void asw_init ( )
```

Initialization of ASW.

This function instantiates all applicative objects. Some objects are not created by this function but directly by the upper-level class. The addresses of objects are then stored in ASW_cnf_struct structure.

The debug interface object is created only if the debug pin is set to logical high level.


This function shall be called after BSW initialization function.

Returns

Nothing

Definition at line 37 of file asw.cpp.

Here is the call graph for this function:

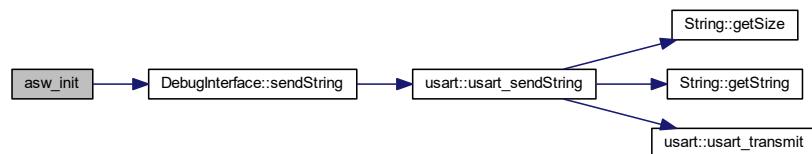


Here is the caller graph for this function:



4.2 asw.h File Reference

ASW main header file.

This graph shows which files directly or indirectly include this file:

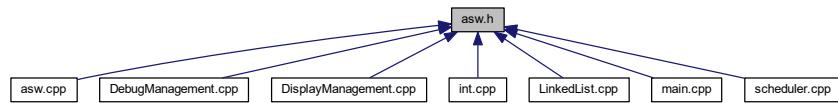

Classes

- struct [T_ASW_init_cnf](#)
ASW initialization configuration structure.

Functions

- void [asw_init](#) ()
Initialization of ASW.

4.2.1 Detailed Description

ASW main header file.

Date

15 mars 2018

Author

nicls67

4.2.2 Function Documentation

4.2.2.1 asw_init()

```
void asw_init ( )
```

Initialization of ASW.

This function instantiates all applicative objects. Some objects are not created by this function but directly by the upper-level class. The addresses of objects are then stored in ASW_cnf_struct structure.

The debug interface object is created only if the debug pin is set to logical high level.


This function shall be called after BSW initialization function.

Returns

Nothing

Definition at line 37 of file asw.cpp.

Here is the call graph for this function:

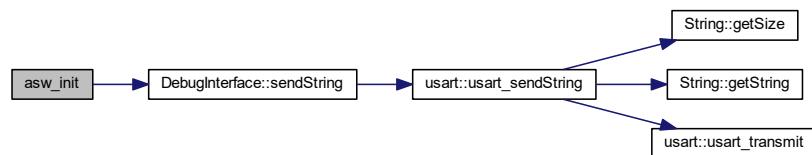

Here is the caller graph for this function:




4.3 bsw.cpp File Reference

BSW main file.

```
#include <avr/io.h>
#include <stdlib.h>
#include "../lib/String/String.h"
#include "uart/usart.h"
#include "timer/timer.h"
#include "I2C/I2C.h"
#include "lcd/LCD.h"
#include "dio/dio.h"
```

```
#include "dht22/dht22.h"
#include "cpuLoad/CpuLoad.h"
#include "bsw.h"
Include dependency graph for bsw.cpp:
```

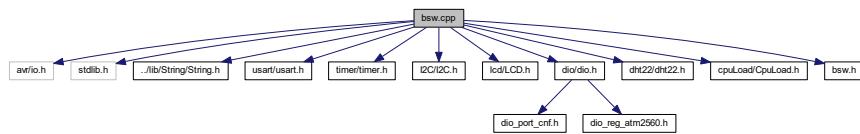

Functions

- void [bsw_init \(\)](#)
Initialization of BSW.

4.3.1 Detailed Description

BSW main file.

Date

13 mars 2018

Author

nicls67

4.3.2 Function Documentation

4.3.2.1 bsw_init()

```
void bsw_init ( )
```

Initialization of BSW.


This function instantiates all driver objects, leading hardware initialization. The addresses of driver objects are then stored in `BSW_cnf_struct` structure.

Returns

Nothing

Definition at line 24 of file `bsw.cpp`.


Here is the caller graph for this function:



4.4 bsw.h File Reference

BSW main header file.

This graph shows which files directly or indirectly include this file:

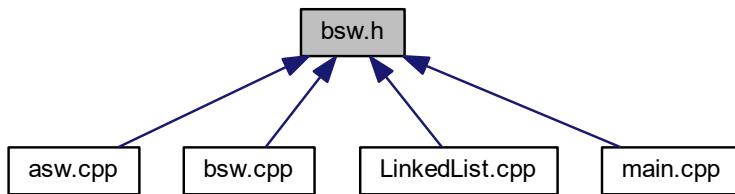

Functions

- void [bsw_init \(\)](#)

Initialization of BSW.

4.4.1 Detailed Description

BSW main header file.

Date

13 mars 2018

Author

nicls67

4.4.2 Function Documentation

4.4.2.1 bsw_init()

```
void bsw_init ( )
```

Initialization of BSW.


This function instantiates all driver objects, leading hardware initialization. The addresses of driver objects are then stored in BSW_cnf_struct structure.

Returns

Nothing

Definition at line 24 of file bsw.cpp.

Here is the caller graph for this function:




4.5 CpuLoad.cpp File Reference

Defines functions of class [CpuLoad](#).

```
#include <stdlib.h>
#include <avr/io.h>
#include "../lib/LinkedList/LinkedList.h"
#include "../scheduler/scheduler.h"
#include "../timer/timer.h"
#include "CpuLoad.h"
```

Include dependency graph for CpuLoad.cpp:

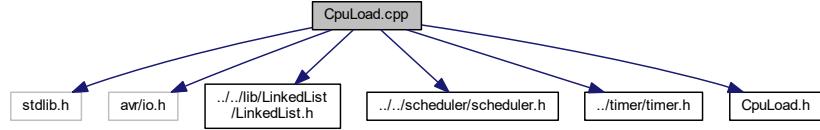

Variables

- [CpuLoad * p_global_BSW_cpuload](#)

4.5.1 Detailed Description

Defines functions of class [CpuLoad](#).

Date

21 mars 2019

Author

nicls67

4.5.2 Variable Documentation

4.5.2.1 p_global_BSW_cpuload

[CpuLoad](#)* p_global_BSW_cpuload


Pointer to cpu load library object

Definition at line 18 of file CpuLoad.cpp.

4.6 CpuLoad.h File Reference

[CpuLoad](#) class header file.

This graph shows which files directly or indirectly include this file:

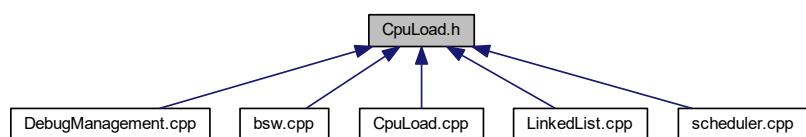

Classes

- class [CpuLoad](#)

Class defining CPU load libraries.

Macros

- #define [NB_OF_SAMPLES](#) 50

Variables

- [CpuLoad * p_global_BSW_cpuload](#)

4.6.1 Detailed Description

[CpuLoad](#) class header file.

Date

21 mars 2019

Author

nicls67

4.6.2 Macro Definition Documentation

4.6.2.1 NB_OF_SAMPLES

```
#define NB_OF_SAMPLES 50
```

Definition at line 13 of file [CpuLoad.h](#).

4.6.3 Variable Documentation

4.6.3.1 p_global_BSW_cpuload


```
CpuLoad* p_global_BSW_cpuload
```

Pointer to cpu load library object

Definition at line 18 of file [CpuLoad.cpp](#).

4.7 DebugInterface.cpp File Reference

```
#include <avr/io.h>
#include <stdlib.h>
#include "../../lib/string/String.h"
#include "../../bsw/usart/usart.h"
#include "DebugInterface.h"
Include dependency graph for DebugInterface.cpp:
```

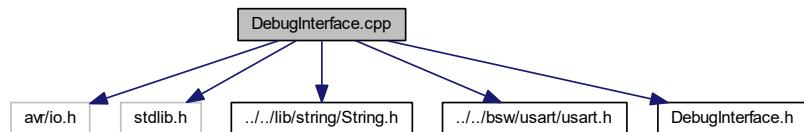

Variables

- `DebugInterface * p_global_ASW_DebugInterface`

4.7.1 Variable Documentation

4.7.1.1 `p_global_ASW_DebugInterface`


`DebugInterface* p_global_ASW_DebugInterface`

Pointer to USART debug interface object

Definition at line 19 of file DebugInterface.cpp.

4.8 DebugInterface.h File Reference

This graph shows which files directly or indirectly include this file:

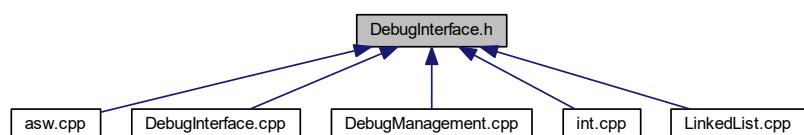

Classes

- class [DebugInterface](#)

Class used for debugging on usart link.

Macros

- `#define USART_BAUDRATE (uint16_t)9600`

Variables

- `DebugInterface * p_global_ASW_DebugInterface`

4.8.1 Macro Definition Documentation

4.8.1.1 USART_BAUDRATE

```
#define USART_BAUDRATE (uint16_t)9600
```

uart connection to PC uses a baud rate of 9600

Definition at line 15 of file DebugInterface.h.

4.8.2 Variable Documentation

4.8.2.1 p_global_ASW_DebugInterface

```
DebugInterface* p_global_ASW_DebugInterface
```

Pointer to USART debug interface object


Definition at line 19 of file DebugInterface.cpp.

4.9 DebugManagement.cpp File Reference

Debug management class source file.

```
#include <avr/io.h>
#include <stdlib.h>
#include "../../lib/string/String.h"
#include "../../lib/LinkedList/LinkedList.h"
#include "../../scheduler/scheduler.h"
#include "../../bsw/usart/usart.h"
#include "../../bsw/cpuLoad/CpuLoad.h"
#include "../TempSensor/TempSensor.h"
#include "../debug_ift/DebugInterface.h"
#include "DebugManagement.h"
#include "../asw.h"
#include "../../main.h"
```

Include dependency graph for DebugManagement.cpp:



Variables

- `DebugManagement * p_global_ASW_DebugManagement`
- `const uint8_t str_debug_main_menu []`
Main menu of debug mode.
- `const uint8_t str_debug_info_message_empty [] = "\n"`
Info menu empty string.
- `const uint8_t str_debug_info_message_wrong_selection [] = "Impossible de faire ca... !\n"`
Info menu string in case a wrong selection has been performed.

4.9.1 Detailed Description

Debug management class source file.

Date

8 mai 2019

Author

nicls67

4.9.2 Variable Documentation

4.9.2.1 p_global_ASW_DebugManagement

`DebugManagement* p_global_ASW_DebugManagement`

Pointer to the `DebugManagement` object

Definition at line 28 of file `DebugManagement.cpp`.

4.9.2.2 str_debug_info_message_empty

`const uint8_t str_debug_info_message_empty[] = "\n"`

Info menu empty string.

Definition at line 40 of file `DebugManagement.cpp`.

4.9.2.3 str_debug_info_message_wrong_selection

`const uint8_t str_debug_info_message_wrong_selection[] = "Impossible de faire ca... !\n"`

Info menu string in case a wrong selection has been performed.

Definition at line 45 of file `DebugManagement.cpp`.

4.9.2.4 str_debug_main_menu

`const uint8_t str_debug_main_menu[]`

Initial value:

```
=  
"Menu principal : \n"  
"    s : Quitter debug\n"
```


Main menu of debug mode.

Definition at line 33 of file `DebugManagement.cpp`.

4.10 DebugManagement.h File Reference

Debug management class header file.

This graph shows which files directly or indirectly include this file:

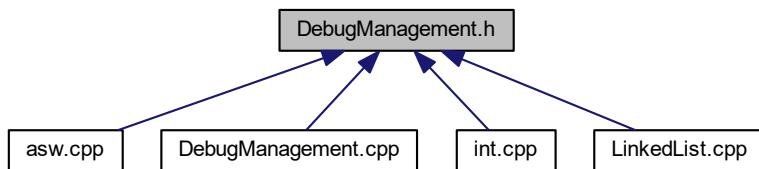

Classes

- class [DebugManagement](#)
Debug management class.

Macros

- `#define PERIOD_MS_TASK_DISPLAY_DEBUG_DATA 5000`
- `#define PERIOD_MS_TASK_DISPLAY_CPU_LOAD 5000`

Enumerations

- enum [debug_state_t](#) { `MAIN_MENU` }
Defines the debug states.

Variables

- `DebugManagement * p_global_ASW_DebugManagement`

4.10.1 Detailed Description

Debug management class header file.

Date

8 mai 2019

Author

nicls67

4.10.2 Macro Definition Documentation

4.10.2.1 PERIOD_MS_TASK_DISPLAY_CPU_LOAD

```
#define PERIOD_MS_TASK_DISPLAY_CPU_LOAD 5000
```

Period for displaying CPU load data

Definition at line 14 of file DebugManagement.h.

4.10.2.2 PERIOD_MS_TASK_DISPLAY_DEBUG_DATA

```
#define PERIOD_MS_TASK_DISPLAY_DEBUG_DATA 5000
```

Period for displaying temperature and humidity data

Definition at line 13 of file DebugManagement.h.

4.10.3 Enumeration Type Documentation

4.10.3.1 debug_state_t

```
enum debug_state_t
```

Defines the debug states.

Enumerator

| | |
|-----------|-------------------------------------|
| MAIN_MENU | Init state : main menu is displayed |
|-----------|-------------------------------------|

Definition at line 19 of file DebugManagement.h.

4.10.4 Variable Documentation

4.10.4.1 p_global_ASW_DebugManagement

```
DebugManagement* p_global_ASW_DebugManagement
```

Pointer to the [DebugManagement](#) object


Definition at line 28 of file DebugManagement.cpp.

4.11 dht22.cpp File Reference

This file defines classes for DHT22 driver.

```
#include <avr/io.h>
#include <util/delay.h>
#include <avr/interrupt.h>
#include "../dio/dio.h"
#include "dht22.h"
```

Include dependency graph for dht22.cpp:

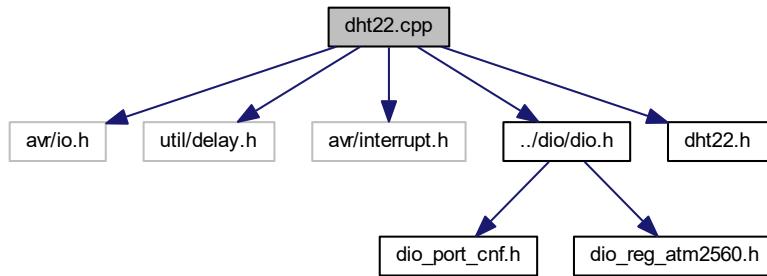

Macros

- #define MAX_WAIT_TIME_US 100

Variables

- `dht22 * p_global_BSW_dht22`

4.11.1 Detailed Description

This file defines classes for DHT22 driver.

Date

23 mars 2018

Author

nicls67

4.11.2 Macro Definition Documentation

4.11.2.1 MAX_WAIT_TIME_US

```
#define MAX_WAIT_TIME_US 100
```

Maximum waiting time in microseconds

Definition at line 18 of file dht22.cpp.

4.11.3 Variable Documentation

4.11.3.1 p_global_BSW_dht22

```
dht22* p_global_BSW_dht22
```


Pointer to [dht22](#) driver object

Definition at line 20 of file dht22.cpp.

4.12 dht22.h File Reference

DHT22 driver header file.

This graph shows which files directly or indirectly include this file:

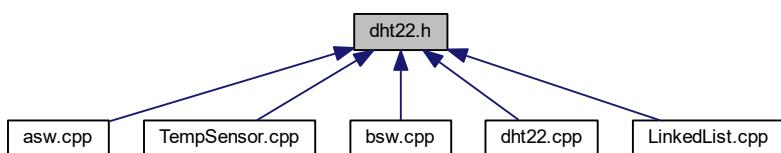

Classes

- class [dht22](#)
DHT 22 driver class.

Variables

- [dht22 * p_global_BSW_dht22](#)

4.12.1 Detailed Description

DHT22 driver header file.

Date

23 mars 2018

Author

nicls67

4.12.2 Variable Documentation

4.12.2.1 p_global_BSW_dht22

`dht22*` `p_global_BSW_dht22`


Pointer to `dht22` driver object

Definition at line 20 of file dht22.cpp.

4.13 dio.cpp File Reference

DIO library.

```
#include <avr/io.h>
#include "dio.h"
Include dependency graph for dio.cpp:
```

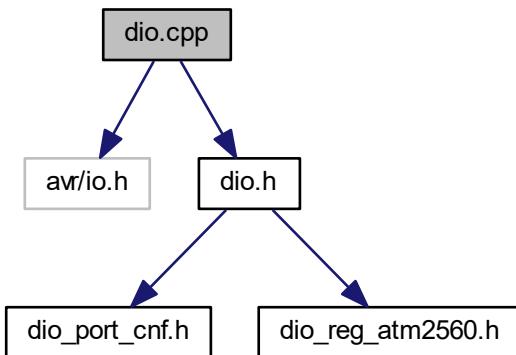

Variables

- `dio * p_global_BSW_dio`

4.13.1 Detailed Description

DIO library.

Date

13 mars 2018

Author

nicls67

4.13.2 Variable Documentation

4.13.2.1 `p_global_BSW_dio`

`dio* p_global_BSW_dio`

Pointer to dio driver object


Definition at line 14 of file dio.cpp.

4.14 dio.h File Reference


DIO library header file.

```
#include "dio_port_cnf.h"
#include "dio_reg_atm2560.h"
```

Include dependency graph for dio.h:

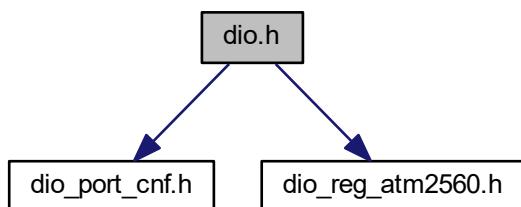

This graph shows which files directly or indirectly include this file:

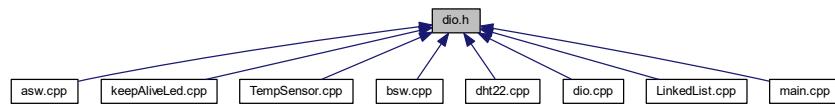

Classes

- class [dio](#)
DIO class.

Macros

- `#define PORT_CNF_OUT 1`
- `#define PORT_CNF_IN 0`
- `#define ENCODE_PORT(port, pin) (uint8_t)((((uint8_t)(port & 0xF)) << 3) | (uint8_t)(pin & 0x7))`
- `#define DECODE_PORT(portcode) (uint8_t)((portcode >> 3) & 0xF)`
- `#define DECODE_PIN(portcode) (uint8_t)(portcode & 0x7)`

Variables

- [dio * p_global_BSW_dio](#)

4.14.1 Detailed Description

DIO library header file.

Date

13 mars 2018

Author

nicls67

4.14.2 Macro Definition Documentation

4.14.2.1 DECODE_PIN

```
#define DECODE_PIN(  
    portcode ) (uint8_t) (portcode & 0x7)
```

Macro used to extract pin index

Definition at line 20 of file dio.h.

4.14.2.2 DECODE_PORT

```
#define DECODE_PORT(  
    portcode ) (uint8_t) ((portcode >> 3) & 0xF)
```

Macro used to extract port index

Definition at line 19 of file dio.h.

4.14.2.3 ENCODE_PORT

```
#define ENCODE_PORT(  
    port,  
    pin ) (uint8_t) (((uint8_t) (port & 0xF)) << 3) | (uint8_t) (pin & 0x7))
```

Macro used to encode port and pin indexes into one single byte

Definition at line 18 of file dio.h.

4.14.2.4 PORT_CNF_IN

```
#define PORT_CNF_IN 0
```

Pin is configured as input

Definition at line 16 of file dio.h.

4.14.2.5 PORT_CNF_OUT

```
#define PORT_CNF_OUT 1
```

Pin is configured as output

Definition at line 15 of file dio.h.

4.14.3 Variable Documentation

4.14.3.1 p_global_BSW_dio

`dio* p_global_BSW_dio`


Pointer to dio driver object

Definition at line 14 of file dio.cpp.

4.15 dio_port_cnf.h File Reference

Digital ports configuration file.

This graph shows which files directly or indirectly include this file:

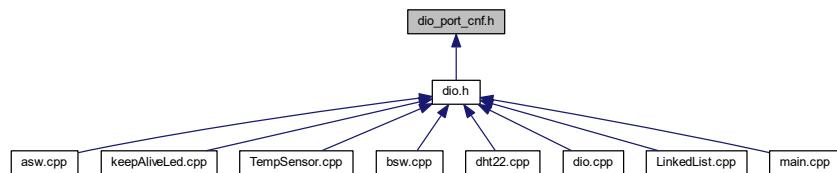

Macros

- `#define PORTB_CNF_DDRB (uint8_t)0b11000000`
Defines the configuration of DDRB register.
- `#define PORTB_CNF_PORTB (uint8_t)0b01010000`
Defines the configuration of PORTB register.
- `#define PORT_A 0`
- `#define PORT_B 1`
- `#define PORT_C 2`
- `#define PORT_D 3`

4.15.1 Detailed Description

Digital ports configuration file.

Date

19 mars 2019

Author

nicls67

4.15.2 Macro Definition Documentation

4.15.2.1 PORT_A

```
#define PORT_A 0
```

PORTA index

Definition at line 42 of file dio_port_cnf.h.

4.15.2.2 PORT_B

```
#define PORT_B 1
```

PORTB index

Definition at line 43 of file dio_port_cnf.h.

4.15.2.3 PORT_C

```
#define PORT_C 2
```

PORTC index

Definition at line 44 of file dio_port_cnf.h.

4.15.2.4 PORT_D

```
#define PORT_D 3
```

PORTD index

Definition at line 45 of file dio_port_cnf.h.

4.15.2.5 PORTB_CNF_DDRB

```
#define PORTB_CNF_DDRB (uint8_t)0b11000000
```

Defines the configuration of DDRB register.

This constant defines the direction of IO pins of PORT B. It will configure register DDRB.

PB0 : N/A
 PB1 : N/A
 PB2 : N/A
 PB3 : N/A
 PB4 : IN
 PB5 : N/A
 PB6 : OUT
 PB7 : OUT

Definition at line 25 of file dio_port_cnf.h.

4.15.2.6 PORTB_CNF_PORTB

```
#define PORTB_CNF_PORTB (uint8_t)0b01010000
```

Defines the configuration of PORTB register.


This constant defines the initial state of IO pins for PORT B. It will configure register PORTB. For outputs pins, it defines the initial level (high or low). For input pins, it defines if the pins is configured as high-Z or pull-up.

PB0 : N/A
 PB1 : N/A
 PB2 : N/A
 PB3 : N/A
 PB4 : Pull-up
 PB5 : N/A
 PB6 : HIGH
 PB7 : LOW

Definition at line 40 of file dio_port_cnf.h.

4.16 dio_reg_atm2560.h File Reference

This graph shows which files directly or indirectly include this file:

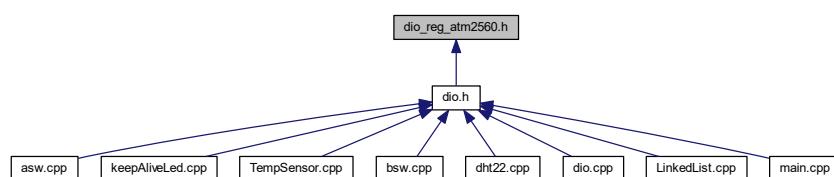

Macros

- #define PORTA_PTR (volatile uint8_t *)(0x02 + 0x20)
- #define PORTB_PTR (volatile uint8_t *)(0x05 + 0x20)
- #define PORTC_PTR (volatile uint8_t *)(0x08 + 0x20)
- #define PORTD_PTR (volatile uint8_t *)(0x0B + 0x20)
- #define PINA_PTR (volatile uint8_t *)(0x00 + 0x20)
- #define PINB_PTR (volatile uint8_t *)(0x03 + 0x20)
- #define PINC_PTR (volatile uint8_t *)(0x06 + 0x20)
- #define PIND_PTR (volatile uint8_t *)(0x09 + 0x20)
- #define DDRA_PTR (volatile uint8_t *)(0x01 + 0x20)
- #define DDRB_PTR (volatile uint8_t *)(0x04 + 0x20)
- #define DDRC_PTR (volatile uint8_t *)(0x07 + 0x20)
- #define DDRD_PTR (volatile uint8_t *)(0x0A + 0x20)

4.16.1 Macro Definition Documentation

4.16.1.1 DDRA_PTR

```
#define DDRA_PTR (volatile uint8_t *) (0x01 + 0x20)
```

Macro defining pointer to DDR A register

Definition at line 24 of file dio_reg_atm2560.h.

4.16.1.2 DDRB_PTR

```
#define DDRB_PTR (volatile uint8_t *) (0x04 + 0x20)
```

Macro defining pointer to DDR B register

Definition at line 25 of file dio_reg_atm2560.h.

4.16.1.3 DDRC_PTR

```
#define DDRC_PTR (volatile uint8_t *) (0x07 + 0x20)
```

Macro defining pointer to DDR C register

Definition at line 26 of file dio_reg_atm2560.h.

4.16.1.4 DDRD_PTR

```
#define DDRD_PTR (volatile uint8_t *) (0x0A + 0x20)
```

Macro defining pointer to DDR D register

Definition at line 27 of file dio_reg_atm2560.h.

4.16.1.5 PINA_PTR

```
#define PINA_PTR (volatile uint8_t *) (0x00 + 0x20)
```

Macro defining pointer to PIN A register

Definition at line 19 of file dio_reg_atm2560.h.

4.16.1.6 PINB_PTR

```
#define PINB_PTR (volatile uint8_t *) (0x03 + 0x20)
```

Macro defining pointer to PIN B register

Definition at line 20 of file dio_reg_atm2560.h.

4.16.1.7 PINC_PTR

```
#define PINC_PTR (volatile uint8_t *) (0x06 + 0x20)
```

Macro defining pointer to PIN C register

Definition at line 21 of file dio_reg_atm2560.h.

4.16.1.8 PIND_PTR

```
#define PIND_PTR (volatile uint8_t *) (0x09 + 0x20)
```

Macro defining pointer to PIN D register

Definition at line 22 of file dio_reg_atm2560.h.

4.16.1.9 PORTA_PTR

```
#define PORTA_PTR (volatile uint8_t *) (0x02 + 0x20)
```

Macro defining pointer to PORT A register

Definition at line 14 of file dio_reg_atm2560.h.

4.16.1.10 PORTB_PTR

```
#define PORTB_PTR (volatile uint8_t *) (0x05 + 0x20)
```

Macro defining pointer to PORT B register

Definition at line 15 of file dio_reg_atm2560.h.

4.16.1.11 PORTC_PTR

```
#define PORTC_PTR (volatile uint8_t *) (0x08 + 0x20)
```

Macro defining pointer to PORT C register

Definition at line 16 of file dio_reg_atm2560.h.

4.16.1.12 PORTD_PTR

```
#define PORTD_PTR (volatile uint8_t *) (0x0B + 0x20)
```


Macro defining pointer to PORT D register

Definition at line 17 of file dio_reg_atm2560.h.

4.17 DisplayInterface.cpp File Reference

Source code file for display services.

```
#include <stdlib.h>
#include <avr/io.h>
#include <util/delay.h>
#include "../lib/String/String.h"
#include "../lib/LinkedList/LinkedList.h"
#include "../scheduler/scheduler.h"
#include "../bsw/I2C/I2C.h"
#include "../bsw/lcd/LCD.h"
#include "DisplayInterface.h"
Include dependency graph for DisplayInterface.cpp:
```



Variables

- `DisplayInterface * p_global_ASW_DisplayInterface`

4.17.1 Detailed Description

Source code file for display services.

Date

23 avr. 2019

Author

nicls67

4.17.2 Variable Documentation

4.17.2.1 `p_global_ASW_DisplayInterface`

`DisplayInterface* p_global_ASW_DisplayInterface`


Pointer to `DisplayInterface` object

Definition at line 25 of file `DisplayInterface.cpp`.

4.18 DisplayInterface.h File Reference

`DisplayInterface` class header file.

This graph shows which files directly or indirectly include this file:

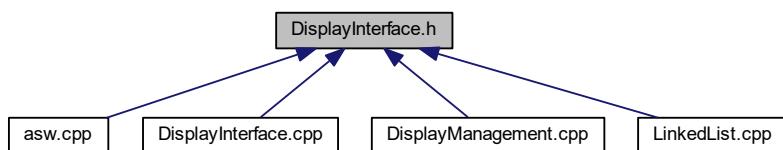

Classes

- struct [T_Display_shift_data](#)
Structure containing shift data.
- struct [T_display_data](#)
Structure containing display data.
- class [DisplayInterface](#)
Display interface services class.

Macros

- `#define DISPLAY_LINE_SHIFT_PERIOD_MS 500`
- `#define DISPLAY_LINE_SHIFT_TEMPO_TIME 6`

Enumerations

- enum [T_DisplayInterface_LineDisplayMode](#) { [NORMAL](#), [LINE_SHIFT](#), [GO_TO_NEXT_LINE](#) }
Modes for line display.
- enum [T_DisplayInterface_LineAlignment](#) { [LEFT](#), [CENTER](#), [RIGHT](#) }
Alignment mode for line display.

Variables

- `DisplayInterface * p_global_ASW_DisplayInterface`

4.18.1 Detailed Description

[DisplayInterface](#) class header file.

Date

23 avr. 2019

Author

nicls67

4.18.2 Macro Definition Documentation

4.18.2.1 DISPLAY_LINE_SHIFT_PERIOD_MS

```
#define DISPLAY_LINE_SHIFT_PERIOD_MS 500
```

In "line shift" mode for line display, line is shifted every 500 ms

Definition at line 68 of file [DisplayInterface.h](#).

4.18.2.2 DISPLAY_LINE_SHIFT_TEMPO_TIME

```
#define DISPLAY_LINE_SHIFT_TEMPO_TIME 6
```

In "line shift" mode for line display, a temporization of 6 periods is added at the end and the beginning of the lines

Definition at line 69 of file DisplayInterface.h.

4.18.3 Enumeration Type Documentation

4.18.3.1 T_DisplayInterface_LineAlignment

```
enum T_DisplayInterface_LineAlignment
```

Alignment mode for line display.

This enumeration defines the possible alignment mode for the text displayed. It is only used when the display mode is NORMAL or GO_TO_NEXT_LINE.

Enumerator

| | |
|--------|-----------------------|
| LEFT | Text is aligned left |
| CENTER | Text is centered |
| RIGHT | Text is aligned right |

Definition at line 33 of file DisplayInterface.h.

4.18.3.2 T_DisplayInterface_LineDisplayMode

```
enum T_DisplayInterface_LineDisplayMode
```

Modes for line display.

This enumeration defines the available modes for the line display functionality :

- 1- Normal mode : if the string is too long to be displayed entirely, the end of the string is cut.
- 2- Line shift mode : the display is moving to display all the string.
- 3- Next line mode : the remaining characters are displayed on the next lines.

Enumerator

| | |
|-----------------|--|
| NORMAL | |
| LINE_SHIFT | |
| GO_TO_NEXT_LINE | |

Definition at line 20 of file DisplayInterface.h.

4.18.4 Variable Documentation

4.18.4.1 p_global_ASW_DisplayInterface

`DisplayInterface* p_global_ASW_DisplayInterface`

Pointer to [DisplayInterface](#) object


Definition at line 25 of file DisplayInterface.cpp.

4.19 DisplayManagement.cpp File Reference

Display management source file.

```
#include <stdlib.h>
#include <avr/io.h>
#include "../../lib/LinkedList/LinkedList.h"
#include "../../lib/string/string.h"
#include "../../scheduler/scheduler.h"
#include "../../bsw/I2C/I2C.h"
#include "../../bsw/lcd/LCD.h"
#include "../TempSensor/TempSensor.h"
#include "../display_ift/DisplayInterface.h"
#include "DisplayManagement.h"
#include "../asw.h"
#include "../../main.h"
```

Include dependency graph for DisplayManagement.cpp:



Variables

- [DisplayManagement * p_global_ASW_DisplayManagement](#)

4.19.1 Detailed Description

Display management source file.

Date

1 mai 2019

Author

nicls67

4.19.2 Variable Documentation

4.19.2.1 p_global_ASW_DisplayManagement

`DisplayManagement* p_global_ASW_DisplayManagement`


Pointer to `DisplayManagement` object

Definition at line 28 of file `DisplayManagement.cpp`.

4.20 DisplayManagement.h File Reference

Display management class header file.

This graph shows which files directly or indirectly include this file:

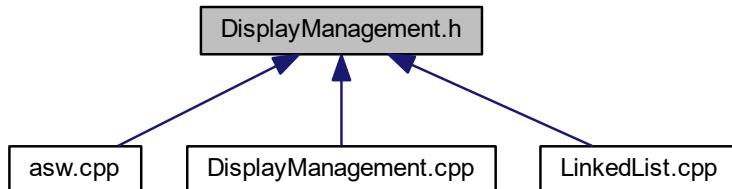

Classes

- class `DisplayManagement`

Display management class.

Macros

- `#define DISPLAY_MGT_LCD_I2C_ADDR 0x27`
- `#define DISPLAY_MGT_PERIOD_TASK_SENSOR 1500`
- `#define DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL 5000`
- `#define DISPLAY_MGT_LINE_TEMP 0`
- `#define DISPLAY_MGT_LINE_HUM 1`
- `#define DISPLAY_MGT_I2C_BITRATE (uint32_t)100000`

Variables

- const `T_LCD_conf_struct LCD_init_cnf`
LCD configuration structure.
- const `uint8_t welcomeMessageString [] = "Bienvenue !"`
- const `uint8_t tempDisplayString [] = "Temperature : "`
- const `uint8_t humidityDisplayString [] = "Humidite : "`
- const `uint8_t noSensorDisplayString [] = "Capteur de temperature desactive"`
- `DisplayManagement * p_global_ASW_DisplayManagement`

4.20.1 Detailed Description

Display management class header file.

Date

1 mai 2019

Author

nicls67

4.20.2 Macro Definition Documentation

4.20.2.1 DISPLAY_MGT_I2C_BITRATE

```
#define DISPLAY_MGT_I2C_BITRATE (uint32_t)100000
```

I2C bus bitrate is 100 kHz

Definition at line 21 of file DisplayManagement.h.

4.20.2.2 DISPLAY_MGT_LCD_I2C_ADDR

```
#define DISPLAY_MGT_LCD_I2C_ADDR 0x27
```

I2C address of the screen

Definition at line 13 of file DisplayManagement.h.

4.20.2.3 DISPLAY_MGT_LINE_HUM

```
#define DISPLAY_MGT_LINE_HUM 1
```

Current humidity is displayed on line 1

Definition at line 19 of file DisplayManagement.h.

4.20.2.4 DISPLAY_MGT_LINE_TEMP

```
#define DISPLAY_MGT_LINE_TEMP 0
```

Current temperature is displayed on line 0

Definition at line 18 of file DisplayManagement.h.

4.20.2.5 DISPLAY_MGT_PERIOD_TASK_SENSOR

```
#define DISPLAY_MGT_PERIOD_TASK_SENSOR 1500
```

Display is updated every 1.5s

Definition at line 15 of file DisplayManagement.h.

4.20.2.6 DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL

```
#define DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOVAL 5000
```

Time after which one the welcome message is removed

Definition at line 16 of file DisplayManagement.h.

4.20.3 Variable Documentation

4.20.3.1 humidityDisplayString

```
const uint8_t humidityDisplayString[] = "Humidite : "
```

String used for humidity display

Definition at line 43 of file DisplayManagement.h.

4.20.3.2 LCD_init_cnf

```
const T\_LCD\_conf\_struct LCD_init_cnf
```

Initial value:

```
= {  
    DISPLAY_MGT_I2C_BITRATE,  
    DISPLAY_MGT_LCD_I2C_ADDR,  
    LCD_CNF_BACKLIGHT_ON,  
    LCD_CNF_TWO_LINE,  
    LCD_CNF_FONT_5_8,  
    LCD_CNF_DISPLAY_ON,  
    LCD_CNF_CURSOR_OFF,  
    LCD_CNF_CURSOR_BLINK_OFF,  
    LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT,  
    LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF  
}
```

[LCD](#) configuration structure.

This structure defines the initial configuration of the [LCD](#) screen.

Definition at line 27 of file [DisplayManagement.h](#).

4.20.3.3 noSensorDisplayString

```
const uint8_t noSensorDisplayString[] = "Capteur de temperature desactive"
```

[String](#) used in case temperature sensor is deactivated

Definition at line 44 of file [DisplayManagement.h](#).

4.20.3.4 p_global_ASW_DisplayManagement

```
DisplayManagement* p_global_ASW_DisplayManagement
```

Pointer to [DisplayManagement](#) object

Definition at line 28 of file [DisplayManagement.cpp](#).

4.20.3.5 tempDisplayString

```
const uint8_t tempDisplayString[] = "Temperature : "
```

[String](#) used for temperature display

Definition at line 42 of file [DisplayManagement.h](#).

4.20.3.6 welcomeMessageString


```
const uint8_t welcomeMessageString[] = "Bienvenue !"
```

Definition at line 41 of file DisplayManagement.h.

4.21 I2C.cpp File Reference

Two-wire interface ([I2C](#)) source file.

```
#include <avr/io.h>
#include "I2C.h"
Include dependency graph for I2C.cpp:
```

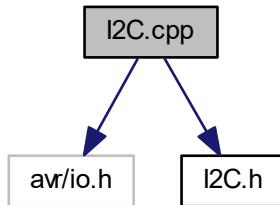

Variables

- [I2C * p_global_BSW_i2c](#)

4.21.1 Detailed Description

Two-wire interface ([I2C](#)) source file.

Date

19 avr. 2019

Author

nicls67

4.21.2 Variable Documentation

4.21.2.1 p_global_BSW_i2c

`I2C* p_global_BSW_i2c`


Pointer to `I2C` driver object

Definition at line 14 of file I2C.cpp.

4.22 I2C.h File Reference

`I2C` class header file.

This graph shows which files directly or indirectly include this file:

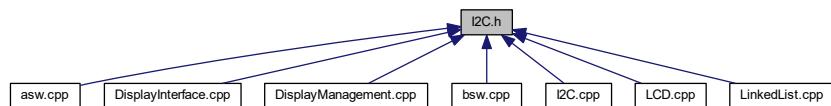

Classes

- class `I2C`

Two-wire serial interface (`I2C`) class definition.

Macros

- `#define START 0x08`
- `#define SLA_ACK 0x18`
- `#define DATA_ACK 0x28`

Variables

- `I2C * p_global_BSW_i2c`

4.22.1 Detailed Description

`I2C` class header file.

Date

19 avr. 2019

Author

nicls67

4.22.2 Macro Definition Documentation

4.22.2.1 DATA_ACK

```
#define DATA_ACK 0x28
```

TWSR status code : DATA has been transmitted and ACK has been received

Definition at line 15 of file I2C.h.

4.22.2.2 SLA_ACK

```
#define SLA_ACK 0x18
```

TWSR status code : SLA has been transmitted and ACK has been received

Definition at line 14 of file I2C.h.

4.22.2.3 START

```
#define START 0x08
```

TWSR status code : START condition transmitted

Definition at line 13 of file I2C.h.

4.22.3 Variable Documentation

4.22.3.1 p_global_BSW_i2c

`I2C*` `p_global_BSW_i2c`

Pointer to `I2C` driver object


Definition at line 14 of file I2C.cpp.

4.23 int.cpp File Reference

Interrupt management source file.

```
#include <stdlib.h>
#include <avr/io.h>
#include <util/delay.h>
#include <avr/interrupt.h>
#include "../lib/string/String.h"
#include "../lib/LinkedList/LinkedList.h"
#include "../scheduler/scheduler.h"
#include "../usart/usart.h"
#include "../asw/TempSensor/TempSensor.h"
#include "../asw/debug_ift/DebugInterface.h"
#include "../asw/debug_mgt/DebugManagement.h"
#include "../asw/asw.h"
#include "../main.h"

Include dependency graph for int.cpp:
```



Functions

- **ISR (TIMER1_COMPA_vect)**
Main software interrupt.
- **ISR (USART0_RX_vect)**
USART Rx Complete interrupt.

4.23.1 Detailed Description

Interrupt management source file.

Date

22 mai 2019

Author

nicls67

4.23.2 Function Documentation

4.23.2.1 ISR() [1/2]

```
ISR (
    TIMER1_COMPA_vect
)
```

Main software interrupt.


This function handles the interrupt raised by Timer #1. It wakes up the software every 500 ms to perform applications.

Returns

Nothing

Definition at line 34 of file int.cpp.

Here is the call graph for this function:

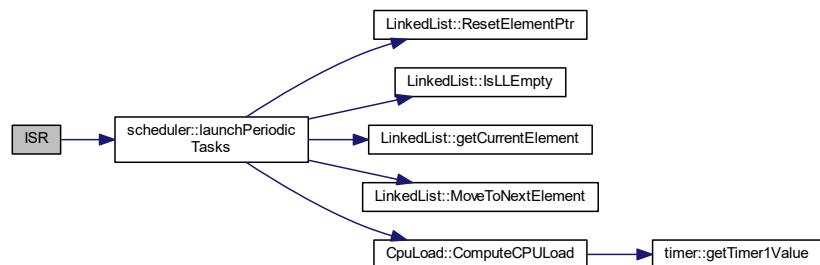

4.23.2.2 ISR() [2/2]

```
ISR (
    USART0_RX_vect
)
```

USART Rx Complete interrupt.


This function handles the interrupt raised when a frame has been received by USART. If debug mode mode is active, it calls debug mode management function. If inactive, it calls debug mode activation function if the received character is 'a'

Returns

Nothing

Definition at line 46 of file int.cpp.

Here is the call graph for this function:

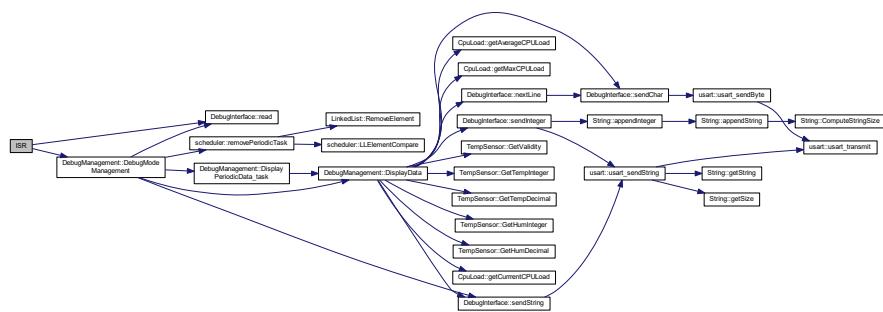


4.24 keepAliveLed.cpp File Reference

Definition of function for class [keepAliveLed](#).

```
#include <avr/io.h>
#include "../../lib/LinkedList/LinkedList.h"
#include "../../scheduler/scheduler.h"
#include "../../bsw/dio/dio.h"
#include "keepAliveLed.h"
```

Include dependency graph for keepAliveLed.cpp:

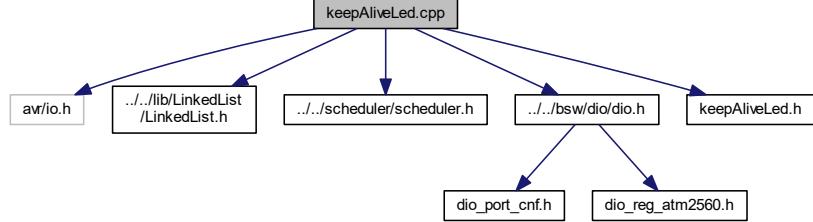

Variables

- [keepAliveLed * p_global_ASW_keepAliveLed](#)

4.24.1 Detailed Description

Definition of function for class [keepAliveLed](#).

Date

17 mars 2018

Author

nicls67

4.24.2 Variable Documentation

4.24.2.1 p_global_ASW_keepAliveLed

[keepAliveLed](#)* p_global_ASW_keepAliveLed


Pointer to [keepAliveLed](#) object

Definition at line 20 of file [keepAliveLed.cpp](#).

4.25 keepAliveLed.h File Reference

Class [keepAliveLed](#) header file.

This graph shows which files directly or indirectly include this file:

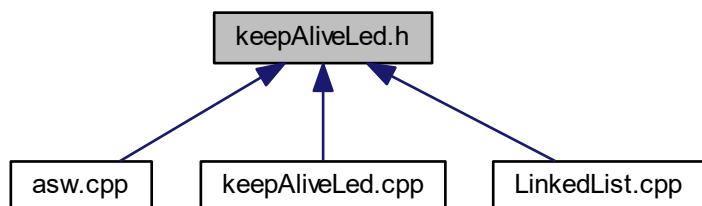

Classes

- class [keepAliveLed](#)

Class for keep-alive LED blinking.

Macros

- `#define PERIOD_MS_TASK_LED SW_PERIOD_MS`
- `#define LED_PORT ENCODE_PORT(PORT_B, 7)`

Variables

- `keepAliveLed * p_global_ASW_keepAliveLed`

4.25.1 Detailed Description

Class `keepAliveLed` header file.

Date

17 mars 2018

Author

nicls67

4.25.2 Macro Definition Documentation

4.25.2.1 LED_PORT

```
#define LED_PORT ENCODE_PORT(PORT_B, 7)
```

LED is connected to port PB7

Definition at line 16 of file `keepAliveLed.h`.

4.25.2.2 PERIOD_MS_TASK_LED

```
#define PERIOD_MS_TASK_LED SW_PERIOD_MS
```

Period for led blinking

Definition at line 15 of file `keepAliveLed.h`.

4.25.3 Variable Documentation

4.25.3.1 p_global_ASW_keepAliveLed

`keepAliveLed* p_global_ASW_keepAliveLed`

Pointer to `keepAliveLed` object


Definition at line 20 of file `keepAliveLed.cpp`.

4.26 LCD.cpp File Reference

`LCD` class source file.

```
#include <util/delay.h>
#include <avr/io.h>
#include "../I2C/I2C.h"
#include "LCD.h"
```

Include dependency graph for `LCD.cpp`:

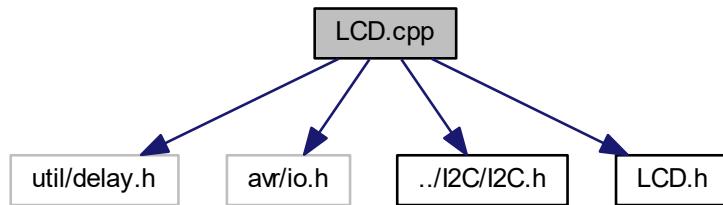

Variables

- `LCD * p_global_BSW_lcd`

4.26.1 Detailed Description

`LCD` class source file.

Date

20 avr. 2019

Author

nicls67

4.26.2 Variable Documentation

4.26.2.1 p_global_BSW_lcd

`LCD* p_global_BSW_lcd`


Pointer to `LCD` driver object

Definition at line 16 of file LCD.cpp.

4.27 LCD.h File Reference

`LCD` class header file.

This graph shows which files directly or indirectly include this file:

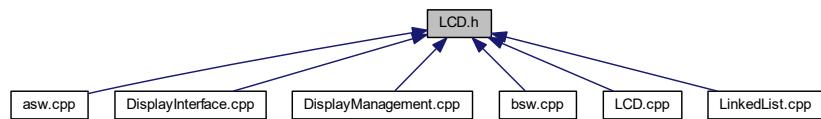

Classes

- struct `T_LCD_conf_struct`
Structure defining `LCD` configuration.
- class `LCD`
Class for `LCD S2004A` display driver.

Macros

- `#define EN_PIN 2`
- `#define RW_PIN 1`
- `#define RS_PIN 0`
- `#define BACKLIGHT_PIN 3`
- `#define LCD_INST_CLR_DISPLAY_BIT 0`
- `#define LCD_INST_FUNCTION_SET 5`
- `#define LCD_INST_DISPLAY_CTRL 3`
- `#define LCD_INST_ENTRY_MODE_SET 2`
- `#define LCD_INST_SET_DDRAM_ADDR 7`
- `#define LCD_FCT_SET_FIELD_DL 4`
- `#define LCD_FCT_SET_FIELD_N 3`
- `#define LCD_FCT_SET_FIELD_F 2`
- `#define LCD_DISPLAY_CTRL_FIELD_D 2`

- `#define LCD_DISPLAY_CTRL_FIELD_C 1`
- `#define LCD_DISPLAY_CTRL_FIELD_B 0`
- `#define LCD_CNF_SHIFT_ID 1`
- `#define LCD_CNF_SHIFT_SH 0`
- `#define LCD_CNF_ONE_LINE 0`
- `#define LCD_CNF_TWO_LINE 1`
- `#define LCD_CNF_FONT_5_8 0`
- `#define LCD_CNF_FONT_5_11 1`
- `#define LCD_CNF_DISPLAY_ON 1`
- `#define LCD_CNF_DISPLAY_OFF 0`
- `#define LCD_CNF_CURSOR_ON 1`
- `#define LCD_CNF_CURSOR_OFF 0`
- `#define LCD_CNF_CURSOR_BLINK_ON 1`
- `#define LCD_CNF_CURSOR_BLINK_OFF 0`
- `#define LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT 1`
- `#define LCD_CNF_ENTRY_MODE_DIRECTION_LEFT 0`
- `#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON 1`
- `#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF 0`
- `#define LCD_CNF_BACKLIGHT_ON 1`
- `#define LCD_CNF_BACKLIGHT_OFF 0`
- `#define LCD_RAM_1_LINE_MIN 0`
- `#define LCD_RAM_1_LINE_MAX 0x4F`
- `#define LCD_RAM_2_LINES_MIN_1 0`
- `#define LCD_RAM_2_LINES_MAX_1 0x27`
- `#define LCD_RAM_2_LINES_MIN_2 0x40`
- `#define LCD_RAM_2_LINES_MAX_2 0x67`
- `#define LCD_WAIT_CLR_RETURN 1600`
- `#define LCD_WAIT_OTHER_MODES 40`
- `#define LCD_SIZE_NB_CHAR_PER_LINE 20`
- `#define LCD_SIZE_NB_LINES 4`

Enumerations

- enum `T_LCD_command` {
 `LCD_CMD_FUNCTION_SET, LCD_CMD_CLEAR_DISPLAY, LCD_CMD_DISPLAY_CTRL, LCD_CMD_ENTRY_MODE_SET,`
`LCD_CMD_SET_DDRAM_ADDR }`

LCD commands enumeration.
- enum `T_LCD_config_mode` { `LCD_MODE_INSTRUCTION = 0, LCD_MODE_DATA = 1` }

LCD modes enumeration.
- enum `T_LCD_ram_area` { `LCD_DATA_DDRAM, LCD_DATA_CGRAM` }

Screen RAM definition.

Variables

- `LCD * p_global_BSW_lcd`

4.27.1 Detailed Description

LCD class header file.

Date

20 avr. 2019

Author

nicls67

4.27.2 Macro Definition Documentation

4.27.2.1 BACKLIGHT_PIN

```
#define BACKLIGHT_PIN 3
```

Backlight pin is on P3

Definition at line 17 of file LCD.h.

4.27.2.2 EN_PIN

```
#define EN_PIN 2
```

EN bit is on P2

Definition at line 14 of file LCD.h.

4.27.2.3 LCD_CNF_BACKLIGHT_OFF

```
#define LCD_CNF_BACKLIGHT_OFF 0
```

Backlight is disabled

Definition at line 70 of file LCD.h.

4.27.2.4 LCD_CNF_BACKLIGHT_ON

```
#define LCD_CNF_BACKLIGHT_ON 1
```

Backlight is enabled

Definition at line 69 of file LCD.h.

4.27.2.5 LCD_CNF_CURSOR_BLINK_OFF

```
#define LCD_CNF_CURSOR_BLINK_OFF 0
```

Cursor blinking is off, bit is set to 0

Definition at line 58 of file LCD.h.

4.27.2.6 LCD_CNF_CURSOR_BLINK_ON

```
#define LCD_CNF_CURSOR_BLINK_ON 1
```

Cursor blinking is on, bit is set to 1

Definition at line 57 of file LCD.h.

4.27.2.7 LCD_CNF_CURSOR_OFF

```
#define LCD_CNF_CURSOR_OFF 0
```

Cursor is off, bit is set to 0

Definition at line 54 of file LCD.h.

4.27.2.8 LCD_CNF_CURSOR_ON

```
#define LCD_CNF_CURSOR_ON 1
```

Cursor is on, bit is set to 1

Definition at line 53 of file LCD.h.

4.27.2.9 LCD_CNF_DISPLAY_OFF

```
#define LCD_CNF_DISPLAY_OFF 0
```

Display is off, bit is set to 0

Definition at line 50 of file LCD.h.

4.27.2.10 LCD_CNF_DISPLAY_ON

```
#define LCD_CNF_DISPLAY_ON 1
```

Display is on, bit is set to 1

Definition at line 49 of file LCD.h.

4.27.2.11 LCD_CNF_ENTRY_MODE_DIRECTION_LEFT

```
#define LCD_CNF_ENTRY_MODE_DIRECTION_LEFT 0
```

Direction of shift is left, bit is set to 0

Definition at line 62 of file LCD.h.

4.27.2.12 LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT

```
#define LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT 1
```

Direction of shift is right, bit is set to 1

Definition at line 61 of file LCD.h.

4.27.2.13 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF

```
#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF 0
```

Display shift is not performed, bit is set to 0

Definition at line 66 of file LCD.h.

4.27.2.14 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON

```
#define LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON 1
```

Display shift is performed, bit is set to 1

Definition at line 65 of file LCD.h.

4.27.2.15 LCD_CNF_FONT_5_11

```
#define LCD_CNF_FONT_5_11 1
```

Two-line configuration, bit is set to 1

Definition at line 46 of file LCD.h.

4.27.2.16 LCD_CNF_FONT_5_8

```
#define LCD_CNF_FONT_5_8 0
```

One-line configuration, bit is set to 0

Definition at line 45 of file LCD.h.

4.27.2.17 LCD_CNF_ONE_LINE

```
#define LCD_CNF_ONE_LINE 0
```

One-line configuration, bit is set to 0

Definition at line 41 of file LCD.h.

4.27.2.18 LCD_CNF_SHIFT_ID

```
#define LCD_CNF_SHIFT_ID 1
```

Field ID (increment or decrement) of command "entry mode set" is on bit DB1

Definition at line 37 of file LCD.h.

4.27.2.19 LCD_CNF_SHIFT_SH

```
#define LCD_CNF_SHIFT_SH 0
```

Field SH (shift of display) of command "entry mode set" is on bit DB1

Definition at line 38 of file LCD.h.

4.27.2.20 LCD_CNF_TWO_LINE

```
#define LCD_CNF_TWO_LINE 1
```

Two-line configuration, bit is set to 1

Definition at line 42 of file LCD.h.

4.27.2.21 LCD_DISPLAY_CTRL_FIELD_B

```
#define LCD_DISPLAY_CTRL_FIELD_B 0
```

Field B (cursor blink) of command "display control" is on bit DB0

Definition at line 34 of file LCD.h.

4.27.2.22 LCD_DISPLAY_CTRL_FIELD_C

```
#define LCD_DISPLAY_CTRL_FIELD_C 1
```

Field C (cursor on/off) of command "display control" is on bit DB1

Definition at line 33 of file LCD.h.

4.27.2.23 LCD_DISPLAY_CTRL_FIELD_D

```
#define LCD_DISPLAY_CTRL_FIELD_D 2
```

Field D (display on/off) of command "display control" is on bit DB2

Definition at line 32 of file LCD.h.

4.27.2.24 LCD_FCT_SET_FIELD_DL

```
#define LCD_FCT_SET_FIELD_DL 4
```

Field DL (data length) of command "function set" is on bit DB4

Definition at line 27 of file LCD.h.

4.27.2.25 LCD_FCT_SET_FIELD_F

```
#define LCD_FCT_SET_FIELD_F 2
```

Field F (font type) of command "function set" is on bit DB2

Definition at line 29 of file LCD.h.

4.27.2.26 LCD_FCT_SET_FIELD_N

```
#define LCD_FCT_SET_FIELD_N 3
```

Field N (number of lines) of command "function set" is on bit DB3

Definition at line 28 of file LCD.h.

4.27.2.27 LCD_INST_CLR_DISPLAY_BIT

```
#define LCD_INST_CLR_DISPLAY_BIT 0
```

Instruction bit for "clear display" is DB0

Definition at line 20 of file LCD.h.

4.27.2.28 LCD_INST_DISPLAY_CTRL

```
#define LCD_INST_DISPLAY_CTRL 3
```

Instruction bit for "display control" is DB3

Definition at line 22 of file LCD.h.

4.27.2.29 LCD_INST_ENTRY_MODE_SET

```
#define LCD_INST_ENTRY_MODE_SET 2
```

Instruction bit for "entry mode" is DB2

Definition at line 23 of file LCD.h.

4.27.2.30 LCD_INST_FUNCTION_SET

```
#define LCD_INST_FUNCTION_SET 5
```

Instruction bit for "function set" is DB5

Definition at line 21 of file LCD.h.

4.27.2.31 LCD_INST_SET_DDRAM_ADDR

```
#define LCD_INST_SET_DDRAM_ADDR 7
```

Instruction bit for "set DDRAM address" is DB7

Definition at line 24 of file LCD.h.

4.27.2.32 LCD_RAM_1_LINE_MAX

```
#define LCD_RAM_1_LINE_MAX 0x4F
```

Maximum address value in 1-line mode

Definition at line 74 of file LCD.h.

4.27.2.33 LCD_RAM_1_LINE_MIN

```
#define LCD_RAM_1_LINE_MIN 0
```

Minimum address value in 1-line mode

Definition at line 73 of file LCD.h.

4.27.2.34 LCD_RAM_2_LINES_MAX_1

```
#define LCD_RAM_2_LINES_MAX_1 0x27
```

Maximum address value in 2-lines mode for line 1

Definition at line 76 of file LCD.h.

4.27.2.35 LCD_RAM_2_LINES_MAX_2

```
#define LCD_RAM_2_LINES_MAX_2 0x67
```

Maximum address value in 2-lines mode for line 2

Definition at line 78 of file LCD.h.

4.27.2.36 LCD_RAM_2_LINES_MIN_1

```
#define LCD_RAM_2_LINES_MIN_1 0
```

Minimum address value in 2-lines mode for line 1

Definition at line 75 of file LCD.h.

4.27.2.37 LCD_RAM_2_LINES_MIN_2

```
#define LCD_RAM_2_LINES_MIN_2 0x40
```

Minimum address value in 2-lines mode for line 2

Definition at line 77 of file LCD.h.

4.27.2.38 LCD_SIZE_NB_CHAR_PER_LINE

```
#define LCD_SIZE_NB_CHAR_PER_LINE 20
```

LCD screen has 20 characters per line

Definition at line 85 of file LCD.h.

4.27.2.39 LCD_SIZE_NB_LINES

```
#define LCD_SIZE_NB_LINES 4
```

LCD screen has 4 lines

Definition at line 86 of file LCD.h.

4.27.2.40 LCD_WAIT_CLR_RETURN

```
#define LCD_WAIT_CLR_RETURN 1600
```

Waiting time after clear display and return home operations is at least 1520 us

Definition at line 81 of file LCD.h.

4.27.2.41 LCD_WAIT_OTHER_MODES

```
#define LCD_WAIT_OTHER_MODES 40
```

Waiting time after all other modes is at least 38 us

Definition at line 82 of file LCD.h.

4.27.2.42 RS_PIN

```
#define RS_PIN 0
```

RS pin is on P0

Definition at line 16 of file LCD.h.

4.27.2.43 RW_PIN

```
#define RW_PIN 1
```

RW pin is on P1

Definition at line 15 of file LCD.h.

4.27.3 Enumeration Type Documentation

4.27.3.1 T_LCD_command

```
enum T_LCD_command
```

LCD commands enumeration.

This enumeration defines all command modes available for [LCD](#) configuration

Enumerator

| | |
|-----------------------|--|
| LCD_CMDFUNCTION_SET | |
| LCD_CMDCLEAR_DISPLAY | |
| LCD_CMDDISPLAY_CTRL | |
| LCD_CMDENTRY_MODE_SET | |
| LCD_CMDSET_DDRAM_ADDR | |

Definition at line 93 of file LCD.h.

4.27.3.2 T_LCD_config_mode

enum [T_LCD_config_mode](#)

LCD modes enumeration.

This enumeration defines the possible modes for communication with [LCD](#). Two modes are possible, DATA for writing data in RAM and INSTRUCTION for configuring the display

Enumerator

| | |
|---------------------|--|
| LCD_MODEINSTRUCTION | |
| LCD_MODEDATA | |

Definition at line 107 of file LCD.h.

4.27.3.3 T_LCD_ram_area

enum [T_LCD_ram_area](#)

Screen RAM definition.

This enumeration defines the RAM areas of the [LCD](#) screen : DDRAM for display, CGRAM for characters generation

Enumerator

| | |
|----------------|--|
| LCD_DATA_DDRAM | |
| LCD_DATA_CGRAM | |

Definition at line 118 of file LCD.h.

4.27.4 Variable Documentation

4.27.4.1 p_global_BSW_lcd

`LCD* p_global_BSW_lcd`


Pointer to `LCD` driver object

Definition at line 16 of file LCD.cpp.

4.28 LinkedList.cpp File Reference

```
#include <stdlib.h>
#include <avr/io.h>
#include "../string/String.h"
#include "../operators/operators.h"
#include "../../bsw/usart/usart.h"
#include "../../bsw/timer/timer.h"
#include "../../bsw/I2C/I2C.h"
#include "../../bsw/lcd/LCD.h"
#include "../../bsw/dio/dio.h"
#include "../../bsw/dht22/dht22.h"
#include "../../bsw/cpuLoad/CpuLoad.h"
#include "../../bsw-bsw.h"
#include "../../asw/TempSensor/TempSensor.h"
#include "../../asw/debug_ift/DebugInterface.h"
#include "../../asw/debug_mgt/DebugManagement.h"
#include "../../asw/display_ift/DisplayInterface.h"
#include "../../asw/keepAliveLed/keepAliveLed.h"
#include "../../asw/display_mgt/DisplayManagement.h"
#include "../../asw/asw.h"
#include "LinkedList.h"
```


Include dependency graph for `LinkedList.cpp`:



4.29 LinkedList.h File Reference

Linked List library header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [LinkedList](#)
Linked list class.
- struct [LinkedList::T_LL_element](#)
Type defining a linked list element.

TypeDefs

- typedef [bool\(* CompareFctPtr_t\)](#) (`void *LLElement, void *CompareElement`)

4.29.1 Detailed Description

Linked List library header file.

Date

27 avr. 2019

Author

nicls67

4.29.2 Typedef Documentation

4.29.2.1 CompareFctPtr_t

```
typedef bool(* CompareFctPtr_t) (void *LLElement, void *CompareElement)
```

Type defining a pointer to the comparison function


Definition at line 14 of file `LinkedList.h`.

4.30 main.cpp File Reference

Background task file.

```
#include <stdlib.h>
#include <avr/io.h>
#include <util/delay.h>
#include <avr/interrupt.h>
#include "lib/LinkedList/LinkedList.h"
#include "bsw/dio/dio.h"
#include "bsw/bsw.h"
#include "scheduler/scheduler.h"
#include "asw/asw.h"
#include "main.h"
```

Include dependency graph for `main.cpp`:

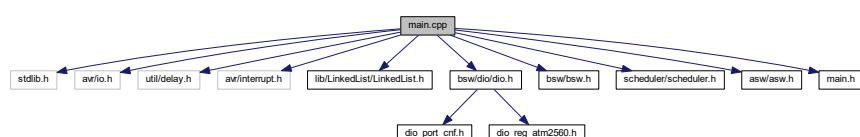

Macros

- `#define DEBUG_ACTIVE_PORT ENCODE_PORT(PORT_B, 4)`

Functions

- `int main (void)`
Background task of program.

Variables

- `bool isDebugModeActivated`
- `const T_ASW_init_cnf ASW_init_cnf`

4.30.1 Detailed Description

Background task file.

Date

12 mars 2018

Author

nicls67

4.30.2 Macro Definition Documentation

4.30.2.1 DEBUG_ACTIVE_PORT

```
#define DEBUG_ACTIVE_PORT ENCODE_PORT(PORT_B, 4)
```

Debug activation pin is port PB6

Definition at line 26 of file main.cpp.

4.30.3 Function Documentation

4.30.3.1 main()


```
int main (
    void )
```

Background task of program.

This function initializes all the software and then goes into an infinite loop. Periodic interrupt will wake up the software to perform application

Definition at line 46 of file main.cpp.

Here is the call graph for this function:

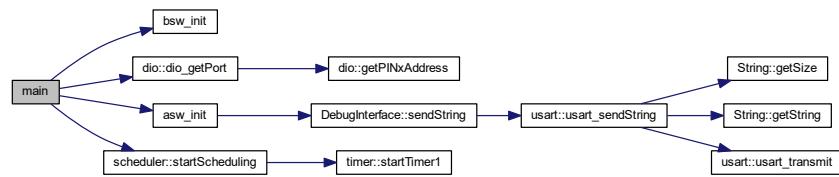

4.30.4 Variable Documentation

4.30.4.1 ASW_init_cnf

```
const T_ASW_init_cnf ASW_init_cnf
```

Initial value:

```
=
{
    true,
    true,
    true,
    true,
    true
}
```

Definition of needed ASW services

Definition at line 30 of file main.cpp.

4.30.4.2 isDebugEnabled

```
bool isDebugEnabled
```


Flag indicating if the debug mode is activated or not

Definition at line 28 of file main.cpp.

4.31 main.h File Reference

Background task header file.

This graph shows which files directly or indirectly include this file:

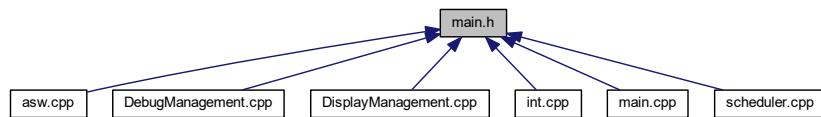

Variables

- bool `isDebugModeActivated`
- const `T_ASW_init_cnf ASW_init_cnf`

4.31.1 Detailed Description

Background task header file.

Date

17 mars 2018

Author

nicls67

4.31.2 Variable Documentation

4.31.2.1 ASW_init_cnf

```
const T_ASW_init_cnf ASW_init_cnf
```

Definition of needed ASW services

Definition at line 30 of file main.cpp.

4.31.2.2 isDebugEnabledActivated

```
bool isDebugEnabledActivated
```

Flag indicating if the debug mode is activated or not


Definition at line 28 of file main.cpp.

4.32 operators.cpp File Reference

c++ operators definitions

```
#include <stdlib.h>
#include "operators.h"
```

Include dependency graph for operators.cpp:

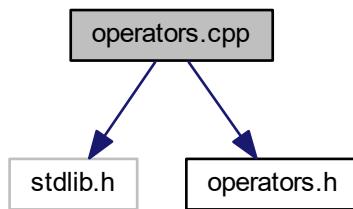

Functions

- void * [operator new](#) (size_t a_size)
Operator new.
- void [operator delete](#) (void *ptr)
Operator delete.

4.32.1 Detailed Description

c++ operators definitions

Date

14 mars 2018

Author

nicls67

4.32.2 Function Documentation

4.32.2.1 operator delete()

```
void operator delete (
    void * ptr )
```

Operator delete.

Equivalent to free function in C Free the memory zone at address ptr

Parameters

| | | |
|----|------------|---|
| in | <i>ptr</i> | Pointer to the start of memory zone to free |
|----|------------|---|

Returns

Nothing

Definition at line 18 of file operators.cpp.

4.32.2.2 operator new()

```
void* operator new (
    size_t a_size )
```

Operator new.

Equivalent to malloc function in C Allocates a memory zone of size a_size

Parameters

| | | |
|----|---------------|-------------------------|
| in | <i>a_size</i> | memory size to allocate |
|----|---------------|-------------------------|

Returns


Pointer to the start of allocated memory zone

Definition at line 13 of file operators.cpp.

4.33 operators.h File Reference

C++ operators definitions header file

This graph shows which files directly or indirectly include this file:

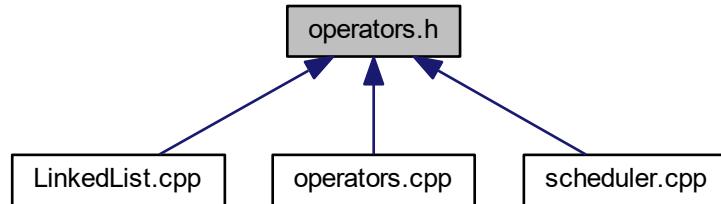

Functions

- `void * operator new (size_t a_size)`
Operator new.
- `void operator delete (void *ptr)`
Operator delete.

4.33.1 Detailed Description

c++ operators definitions header file

Date

14 mars 2018

Author

nicls67

4.33.2 Function Documentation

4.33.2.1 operator delete()

```
void operator delete (
    void * ptr )
```

Operator delete.

Equivalent to free function in C Free the memory zone at address ptr

Parameters

| | | |
|----|------------|---|
| in | <i>ptr</i> | Pointer to the start of memory zone to free |
|----|------------|---|

Returns

Nothing

Definition at line 18 of file operators.cpp.

4.33.2.2 operator new()

```
void* operator new (
    size_t a_size )
```

Operator new.

Equivalent to malloc function in C Allocates a memory zone of size a_size

Parameters

| | | |
|----|---------------|-------------------------|
| in | <i>a_size</i> | memory size to allocate |
|----|---------------|-------------------------|

Returns

Pointer to the start of allocated memory zone


Definition at line 13 of file operators.cpp.

4.34 scheduler.cpp File Reference

Defines scheduler class.

```
#include <stdlib.h>
#include <avr/io.h>
#include "../lib/LinkedList/LinkedList.h"
#include "../lib/operators/operators.h"
#include "../bsw/timer/timer.h"
#include "../bsw/cpuLoad/CpuLoad.h"
#include "../asw/asw.h"
#include "scheduler.h"
#include "../main.h"
```

Include dependency graph for scheduler.cpp:



Variables

- `scheduler * p_global_scheduler`

4.34.1 Detailed Description

Defines scheduler class.

Date

16 mars 2018

Author

nicls67

4.34.2 Variable Documentation

4.34.2.1 `p_global_scheduler`

`scheduler* p_global_scheduler`


Pointer to scheduler object

Definition at line 26 of file scheduler.cpp.

4.35 scheduler.h File Reference

Scheduler class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class `scheduler`
Scheduler class.
- struct `scheduler::Task_t`
Type defining a task structure.

Macros

- `#define SW_PERIOD_MS 500`
- `#define PRESCALER_PERIODIC_TIMER 256`
- `#define TIMER_CTC_VALUE ((F_CPU/PRESCALER_PERIODIC_TIMER)/(1000/SW_PERIOD_MS))`

Typedefs

- `typedef void(* TaskPtr_t) (void)`
Type defining a pointer to function.

Variables

- `scheduler * p_global_scheduler`

4.35.1 Detailed Description

Scheduler class header file.

Date

16 mars 2018

Author

nicls67

4.35.2 Macro Definition Documentation

4.35.2.1 PRESCALER_PERIODIC_TIMER

```
#define PRESCALER_PERIODIC_TIMER 256
```

Value of prescaler to use for periodic timer

Definition at line 16 of file scheduler.h.

4.35.2.2 SW_PERIOD_MS

```
#define SW_PERIOD_MS 500
```

Software period, used to define periodic timer interrupt

Definition at line 15 of file scheduler.h.

4.35.2.3 TIMER_CTC_VALUE

```
#define TIMER_CTC_VALUE ((F_CPU/PRESCALER_PERIODIC_TIMER)/(1000/SW_PERIOD_MS))
```

Compare value for periodic timer

Definition at line 17 of file scheduler.h.

4.35.3 Typedef Documentation

4.35.3.1 TaskPtr_t

```
typedef void(* TaskPtr_t) (void)
```

Type defining a pointer to function.

Definition at line 22 of file scheduler.h.

4.35.4 Variable Documentation

4.35.4.1 p_global_scheduler

```
scheduler* p_global_scheduler
```


Pointer to scheduler object

Definition at line 26 of file scheduler.cpp.

4.36 String.cpp File Reference

[String](#) class source file.

```
#include <stdlib.h>
#include <avr/io.h>
#include "String.h"
Include dependency graph for String.cpp:
```

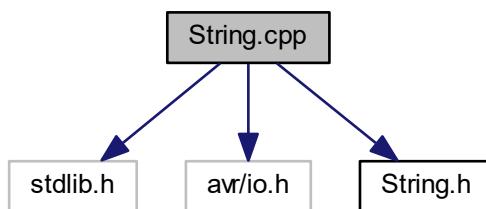

4.36.1 Detailed Description

[String](#) class source file.

Date

2 mai 2019


Author

nicls67

4.37 String.h File Reference

[String](#) class header file.

This graph shows which files directly or indirectly include this file:



Classes

- class [String](#)

String management class.

4.37.1 Detailed Description

[String](#) class header file.

Date

2 mai 2019

Author


nicls67

4.38 TempSensor.cpp File Reference

Defines function of class [TempSensor](#).

```
#include <avr/io.h>
#include "../../lib/LinkedList/LinkedList.h"
#include "../../scheduler/scheduler.h"
#include "../../bsw/dio/dio.h"
#include "../../bsw/dht22/dht22.h"
#include "TempSensor.h"
```

Include dependency graph for TempSensor.cpp:

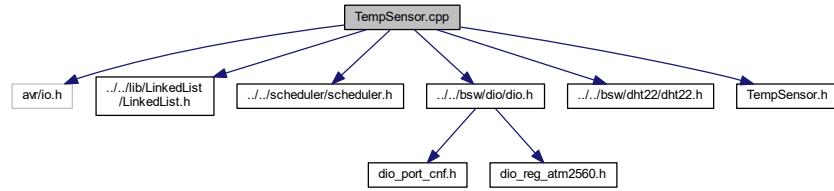

Macros

- [#define PIT_BEFORE_INVALID 60](#)

Variables

- [TempSensor * p_global_ASW_TempSensor](#)

4.38.1 Detailed Description

Defines function of class [TempSensor](#).

Date

23 mars 2018

Author

nicls67

4.38.2 Macro Definition Documentation

4.38.2.1 PIT_BEFORE_INVALID

```
#define PIT_BEFORE_INVALID 60
```

Definition at line 20 of file TempSensor.cpp.

4.38.3 Variable Documentation

4.38.3.1 p_global_ASW_TempSensor

```
TempSensor* p_global_ASW_TempSensor
```


Pointer to [TempSensor](#) object

Definition at line 22 of file TempSensor.cpp.

4.39 TempSensor.h File Reference

Class [TempSensor](#) header file.

This graph shows which files directly or indirectly include this file:

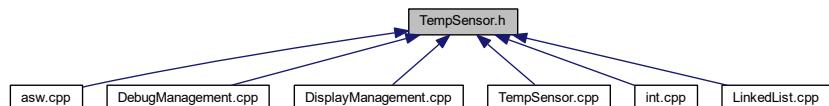

Classes

- class [TempSensor](#)
Class for temperature sensor.

Macros

- #define PERIOD_MS_TASK_TEMP_SENSOR 5000
- #define DHT22_PORT_ENCODE_PORT(PORT_B, 6)

Variables

- [TempSensor * p_global_ASW_TempSensor](#)

4.39.1 Detailed Description

Class [TempSensor](#) header file.

Date

23 mars 2018

Author

nicls67

4.39.2 Macro Definition Documentation

4.39.2.1 DHT22_PORT

```
#define DHT22_PORT ENCODE_PORT(PORT_B, 6)
```

DHT22 is connected to port PB6

Definition at line 15 of file TempSensor.h.

4.39.2.2 PERIOD_MS_TASK_TEMP_SENSOR

```
#define PERIOD_MS_TASK_TEMP_SENSOR 5000
```

Period for reading temperature data

Definition at line 13 of file TempSensor.h.

4.39.3 Variable Documentation

4.39.3.1 p_global_ASW_TempSensor

```
TempSensor* p_global_ASW_TempSensor
```


Pointer to [TempSensor](#) object

Definition at line 22 of file TempSensor.cpp.

4.40 timer.cpp File Reference

Defines function for class timer.

```
#include <avr/io.h>
#include "timer.h"
Include dependency graph for timer.cpp:
```

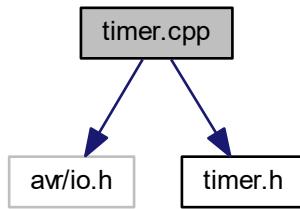

Variables

- `timer * p_global_BSW_timer`

4.40.1 Detailed Description

Defines function for class timer.

Date

15 mars 2018

Author

nicls67

4.40.2 Variable Documentation

4.40.2.1 `p_global_BSW_timer`

`timer* p_global_BSW_timer`


Pointer to timer driver object

Definition at line 13 of file timer.cpp.

4.41 timer.h File Reference

Timer class header file.

This graph shows which files directly or indirectly include this file:

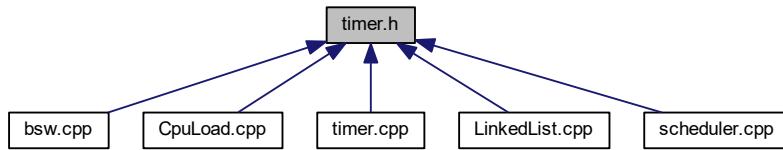

Classes

- class [timer](#)
Class defining a timer.

Variables

- [timer * p_global_BSW_timer](#)

4.41.1 Detailed Description

Timer class header file.

Date

15 mars 2018

Author

nicls67

4.41.2 Variable Documentation

4.41.2.1 [p_global_BSW_timer](#)

[timer](#)* p_global_BSW_timer

Pointer to timer driver object


Definition at line 13 of file [timer.cpp](#).

4.42 usart.cpp File Reference

BSW library for USART.

```
#include <avr/io.h>
#include "../lib/string/String.h"
#include "usart.h"
```

Include dependency graph for usart.cpp:

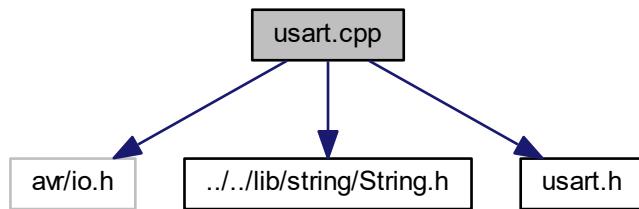

Variables

- `usart * p_global_BSW_usart`

4.42.1 Detailed Description

BSW library for USART.

Date

13 mars 2018

Author

nicls67

4.42.2 Variable Documentation

4.42.2.1 `p_global_BSW_usart`

`usart* p_global_BSW_usart`


Pointer to usart driver object

Definition at line 16 of file usart.cpp.

4.43 usart.h File Reference

Header file for USART library.

This graph shows which files directly or indirectly include this file:

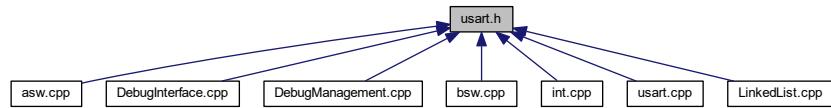

Classes

- class [uart](#)
USART serial bus class.

Variables

- [uart * p_global_BSW_usart](#)

4.43.1 Detailed Description

Header file for USART library.

Date

13 mars 2018

Author

nicls67

4.43.2 Variable Documentation

4.43.2.1 [p_global_BSW_usart](#)

`uart* p_global_BSW_usart`

Pointer to usart driver object

Definition at line 16 of file `usart.cpp`.

Index

~LinkedList
 LinkedList, 79

~String
 String, 95

ASW_init_cnf
 main.cpp, 192
 main.h, 193

addPeriodicTask
 scheduler, 86

alignment
 T_display_data, 104

appendBool
 String, 95

appendChar
 String, 96

appendInteger
 String, 97

appendString
 String, 98

asw.cpp, 133
 asw_init, 134

asw.h, 135
 asw_init, 135

asw_init
 asw.cpp, 134
 asw.h, 135

AttachNewElement
 LinkedList, 80

avg_load
 CpuLoad, 8

BACKLIGHT_PIN
 LCD.h, 179

backlight_en
 T_LCD_conf_struct, 107

backlight_enable
 LCD, 74

BaudRate
 uart, 132

bitrate
 I2C, 58

blinkLed_task
 keepAliveLed, 59

bsw.cpp, 136
 bsw_init, 137

bsw.h, 138
 bsw_init, 138

bsw_init
 bsw.cpp, 137

bsw.h, 138
 bsw_init, 138

bsw.h, 138

Clear
 String, 99

ClearFullScreen
 DisplayInterface, 39

ClearLine
 DisplayInterface, 40

ClearStringInDataStruct
 DisplayInterface, 41

cnfCursorBlink
 LCD, 75

cnfCursorOnOff
 LCD, 75

cnfDisplayOnOff
 LCD, 75

cnfEntryModeDir
 LCD, 75

cnfEntryModeShift
 LCD, 75

cnfFontType
 LCD, 76

cnfI2C_addr
 LCD, 76

cnfLineNumber
 LCD, 76

command
 LCD, 63

CompareFctPtr_t
 LinkedList.h, 190

ComputeCPUload
 CpuLoad, 6

ComputeStringSize
 String, 99

ConfigureBacklight
 LCD, 64

ConfigureCursorBlink
 LCD, 64

ConfigureCursorOnOff
 LCD, 65

ConfigureDisplayOnOff
 LCD, 66

ConfigureEntryModeDir
 LCD, 66

ConfigureEntryModeShift
 LCD, 67

ConfigureFontType
 LCD, 68

ConfigureI2CAddr
 LCD, 68

ConfigureLineNumber
 LCD, 69
 configureTimer1
 timer, 124
 CpuLoad, 5
 avg_load, 8
 ComputeCPUload, 6
 CpuLoad, 6
 current_load, 8
 getAverageCPUload, 7
 getCurrentCPUload, 7
 getMaxCPUload, 7
 last_sum_value, 8
 max_load, 9
 sample_cnt, 9
 sample_idx, 9
 sample_mem, 9
 CpuLoad.cpp, 139
 p_global_BSW_cpupload, 140
 CpuLoad.h, 140
 NB_OF_SAMPLES, 141
 p_global_BSW_cpupload, 141
 curElement_ptr
 LinkedList, 84
 current_load
 CpuLoad, 8
 cursor_en
 T_LCD_conf_struct, 107
 cursorBlink_en
 T_LCD_conf_struct, 107

DATA_ACK
 I2C.h, 170
 DDRA_PTR
 dio_reg_atm2560.h, 157
 DDRB_PTR
 dio_reg_atm2560.h, 157
 DDRC_PTR
 dio_reg_atm2560.h, 157
 DDRD_PTR
 dio_reg_atm2560.h, 157
 DEBUG_ACTIVE_PORT
 main.cpp, 191
 DECODE_PIN
 dio.h, 152
 DECODE_PORT
 dio.h, 153
 DHT22_PORT
 TempSensor.h, 204
 DISPLAY_LINE_SHIFT_PERIOD_MS
 DisplayInterface.h, 161
 DISPLAY_LINE_SHIFT_TEMPO_TIME
 DisplayInterface.h, 161
 DISPLAY_MGT_I2C_BITRATE
 DisplayManagement.h, 165
 DISPLAY_MGT_LCD_I2C_ADDR
 DisplayManagement.h, 165
 DISPLAY_MGT_LINE_HUM
 DisplayManagement.h, 165

DISPLAY_MGT_LINE_TEMP
 DisplayManagement.h, 166
 DISPLAY_MGT_PERIOD_TASK_SENSOR
 DisplayManagement.h, 166
 DISPLAY_MGT_PERIOD_WELCOME_MSG_REMOTE
 VAL
 DisplayManagement.h, 166
 data_ptr
 LinkedList::T_LL_element, 110
 ddram_addr
 LCD, 76
 debug_ift_ptr
 DebugManagement, 23
 debug_state_t
 DebugManagement.h, 147
 DebugInterface, 10
 DebugInterface, 11
 nextLine, 11
 read, 11
 sendBool, 12
 sendChar, 13
 sendInteger, 13
 sendString, 14, 15
 usart_drv_ptr, 16
 DebugInterface.cpp, 142
 p_global_ASW_DebugInterface, 142
 DebugInterface.h, 142
 p_global_ASW_DebugInterface, 143
 USART_BAUDRATE, 143
 DebugManagement, 16
 debug_ift_ptr, 23
 DebugManagement, 18
 DebugModeManagement, 18
 DisplayData, 19
 DisplayPeriodicData_task, 20
 getIftptr, 21
 getInfoStringPtr, 21
 getMenuStringPtr, 22
 info_string_ptr, 23
 menu_state, 23
 menu_string_ptr, 23
 setInfoStringPtr, 22
 tempSensor_ptr, 23
 DebugManagement.cpp, 144
 p_global_ASW_DebugManagement, 144
 str_debug_info_message_empty, 145
 str_debug_info_message_wrong_selection, 145
 str_debug_main_menu, 145
 DebugManagement.h, 146
 debug_state_t, 147
 p_global_ASW_DebugManagement, 147
 PERIOD_MS_TASK_DISPLAY_CPU_LOAD, 147
 PERIOD_MS_TASK_DISPLAY_DEBUG_DATA,
 147
 DebugModeManagement
 DebugManagement, 18
 dht22, 24
 dht22, 25

dht22_port, 27
dio_ptr, 27
initializeCommunication, 25
read, 26
dht22.cpp, 148
 MAX_WAIT_TIME_US, 148
 p_global_BSW_dht22, 149
dht22.h, 149
 p_global_BSW_dht22, 150
dht22_port
 dht22, 27
dio, 28
 dio, 29
 dio_changePortPinCnf, 29
 dio_getPort, 30
 dio_getPort_fast, 31
 dio_invertPort, 31
 dio_memorizePINaddress, 32
 dio_setPort, 33
 getDDRxAddress, 34
 getPINxAddress, 35
 getPORTxAddress, 35
 PINx_addr_mem, 36
 PINx_idx_mem, 36
 ports_init, 36
dio.cpp, 150
 p_global_BSW_dio, 151
dio.h, 151
 DECODE_PIN, 152
 DECODE_PORT, 153
 ENCODE_PORT, 153
 p_global_BSW_dio, 154
 PORT_CNF_IN, 153
 PORT_CNF_OUT, 153
dio_changePortPinCnf
 dio, 29
dio_getPort
 dio, 30
dio_getPort_fast
 dio, 31
dio_invertPort
 dio, 31
dio_memorizePINaddress
 dio, 32
dio_port_cnf.h, 154
 PORT_A, 155
 PORT_B, 155
 PORT_C, 155
 PORT_D, 155
 PORTB_CNF_DDRB, 155
 PORTB_CNF_PORTB, 156
dio_ptr
 dht22, 27
dio_reg_atm2560.h, 156
 DDRA_PTR, 157
 DDRB_PTR, 157
 DDRC_PTR, 157
 DDRD_PTR, 157
PINA_PTR, 158
PINB_PTR, 158
PINC_PTR, 158
PIND_PTR, 158
PORTA_PTR, 158
PORTB_PTR, 159
PORTC_PTR, 159
PORTD_PTR, 159
dio_setPort
 dio, 33
display_data
 DisplayInterface, 48
display_en
 T_LCD_conf_struct, 108
display_str
 T_display_data, 104
DisplayData
 DebugManagement, 19
DisplayFullLine
 DisplayInterface, 42
DisplayInterface, 37
 ClearFullScreen, 39
 ClearLine, 40
 ClearStringInDataStruct, 41
 display_data, 48
 DisplayFullLine, 42
 DisplayInterface, 39
 dummy, 48
 FindFirstCharAddr, 42
 getDisplayDataPtr, 43
 IsLineEmpty, 44
 isShiftInProgress, 48
 p_lcd, 48
 RefreshLine, 44
 setLineAlignment, 45
 setLineAlignmentAndRefresh, 46
 shiftLine_task, 46
 updateLineAndRefresh, 47
DisplayInterface.cpp, 159
 p_global_ASW_DisplayInterface, 160
DisplayInterface.h, 160
 DISPLAY_LINE_SHIFT_PERIOD_MS, 161
 DISPLAY_LINE_SHIFT_TEMPO_TIME, 161
 p_global_ASW_DisplayInterface, 163
 T_DisplayInterface_LineAlignment, 162
 T_DisplayInterface_LineDisplayMode, 162
DisplayManagement, 49
 DisplayManagement, 50
 DisplaySensorData_Task, 51
 GetIftPointer, 52
 GetTempSensorPtr, 52
 p_display_ift, 54
 p_tempSensor, 54
 RemoveWelcomeMessage_Task, 53
DisplayManagement.cpp, 163
 p_global_ASW_DisplayManagement, 164
DisplayManagement.h, 164
 DISPLAY_MGT_I2C_BITRATE, 165

DISPLAY_MGT_LCD_I2C_ADDR, 165
 DISPLAY_MGT_LINE_HUM, 165
 DISPLAY_MGT_LINE_TEMP, 166
 DISPLAY_MGT_PERIOD_TASK_SENSOR, 166
 DISPLAY_MGT_PERIOD_WELCOME_MSG_R←
 EMOVAL, 166
 humidityDisplayString, 166
 LCD_init_cnf, 166
 noSensorDisplayString, 167
 p_global_ASW_DisplayManagement, 167
 tempDisplayString, 167
 welcomeMessageString, 167
 DisplayPeriodicData_task
 DebugManagement, 20
 DisplaySensorData_Task
 DisplayManagement, 51
 dummy
 DisplayInterface, 48

 EN_PIN
 LCD.h, 179
 ENCODE_PORT
 dio.h, 153
 entryModeDir
 T_LCD_conf_struct, 108
 entryModeShift
 T_LCD_conf_struct, 108

 FindElement
 LinkedList, 80
 FindFirstCharAddr
 DisplayInterface, 42
 firstElement
 LinkedList, 84
 fontType_cnf
 T_LCD_conf_struct, 108

 getAverageCPUload
 CpuLoad, 7
 getCurrentElement
 LinkedList, 81
 getCurrentCPUload
 CpuLoad, 7
 GetDDRAMAddress
 LCD, 70
 getDDRxAddress
 dio, 34
 getDisplayDataPtr
 DisplayInterface, 43
 GetHumDecimal
 TempSensor, 113
 GetHumInteger
 TempSensor, 114
 getHumPtr
 TempSensor, 114
 getHumidity
 TempSensor, 113
 GetIftPointer
 DisplayManagement, 52

 getIftPtr
 DebugManagement, 21
 getInfoStringPtr
 DebugManagement, 21
 GetLineNumberCnf
 LCD, 70
 getMaxCPUload
 CpuLoad, 7
 getMenuStringPtr
 DebugManagement, 22
 getPINxAddress
 dio, 35
 getPORTxAddress
 dio, 35
 getPitNumber
 scheduler, 87
 getSize
 String, 100
 getString
 String, 100
 getTaskCount
 scheduler, 87
 getTaskPeriod
 TempSensor, 115
 getTemp
 TempSensor, 115
 GetTempDecimal
 TempSensor, 116
 GetTempInteger
 TempSensor, 116
 getTempPtr
 TempSensor, 117
 GetTempSensorPtr
 DisplayManagement, 52
 getTimer1Value
 timer, 125
 GetValidity
 TempSensor, 117

 humidityDisplayString
 DisplayManagement.h, 166

 I2C.cpp, 168
 p_global_BSW_i2c, 168
 I2C.h, 169
 DATA_ACK, 170
 p_global_BSW_i2c, 170
 SLA_ACK, 170
 START, 170
 I2C, 54
 bitrate, 58
 I2C, 55
 initializeBus, 56
 setBitRate, 56
 setTxAddress, 57
 tx_address, 58
 writeByte, 57
 i2c_addr
 T_LCD_conf_struct, 108

i2c_bitrate
 T_LCD_conf_struct, 109

i2c_drv_ptr
 LCD, 76

ISR
 int.cpp, 171, 172

info_string_ptr
 DebugManagement, 23

initializeBus
 I2C, 56

initializeCommunication
 dht22, 25

InitializeScreen
 LCD, 70

int.cpp, 171
 ISR, 171, 172

isDebugActivated
 T_ASW_init_cnf, 102

isDebugModeActivated
 main.cpp, 192
 main.h, 193

isDisplayActivated
 T_ASW_init_cnf, 102

isEmpty
 T_display_data, 104

isLEDActivated
 T_ASW_init_cnf, 102

IsLLEmpty
 LinkedList, 81

IsLineEmpty
 DisplayInterface, 44

isShiftInProgress
 DisplayInterface, 48

isTempSensorActivated
 T_ASW_init_cnf, 103

keepAliveLed, 58
 blinkLed_task, 59
 keepAliveLed, 59

keepAliveLed.cpp, 173
 p_global_ASW_keepAliveLed, 174

keepAliveLed.h, 174
 LED_PORT, 175
 p_global_ASW_keepAliveLed, 175
 PERIOD_MS_TASK_LED, 175

LCD.cpp, 176
 p_global_BSW_lcd, 177

LCD.h, 177
 BACKLIGHT_PIN, 179
 EN_PIN, 179
 LCD_CNF_BACKLIGHT_OFF, 179
 LCD_CNF_BACKLIGHT_ON, 179
 LCD_CNF_CURSOR_BLINK_OFF, 180
 LCD_CNF_CURSOR_BLINK_ON, 180
 LCD_CNF_CURSOR_OFF, 180
 LCD_CNF_CURSOR_ON, 180
 LCD_CNF_DISPLAY_OFF, 180
 LCD_CNF_DISPLAY_ON, 181

LCD_CNF_ENTRY_MODE_DIRECTION_LEFT,
 181

LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT,
 181

LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_↔
 OFF, 181

LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_↔
 ON, 181

LCD_CNF_FONT_5_11, 182

LCD_CNF_FONT_5_8, 182

LCD_CNF_ONE_LINE, 182

LCD_CNF_SHIFT_ID, 182

LCD_CNF_SHIFT_SH, 182

LCD_CNF_TWO_LINE, 183

LCD_DISPLAY_CTRL_FIELD_B, 183

LCD_DISPLAY_CTRL_FIELD_C, 183

LCD_DISPLAY_CTRL_FIELD_D, 183

LCD_FCT_SET_FIELD_DL, 183

LCD_FCT_SET_FIELD_F, 184

LCD_FCT_SET_FIELD_N, 184

LCD_INST_CLR_DISPLAY_BIT, 184

LCD_INST_DISPLAY_CTRL, 184

LCD_INST_ENTRY_MODE_SET, 184

LCD_INST_FUNCTION_SET, 185

LCD_INST_SET_DDRAM_ADDR, 185

LCD_RAM_1_LINE_MAX, 185

LCD_RAM_1_LINE_MIN, 185

LCD_RAM_2_LINES_MAX_1, 185

LCD_RAM_2_LINES_MAX_2, 186

LCD_RAM_2_LINES_MIN_1, 186

LCD_RAM_2_LINES_MIN_2, 186

LCD_SIZE_NB_CHAR_PER_LINE, 186

LCD_SIZE_NB_LINES, 186

LCD_WAIT_CLR_RETURN, 187

LCD_WAIT_OTHER_MODES, 187

p_global_BSW_lcd, 188

RS_PIN, 187

RW_PIN, 187

T_LCD_command, 187

T_LCD_config_mode, 188

T_LCD_ram_area, 188

LCD_CNF_BACKLIGHT_OFF
 LCD.h, 179

LCD_CNF_BACKLIGHT_ON
 LCD.h, 179

LCD_CNF_CURSOR_BLINK_OFF
 LCD.h, 180

LCD_CNF_CURSOR_BLINK_ON
 LCD.h, 180

LCD_CNF_CURSOR_OFF
 LCD.h, 180

LCD_CNF_CURSOR_ON
 LCD.h, 180

LCD_CNF_DISPLAY_OFF
 LCD.h, 180

LCD_CNF_DISPLAY_ON
 LCD.h, 181

LCD_CNF_ENTRY_MODE_DIRECTION_LEFT

LCD.h, 181
 LCD_CNF_ENTRY_MODE_DIRECTION_RIGHT
 LCD.h, 181
 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_OFF
 LCD.h, 181
 LCD_CNF_ENTRY_MODE_DISPLAY_SHIFT_ON
 LCD.h, 181
 LCD_CNF_FONT_5_11
 LCD.h, 182
 LCD_CNF_FONT_5_8
 LCD.h, 182
 LCD_CNF_ONE_LINE
 LCD.h, 182
 LCD_CNF_SHIFT_ID
 LCD.h, 182
 LCD_CNF_SHIFT_SH
 LCD.h, 182
 LCD_CNF_TWO_LINE
 LCD.h, 183
 LCD_DISPLAY_CTRL_FIELD_B
 LCD.h, 183
 LCD_DISPLAY_CTRL_FIELD_C
 LCD.h, 183
 LCD_DISPLAY_CTRL_FIELD_D
 LCD.h, 183
 LCD_FCT_SET_FIELD_DL
 LCD.h, 183
 LCD_FCT_SET_FIELD_F
 LCD.h, 184
 LCD_FCT_SET_FIELD_N
 LCD.h, 184
 LCD_INST_CLR_DISPLAY_BIT
 LCD.h, 184
 LCD_INST_DISPLAY_CTRL
 LCD.h, 184
 LCD_INST_ENTRY_MODE_SET
 LCD.h, 184
 LCD_INST_FUNCTION_SET
 LCD.h, 185
 LCD_INST_SET_DDRAM_ADDR
 LCD.h, 185
 LCD_RAM_1_LINE_MAX
 LCD.h, 185
 LCD_RAM_1_LINE_MIN
 LCD.h, 185
 LCD_RAM_2_LINES_MAX_1
 LCD.h, 185
 LCD_RAM_2_LINES_MAX_2
 LCD.h, 186
 LCD_RAM_2_LINES_MIN_1
 LCD.h, 186
 LCD_RAM_2_LINES_MIN_2
 LCD.h, 186
 LCD_SIZE_NB_CHAR_PER_LINE
 LCD.h, 186
 LCD_SIZE_NB_LINES
 LCD.h, 186
 LCD_WAIT_CLR_RETURN

LCD.h, 187
 LCD_WAIT_OTHER_MODES
 LCD.h, 187
 LCD_init_cnf
 DisplayManagement.h, 166
 LCD, 60
 backlight_enable, 74
 cnfCursorBlink, 75
 cnfCursorOnOff, 75
 cnfDisplayOnOff, 75
 cnfEntryModeDir, 75
 cnfEntryModeShift, 75
 cnfFontType, 76
 cnfI2C_addr, 76
 cnfLineNumber, 76
 command, 63
 ConfigureBacklight, 64
 ConfigureCursorBlink, 64
 ConfigureCursorOnOff, 65
 ConfigureDisplayOnOff, 66
 ConfigureEntryModeDir, 66
 ConfigureEntryModeShift, 67
 ConfigureFontType, 68
 ConfigureI2CAddr, 68
 ConfigureLineNumber, 69
 ddram_addr, 76
 GetDDRAMAddress, 70
 GetLineNumberCnf, 70
 i2c_drv_ptr, 76
 InitializeScreen, 70
 LCD, 62
 SetDDRAMAddress, 71
 write, 72
 write4bits, 73
 WriteInRam, 74

LED_PORT
 keepAliveLed.h, 175

LL_ElementCompare
 scheduler, 88

last_sum_value
 CpuLoad, 8

launchPeriodicTasks
 scheduler, 88

lineNumber_cnf
 T_LCD_conf_struct, 109

LinkedList, 77
 ~LinkedList, 79
 AttachNewElement, 80
 curElement_ptr, 84
 FindElement, 80
 firstElement, 84
 getCurrentElement, 81
 IsLLEmpty, 81
 LinkedList, 79
 MoveToNextElement, 82
 RemoveElement, 82
 ResetElementPtr, 83
 T_LL_element, 78

LinkedList.cpp, 189
LinkedList.h, 189
 CompareFctPtr_t, 190
LinkedList::T_LL_element, 109
 data_ptr, 110
 nextElement, 110

MAX_WAIT_TIME_US
 dht22.cpp, 148

main
 main.cpp, 191

main.cpp, 190
 ASW_init_cnf, 192
 DEBUG_ACTIVE_PORT, 191
 isDebugModeActivated, 192
 main, 191

main.h, 193
 ASW_init_cnf, 193
 isDebugModeActivated, 193

max_load
 CpuLoad, 9

menu_state
 DebugManagement, 23

menu_string_ptr
 DebugManagement, 23

mode
 T_display_data, 104

MoveToNextElement
 LinkedList, 82

NB_OF_SAMPLES
 CpuLoad.h, 141

nextElement
 LinkedList::T_LL_element, 110

nextLine
 DebugInterface, 11

noSensorDisplayString
 DisplayManagement.h, 167

operator delete
 operators.cpp, 195
 operators.h, 196

operator new
 operators.cpp, 195
 operators.h, 197

operators.cpp, 194
 operator delete, 195
 operator new, 195

operators.h, 195
 operator delete, 196
 operator new, 197

p_display_ift
 DisplayManagement, 54

p_global_ASW_DebugInterface
 DebugInterface.cpp, 142
 DebugInterface.h, 143

p_global_ASW_DebugManagement
 DebugManagement.cpp, 144

 DebugManagement.h, 147

p_global_ASW_DisplayInterface
 DisplayInterface.cpp, 160
 DisplayInterface.h, 163

p_global_ASW_DisplayManagement
 DisplayManagement.cpp, 164
 DisplayManagement.h, 167

p_global_ASW_TempSensor
 TempSensor.cpp, 203
 TempSensor.h, 204

p_global_ASW_keepAliveLed
 keepAliveLed.cpp, 174
 keepAliveLed.h, 175

p_global_BSW_cupload
 CpuLoad.cpp, 140
 CpuLoad.h, 141

p_global_BSW_dht22
 dht22.cpp, 149
 dht22.h, 150

p_global_BSW_dio
 dio.cpp, 151
 dio.h, 154

p_global_BSW_i2c
 I2C.cpp, 168
 I2C.h, 170

p_global_BSW_lcd
 LCD.cpp, 177
 LCD.h, 188

p_global_BSW_timer
 timer.cpp, 205
 timer.h, 206

p_global_BSW_usart
 uart.cpp, 207
 uart.h, 208

p_global_scheduler
 scheduler.cpp, 198
 scheduler.h, 200

p_lcd
 DisplayInterface, 48

p_tempSensor
 DisplayManagement, 54

PERIOD_MS_TASK_DISPLAY_CPU_LOAD
 DebugManagement.h, 147

PERIOD_MS_TASK_DISPLAY_DEBUG_DATA
 DebugManagement.h, 147

PERIOD_MS_TASK_LED
 keepAliveLed.h, 175

PERIOD_MS_TASK_TEMP_SENSOR
 TempSensor.h, 204

PINA_PTR
 dio_reg_atm2560.h, 158

PINB_PTR
 dio_reg_atm2560.h, 158

PINC_PTR
 dio_reg_atm2560.h, 158

PIND_PTR
 dio_reg_atm2560.h, 158

PINx_addr_mem

dio, 36
 PINx_idx_mem
 dio, 36
 PIT_BEFORE_INVALID
 TempSensor.cpp, 202
 PORT_CNF_IN
 dio.h, 153
 PORT_CNF_OUT
 dio.h, 153
 PORT_A
 dio_port_cnf.h, 155
 PORT_B
 dio_port_cnf.h, 155
 PORT_C
 dio_port_cnf.h, 155
 PORT_D
 dio_port_cnf.h, 155
 PORTA_PTR
 dio_reg_atm2560.h, 158
 PORTB_CNF_DDRB
 dio_port_cnf.h, 155
 PORTB_CNF_PORTB
 dio_port_cnf.h, 156
 PORTB_PTR
 dio_reg_atm2560.h, 159
 PORTC_PTR
 dio_reg_atm2560.h, 159
 PORTD_PTR
 dio_reg_atm2560.h, 159
 PRESCALER_PERIODIC_TIMER
 scheduler.h, 199
 period
 scheduler::Task_t, 111
 pit_number
 scheduler, 92
 ports_init
 dio, 36
 prescaler
 timer, 126
 RS_PIN
 LCD.h, 187
 RW_PIN
 LCD.h, 187
 read
 DebugInterface, 11
 dht22, 26
 read_humidity
 TempSensor, 121
 read_temperature
 TempSensor, 121
 readTempSensor_task
 TempSensor, 118
 RefreshLine
 DisplayInterface, 44
 RemoveElement
 LinkedList, 82
 removePeriodicTask
 scheduler, 89
 RemoveWelcomeMessage_Task
 DisplayManagement, 53
 ResetElementPtr
 LinkedList, 83
 SLA_ACK
 I2C.h, 170
 START
 I2C.h, 170
 SW_PERIOD_MS
 scheduler.h, 199
 sample_cnt
 CpuLoad, 9
 sample_idx
 CpuLoad, 9
 sample_mem
 CpuLoad, 9
 scheduler, 84
 addPeriodicTask, 86
 getPitNumber, 87
 getTaskCount, 87
 LLElementCompare, 88
 launchPeriodicTasks, 88
 pit_number, 92
 removePeriodicTask, 89
 scheduler, 86
 startScheduling, 90
 task_count, 92
 Task_t, 86
 TasksLL_ptr, 92
 updateTaskPeriod, 91
 scheduler.cpp, 197
 p_global_scheduler, 198
 scheduler.h, 198
 p_global_scheduler, 200
 PRESCALER_PERIODIC_TIMER, 199
 SW_PERIOD_MS, 199
 TIMER_CTC_VALUE, 199
 TaskPtr_t, 200
 scheduler::Task_t, 110
 period, 111
 TaskPtr, 111
 sendBool
 DebugInterface, 12
 sendChar
 DebugInterface, 13
 sendInteger
 DebugInterface, 13
 sendString
 DebugInterface, 14, 15
 setBaudRate
 uart, 128
 setBitRate
 I2C, 56
 SetDDRAMAddress
 LCD, 71
 setInfoStringPtr
 DebugManagement, 22
 setLineAlignment

DisplayInterface, 45
setLineAlignmentAndRefresh
 DisplayInterface, 46
setTxAddress
 I2C, 57
setValidity
 TempSensor, 119
shift_data
 T_display_data, 105
shiftLine_task
 DisplayInterface, 46
size
 String, 101
startScheduling
 scheduler, 90
startTimer1
 timer, 125
stopTimer1
 timer, 125
str_cur_ptr
 T_Display_shift_data, 106
str_debug_info_message_empty
 DebugManagement.cpp, 145
str_debug_info_message_wrong_selection
 DebugManagement.cpp, 145
str_debug_main_menu
 DebugManagement.cpp, 145
str_ptr
 T_Display_shift_data, 106
String, 93
 ~String, 95
 appendBool, 95
 appendChar, 96
 appendInteger, 97
 appendString, 98
 Clear, 99
 ComputeStringSize, 99
 getSize, 100
 getString, 100
 size, 101
 String, 94
 string, 101
string
 String, 101
String.cpp, 200
String.h, 201

T_ASW_init_cnf, 102
 isDebugActivated, 102
 isDisplayActivated, 102
 isLEDActivated, 102
 isTempSensorActivated, 103
T_Display_shift_data, 105
 str_cur_ptr, 106
 str_ptr, 106
 temporization, 106
T_DisplayInterface_LineAlignment
 DisplayInterface.h, 162
T_DisplayInterface_LineDisplayMode
 DisplayInterface.h, 162
 LCD.h, 187
 T_LCD_conf_struct, 107
 backlight_en, 107
 cursor_en, 107
 cursorBlink_en, 107
 display_en, 108
 entryModeDir, 108
 entryModeShift, 108
 fontType_cnf, 108
 i2c_addr, 108
 i2c_bitrate, 109
 lineNumber_cnf, 109
 T_LCD_config_mode
 LCD.h, 188
 T_LCD_ram_area
 LCD.h, 188
 T_LL_element
 LinkedList, 78
 T_display_data, 103
 alignment, 104
 display_str, 104
 isEmpty, 104
 mode, 104
 shift_data, 105
 TIMER_CTC_VALUE
 scheduler.h, 199
task_count
 scheduler, 92
task_period
 TempSensor, 121
Task_t
 scheduler, 86
TaskPtr
 scheduler::Task_t, 111
TaskPtr_t
 scheduler.h, 200
TasksLL_ptr
 scheduler, 92
tempDisplayString
 DisplayManagement.h, 167
TempSensor, 111
 GetHumDecimal, 113
 GetHumInteger, 114
 getHumPtr, 114
 getHumidity, 113
 getTaskPeriod, 115
 getTemp, 115
 GetTempDecimal, 116
 GetTempInteger, 116
 getTempPtr, 117
 GetValidity, 117
 read_humidity, 121
 read_temperature, 121
 readTempSensor_task, 118
 setValidity, 119
 task_period, 121

TempSensor, 113
updateLastValidValues, 119
updateTaskPeriod, 120
valid_hum, 122
valid_pit, 122
valid_temp, 122
validity, 122
validity_last_read, 122
TempSensor.cpp, 202
 p_global_ASW_TempSensor, 203
 PIT_BEFORE_INVALID, 202
TempSensor.h, 203
 DHT22_PORT, 204
 p_global_ASW_TempSensor, 204
 PERIOD_MS_TASK_TEMP_SENSOR, 204
tempSensor_ptr
 DebugManagement, 23
temporization
 T_Display_shift_data, 106
timer, 123
 configureTimer1, 124
 getTimer1Value, 125
 prescaler, 126
 startTimer1, 125
 stopTimer1, 125
 timer, 123
timer.cpp, 205
 p_global_BSW_timer, 205
timer.h, 206
 p_global_BSW_timer, 206
tx_address
 I2C, 58

USART_BAUDRATE
 DebugInterface.h, 143
updateLastValidValues
 TempSensor, 119
updateLineAndRefresh
 DisplayInterface, 47
updateTaskPeriod
 scheduler, 91
 TempSensor, 120
USART, 126
 BaudRate, 132
 setBaudRate, 128
 USART, 127
 USART_init, 128
 USART_read, 129
 USART_sendByte, 129
 USART_sendString, 130
 USART_transmit, 131
USART.cpp, 207
 p_global_BSW_USART, 207
USART.h, 208
 p_global_BSW_USART, 208
USART_drv_ptr
 DebugInterface, 16
USART_init
 USART, 128

 USART_read
 USART, 129
 USART_sendByte
 USART, 129
 USART_sendString
 USART, 130
 USART_transmit
 USART, 131

 valid_hum
 TempSensor, 122
 valid_pit
 TempSensor, 122
 valid_temp
 TempSensor, 122
 validity
 TempSensor, 122
 validity_last_read
 TempSensor, 122

welcomeMessageString
 DisplayManagement.h, 167
write
 LCD, 72
write4bits
 LCD, 73
writeByte
 I2C, 57
WriteInRam
 LCD, 74