


A Hybridized Discontinuous Galerkin Solver for Inductively Coupled Plasma

Nicolas Corthouts

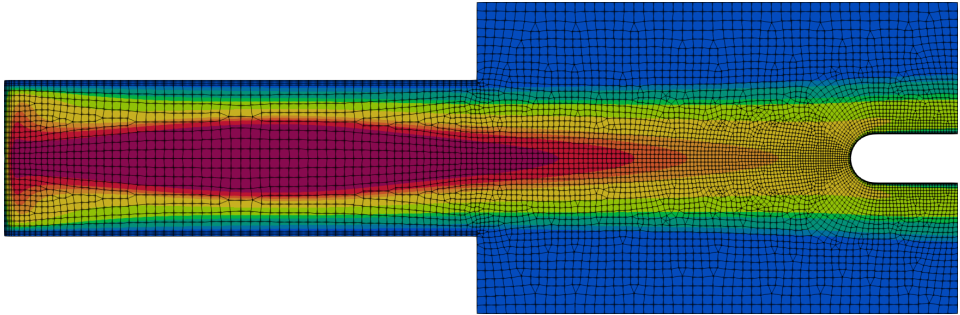


Introduction

Etats de la matière: eau à pression atmosphérique


Etats de la matière: eau à pression atmosphérique

Solide




Etats de la matière: eau à pression atmosphérique

Solide




Liquide




Etats de la matière: eau à pression atmosphérique


Solide



Liquide




Gaz




Etats de la matière: eau à pression atmosphérique


Solide



Liquide




Gaz




Que se passe-t-il si on chauffe encore plus?


Translation, rotation et vibration

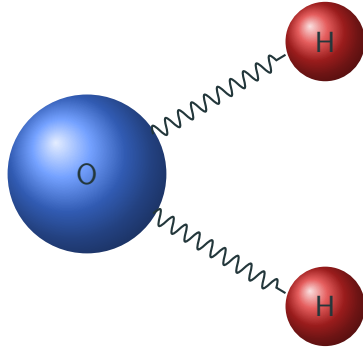


Translation, rotation et vibration

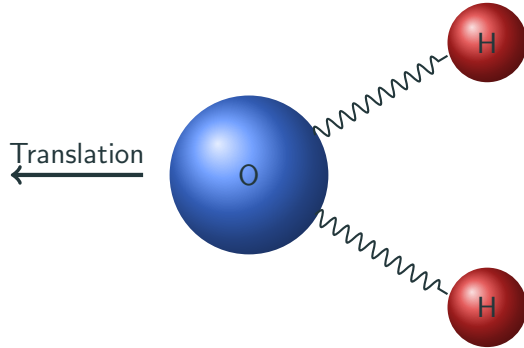


Translation, rotation et vibration

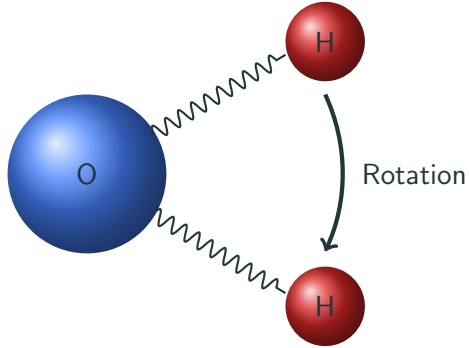


Translation, rotation et vibration

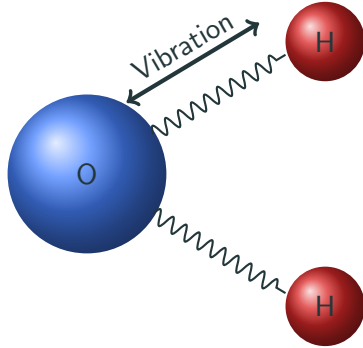


Translation, rotation et vibration

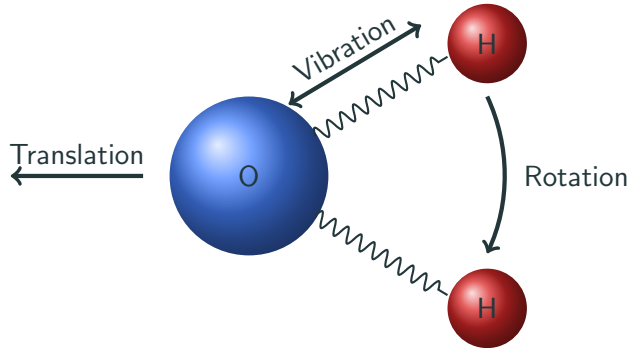




Excitation et ionization

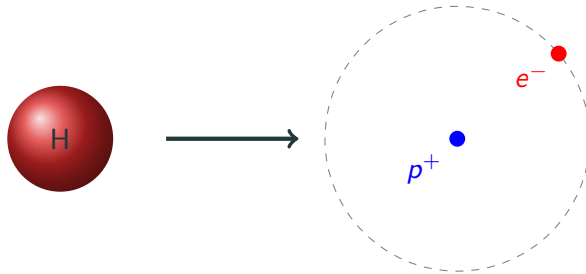


Excitation et ionization

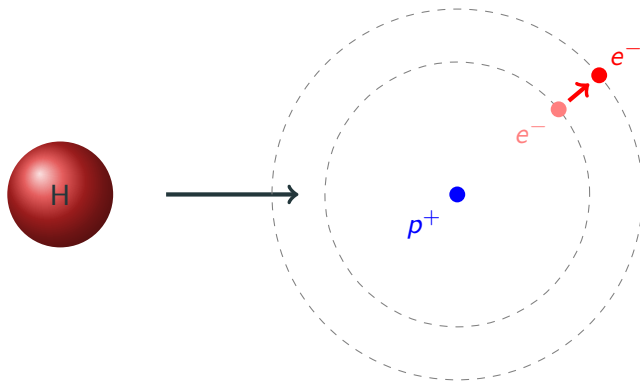


Si l'énergie reçue le permet, l'électron est dans un état **excité**. Il reviendra à son état initial en émettant de la lumière: c'est la **radiation**.

Excitation et ionization

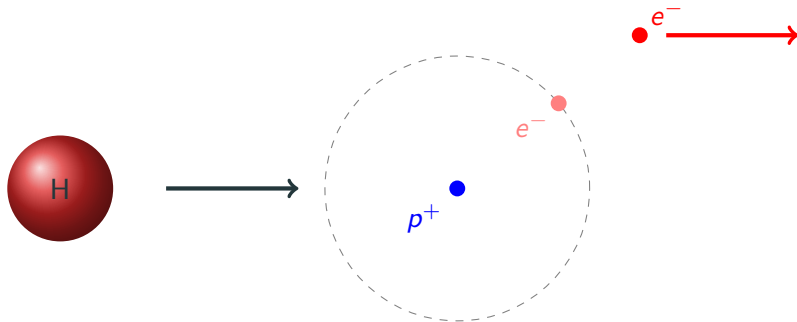


Si l'énergie reçue est suffisamment grande, l'électron est arraché: il devient **libre**.
L'atome d'hydrogène a été **ionisé**.

Plasma: le quatrième état de la matière




Gaz neutre

Plasma: le quatrième état de la matière

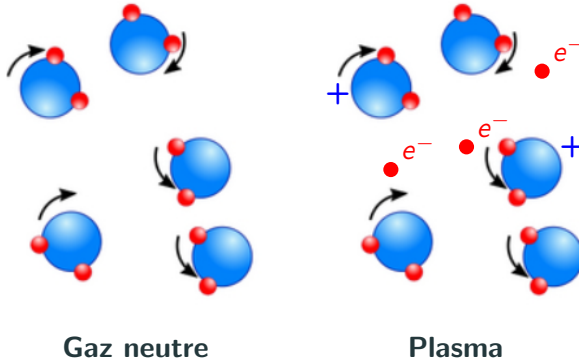

Plasma: le quatrième état de la matière

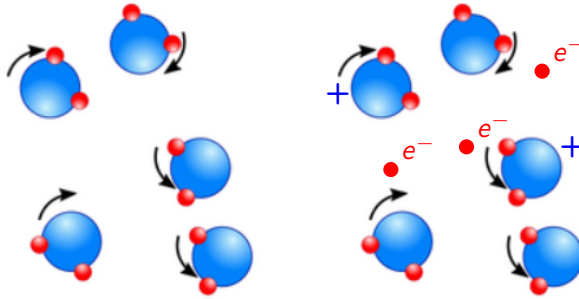

Gaz neutre

Plasma

Un plasma est un gaz quasi-neutre composé de particules chargées (ions $\bullet^+$ et électrons $\bullet^{e^-}$) et neutres ($\bullet^n$) démontrant un comportement collectif.¹

¹ F. F. Chen. Introduction to Plasma Physics and Controlled Fusion. Ed. by Springer International Publisher. 2016

Collision = interaction entre particules

Collision = interaction entre particules

Collisions de courte portée



Contact direct (local & binaire)

Collision = interaction entre particules

Collisions de courte portée



Contact direct (local & binaire)

Collisions de longue portée



Force électrique (à distance, collectif)

Collision = interaction entre particules

Collisions de courte portée



Contact direct (local & binaire)

Collisions de longue portée



Force électrique (à distance, collectif)

Si l'échelle est suffisamment grande ($> 1 \mu\text{m}$ dans notre cas), le plasma est **quasi-neutre** grâce à la force électrique.

Les collisions entre les particles peuvent mener à des réactions chimiques.

Si τ_{chem} et τ_{hydro} sont les temps caractéristiques de réaction chimique et d'écoulement:

Les collisions entre les particles peuvent mener à des réactions chimiques.

Si τ_{chem} et τ_{hydro} sont les temps caractéristiques de réaction chimique et d'écoulement:

$$\tau_{chem} \gg \tau_{hydro}$$

En équilibre chimique

Les collisions entre les particules peuvent mener à des réactions chimiques.

Si τ_{chem} et τ_{hydro} sont les temps caractéristiques de réaction chimique et d'écoulement:

$\tau_{chem} \gg \tau_{hydro}$	$\tau_{chem} \simeq \tau_{hydro}$
En équilibre chimique	Hors équilibre chimique

Les collisions entre les particules peuvent mener à des réactions chimiques.

Si τ_{chem} et τ_{hydro} sont les temps caractéristiques de réaction chimique et d'écoulement:

$\tau_{chem} \gg \tau_{hydro}$	$\tau_{chem} \simeq \tau_{hydro}$	$\tau_{chem} \ll \tau_{hydro}$
En équilibre chimique	Hors équilibre chimique	Pas de réaction chimique

Les collisions entre les particles peuvent mener à des réactions chimiques.


Si τ_{chem} et τ_{hydro} sont les temps caractéristiques de réaction chimique et d'écoulement:

$\tau_{chem} \gg \tau_{hydro}$	$\tau_{chem} \simeq \tau_{hydro}$	$\tau_{chem} \ll \tau_{hydro}$
En équilibre chimique	Hors équilibre chimique	Pas de réaction chimique

Les plasmas sont soit en équilibre, soit hors équilibre.

Plasma dans la vie de tous les jours

Les plasmas composent 90% de l'univers visible.



De plus en plus d'applications: fusion nucléaire, médecine, métallurgie, lasers, création de microprocesseurs, ...

Pour les "plasmas froids", l'énergie est d'abord emmagasinée par les électrons libres et cédée lors des collisions aux ions et neutres lourds.

Pour les "plasmas froids", l'énergie est d'abord emmagasinée par les électrons libres et cédée lors des collisions aux ions et neutres lourds.

Collisions peu efficaces

$$T_e \gg T_h$$

Hors équilibre thermique

Pour les "plasmas froids", l'énergie est d'abord emmagasinée par les électrons libres et cédée lors des collisions aux ions et neutres lourds.

Collisions peu efficaces

$$T_e \gg T_h$$

Hors équilibre thermique

Collisions efficaces

$$T_e \simeq T_h$$


Equilibre thermique

Plasma en réentrée atmosphérique




La grande vitesse de réentrée $\simeq 10 \text{ km s}^{-1}$, un choc suffisamment fort pour ioniser l'air $\Rightarrow$ plasma.

Système de protection thermique et destruction des déchets spatiaux

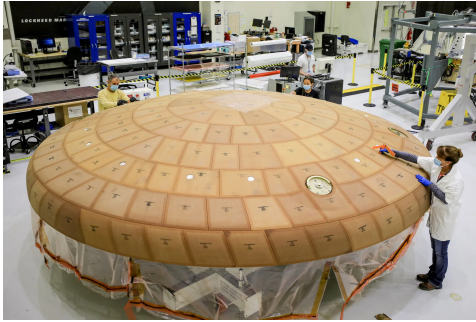

TPS

Système de protection thermique et destruction des déchets spatiaux

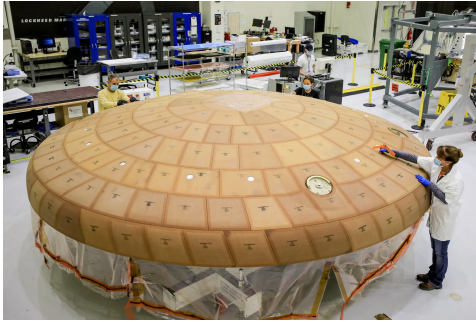


TPS



Déchets spatiaux

Système de protection thermique et destruction des déchets spatiaux

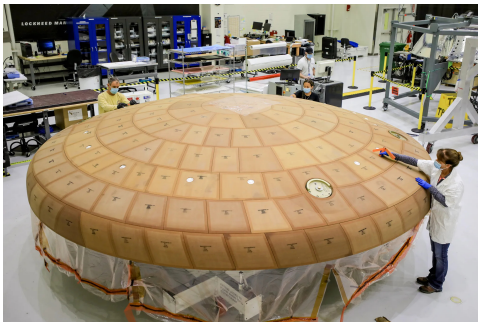


TPS




Déchets spatiaux

Nécessité de développer des machines expérimentales reproduisant les plasmas de réentrée atmosphérique pour étudier ces applications.

Plasma à induction

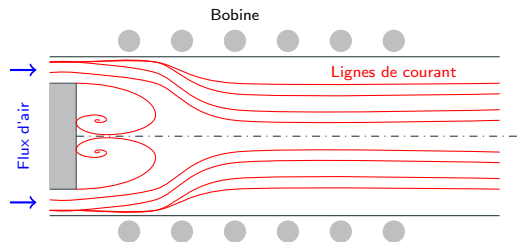

Torche

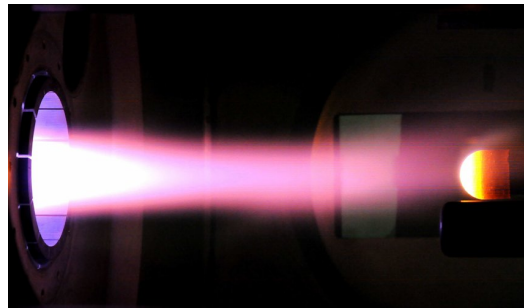


Chambre


Exemples: Plasmatron (VKI), Plasmatron X (Illinois), IPG (Russie), ...

Basé sur le principe de **transfer de chaleur local**.

Plasma à induction

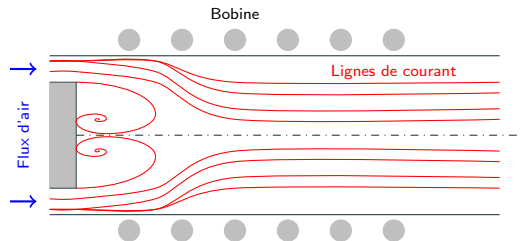


Torche

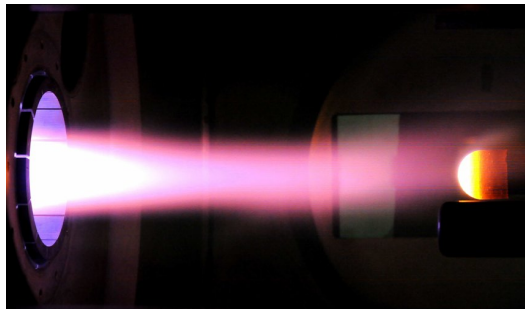

Chambre

Résoudre les équations de Maxwell, de Navier-Stokes + modèles physico-chimiques + modèle de radiation.


Des solveurs numériques (volumes finis) ont été développés afin de préparer au mieux les expériences dans les torches à induction.

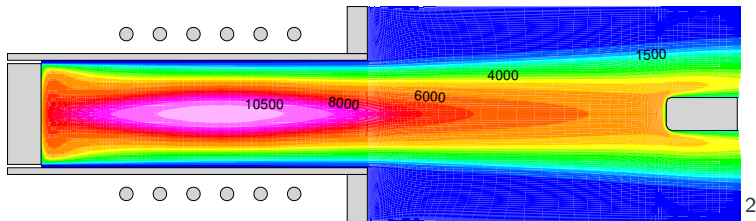

La plupart des solvers actuels


La plupart des solvers actuels

- Ne représentent que des géométries axisymétriques et simples.

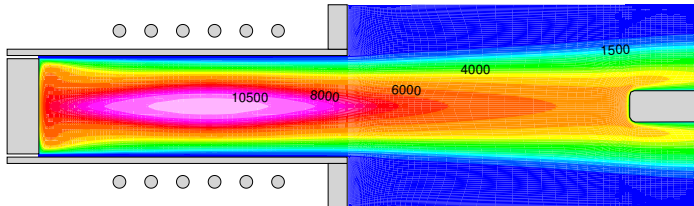

La plupart des solvers actuels

- Ne représentent que des géométries axisymétriques et simples.

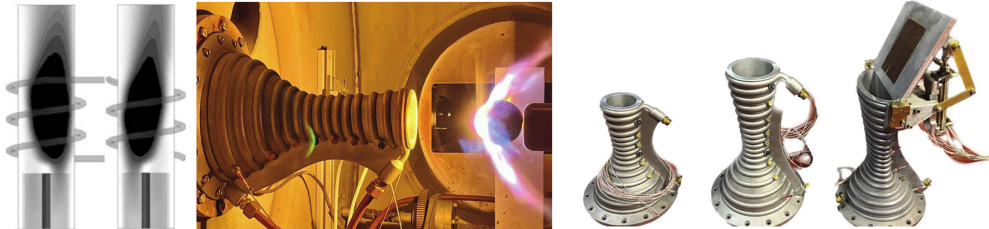

La plupart des solvers actuels


- Ne représentent que des géométries axisymétriques et simples.
Besoin d'un solver 3D.

La plupart des solvers actuels

- Ne représentent que des géométries axisymétriques et simples.
Besoin d'un solver 3D.
- Sont en régime établi.

La plupart des solveurs actuels

- Ne représentent que des géométries axisymétriques et simples.
Besoin d'un solveur 3D.
- Sont en régime établi.

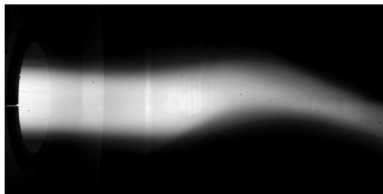

La plupart des solveurs actuels

- Ne représentent que des géométries axisymétriques et simples.
Besoin d'un solveur 3D.
- Sont en régime établi.
Besoin d'un solveur instationnaire.

La plupart des solveurs actuels

- Ne représentent que des géométries axisymétriques et simples.
Besoin d'un solveur 3D.
- Sont en régime établi.
Besoin d'un solveur instationnaire.
- Utilisent un modèle à l'équilibre chimique et thermique sans radiation.

La plupart des solveurs actuels

- Ne représentent que des géométries axisymétriques et simples.

Besoin d'un solveur 3D.

- Sont en régime établi.

Besoin d'un solveur instationnaire.

- Utilisent un modèle à l'équilibre chimique et thermique sans radiation.

C'est faux! Car les déséquilibres chimique et thermique ont été observés dans les plasmas à induction! La radiation joue aussi un rôle important dans le transfert de chaleur.

La plupart des solveurs actuels


- Ne représentent que des géométries axisymétriques et simples.
Besoin d'un solveur 3D.
- Sont en régime établi.
Besoin d'un solveur instationnaire.
- Utilisent un modèle à l'équilibre chimique et thermique sans radiation.
Besoin d'un solveur avec une chimie plus détaillée et de la radiation.

La plupart des solveurs actuels

- Ne représentent que des géométries axisymétriques et simples.
Besoin d'un solver 3D.
- Sont en régime établi.
Besoin d'un solver instationnaire.
- Utilisent un modèle à l'équilibre chimique et thermique sans radiation.
Besoin d'un solver avec une chimie plus détaillée et de la radiation.


Peut-on améliorer les solveurs volume finis actuels afin de pouvoir prendre en compte toute la physique?

Le problème des solvers volume finis actuels.

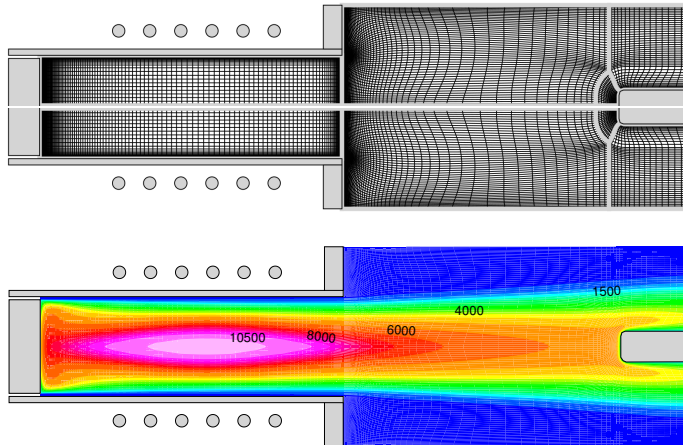

Pour les volumes finis, la solution est constante sur chaque éléments.

Le problème des solvers volume finis actuels.

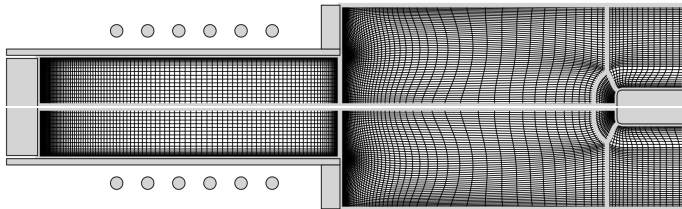


Les volumes finis nécessitent un maillage de bonne qualité, et donc très fin dans les régions de grande variation ou de géométrie complexe

- Demande beaucoup d'attention au maillage.
- Quasi impossible pour les géométries complexes.
- Demande un maillage trop fin partout pour une physique plus complexe.

Développer un solveur faisant partie des méthodes de Galerkin discontinues pour les plasma à induction.

- La solution n'est plus constante sur chaque élément.
- Beaucoup plus grande flexibilité de maillage.

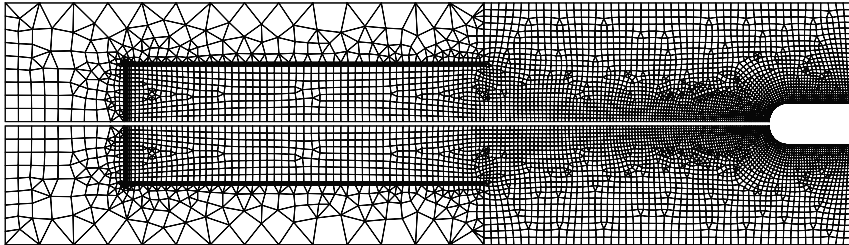

Research questions


With the objective of producing a new high order solver for inductively coupled plasma, we will try to answer the following questions:

- Q1 In addition of being precise, can a high-order solver be robust for inductively coupled plasma applications?**
- Q2 Is the developed solver user-friendly?**
- Q3 Can the new solver be easily adapted to the new experiments performed in ICP facilities?**

Model for inductively coupled plasma

Hypothesis on the plasma

- Collision-dominated and thermal plasma



$$T_e \simeq T_h$$

Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality

Characteristic length $\gg$ Debye length

$$E_{thermal} \simeq E_{elec}$$

and



$$q \simeq 0$$

Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Electrons return fast to equilibrium when perturbed by ELM waves.
- ELM wavelength $\gg$ plasma length scale.


Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Axisymmetry



Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Axisymmetry
- Non-radiative plasma

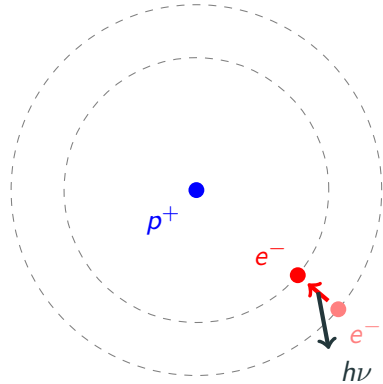

Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Axisymmetry
- Non-radiative plasma
- Local thermodynamic equilibrium

Thermal + chemical equilibrium =
LTE

Hypothesis on the plasma


- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Axisymmetry
- Non-radiative plasma
- Local thermodynamic equilibrium
- No elemental de-mixing

Elemental de-mixing = diffusion of elements for LTE.

Results closer to non-equilibrium.


Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Axisymmetry
- Non-radiative plasma
- Local thermodynamic equilibrium
- No elemental de-mixing
- Unmagnetized plasma

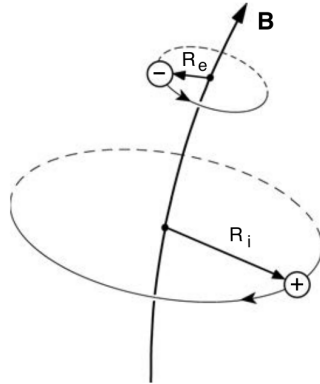

Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Axisymmetry
- Non-radiative plasma
- Local thermodynamic equilibrium
- No elemental de-mixing
- Unmagnetized plasma
- Steady-state

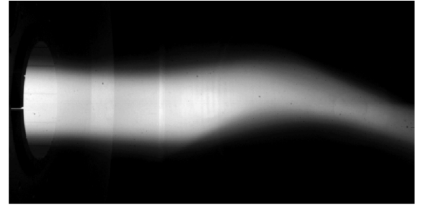

Equations averaged over one period of the induction current.

Hypothesis on the plasma

- Collision-dominated and thermal plasma
- Quasi-neutrality
- No displacement current
- Axisymmetry
- Non-radiative plasma
- Local thermodynamic equilibrium
- No elemental de-mixing
- Unmagnetized plasma
- Steady-state

The electric field:

- It is ambipolar ($j_z = j_r = 0$).
- The coils are thin parallels wires surrounding the facility.
- Axisymmetric
- $E_{tot} = E_C + E_P$
- We use phasor notation.

Equations governing the plasma

Navier-Stokes equations

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) = -\nabla p + \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} \right) = \nabla \cdot (\boldsymbol{\tau} \mathbf{v}) + \nabla \cdot \mathbf{q} + P_J$$

Equations governing the plasma

Navier-Stokes equations

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) = -\nabla p + \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} \right) = \nabla \cdot (\boldsymbol{\tau} \mathbf{v}) + \nabla \cdot \mathbf{q} + P_J$$

$$\boldsymbol{\tau} = \eta \left(\nabla \mathbf{v} + \nabla \mathbf{v}^T \right) - \frac{2}{3} \eta \nabla \cdot \mathbf{v}$$

$$\mathbf{q} = -k \nabla T$$

$$F_z^L = \frac{\sigma_e}{4\pi f} \left[E_l^{lm} \partial_z E_l^{Re} - E_l^{Re} \partial_z E_l^{lm} \right]$$

$$F_r^L = \frac{\sigma_e}{4\pi f} \left[E_l^{lm} \frac{1}{r} \partial_r (r E_l^{Re}) - E_l^{Re} \frac{1}{r} \partial_r (r E_l^{lm}) \right]$$

$$P^J = \frac{\sigma_e}{2} \left[(E_l^{lm})^2 + (E_l^{Re})^2 \right]$$

Electric field equation

$$\partial_{zz}^2 E_P + \frac{1}{r} \partial_r (r \partial_r E_P) - \frac{E_P}{r^2} = i 2 \pi f \mu_0 \sigma_e (E_C + E_P)$$

Electric field equation

$$\partial_{zz}^2 E_P + \frac{1}{r} \partial_r (r \partial_r E_P) - \frac{E_P}{r^2} = i 2 \pi f \mu_0 \sigma_e (E_C + E_P)$$

μ_0 : magnetic permeability

σ_e : electron electric conductivity

f : induction frequency

Electric field equation

$$\partial_{zz}^2 E_P + \frac{1}{r} \partial_r (r \partial_r E_P) - \frac{E_P}{r^2} = i 2 \pi f \mu_0 \sigma_e (E_C + E_P)$$

$$E_C = \sum_{l=1}^{N_{coil}} i f \mu_0 I_C \sqrt{\frac{r_0}{r}} \left[2 \frac{E_2(k_l)}{k_l} - E_1(k_l) \left(\frac{2}{k_l} - k_l \right) \right]$$

$E_1(k)$, $E_2(k)$ elliptic integral of the first and second kind.

The transport properties are computed using Mutation++

$$\eta, k, \sigma_e$$

M⁺⁺utation

Multicomponent Thermodynamic And Transport properties for IONized gases in C++

Navier-Stokes

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) = -\nabla p + \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} \right) = \nabla \cdot (\boldsymbol{\tau} \mathbf{v}) + \nabla \cdot \mathbf{q} + P_J$$

Navier-Stokes

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) = -\nabla p + \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} \right) = \nabla \cdot (\boldsymbol{\tau} \mathbf{v}) + \nabla \cdot \mathbf{q} + P_J$$

Maxwell

$$\partial_{zz}^2 E_P + \frac{1}{r} \partial_r (r \partial_r E_P) - \frac{E_P}{r^2} = i 2 \pi f \mu_0 \sigma_e (E_C + E_P)$$

Navier-Stokes

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$


$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) = -\nabla p + \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} \right) = \nabla \cdot (\boldsymbol{\tau} \mathbf{v}) + \nabla \cdot \mathbf{q} + P_J$$


Maxwell

$$\partial_{zz}^2 E_P + \frac{1}{r} \partial_r (r \partial_r E_P) - \frac{E_P}{r^2} = i 2 \pi f \mu_0 \sigma_e (E_C + E_P)$$

Computational domain

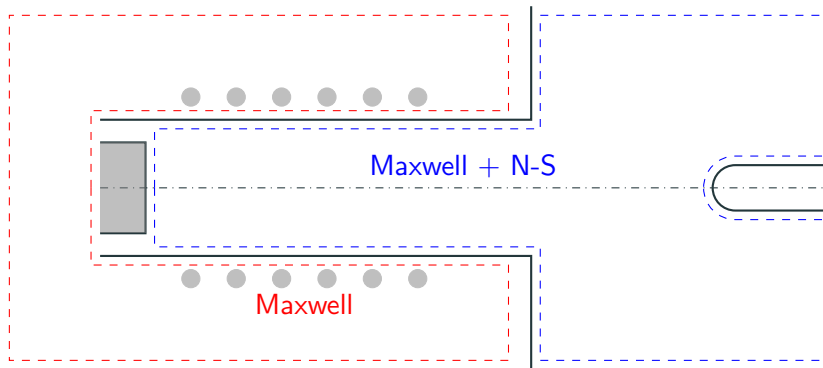


Computational domain

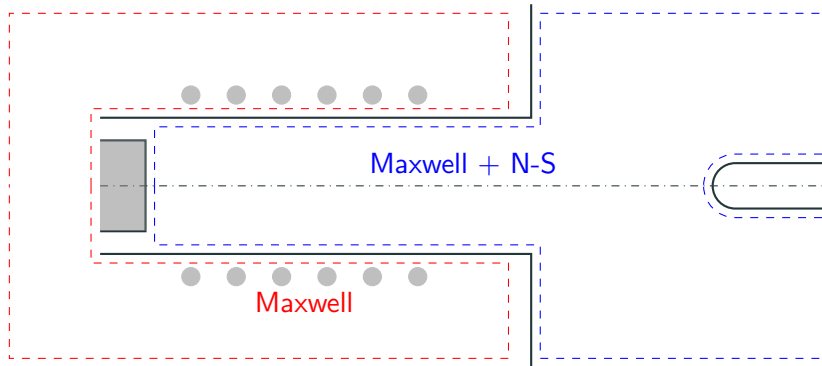


Symmetry axis $\partial_r p = 0$, $\partial_r u_z = 0$, $u_r = 0$, $\partial_r T = 0$ and $E_P = 0$.

Computational domain

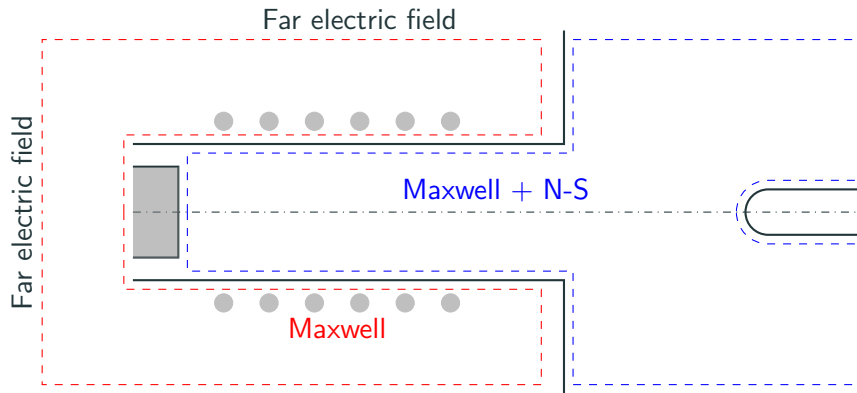


Vanishing far electric field $E_P = 0$.

Computational domain

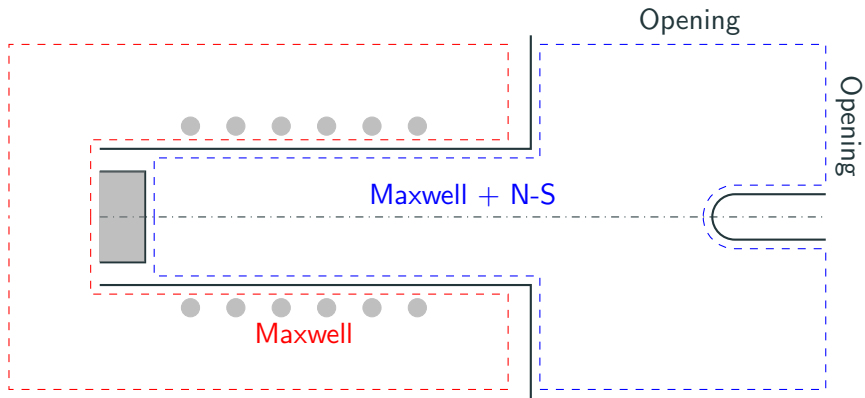


Openings $p = p_0$

Computational domain

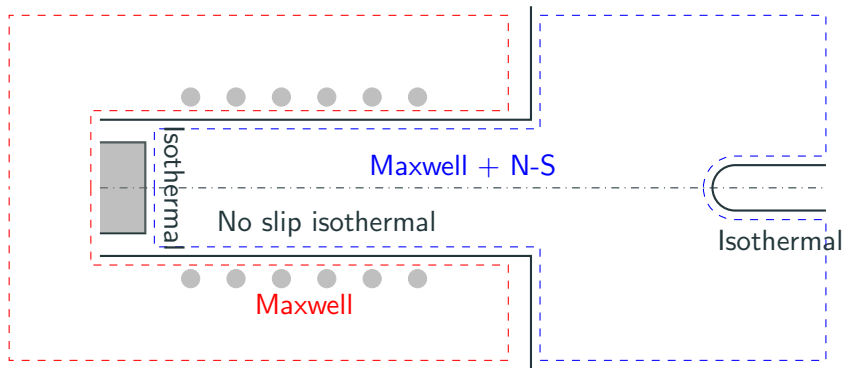


No-slip wall isothermal $T = T_{wall}$ and $\mathbf{u} = \mathbf{0}$.

Computational domain

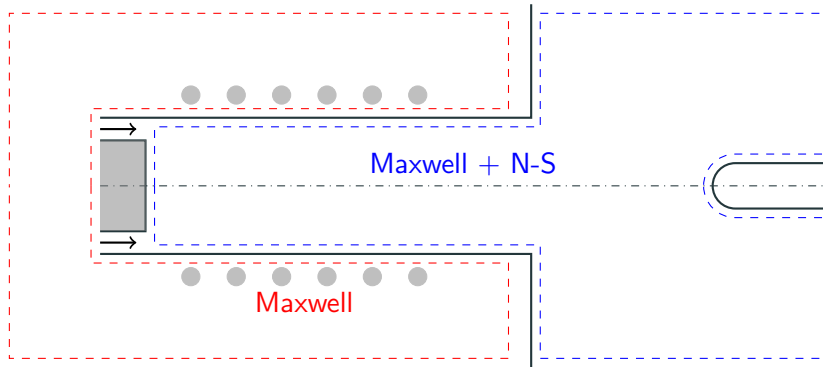


Inflow $u_z = U_{in}$, $u_r = 0$ and $T = T_{inlet}$.

Computational domain

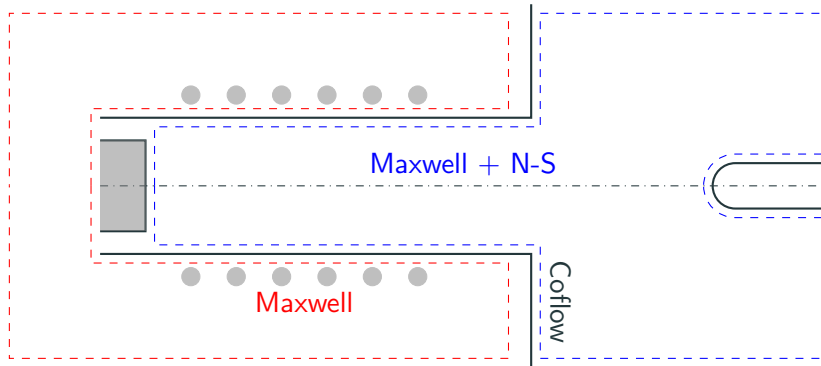

Stabilizing co-flow $T = T_{wall}$, $\mathbf{u} = u_{coflow}\mathbf{e}_z$

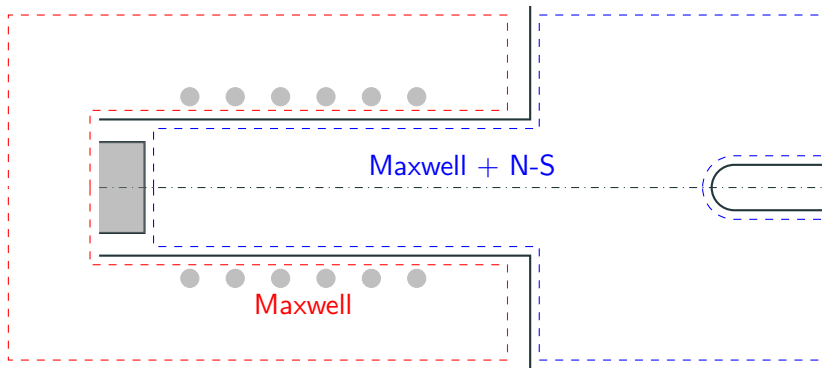


ICP and Maxwell interface

$$\nabla E_p^{Re,NS} \cdot \mathbf{n}^{NS} = \nabla E_p^{Re,MAX} \cdot \mathbf{n}^{MAX}$$


$$\nabla E_p^{Im,NS} \cdot \mathbf{n}^{NS} = \nabla E_p^{Im,MAX} \cdot \mathbf{n}^{MAX}$$

Computational domain

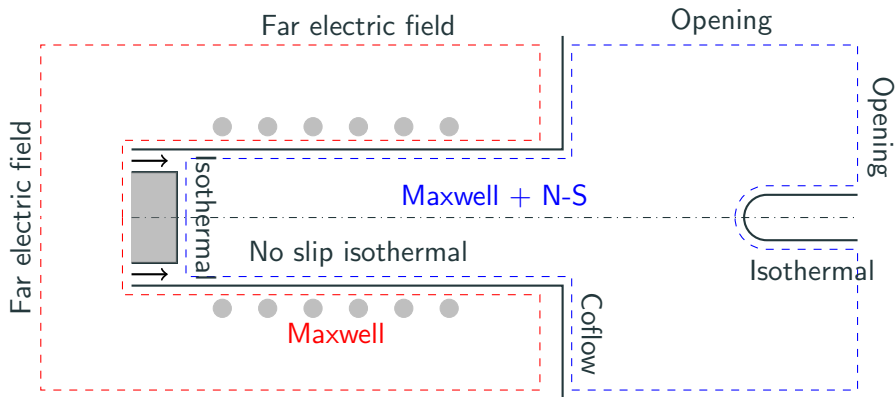


Hybridized discontinuous Galerkin method

Finite volume and (hybridized) discontinuous Galerkin

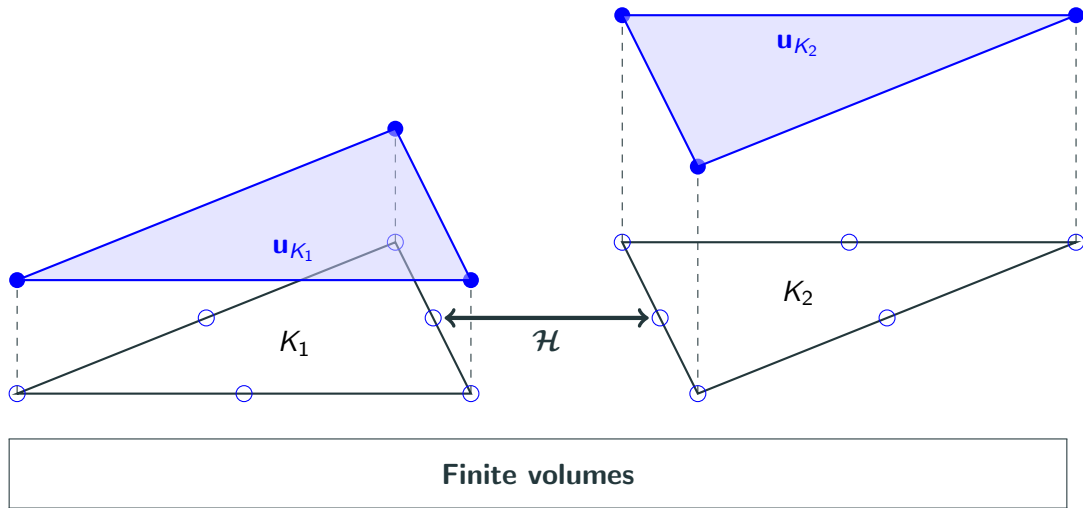


Finite volume and (hybridized) discontinuous Galerkin

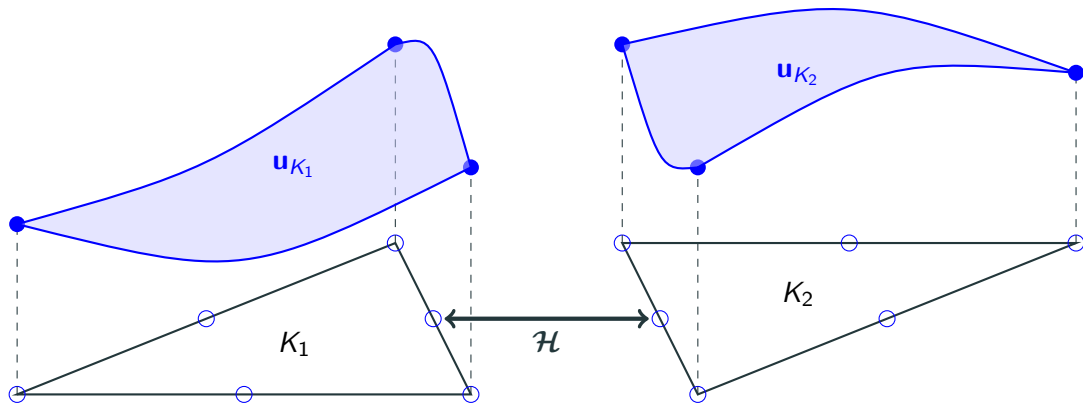

Discontinuous Galerkin

Finite volume and (hybridized) discontinuous Galerkin

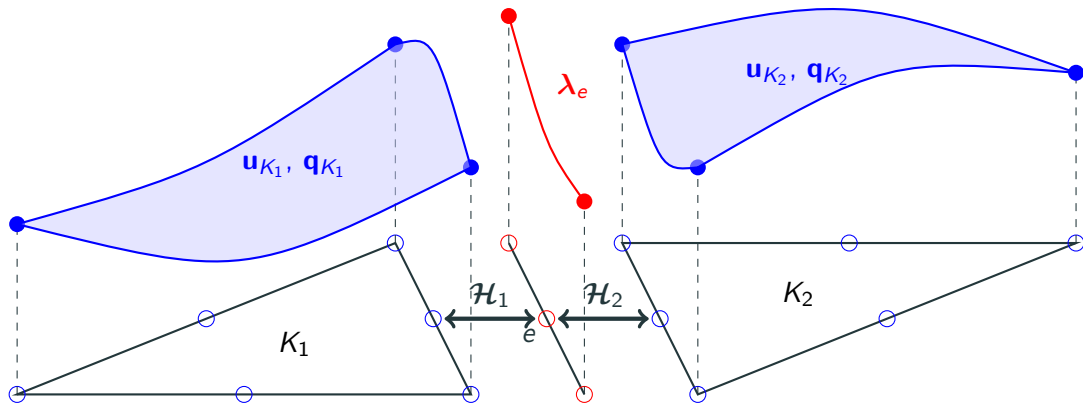

Hybridized discontinuous Galerkin

Conservative form of the equations

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v} + p \mathbb{I}) - \nabla \cdot \boldsymbol{\tau} = \mathbf{F}_L$$

$$\partial_t (\rho E) + \nabla \cdot (\rho E \mathbf{v} + p \mathbf{v}) - \nabla \cdot (\boldsymbol{\tau} \mathbf{v} + \mathbf{q}) = P_J$$

$$- \nabla \cdot (\nabla E_P) = -\frac{E_P}{r^2} - i2\pi f \mu_0 \sigma_e (E_C + E_P)$$

Conservative form of the equations

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v} + p \mathbb{I}) - \nabla \cdot \boldsymbol{\tau} = \mathbf{F}_L$$

$$\partial_t (\rho E) + \nabla \cdot (\rho E \mathbf{v} + p \mathbf{v}) - \nabla \cdot (\boldsymbol{\tau} \mathbf{v} + \mathbf{q}) = P_J$$

$$- \nabla \cdot (\nabla E_P) = -\frac{E_P}{r^2} - i2\pi f \mu_0 \sigma_e (E_C + E_P)$$

$$\partial_t \mathbf{w}(\mathbf{u}) + \nabla \cdot \mathbf{F}_c(\mathbf{u}) - \nabla \cdot \mathbf{F}_v(\mathbf{u}, \nabla \mathbf{u}) = \mathbf{S}(\mathbf{u}, \nabla \mathbf{u})$$

Conservative form of the equations

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v} + p \mathbb{I}) - \nabla \cdot \boldsymbol{\tau} = \mathbf{F}_L$$

$$\begin{aligned} \partial_t (\rho E) + \nabla \cdot (\rho E \mathbf{v} + p \mathbf{v}) - \nabla \cdot (\boldsymbol{\tau} \mathbf{v} + \mathbf{q}) &= P_J \\ - \nabla \cdot (\nabla E_P) &= -\frac{E_P}{r^2} - i2\pi f \mu_0 \sigma_e (E_C + E_P) \end{aligned}$$

$$\partial_t \mathbf{w}(\mathbf{u}) + \nabla \cdot \mathbf{F}_c(\mathbf{u}) - \nabla \cdot \mathbf{F}_v(\mathbf{u}, \nabla \mathbf{u}) = \mathbf{S}(\mathbf{u}, \nabla \mathbf{u})$$

Model problem

$$\begin{aligned}\partial_t \mathbf{w}(\mathbf{u}) + \nabla \cdot (\mathbf{F}_c(\mathbf{u}) - \mathbf{F}_v(\mathbf{u}, \nabla \mathbf{u})) &= \mathbf{S}(\mathbf{u}, \nabla \mathbf{u}) && \text{on } \Omega \\ \mathbf{u} &= \mathbf{u}_{bc} && \text{on } \partial\Omega_D \\ \mathbf{F}_v \cdot \mathbf{n} &= \mathbf{F}_{v,n,bc} && \text{on } \partial\Omega_N \\ \mathbf{u}(t=0) &= \mathbf{U} && \text{on } \Omega\end{aligned}$$

$\mathbf{F}_{c,v}$: convective and diffusive fluxes.

$\mathbf{S}$: source terms.

$\mathbf{w}$: conservative variables.

$\mathbf{u}, \mathbf{u}_{bc}$: solution and boundary condition.

Ω : domain of the problem.

$\partial\Omega_{D,N}$: domain boundary for Dirichlet and Neumann BC.

$\mathbf{U}$: initial data.

Model problem

$$\begin{aligned}\partial_t \mathbf{w}(\mathbf{u}) + \nabla \cdot (\mathbf{F}_c(\mathbf{u}) - \mathbf{F}_v(\mathbf{u}, \nabla \mathbf{u})) &= \mathbf{S}(\mathbf{u}, \nabla \mathbf{u}) && \text{on } \Omega \\ \mathbf{u} &= \mathbf{u}_{bc} && \text{on } \partial\Omega_D \\ \mathbf{F}_v \cdot \mathbf{n} &= \mathbf{F}_{v,n,bc} && \text{on } \partial\Omega_N \\ \mathbf{u}(t=0) &= \mathbf{U} && \text{on } \Omega\end{aligned}$$

Before going further, some notation:

$$\begin{aligned}(a, b)_K &= \int_K ab \, dV, \\ \langle a, b \rangle_{\partial K} &= \int_{\partial K} ab \, dS.\end{aligned}$$

From weak form to discrete DG problem


$$(\partial_t \mathbf{w} - \mathbf{S}, w)_\Omega - (\mathbf{F}_c - \mathbf{F}_v, \nabla w)_\Omega + \langle (\mathbf{F}_c - \mathbf{F}_v) \cdot \mathbf{n}, w \rangle_{\partial\Omega} = 0, \quad \forall w \in L_2(\Omega)$$

Multiplying by a function $w \in L_2(\Omega)$ and integrating over the domain gives the **weak form**.

From weak form to discrete DG problem

$$(\partial_t \mathbf{w} - \mathbf{S}, w)_{\mathcal{T}} - (\mathbf{F}_c - \mathbf{F}_v, \nabla w)_{\mathcal{T}} + \sum_{K \in \mathcal{T}} \langle (\mathbf{F}_c - \mathbf{F}_v) \cdot \mathbf{n}, w \rangle_{\partial K} = 0, \quad \forall w \in L_2(\Omega)$$

The domain Ω is split in a collection of elements $K \in \mathcal{T}$.

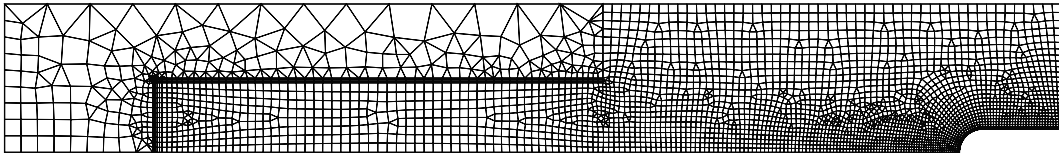

From weak form to discrete DG problem

$$(\partial_t \mathbf{w} - \mathbf{S}, w)_{\mathcal{T}} - (\mathbf{F}_c - \mathbf{F}_v, \nabla w)_{\mathcal{T}} + \sum_{K \in \mathcal{T}} \langle (\mathbf{F}_c - \mathbf{F}_v) \cdot \mathbf{n}, w \rangle_{\partial K} = 0, \quad \forall w \in W_h$$

We restrict w to a **finite dimensional** subset of $L_2(\Omega)$.

$$W_h = \{w \in L^2(\Omega) : w|_K \in \mathcal{P}^p(K), \forall K \in \mathcal{T}\} \subset L_2(\Omega)$$

From weak form to discrete DG problem

$$(\partial_t \mathbf{w} - \mathbf{S}, w)_{\mathcal{T}} - (\mathbf{F}_c - \mathbf{F}_v, \nabla w)_{\mathcal{T}} + \sum_{K \in \mathcal{T}} \langle \mathcal{H}, w \rangle_{\partial K} = 0, \quad \forall w \in W_h$$

For stabilizing the method, the convective and diffusive fluxes on the interface are approximated

$$(\mathbf{F}_c - \mathbf{F}_v) \cdot \mathbf{n}_K \simeq \mathcal{H}$$

From weak form to discrete DG problem

$$(\partial_t \mathbf{w}_h - \mathbf{S}_h, w)_{\mathcal{T}} - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla w)_{\mathcal{T}} + \sum_{K \in \mathcal{T}} \langle \mathcal{H}, w \rangle_{\partial K} = 0, \quad \forall w \in W_h$$

The solution is also approximated by

$$\mathbf{u} \simeq \mathbf{u}_h \in W_h$$

From weak form to discrete DG problem

$$(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}, \varphi_{K,i} \rangle_{\partial K} = 0, \quad \forall \varphi_{K,i} \in W_h$$

If the $\varphi_{K,i}$ is a local basis of W_h on K , $i \in \{1, 2, \dots, p\}$,

$$\mathbf{u} \simeq \mathbf{u}_h = \sum_{K \in \mathcal{T}} \sum_{i=1}^p \mathbf{u}_{K,i} \varphi_{K,i}$$

From weak form to discrete DG problem

$$(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}, \varphi_{K,i} \rangle_{\partial K} = 0, \quad \forall \varphi_{K,i} \in W_h$$

- $\varphi_{K,i}$ are discontinuous across elements.
- If $\varphi_{K,i} = 1$ everywhere $\Rightarrow$ finite volume.

$$\begin{aligned}(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}, \varphi_{K,i} \rangle_{\partial K} &= 0, \quad \forall \varphi_{K,i} \in W_h \\ (\mathbf{q}_h, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_h, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \mathbf{u}_h, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} &= 0, \quad \forall \boldsymbol{\tau}_{K,i} \in V_h\end{aligned}$$

With the solution gradient

$$\mathbf{q} = \nabla \mathbf{u} \simeq \mathbf{q}_h = \sum_{K \in \mathcal{T}} \sum_{i=1}^p \mathbf{q}_{K,i} \boldsymbol{\tau}_{K,i}$$

with the subset

$$V_h = \left\{ \mathbf{v} \in L^2(\Omega) : \mathbf{v}|_K \in (\mathcal{P}^p(K))^D, \forall K \in \mathcal{T} \right\}$$

and local basis $\boldsymbol{\tau}_{K,i}$.

$$\begin{aligned}(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}(\boldsymbol{\lambda}_h), \varphi_{K,i} \rangle_{\partial K} &= 0, \quad \forall \varphi_{K,i} \in W_h \\ (\mathbf{q}_h, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_h, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \boldsymbol{\lambda}_h, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} &= 0, \quad \forall \boldsymbol{\tau}_{K,i} \in V_h\end{aligned}$$

$$\Gamma = \{e : e = K_i \cap K_j; \forall K_i, K_j \in \mathcal{T}, K_i \neq K_j\}.$$

$$M_h = \{\mu \in L^2(\Gamma) : \mu|_e \in \mathcal{P}^p(e), \forall e \in \Gamma\}$$

$$\boldsymbol{\lambda}_h = \sum_{e \in \Gamma} \sum_{i=1}^p \boldsymbol{\lambda}_{e,i} \mu_{e,i}$$

$$\begin{aligned}(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}(\mathbf{u}_h, \mathbf{q}_h, \boldsymbol{\lambda}_h), \varphi_{K,i} \rangle_{\partial K} &= 0, \quad \forall \varphi_{K,i} \in W_h \\ (\mathbf{q}_h, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_h, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \boldsymbol{\lambda}_h, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} &= 0, \quad \forall \boldsymbol{\tau}_{K,i} \in V_h \\ \langle [[\mathcal{H}]], \mu_{e,i} \rangle_e &= 0, \quad \forall \mu_{e,i} \in M_h\end{aligned}$$

Equation for $\boldsymbol{\lambda}$: continuity of the normal numerical flux across the interfaces.

The jump operator is given by

$$[[\mathbf{u}]] = \mathbf{u}_+ \cdot \mathbf{n}_+ + \mathbf{u}_- \cdot \mathbf{n}_-$$

$$\begin{aligned}(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}(\mathbf{u}_h, \mathbf{q}_h, \boldsymbol{\lambda}_h), \varphi_{K,i} \rangle_{\partial K} &= 0, \quad \forall \varphi_{K,i} \in W_h \\ (\mathbf{q}_h, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_h, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \boldsymbol{\lambda}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} &= 0, \quad \forall \boldsymbol{\tau}_{K,i} \in V_h \\ \langle [[\mathcal{H}]], \mu_{e,i} \rangle_e = 0, \quad \forall \mu_{e,i} \in M_h\end{aligned}$$

Why HDG over DG?


$$\begin{aligned}(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}(\mathbf{u}_h, \mathbf{q}_h, \boldsymbol{\lambda}_h), \varphi_{K,i} \rangle_{\partial K} &= 0, \quad \forall \varphi_{K,i} \in W_h \\ (\mathbf{q}_h, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_h, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \boldsymbol{\lambda}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} &= 0, \quad \forall \boldsymbol{\tau}_{K,i} \in V_h \\ \langle [[\mathcal{H}]], \mu_{e,i} \rangle_e = 0, \quad \forall \mu_{e,i} \in M_h\end{aligned}$$

Why HDG over DG?

As will be seen later, HDG allows for static condensation, effectively reducing the number of DOFs when using a Newton solver.

ICP as a multi-domain problem


Single domain + integral boundary value

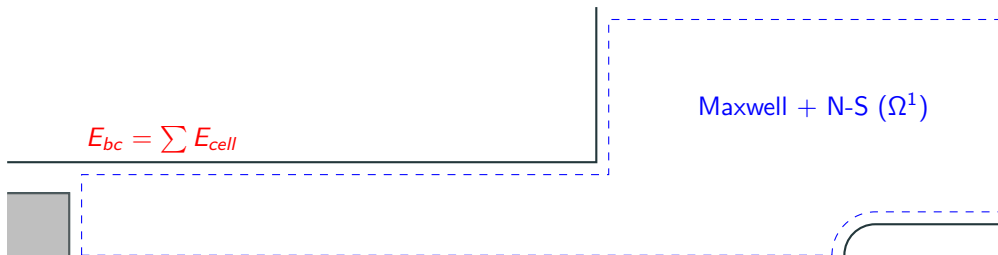

Compact but fills the jacobian matrix, making it incompatible with HDG.

ICP as a multi-domain problem

Two overlapping domain

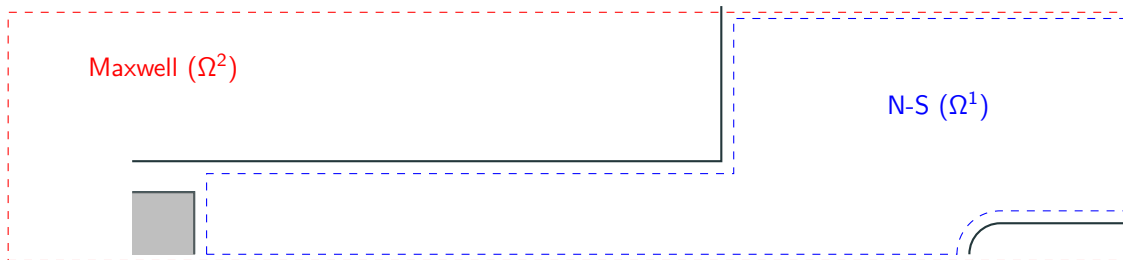

Most widely used. Solve N-S while Maxwell frozen, and *vice versa*. Slow convergence.

ICP as a multi-domain problem

Multi-domain



Solves the system in a fully coupled manner, with two domains. The method we employ here.

Modification of the model problem

$$\partial_t \mathbf{w}^l(\mathbf{u}) + \nabla \cdot \left(\mathbf{F}_c^l(\mathbf{u}) - \mathbf{F}_v^l(\mathbf{u}, \nabla \mathbf{u}) \right) = \mathbf{S}^l(\mathbf{u}, \nabla \mathbf{u}), \quad \text{on } \Omega^l$$

$$\mathbf{u}^l = \mathbf{u}_{bc}^l, \quad \mathbf{x} \in \partial\Omega_d^l$$

$$\mathbf{F}_v^l \cdot \mathbf{n} = \mathbf{F}_{v,n,bc}^l, \quad \text{on } \partial\Omega_n^l$$

$$\mathcal{F}^{l,l'}(\mathbf{u}^l, \nabla \mathbf{u}^l, \mathbf{u}^{l'}, \nabla \mathbf{u}^{l'}) = 0, \quad \text{on } \gamma^{l,l'}, \quad l \neq l'$$

$$\mathbf{u}^l(t=0) = \mathbf{U}^l, \quad \text{on } \Omega^l$$

Modification of the model problem

$$\partial_t \mathbf{w}^l(\mathbf{u}) + \nabla \cdot \left(\mathbf{F}_c^l(\mathbf{u}) - \mathbf{F}_v^l(\mathbf{u}, \nabla \mathbf{u}) \right) = \mathbf{S}^l(\mathbf{u}, \nabla \mathbf{u}), \quad \text{on } \Omega^l$$

$$\mathbf{u}^l = \mathbf{u}_{bc}^l, \quad \mathbf{x} \in \partial\Omega_d^l$$

$$\mathbf{F}_v^l \cdot \mathbf{n} = \mathbf{F}_{v,n,bc}^l, \quad \text{on } \partial\Omega_n^l$$

$$\mathcal{F}^{l,l'}(\mathbf{u}^l, \nabla \mathbf{u}^l, \mathbf{u}^{l'}, \nabla \mathbf{u}^{l'}) = 0, \quad \text{on } \gamma^{l,l'}, \quad l \neq l'$$

$$\mathbf{u}^l(t=0) = \mathbf{U}^l, \quad \text{on } \Omega^l$$

Modification of the model problem

$$\begin{aligned}
 \partial_t \mathbf{w}^l(\mathbf{u}) + \nabla \cdot \left(\mathbf{F}_c^l(\mathbf{u}) - \mathbf{F}_v^l(\mathbf{u}, \nabla \mathbf{u}) \right) &= \mathbf{S}^l(\mathbf{u}, \nabla \mathbf{u}), & \text{on } \Omega^l \\
 \mathbf{u}^l &= \mathbf{u}_{bc}^l, & \mathbf{x} \in \partial\Omega_d^l \\
 \mathbf{F}_v^l \cdot \mathbf{n} &= \mathbf{F}_{v,n,bc}^l, & \text{on } \partial\Omega_n^l \\
 \mathcal{F}^{l,l'}(\mathbf{u}^l, \nabla \mathbf{u}^l, \mathbf{u}^{l'}, \nabla \mathbf{u}^{l'}) &= 0, & \text{on } \gamma^{l,l'}, l \neq l' \\
 \mathbf{u}^l(t=0) &= \mathbf{U}^l, & \text{on } \Omega^l
 \end{aligned}$$

For ICP,

$$\mathcal{F} = \begin{pmatrix} \nabla E_p^{Re,NS} \cdot \mathbf{n}^{NS} - \nabla E_p^{Re,MAX} \cdot \mathbf{n}^{MAX} \\ \nabla E_p^{Im,NS} \cdot \mathbf{n}^{NS} - \nabla E_p^{Im,MAX} \cdot \mathbf{n}^{MAX} \end{pmatrix}$$

Modification of the discrete formulation

$$\begin{aligned} & \left(\partial_t \mathbf{w}_h - \mathbf{S}_h^K, \varphi_{K,i} \right)_K - \left(\mathbf{F}_{h,c}^K - \mathbf{F}_{h,v}^K, \nabla \varphi_{K,i} \right)_K + \left\langle \mathcal{H}^K, \varphi_{K,i} \right\rangle_{\partial K} = 0 \\ & (\mathbf{q}_K, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_K, \nabla \boldsymbol{\tau}_{K',i})_K + \langle \boldsymbol{\lambda}_{\partial K}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} = 0 \\ & \langle [[\mathcal{H}]], \mu_{e,i} \rangle_{e \setminus \bar{\Gamma}} + \langle \tilde{\mathcal{F}}^e, \mu_{e,i} \rangle_{e \cap \bar{\Gamma}} = 0 \end{aligned}$$

with $\bar{\Gamma}$ the set of interfaces between subdomains.

$$\mathcal{H} = \mathcal{H}_c - \mathcal{H}_v$$

$$\mathcal{H}_c = R\mathcal{H}_{c,n}(\mathbf{u}, \lambda) = R(\dot{m} + \dot{m}_p)\Psi_\lambda - R|\dot{m}|(\Psi_\lambda - \Psi_U) + \mathbf{P}$$

with

$$\boldsymbol{\Psi} = \left(1 \quad v^\perp \quad v^\parallel \quad v_\theta \quad e + \frac{1}{2}||\mathbf{v}||^2 + \frac{p}{\rho} \right)^T$$

$$\mathbf{P} = \left(0 \quad p_\lambda \quad 0 \quad 0 \right)^T$$

$$\mathcal{H} = \mathcal{H}_c - \mathcal{H}_v$$

$$\mathcal{H}_v(\mathbf{u}, \lambda, \mathbf{q}) = \mathbf{F}_v(\lambda, \mathbf{q}) \cdot \mathbf{n} + \gamma(h)(\lambda - \mathbf{u})$$

with

$$\gamma = C \max_{K \ni f} \left(\frac{1}{2\mathcal{V}} \sum_{f \in K} \mathcal{A} \right)$$

C depends on the diffusive transport coefficients.

Solution strategy

The HDG system is solved at steady-state such that

$$\begin{aligned}
 & \left(\cancel{\partial_t \mathbf{w}_h} - \mathbf{S}_h^K, \varphi_{K,i} \right)_K - \left(\mathbf{F}_{h,c}^K - \mathbf{F}_{h,v}^K, \nabla \varphi_{K,i} \right)_K + \left\langle \mathcal{H}^K, \varphi_{K,i} \right\rangle_{\partial K} = 0 \\
 & (\mathbf{q}_K, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_K, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \boldsymbol{\lambda}_{\partial K}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} = 0 \\
 & \langle [[\mathcal{H}]], \mu_{e,i} \rangle_{e \setminus \bar{\Gamma}} + \langle \tilde{\mathcal{F}}^e, \mu_{e,i} \rangle_{e \cap \bar{\Gamma}} = 0
 \end{aligned}$$

If the system is written as $\mathcal{N} = 0$, then the Newton method solves

$$\mathcal{N}'(\mathbf{x}_k) \delta \mathbf{x}_k = -\mathcal{N}(\mathbf{x}_k)$$

with $\delta \mathbf{x}_k = \mathbf{x}_{k+1} - \mathbf{x}_k$.

Solution strategy

The HDG system is solved at steady-state such that

$$\begin{aligned} \left(\frac{\delta \mathbf{w}_h^K}{\tau_{K,k}} - \mathbf{S}_h^K, \varphi_{K,i} \right)_K - \left(\mathbf{F}_{h,c}^K - \mathbf{F}_{h,v}^K, \nabla \varphi_{K,i} \right)_K + \left\langle \mathcal{H}^K, \varphi_{K,i} \right\rangle_{\partial K} &= 0 \\ (\mathbf{q}_K, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_K, \nabla \boldsymbol{\tau}_{K',i})_K + \langle \boldsymbol{\lambda}_{\partial K}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} &= 0 \\ \langle [[\mathcal{H}]], \mu_{e,i} \rangle_{e \setminus \bar{\Gamma}} + \langle \tilde{\mathcal{F}}^e, \mu_{e,i} \rangle_{e \cap \bar{\Gamma}} &= 0 \end{aligned}$$

If the system is written as $\tilde{\mathcal{N}} = 0$, then the Newton method solves

$$\tilde{\mathcal{N}}'(\mathbf{x}_k) \delta \mathbf{x} = -\tilde{\mathcal{N}}(\mathbf{x}_k)$$

with $\delta \mathbf{x} = \mathbf{x}_{k+1} - \mathbf{x}_k$.

In order to stabilize the solver, a fictive temporal term is added.

$$\frac{\delta \mathbf{w}_h}{\tau_K} = \frac{\mathbf{w}(\mathbf{u}_{h,k+1}) - \mathbf{w}(\mathbf{u}_{h,k})}{\tau_{K,k}}$$

with

$$\tau_{K,k} = CFL_k \frac{h_K}{v_K} = CFL_k \frac{V_K}{\int_{\partial K} \lambda_{\max} dS}$$

and the following CFL evolution law

$$CFL_k = \min \left(CFL_0 \left(\frac{\|\mathcal{N}\|_2^0}{\|\mathcal{N}\|_2^k} \right)^\alpha, CFL_{\max} \right)$$

$$\frac{\delta \mathbf{w}_h}{\tau_K} = \frac{\mathbf{w}(\mathbf{u}_{h,k+1}) - \mathbf{w}(\mathbf{u}_{h,k})}{\tau_{K,k}}$$

with

$$\tau_{K,k} = CFL_k \frac{h_K}{v_K} = CFL_k \frac{V_K}{\int_{\partial K} \lambda_{\max} dS}$$

and the following CFL evolution law

$$CFL_k = \min \left(CFL_0 \left(\frac{\|\mathcal{N}\|_2^0}{\|\mathcal{N}\|_2^k} \right)^\alpha, CFL_{\max} \right)$$

We only use convective eigenvalues here. The diffusive could be use to enhance the convergence.

Matrix form of the system

$$\tilde{\mathcal{N}}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\tilde{\mathcal{N}}(\mathbf{x}_k)$$

Matrix form of the system

$$\tilde{\mathcal{N}}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\tilde{\mathcal{N}}(\mathbf{x}_k)$$

$$\underbrace{\begin{pmatrix} A & B & R \\ C & D & S \\ L & M & N \end{pmatrix}}_{\tilde{\mathcal{N}}'} \overbrace{\begin{pmatrix} \delta Q \\ \delta U \\ \delta \Lambda \end{pmatrix}}^{\delta \mathbf{x}} = \underbrace{\begin{pmatrix} F \\ G \\ H \end{pmatrix}}_{-\tilde{\mathcal{N}}},$$

Matrix form of the system

$$\tilde{\mathcal{N}}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\tilde{\mathcal{N}}(\mathbf{x}_k)$$

The system can be split into two parts

$$\underbrace{\begin{pmatrix} A & B \\ C & D \end{pmatrix}}_{\text{Block diagonal}} \begin{pmatrix} \delta Q \\ \delta U \end{pmatrix} = \begin{pmatrix} F \\ G \end{pmatrix} - \begin{pmatrix} R \\ S \end{pmatrix} \delta\Lambda$$

and

$$\begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} \delta Q \\ \delta U \end{pmatrix} + N\delta\Lambda = H$$

Matrix form of the system

$$\tilde{\mathcal{N}}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\tilde{\mathcal{N}}(\mathbf{x}_k)$$

By eliminating δU and δQ , one gets the **global** system

$$\left(N - \begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} R \\ S \end{pmatrix} \right) \delta\Lambda = H - \begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} F \\ G \end{pmatrix}$$

Matrix form of the system

$$\tilde{\mathcal{N}}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\tilde{\mathcal{N}}(\mathbf{x}_k)$$

By eliminating δU and δQ , one gets the **global** system

$$\left(N - \begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} R \\ S \end{pmatrix} \right) \delta\Lambda = H - \begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} F \\ G \end{pmatrix}$$

System solved for λ , then $\mathbf{u}$ and $\mathbf{q}$ are retrieved by small local matrices inversion.

$$\begin{pmatrix} \delta Q \\ \delta U \end{pmatrix} = \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} F \\ G \end{pmatrix} - \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} R \\ S \end{pmatrix} \delta\Lambda$$

The problem of power quenching

If the power dissipated is not maintained, the torch quenches!

The problem of power quenching

If the power dissipated is not maintained, the torch quenches!

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) + \nabla p - \nabla \cdot \boldsymbol{\tau} = \mathbf{F}^L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} - \boldsymbol{\tau} \cdot \mathbf{v} - \mathbf{q} \right) = P_J$$

$$\Delta E_P = \frac{E_P}{r^2} + i2\pi f \mu_0 \sigma_e (E_C + E_P)$$

The problem of power quenching

If the power dissipated is not maintained, the torch quenches!

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) + \nabla p - \nabla \cdot \boldsymbol{\tau} = \gamma \mathbf{F}^L \Big|_{I_c=1\text{ A}}$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} - \boldsymbol{\tau} \cdot \mathbf{v} - \mathbf{q} \right) = \gamma P_J \Big|_{I_c=1\text{ A}}$$

$$\Delta E_P \Big|_{I_c=1\text{ A}} = \frac{E_P \Big|_{I_c=1\text{ A}}}{r^2} + i2\pi f \mu_0 \sigma_e \left(E_C \Big|_{I_c=1\text{ A}} + E_P \Big|_{I_c=1\text{ A}} \right)$$

Power ratio

γ is the power ratio

$$\gamma = \frac{P_{target}}{P|_{I_c=1\text{ A}}}$$

with P_{target} the desired power and

$$P|_{I_c=1\text{ A}} = \int_{NS} \frac{\sigma_e}{2} \| E_C|_{I_c=1\text{ A}} + E_P|_{I_c=1\text{ A}} \|^2 dV$$


γ is computed at every Newton iteration and used to scale $P_J|_{I_c=1\text{ A}}$ and $\mathbf{F}^L|_{I_c=1\text{ A}}$.

The true electric fields are given by

$$E_C = \sqrt{\gamma} E_C|_{I_c=1\text{ A}} \quad E_P = \sqrt{\gamma} E_P|_{I_c=1\text{ A}}$$

Results

Manufactured solution

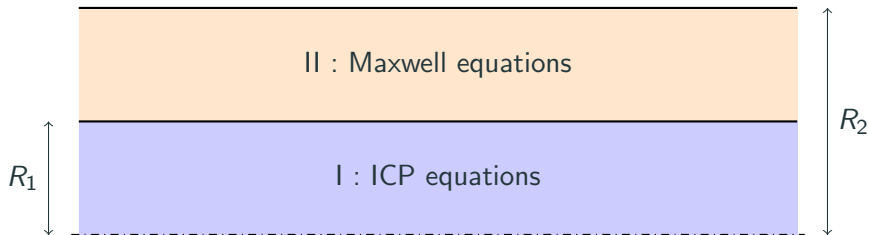

$$p = \Delta p_0 f(z, r) + p_0 \quad T = T_{min} + (T_{max} - T_{min}) f(z, r)$$



$$v_z = u_0 f(z, r) \quad E_p = E_0 f(z, r)(1 - i)$$

$$v_r = u_0 f(z, r) \quad v_\theta = u_0 f(z, r)$$

with



$$f(z, r) = \left(\frac{rz}{RL} \right)^2 \exp \left(-\frac{z}{L} - \frac{r}{R_1} \right)$$

Convergence study : in the torch

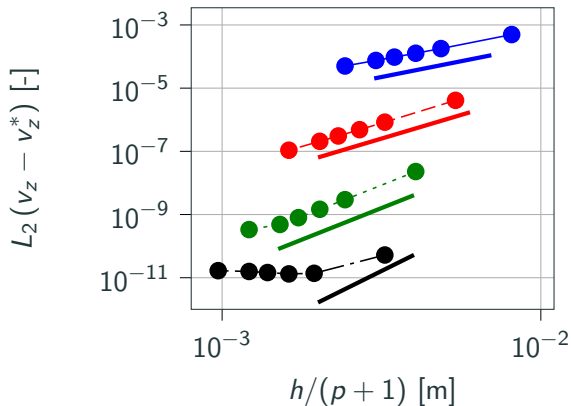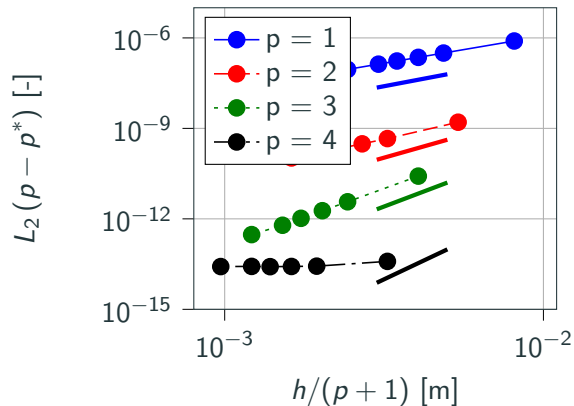


Convergence order of $p+1$ is retrieved!

Convergence study : in the torch

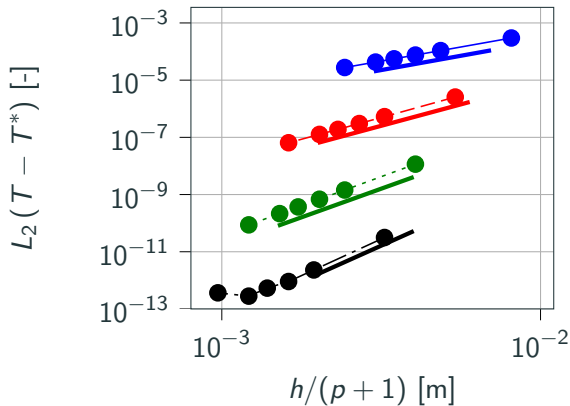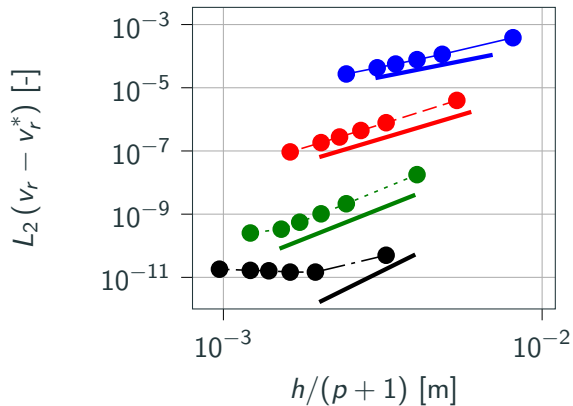



Convergence order of $p + 1$ is retrieved!

Convergence study : in the torch

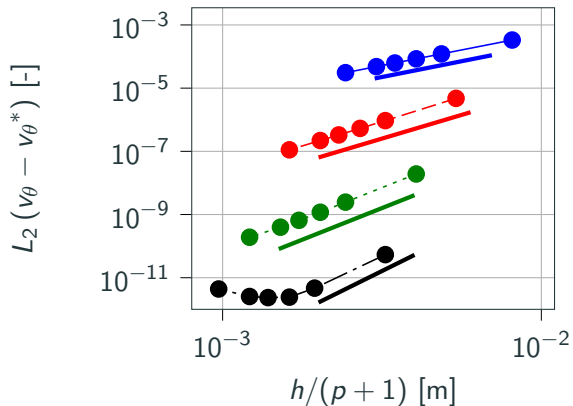



Convergence order of $p+1$ is retrieved!

Convergence study : outside the torch

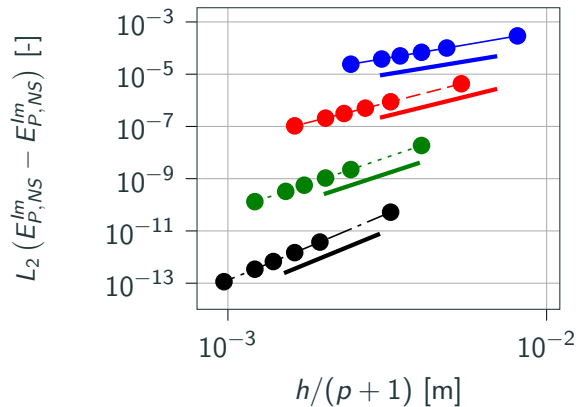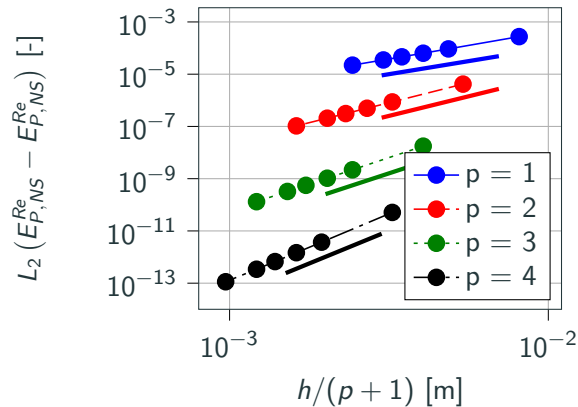


Convergence order of $p+1$ is retrieved!

Convergence study : outside the torch

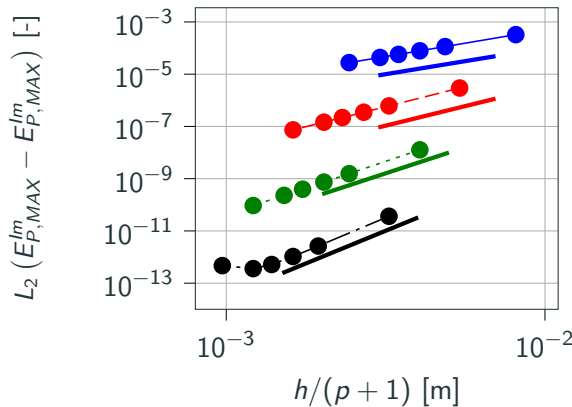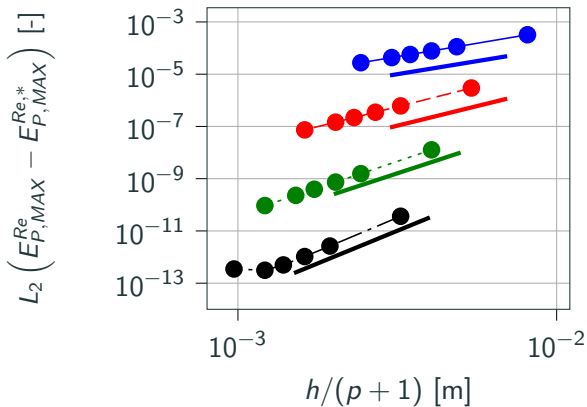

Convergence order of $p+1$ is retrieved!


Grid and order dependence study

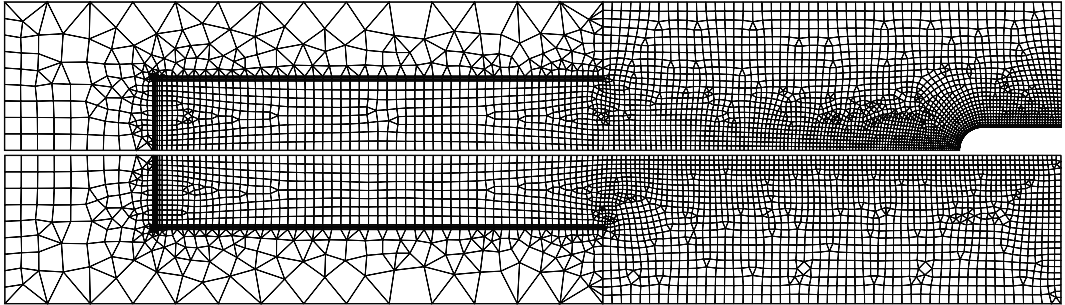

Mesh independence study : this relatively coarse mesh at $p = 4$ with 4013 elements for the probe case and 3055 for the freestream case.

In the following we only consider the probe case.

Grid and order dependence study

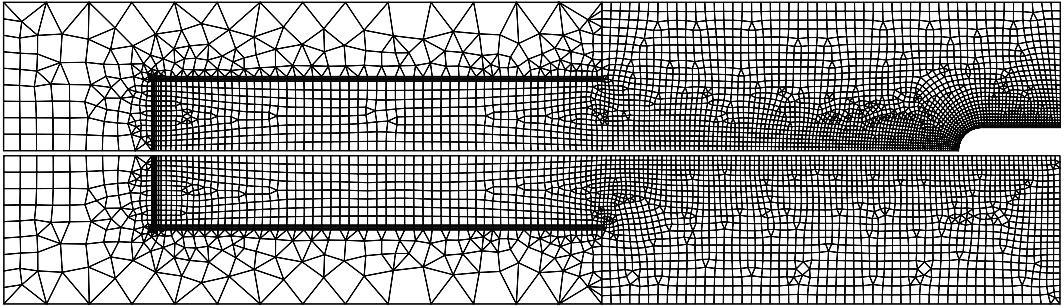

The mesh size close to the probe is $10\text{ }\mu\text{m}$ thick, while it is of $1\text{ }\mu\text{m}$ for the finite volume solvers!

The question of the coflow

A coflow is introduced in the chamber for obtaining a steady state, does it have an important impact?

The question of the coflow


A coflow is introduced in the chamber for obtaining a steady state, does it have an important impact?

We consider an ICP flow with the following characteristics

- $P = 100 \text{ kW}$ (power dissipated in the facility)
- $p_0 = 10\,000 \text{ Pa}$ (background pressure)
- $f = 0.37 \text{ MHz}$ (induction frequency)
- $Q = 16 \text{ g s}^{-1}$ (mass flow rate)
- $S = 20^\circ$ (swirl angle)
- air mixture with 11 species

The question of the coflow

A coflow is introduced in the chamber for obtaining a steady state, does it have an important impact?

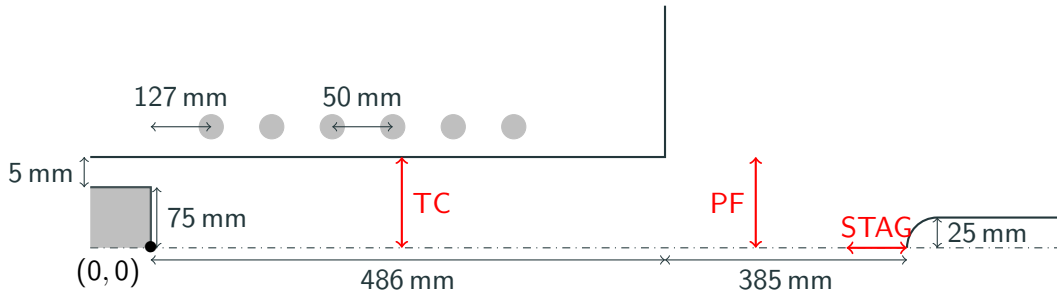

The question of the coflow

A coflow is introduced in the chamber for obtaining a steady state, does it have an important impact?



The coflow parameter χ is defined as

$$\chi = \frac{U_{blow}}{U_{in}}$$

and tested from 0.2 to 1.0.

The question of the coflow

A coflow is introduced in the chamber for obtaining a steady state, does it have an important impact? **Short answer is no.**

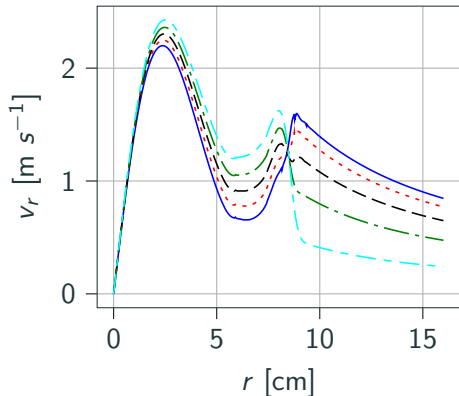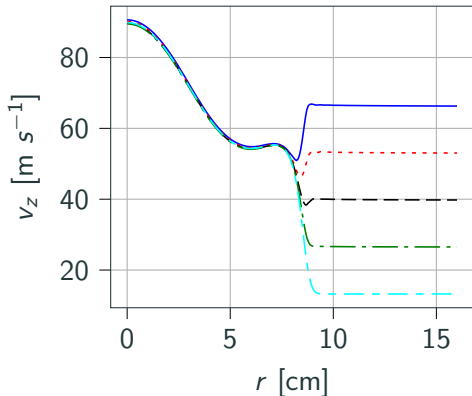

The question of the coflow

A coflow is introduced in the chamber for obtaining a steady state, does it have an important impact?

However, we were not able to obtain any steady state without coflow.

A question to ask is to see if steady state is possible in ICP?



Left for future work...

We compared the results of the COOLFluid solver and the HDG code.

- $p_0 = 5000 \text{ Pa}$
- $Q = 16 \text{ g s}^{-1}$
- $T_{\text{wall}} = T_{\text{inlet}} = 350 \text{ K}$
- $P = 100 \text{ kW}$
- $f = 0.37 \text{ MHz}$
- air mixture with 11 species.
- No swirl angle.
- The coflow applied for HDG is $\chi_{\text{HDG}} = 0.2$.


Comparison with the COOLFluid solver

We compared the results of the COOLFluid solver and the HDG code.

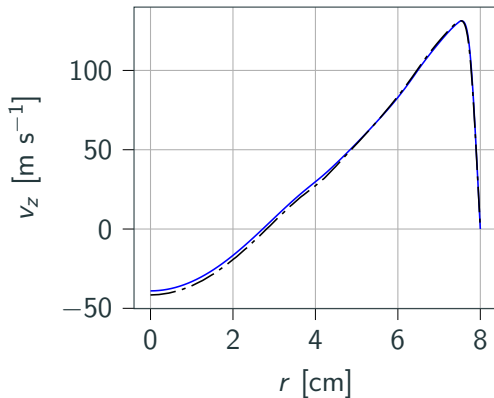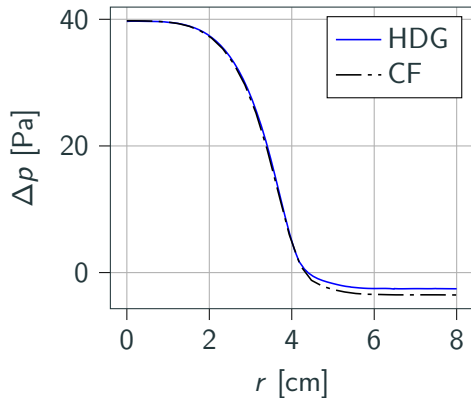



Comparison with the COOLFluid solver

We compared the results of the COOLFluid solver and the HDG code.

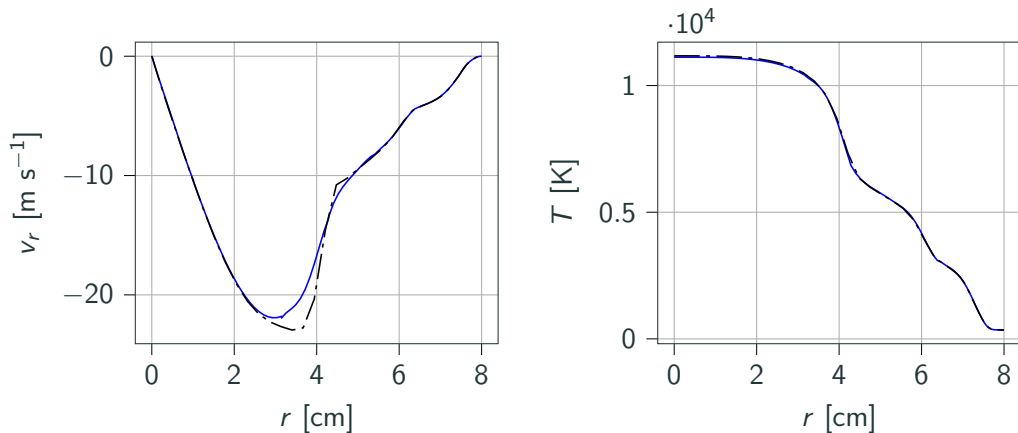

Comparison with the COOLFluid solver

We compared the results of the COOLFluid solver and the HDG code.

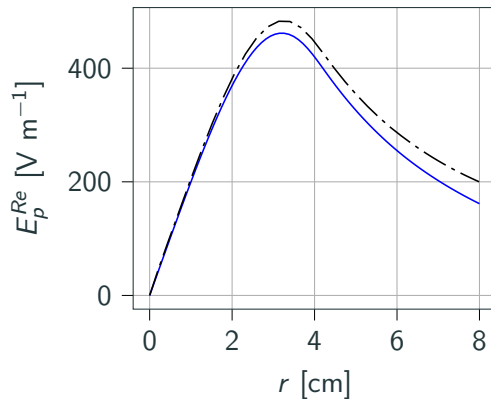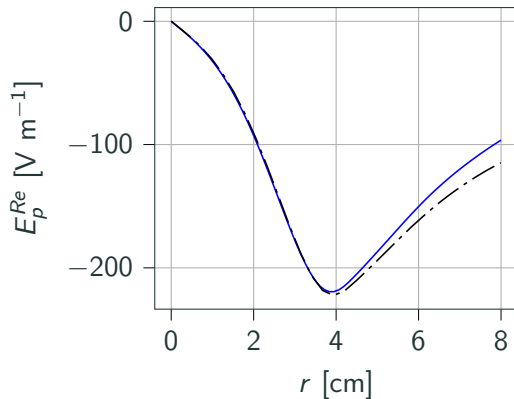



We compared the results of the COOLFluid solver and the HDG code.

Very similar results except for the electric field in the torch, might be due to the way electric field boundary conditions are imposed.

Convergence history

We use **GMRES** solver with at most 50 vectors and a **ILU(4)** preconditioner.


We first solve at order 1 then order 4 (red separation line).

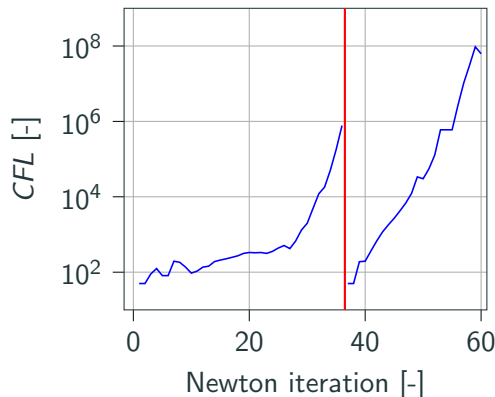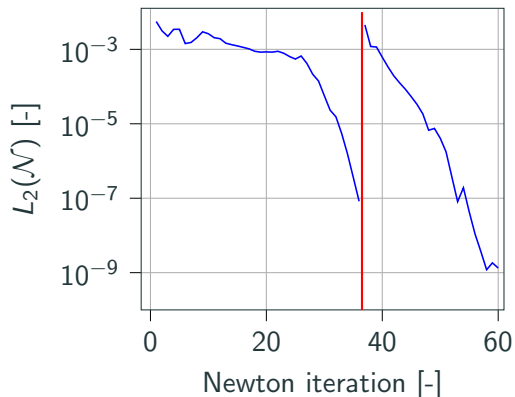

Convergence history

We use **GMRES** solver with at most 50 vectors and a **ILU(4)** preconditioner.

We first solve at order 1 then order 4 (red separation line).

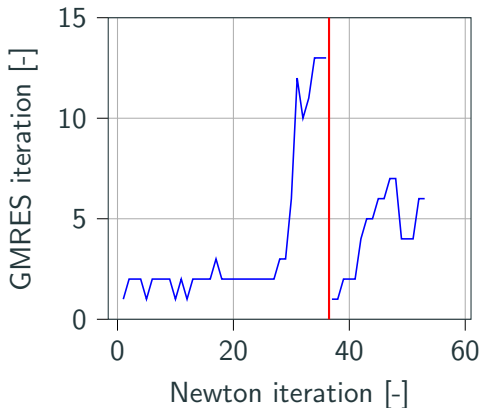


We use GMRES solver with at most 50 vectors and a ILU(4) preconditioner.

We first solve at order 1 then order 4 (red separation line).


We have a fast and robust solver for ICP, able to produce meaningful results in 20 minutes of time on a single laptop using 8 OMP threads!

Flow fields in ICP: gauge pressure

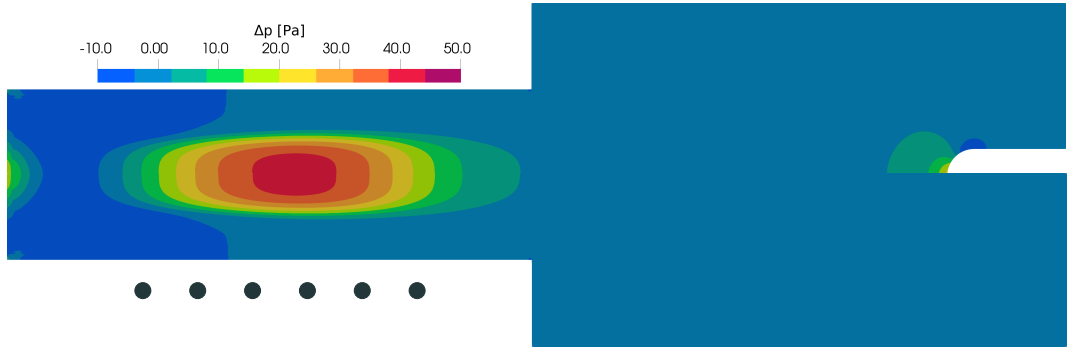


The pressure is almost constant everywhere.

Flow fields in ICP: temperature

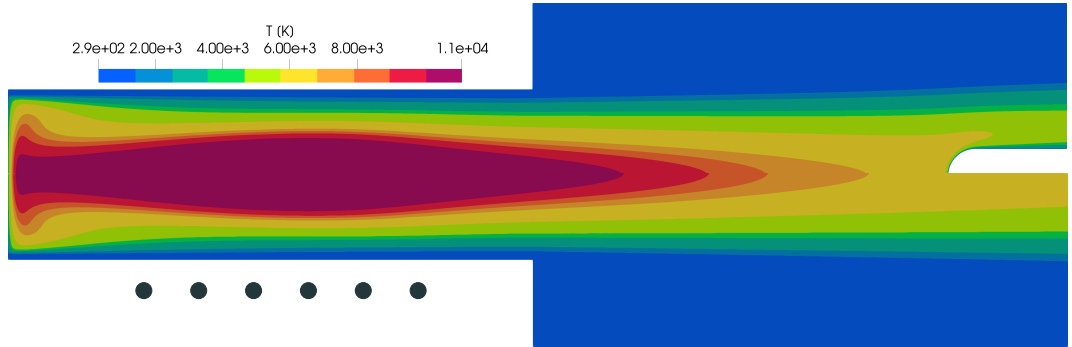


Large temperature gradients.

Flow fields in ICP: streamlines

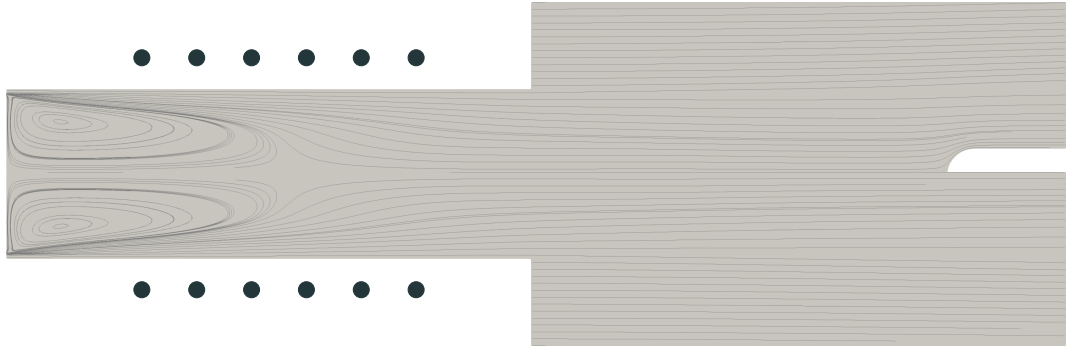


$$\nabla \cdot \mathbf{v} \simeq 0$$

Flow fields in ICP: volume power

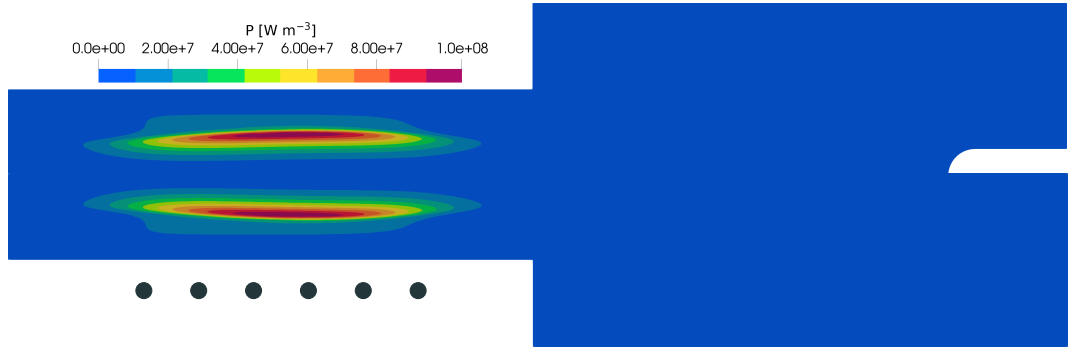


Volume power peak off-axis, where the coupling is the strongest.

Flow fields in ICP: Total electric field

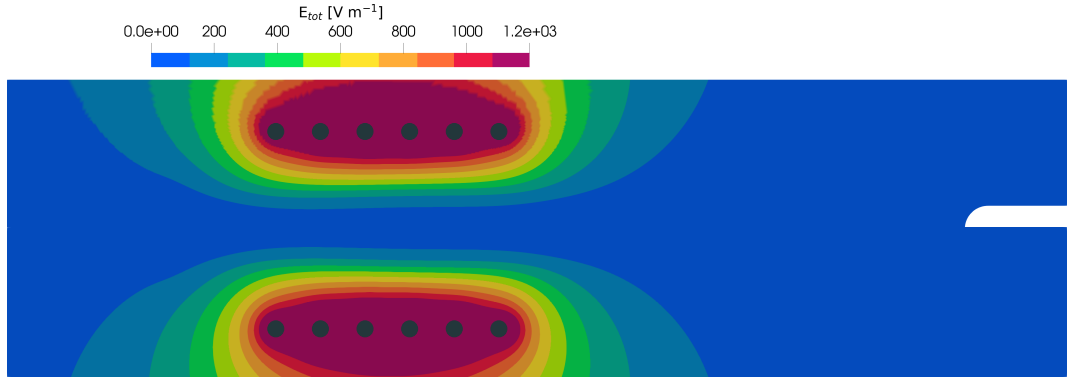

Flow fields in ICP: Lorentz force

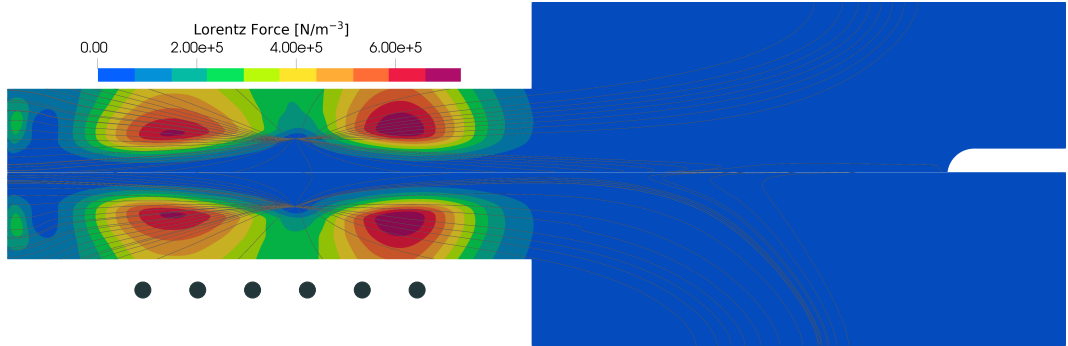

Parametric study

We performed a parametric study of ICP for the parameters used by the experimenters.

- Q from 8 g s^{-1} to 16 g s^{-1} .
- p_0 from 5000 Pa to 20 000 Pa.
- P_{tot} from 50 kW to 200 kW.
- f from 10 kHz, to 1 MHz.
- S from 0° to 20° .

The complete discussion is in the thesis.

Conclusions and future work

Q1 In addition of being precise, can a high-order solver be robust?

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Yes, but there is still some parameter tuning.

However, much easier to use and give meaningful results fast.

A lot of simulations can be performed "eyes closed".

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Yes, but there is still some parameter tuning.

However, much easier to use and give meaningful results fast.

A lot of simulations can be performed "eyes closed".

Q3 Can the new solver be easily adapted to the new experiments performed in ICP facilities?

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Yes, but there is still some parameter tuning.

However, much easier to use and give meaningful results fast.

A lot of simulations can be performed "eyes closed".

Q3 Can the new solver be easily adapted to the new experiments performed in ICP facilities?

We believe so, but there is still much work to do...

Going 2D, 3D, and complex chemistry and radiation for unsteady simulations will need much more computational power.

For supersonic, shock capturing and redesign of the numerical flux.

Future work

Main effort is to put our developments in the ARGO DG solver, which is fully paralleled and equipped shock capturing technologies. (Landry Riou)

We see the following roadmap:

- Going 3D.
- Going unsteady (also relieving the average over the induction current period).
- Development of chemistry (non equilibrium).
- Development of radiation.