

Presentation and experience



[2015→2020] Master in Physics Engineering

[2020→2021] Research master at VKI.


[2021→2025] Ph. D. on ICP simulations.

[2025→Now] Software Developer at Spacebel.

[2019→Now] Experience with DG.


I developed a **high-order numerical solver** for **inductively coupled plasma** (ICP).

ICP facility: an overview

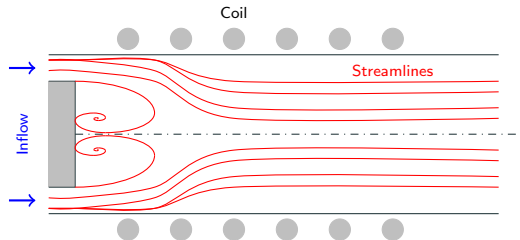


Torch

- $T \simeq 10\,000\text{ K}$, $p \in [1000\text{ Pa}; 100\,000\text{ Pa}]$.
- $Re \simeq 100$, $Ma \simeq 0.01$.
- Air, argon, carbon dioxide.

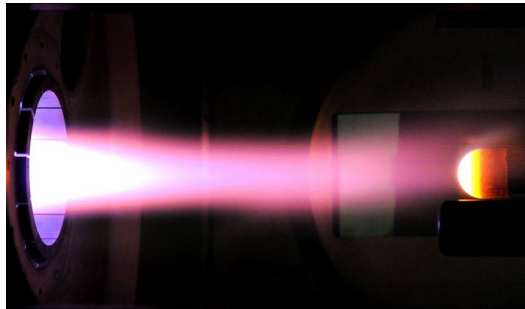


Chamber

- At LTE & non equilibrium.
- Local heat transfer principle.

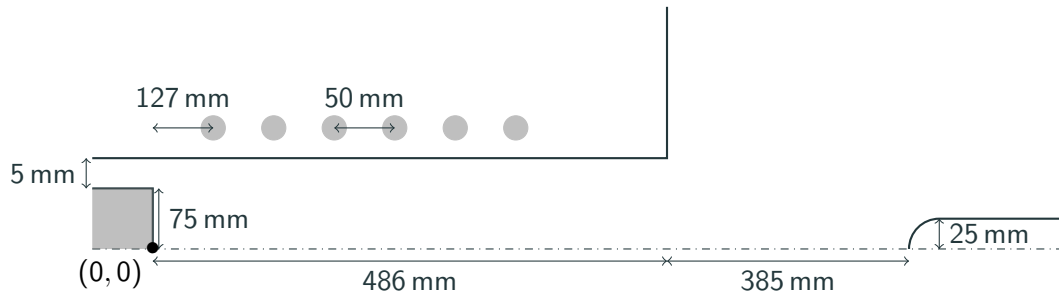


Large temperature gradients!

ICP simulations : complex physics at play

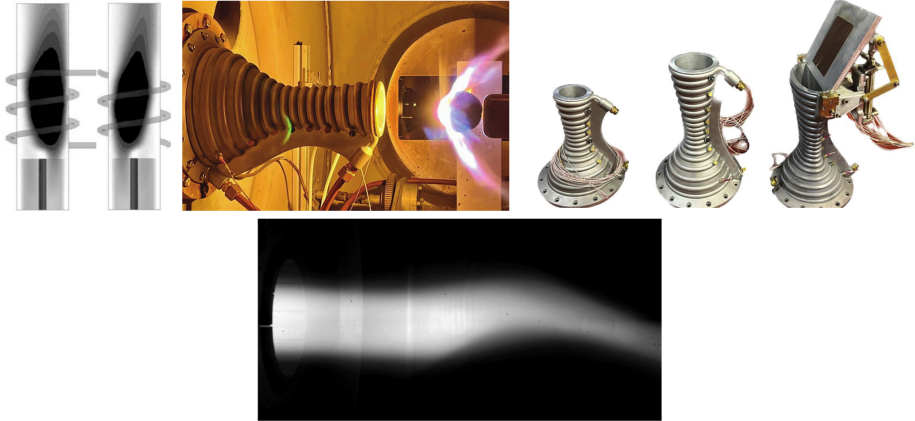


ICP : existing solvers

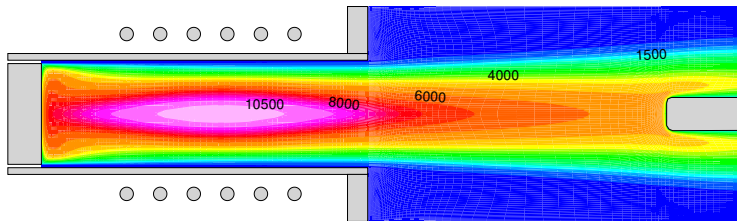


- Axisymmetric.
- Subsonic.
- Steady-state.
- Local thermodynamic equilibrium.
- No-radiation.
- Relatively slow convergence.
- Requires a constant attention during convergence processes.

Finite volume solver limitations.

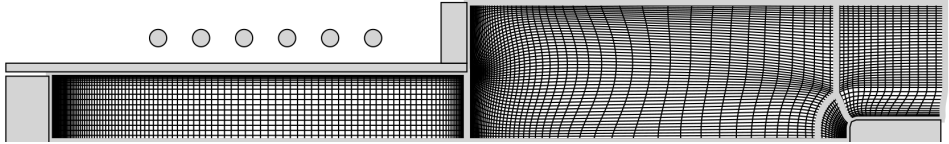

- Constant solution on each element: refined mesh large gradient region.
- Dissipative, "smoothing" the physics.
- Structured mesh.

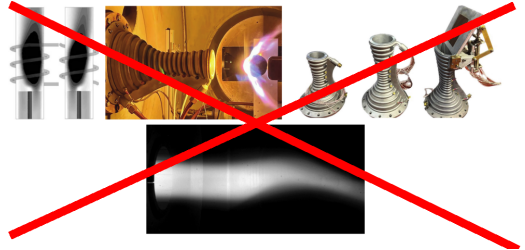

Developing a hybridized discontinuous Galerkin solver of inductively coupled plasmas.

- Q1 In addition of being precise, can a high-order solver be robust for inductively coupled plasma applications?
- Q2 Is the developed solver user-friendly?
- Q3 Can the new solver be easily adapted to the new experiments performed in ICP facilities?

Equations governing the plasma

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$

$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) = -\nabla p + \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} \right) = \nabla \cdot (\boldsymbol{\tau} \mathbf{v}) + \nabla \cdot \mathbf{q} + P_J$$

$$\boldsymbol{\tau} = \eta \left(\nabla \mathbf{v} + \nabla \mathbf{v}^T \right) - \frac{2}{3} \eta \nabla \cdot \mathbf{v}$$

$$\mathbf{q} = -\lambda \nabla T$$

$$F_z^L = \frac{\sigma_e}{4\pi f} \left[E_l^{lm} \partial_z E_l^{Re} - E_l^{Re} \partial_z E_l^{lm} \right]$$

$$F_r^L = \frac{\sigma_e}{4\pi f} \left[E_l^{lm} \frac{1}{r} \partial_r (r E_l^{Re}) - E_l^{Re} \frac{1}{r} \partial_r (r E_l^{lm}) \right]$$

$$P^J = \frac{\sigma_e}{2} \left[(E_l^{lm})^2 + (E_l^{Re})^2 \right]$$

Equations governing the plasma

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0$$


$$\partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v}) = -\nabla p + \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_L$$

$$\partial_t \left(\rho e + \frac{1}{2} \rho \|\mathbf{v}\|^2 \right) + \nabla \cdot \left(\rho e \mathbf{v} + \frac{1}{2} \rho \|\mathbf{v}\|^2 \mathbf{v} + p \mathbf{v} \right) = \nabla \cdot (\boldsymbol{\tau} \mathbf{v}) + \nabla \cdot \mathbf{q} + P_J$$

$$\partial_{zz}^2 E_P + \frac{1}{r} \partial_r (r \partial_r E_P) - \frac{E_P}{r^2} = i 2 \pi f \mu_0 \sigma_e (E_C + E_P)$$

μ_0 : magnetic permeability, σ_e : electron electric conductivity, f : induction frequency

Computational domain and boundary conditions

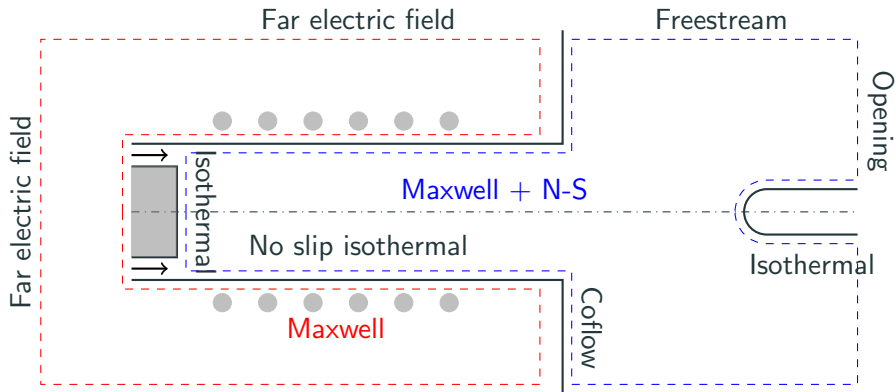

Hybridized discontinuous Galerkin method

Conservative form of the equations

$$\begin{aligned}\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) &= 0 \\ \partial_t (\rho \mathbf{v}) + \nabla \cdot (\rho \mathbf{v} \mathbf{v} + p \mathbb{I}) - \nabla \cdot \boldsymbol{\tau} &= \mathbf{F}_L \\ \partial_t (\rho E) + \nabla \cdot (\rho E \mathbf{v} + p \mathbf{v}) - \nabla \cdot (\boldsymbol{\tau} \mathbf{v} + \mathbf{q}) &= P_J \\ &\quad - \nabla \cdot (\nabla E_P) = -\frac{E_P}{r^2} - i2\pi f \mu_0 \sigma_e (E_C + E_P)\end{aligned}$$

$$\partial_t \mathbf{w}(\mathbf{u}) + \nabla \cdot \mathbf{F}_c(\mathbf{u}) - \nabla \cdot \mathbf{F}_v(\mathbf{u}, \nabla \mathbf{u}) = \mathbf{S}(\mathbf{u}, \nabla \mathbf{u})$$

$$\text{For N-S: } \mathbf{w} = \left(\rho \quad \rho \mathbf{v} \quad \rho e + \rho \frac{\|\mathbf{v}\|^2}{2} \right), \quad \mathbf{u} = (p \quad \mathbf{v} \quad T)$$

Model problem and weak form

$$\begin{aligned}\partial_t \mathbf{w}(\mathbf{u}) + \nabla \cdot (\mathbf{F}_c(\mathbf{u}) - \mathbf{F}_v(\mathbf{u}, \nabla \mathbf{u})) &= \mathbf{S}(\mathbf{u}, \nabla \mathbf{u}) && \text{on } \Omega \\ \mathbf{u} &= \mathbf{u}_{bc} && \text{on } \partial\Omega_D \\ \mathbf{F}_v \cdot \mathbf{n} &= \mathbf{F}_{v,n,bc} && \text{on } \partial\Omega_N \\ \mathbf{u}(t=0) &= \mathbf{U} && \text{on } \Omega\end{aligned}$$

$\mathbf{F}_{c,v}$: convective and diffusive fluxes.

$\mathbf{S}$: source terms.

$\mathbf{w}$: conservative variables.

$\mathbf{u}, \mathbf{u}_{bc}$: solution and boundary condition.

Ω : domain of the problem.

$\partial\Omega_{D,N}$: domain boundary for Dirichlet and Neumann BC.

$\mathbf{U}$: initial data.

Model problem and weak form

$$\begin{aligned}\partial_t \mathbf{w}(\mathbf{u}) + \nabla \cdot (\mathbf{F}_c(\mathbf{u}) - \mathbf{F}_v(\mathbf{u}, \nabla \mathbf{u})) &= \mathbf{S}(\mathbf{u}, \nabla \mathbf{u}) && \text{on } \Omega \\ \mathbf{u} &= \mathbf{u}_{bc} && \text{on } \partial\Omega_D \\ \mathbf{F}_v \cdot \mathbf{n} &= \mathbf{F}_{v,n,bc} && \text{on } \partial\Omega_N \\ \mathbf{u}(t=0) &= \mathbf{U} && \text{on } \Omega\end{aligned}$$

Weak form:


$$(\partial_t \mathbf{w} - \mathbf{S}, w)_\Omega - (\mathbf{F}_c - \mathbf{F}_v, \nabla w)_\Omega + \langle (\mathbf{F}_c - \mathbf{F}_v) \cdot \mathbf{n}, w \rangle_{\partial\Omega} = 0, \quad \forall w \in L_2(\Omega)$$

with

$$(a, b)_K = \int_K ab \, dV, \quad \langle a, b \rangle_{\partial K} = \int_{\partial K} ab \, dS$$

Weak form: spatial discretization.

Division of Ω into elements (K):

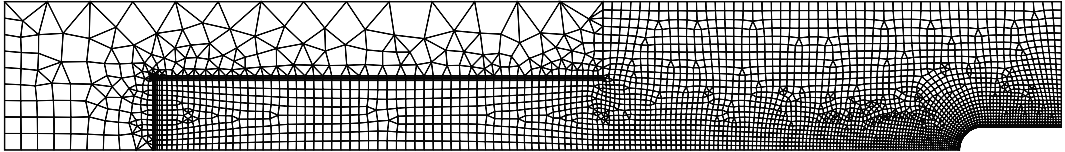

$$\sum_K (\partial_t \mathbf{w} - \mathbf{S}, w)_K - (\mathbf{F}_c - \mathbf{F}_v, \nabla w)_K + \langle (\mathbf{F}_c - \mathbf{F}_v) \cdot \mathbf{n}, w \rangle_{\partial K} = 0, \quad \forall w \in L_2(\Omega)$$

Weak form: Functional space reduction and solution

Restriction of functional space to a finite dimensional subspace of $L_2(\Omega)$. Ex:

$$w \in \mathcal{P}_p(K) \subset L_2(\Omega),$$

with $\mathcal{P}_p(K)$ polynomials of degree at most p on K .

If $\{\varphi_{K,i}\}$, $i = \{1, 2, \dots, N_p\}$ is a basis (Lagrange, monomial, ...) of $\mathcal{P}_p(K)$, then


$$(\partial_t \mathbf{w} - \mathbf{S}, \varphi_{K,i})_K - (\mathbf{F}_c - \mathbf{F}_v, \nabla \varphi_{K,i})_K + \langle (\mathbf{F}_c - \mathbf{F}_v) \cdot \mathbf{n}, \varphi_{K,i} \rangle_{\partial K} = 0$$

$\mathbf{u}$ is then discretized as

$$\mathbf{u}_h = \sum_K \sum_{i=1}^{N_p} \mathbf{u}_{K,i} \varphi_{K,i}$$

Discontinuous Galerkin

$$(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}(\mathbf{u}_h, \nabla \mathbf{u}_h), \varphi_{K,i} \rangle_{\partial K} = 0$$

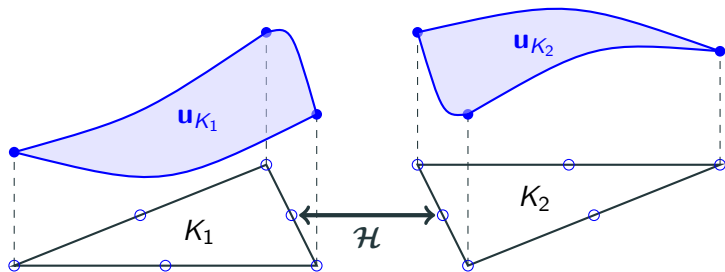


$$\mathbf{u}_h = \sum_K \sum_{i=1}^{N_p} \mathbf{u}_{K,i} \varphi_{K,i}$$

Hybridized Discontinuous Galerkin

$$(\partial_t \mathbf{w}_h - \mathbf{S}_h, \varphi_{K,i})_K - (\mathbf{F}_{c,h} - \mathbf{F}_{v,h}, \nabla \varphi_{K,i})_K + \langle \mathcal{H}(\lambda_h, \mathbf{u}_h, \mathbf{q}_h), \varphi_{K,i} \rangle_{\partial K} = 0$$

$$(\mathbf{q}_h, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_h, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \lambda_h, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} = 0$$

$$\langle [[\mathcal{H}]], \mu_{e,i} \rangle_e = 0$$

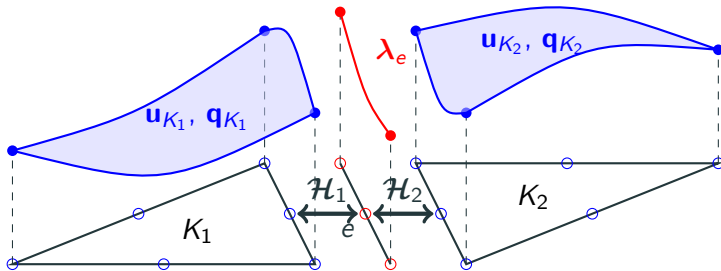

$$\mathbf{u}_h = \sum_K \sum_{i=1}^{N_p} \mathbf{u}_{K,i} \varphi_{K,i}$$

$$\mathbf{q}_h = \sum_K \sum_{i=1}^{N_p} \mathbf{q}_{K,i} \boldsymbol{\tau}_{K,i}$$

$$\lambda_h = \sum_e \sum_{i=1}^{N_p} \lambda_{e,i} \mu_{e,i}$$

ICP as a multi-domain problem



Solves the system in a fully coupled manner, with two domains.

Modification of the model problem

$$\begin{aligned}\partial_t \mathbf{w}^l(\mathbf{u}) + \nabla \cdot \left(\mathbf{F}_c^l(\mathbf{u}) - \mathbf{F}_v^l(\mathbf{u}, \nabla \mathbf{u}) \right) &= \mathbf{S}^l(\mathbf{u}, \nabla \mathbf{u}), & \text{on } \Omega^l \\ \mathbf{u}^l &= \mathbf{u}_{bc}^l, & \mathbf{x} \in \partial\Omega_d^l \\ \mathbf{F}_v^l \cdot \mathbf{n} &= \mathbf{F}_{v,n,bc}^l, & \text{on } \partial\Omega_n^l \\ \mathcal{F}^{l,l'}(\mathbf{u}^l, \nabla \mathbf{u}^l, \mathbf{u}^{l'}, \nabla \mathbf{u}^{l'}) &= 0, & \text{on } \gamma^{l,l'}, l \neq l' \\ \mathbf{u}^l(t=0) &= \mathbf{U}^l, & \text{on } \Omega^l\end{aligned}$$

For ICP,

$$\mathcal{F} = \begin{pmatrix} \nabla E_p^{Re,NS} \cdot \mathbf{n}^{NS} - \nabla E_p^{Re,MAX} \cdot \mathbf{n}^{MAX} \\ \nabla E_p^{Im,NS} \cdot \mathbf{n}^{NS} - \nabla E_p^{Im,MAX} \cdot \mathbf{n}^{MAX} \end{pmatrix}$$

Modification of the discrete formulation

$$\begin{aligned} & \left(\partial_t \mathbf{w}_h - \mathbf{S}_h^K, \varphi_{K,i} \right)_K - \left(\mathbf{F}_{h,c}^K - \mathbf{F}_{h,v}^K, \nabla \varphi_{K,i} \right)_K + \left\langle \mathcal{H}^K, \varphi_{K,i} \right\rangle_{\partial K} = 0 \\ & (\mathbf{q}_K, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_K, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \boldsymbol{\lambda}_{\partial K}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} = 0 \\ & \langle [[\mathcal{H}]], \mu_{e,i} \rangle_{e \setminus \bar{\Gamma}} + \langle \tilde{\mathcal{F}}^e, \mu_{e,i} \rangle_{e \cap \bar{\Gamma}} = 0 \end{aligned}$$

with $\bar{\Gamma}$ the set of interfaces between subdomains.

Numerical fluxes : convection

Low mach requires to use preconditioned numerical flux

$$\mathcal{H} = \mathcal{H}_c - \mathcal{H}_v$$

$$\mathcal{H}_c = R\mathcal{H}_{c,n}(\mathbf{u}, \lambda) = R(\dot{m} + \dot{m}_p)\Psi_\lambda - R|\dot{m}|(\Psi_\lambda - \Psi_U) + \mathbf{P}$$

with

$$\Psi = \left(1 \quad v^\perp \quad v^\parallel \quad v_\theta \quad e + \frac{1}{2}||\mathbf{v}||^2 + \frac{p}{\rho}\right)^T$$

$$\mathbf{P} = \left(0 \quad p_\lambda \quad 0 \quad 0\right)^T$$

$$\dot{m}_p = \frac{p_U - p_\lambda}{V_p}$$

$$\mathcal{H} = \mathcal{H}_c - \mathcal{H}_v$$

$$\mathcal{H}_v(\mathbf{u}, \lambda, \mathbf{q}) = \mathbf{F}_v(\lambda, \mathbf{q}) \cdot \mathbf{n} + \gamma(h)(\lambda - \mathbf{u})$$

with

$$\gamma = C \max_{f \in K} \left(\frac{1}{2\mathcal{V}} \sum_{f \in K} \mathcal{A} \right)$$

C depends on the diffusive transport coefficients.

Solution strategy: Newton solver with damping term

$$\mathcal{N}(\mathbf{x}) = 0 \Rightarrow \mathcal{N}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\mathcal{N}(\mathbf{x}_k)$$


with a damping term.

$$P_{tot} = \int_{NS} P_J dV$$

The current I_c is adapted throughout the simulation in order to reach a target power P_{target} .

$$I_c^{k+1} = I_c^k \sqrt{\frac{P_{target}}{P_{tot}^k}}$$

Manufactured solution

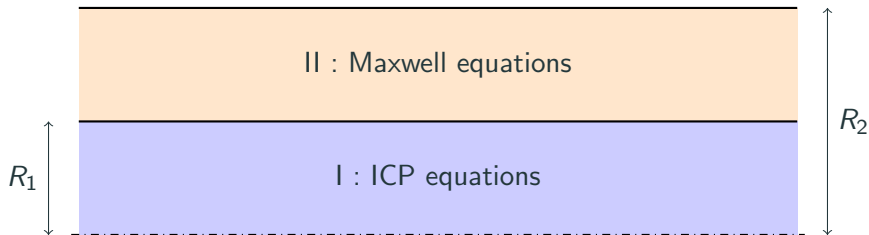

$$p = \Delta p_0 f(z, r) + p_0 \quad T = T_{min} + (T_{max} - T_{min}) f(z, r)$$



$$v_z = u_0 f(z, r) \quad E_p = E_0 f(z, r)(1 - i)$$

$$v_r = u_0 f(z, r) \quad v_\theta = u_0 f(z, r)$$

with



$$f(z, r) = \left(\frac{rz}{RL} \right)^2 \exp \left(-\frac{z}{L} - \frac{r}{R_1} \right)$$

Convergence study : in the torch

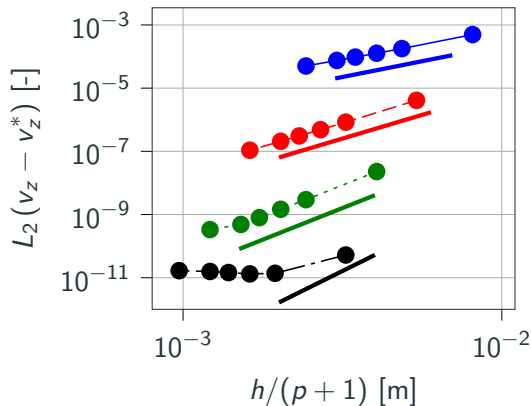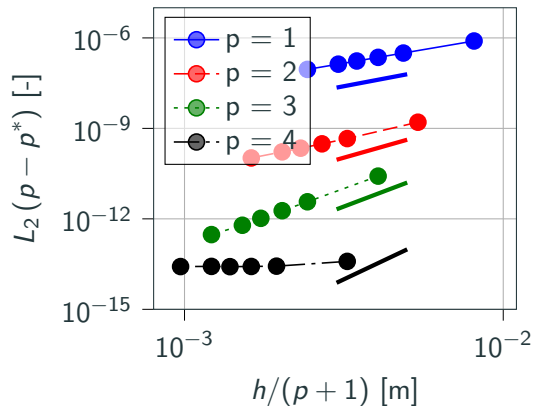


Convergence order of $p+1$ is retrieved!

Convergence study : in the torch

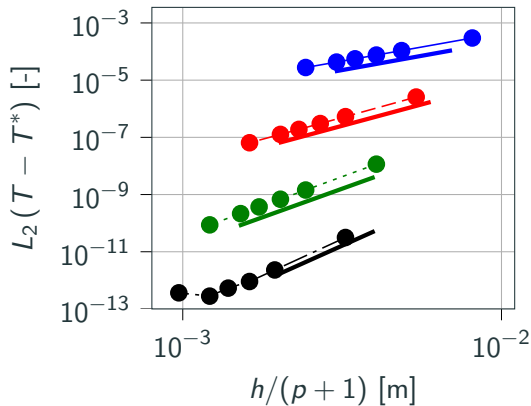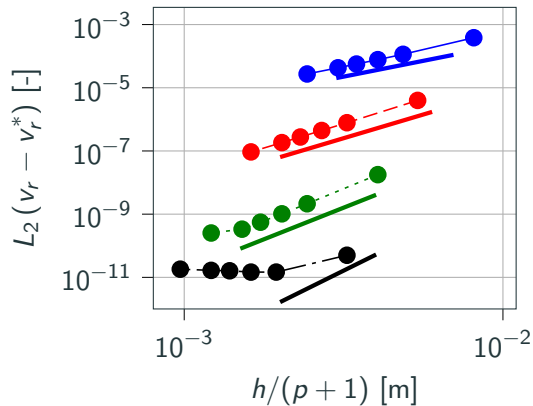



Convergence order of $p + 1$ is retrieved!

Convergence study : in the torch

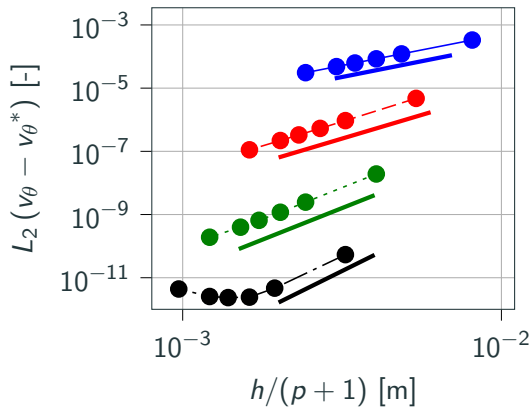



Convergence order of $p+1$ is retrieved!

Convergence study : outside the torch

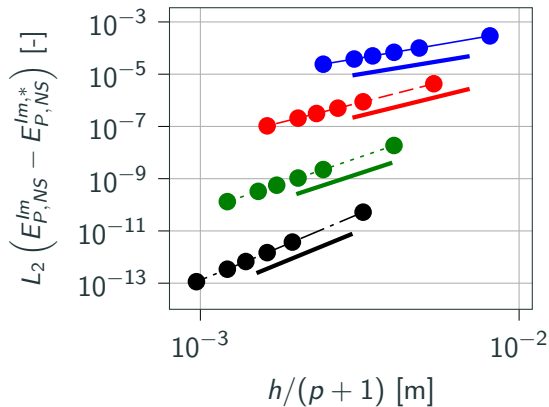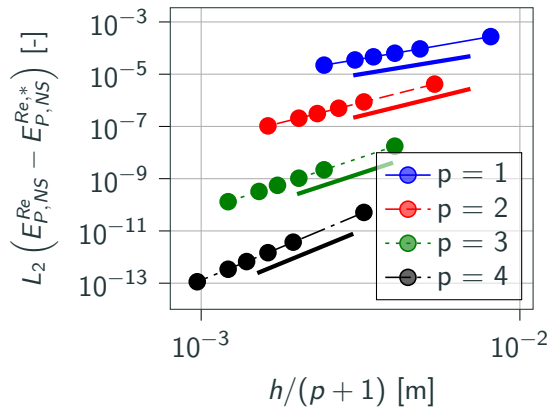


Convergence order of $p + 1$ is retrieved!

Convergence study : outside the torch

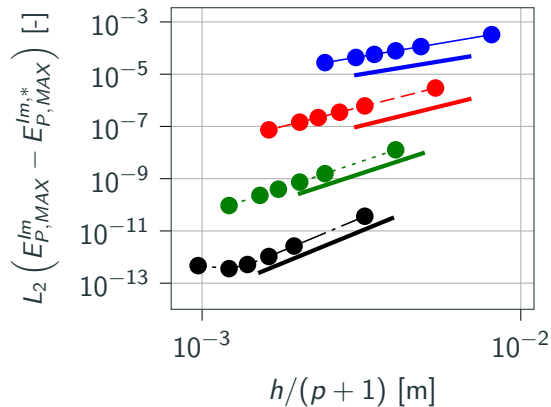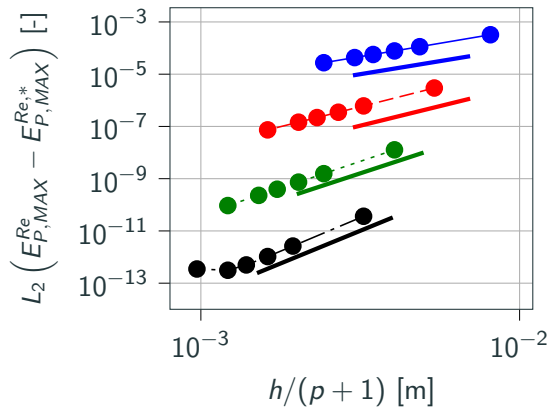

Convergence order of $p + 1$ is retrieved!

Mesh and order dependence study

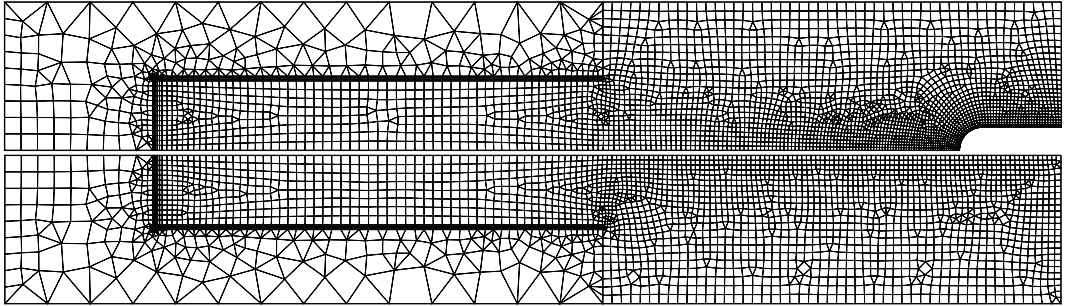


This mesh at $p = 4$ with 4013 elements for the probe case and 3055 for the freestream case is sufficient for capturing the solution accurately.

The mesh size close to the probe is $10\text{ }\mu\text{m}$ thick, while it is of $1\text{ }\mu\text{m}$ for FV!

The question of the coflow

A coflow is introduced in the chamber for obtaining a steady state, does it have an important impact?



- $P = 100 \text{ kW}$
- $p_0 = 10\,000 \text{ Pa}$
- $f = 0.37 \text{ MHz}$
- $Q = 16 \text{ g s}^{-1}$
- $S = 20^\circ$
- air (11 species)

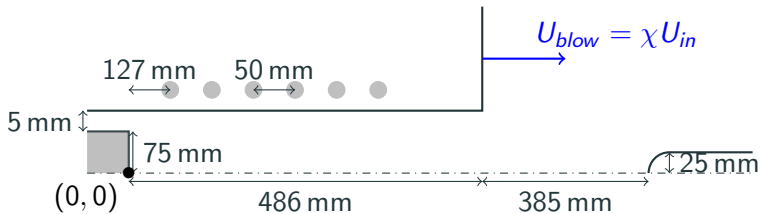

$$\chi = \frac{U_{blow}}{U_{in}} \in [0.2, 1.]$$



Effect of the coflow on the simulations

Only has an impact at the torch exit, outside the torch radius.

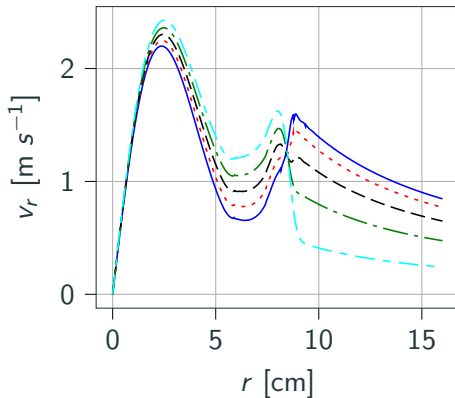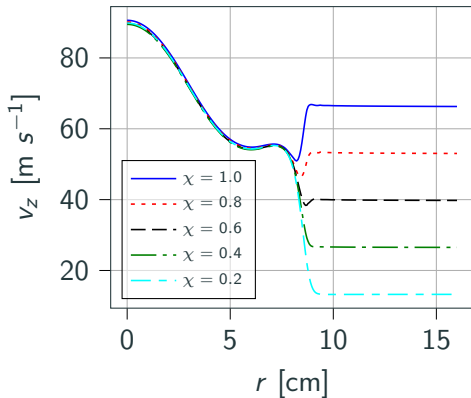


However, we were not able to obtain any steady state without coflow.

Comparison with the COOLFluid solver (radial profile in the torch)

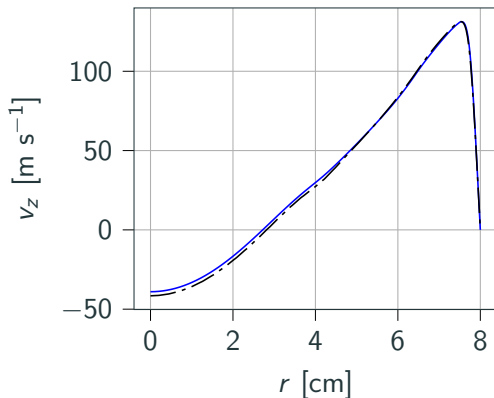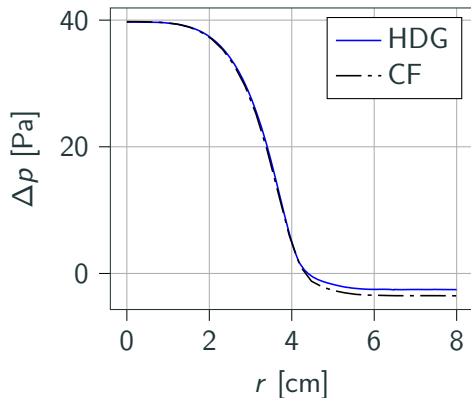



$p_0 = 5000$ Pa, $Q = 16$ g s⁻¹, $T_{wall} = T_{inlet} = 350$ K, $P = 100$ kW, $f = 0.37$ MHz, $S = 0$, air (11 species), $\chi_{HDG} = 0.2$.

Comparison with the COOLFluid solver (radial profile in the torch)

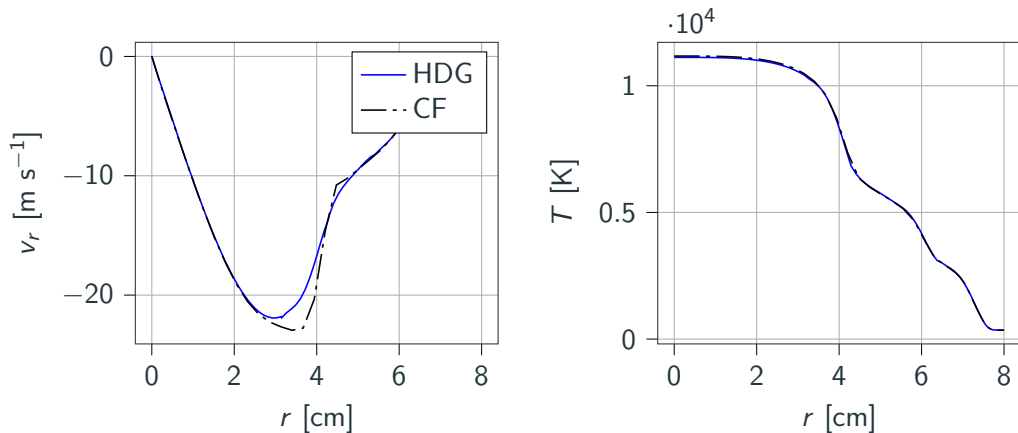

$p_0 = 5000 \text{ Pa}$, $Q = 16 \text{ g s}^{-1}$, $T_{\text{wall}} = T_{\text{inlet}} = 350 \text{ K}$, $P = 100 \text{ kW}$, $f = 0.37 \text{ MHz}$, $S = 0$, air (11 species), $\chi_{\text{HDG}} = 0.2$.

Comparison with the COOLFluid solver (radial profile in the torch)

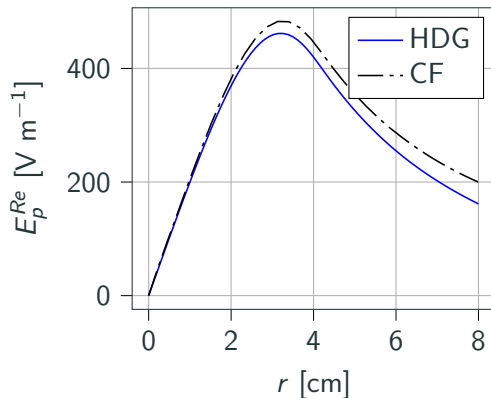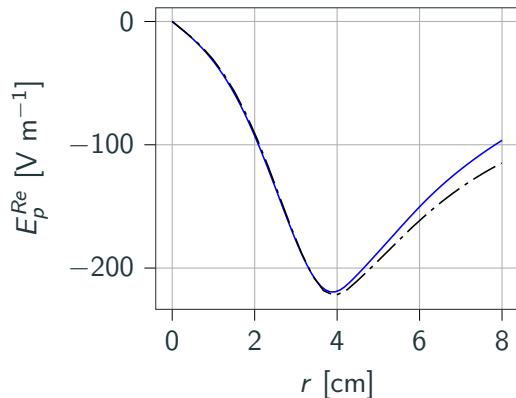


$p_0 = 5000$ Pa, $Q = 16$ g s⁻¹, $T_{wall} = T_{inlet} = 350$ K, $P = 100$ kW, $f = 0.37$ MHz, $S = 0$, air (11 species), $\chi_{HDG} = 0.2$.

Convergence history

We use **GMRES** solver with at most 50 vectors and a **ILU(4)** preconditioner.

We first solve with polynomial degree 1 then 4 (red separation line).

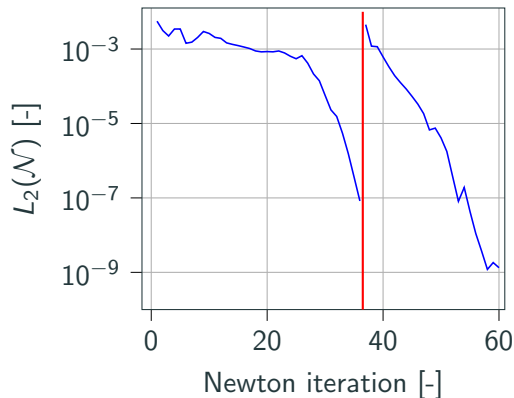


**Fast and robust solver for ICP,
able to produce meaningful re-
sults in 20 minutes of time on
a single laptop using 8 OMP
threads!**

DOFS $\lambda \simeq 400\,000$

DOFs $w \simeq 1\,000\,000$


DOFS $q \simeq 2\,000\,000$

Flow fields in ICP: gauge pressure

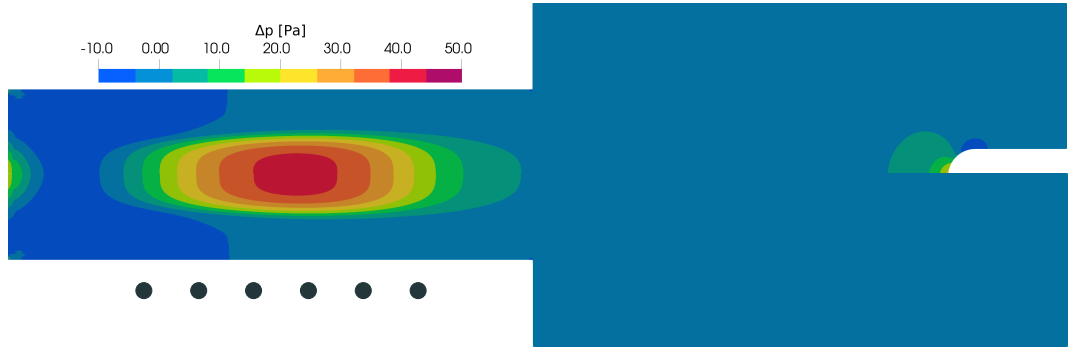


The pressure is almost constant everywhere ($p_0 = 10\,000\text{ Pa}$).

Flow fields in ICP: temperature

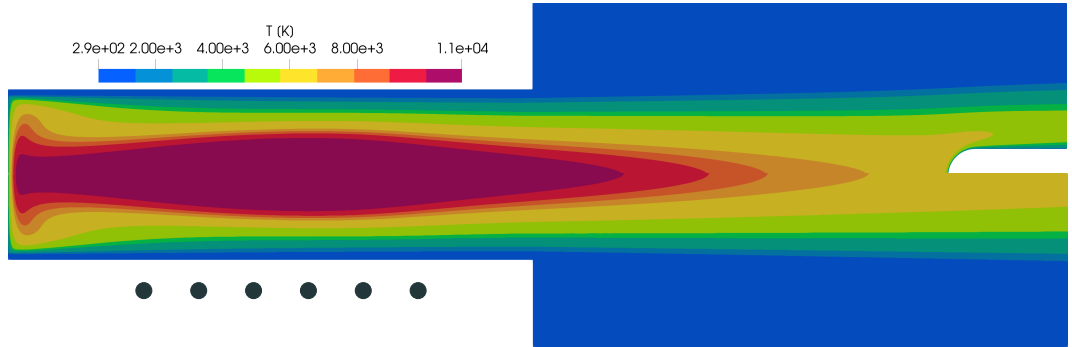


Large temperature gradients.

Flow fields in ICP: streamlines

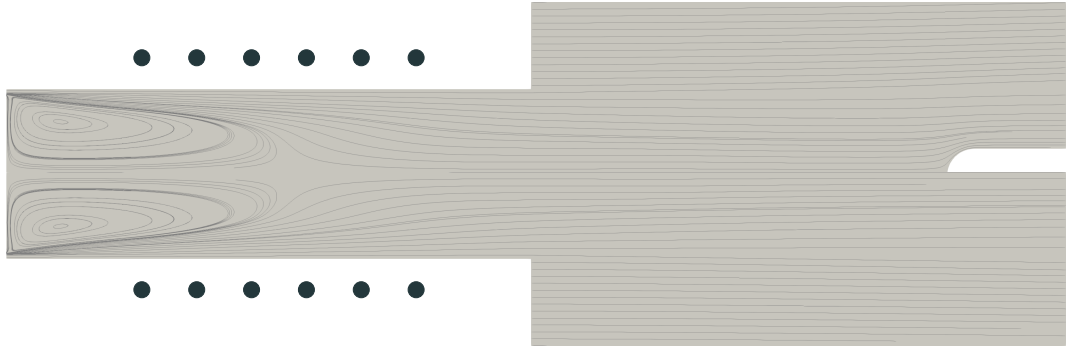

$$\nabla \cdot \mathbf{v} \simeq 0$$

Flow fields in ICP: volume power

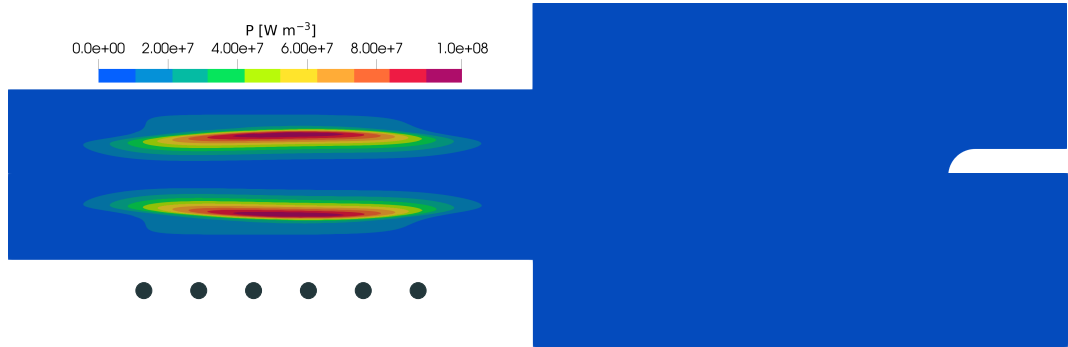

Volume power peak off-axis, where the coupling is the strongest.

Parametric study

We performed a parametric study of ICP for the parameters used by the experimenters.

- Q from 8 g s^{-1} to 16 g s^{-1} .
- p_0 from 5000 Pa to 20 000 Pa.
- P_{tot} from 50 kW to 200 kW.
- f from 10 kHz, to 1 MHz.
- S from 0° to 20° .

The complete discussion is in the thesis.

Conclusions and future work

Q1 In addition of being precise, can a high-order solver be robust?

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Yes, but there is still some parameter tuning.

However, much easier to use and give meaningful results fast.

A lot of simulations can be performed "eyes closed".

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Yes, but there is still some parameter tuning.

However, much easier to use and give meaningful results fast.

A lot of simulations can be performed "eyes closed".

Q3 Can the new solver be easily adapted to the new experiments performed in ICP facilities?

Q1 In addition of being precise, can a high-order solver be robust?

YES! More robust than FV, thanks to the monolithic strategy.

Q2 Is the developed solver user-friendly?

Yes, but there is still some parameter tuning.

However, much easier to use and give meaningful results fast.

A lot of simulations can be performed "eyes closed".

Q3 Can the new solver be easily adapted to the new experiments performed in ICP facilities?

We believe so, but there is still much work to do...

Going 2D, 3D, and complex chemistry and radiation for unsteady simulations will need much more computational power.

For supersonic, shock capturing and redesign of the numerical flux.

Future work


Main effort is to put our developments in the ARGO DG solver, which is fully paralleled and equipped shock capturing technologies. (Landry Riou)

We see the following roadmap:

- Going 3D.
- Going unsteady (also relieving the average over the induction current period).
- Development of chemistry (non equilibrium).
- Development of radiation.
- For all of the above, comparison with experiment when possible.



Backup

Power dissipated in the facility: impact on mass flow rate

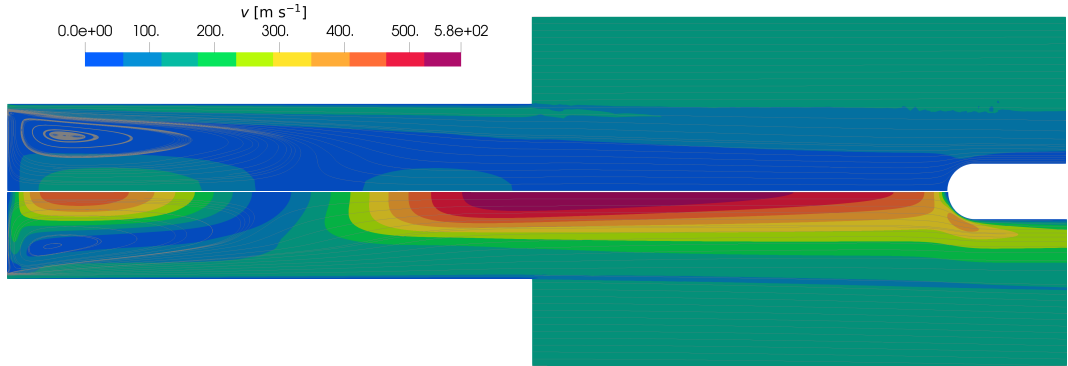


$P_{tot} = 50 \text{ kW}$ (top) and $P_{tot} = 200 \text{ kW}$ (bottom)


Power dissipated in the facility: impact in the torch

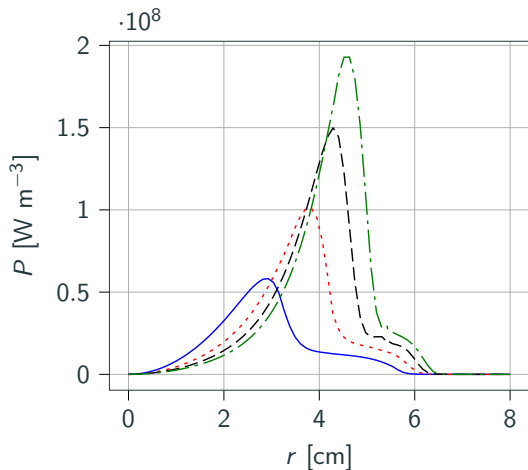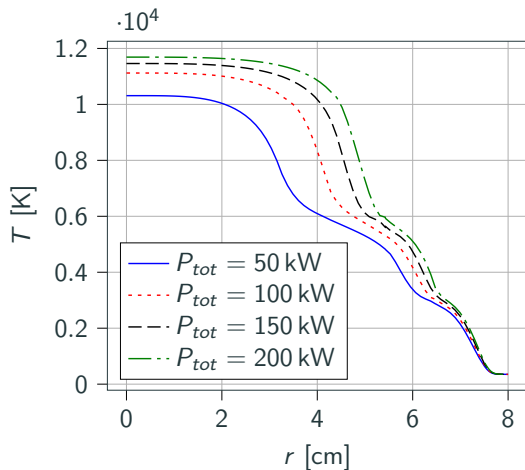

Power dissipated in the facility: impact along the stagnation line

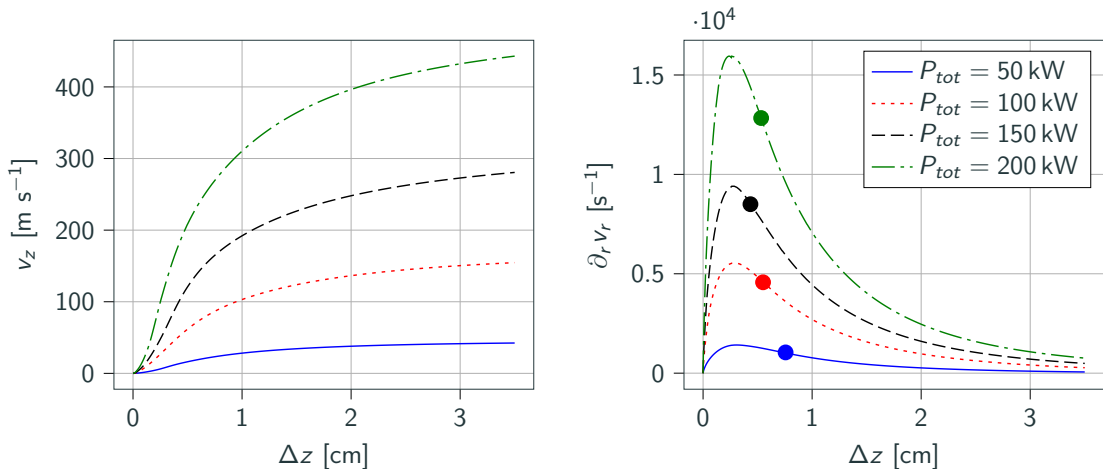

Power dissipated in the facility: impact along the stagnation line

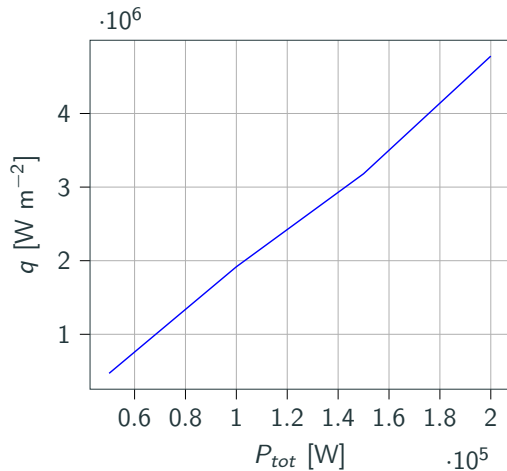

Matrix form of the system

$$\mathcal{N}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\mathcal{N}(\mathbf{x}_k)$$

$$\underbrace{\begin{pmatrix} A & B & R \\ C & D & S \\ L & M & N \end{pmatrix}}_{\mathcal{N}'} \underbrace{\begin{pmatrix} \delta Q \\ \delta U \\ \delta \Lambda \end{pmatrix}}_{\delta \mathbf{x}} = \underbrace{\begin{pmatrix} F \\ G \\ H \end{pmatrix}}_{-\mathcal{N}} \Rightarrow \begin{cases} \underbrace{\begin{pmatrix} A & B \\ C & D \end{pmatrix}}_{\text{Block diagonal}} \begin{pmatrix} \delta Q \\ \delta U \end{pmatrix} = \begin{pmatrix} F \\ G \end{pmatrix} - \begin{pmatrix} R \\ S \end{pmatrix} \delta \Lambda \\ \begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} \delta Q \\ \delta U \end{pmatrix} + N \delta \Lambda = H \end{cases}$$

Matrix form of the system

$$\mathcal{N}'(\mathbf{x}_k)\delta\mathbf{x}_k = -\mathcal{N}(\mathbf{x}_k)$$


By eliminating δU and δQ , one gets the **global** system

$$\left(N - \begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} R \\ S \end{pmatrix} \right) \delta\Lambda = H - \begin{pmatrix} L & M \end{pmatrix} \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} F \\ G \end{pmatrix}$$

System solved for λ , then $\mathbf{u}$ and $\mathbf{q}$ are retrieved by small local matrices inversion.

$$\begin{pmatrix} \delta Q \\ \delta U \end{pmatrix} = \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} F \\ G \end{pmatrix} - \begin{pmatrix} A & B \\ C & D \end{pmatrix}^{-1} \begin{pmatrix} R \\ S \end{pmatrix} \delta\Lambda$$



Comparison with experiment

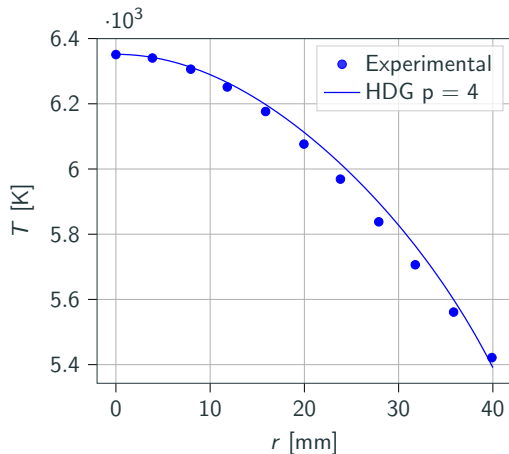

- $p_0 = 200$ mbar
- $Q = 16 \text{ g s}^{-1}$
- $P_{exp.} = 200$ kW
- $P_{num.} = 78$ kW
- Freestream, no swirl, air.



Comparison of the experimental $T(r)$ at 385 mm from the torch exit, from $r = 0$ to 40 mm.

Transport properties

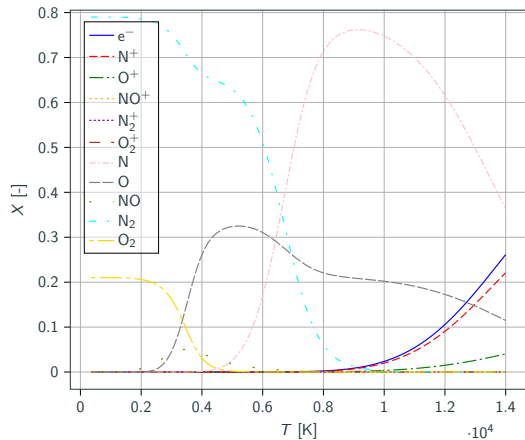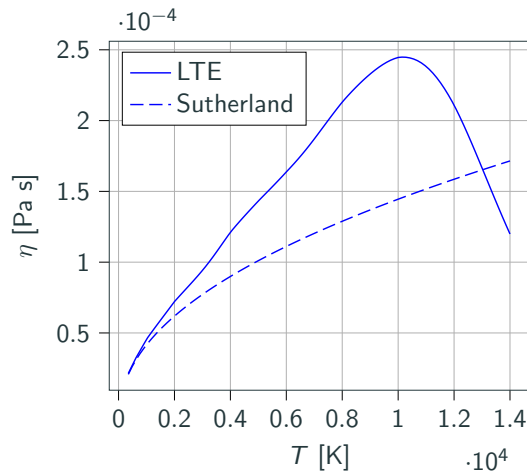



$$\eta \propto \sqrt{T}/\sigma$$

Transport properties

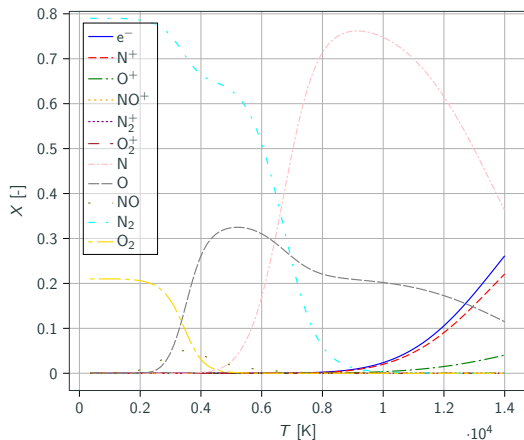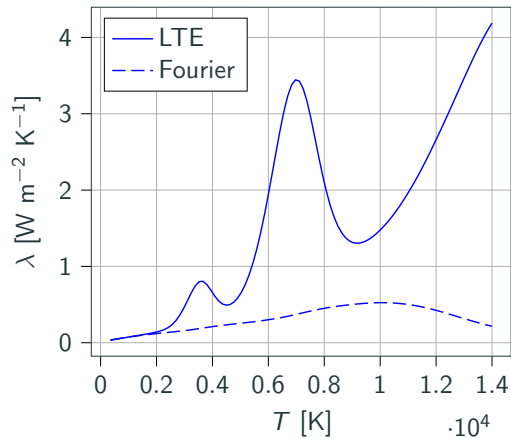

$$\lambda_r \propto \frac{dX}{dT}$$

Transport properties

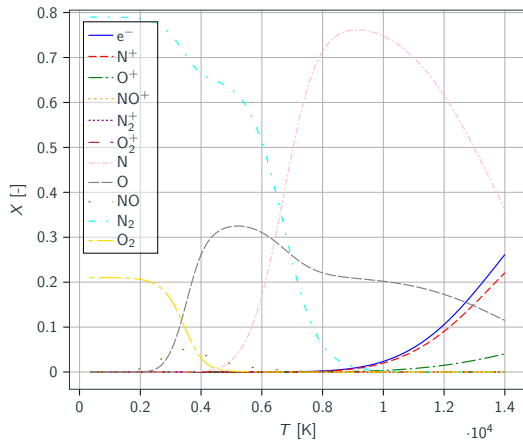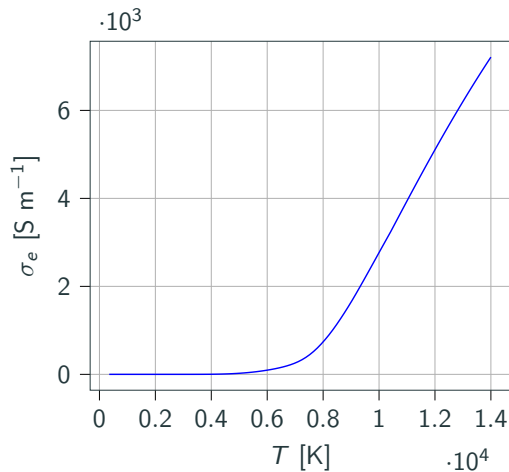

$$\sigma_e \propto X_e$$

Plasma governing equations : the Boltzmann equation

$$\mathcal{D}_i(f_{i,l}) = \partial_t f_{i,l} + \mathbf{c}_i \cdot \nabla f_{i,l} + \frac{\mathbf{F}_i}{m_i} \cdot \partial_{\mathbf{c}_i} f_{i,l} = \mathcal{S}_i + \mathcal{C}_i$$

$f_i(\mathbf{x}, \mathbf{c})$: probability density function.

$\mathcal{S}_i$: scattering collision operator (non chemically reacting).

$\mathcal{C}_i$: chemically reacting collision operator.

Provided $Kn = \frac{\lambda}{L} \ll 1$ (continuous medium)

$$\rho = \sum_i \int m_i f_i d\mathbf{c}_i. \quad \rho \mathbf{v} = \sum_i \int m_i \mathbf{c}_i f_i d\mathbf{c}_i, \dots$$

Solution strategy

The HDG system is solved at steady-state such that

$$\begin{aligned}
 & \left(\cancel{\partial_t \mathbf{w}_h} - \mathbf{S}_h^K, \varphi_{K,i} \right)_K - \left(\mathbf{F}_{h,c}^K - \mathbf{F}_{h,v}^K, \nabla \varphi_{K,i} \right)_K + \left\langle \mathcal{H}^K, \varphi_{K,i} \right\rangle_{\partial K} = 0 \\
 & (\mathbf{q}_K, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_K, \nabla \boldsymbol{\tau}_{K,i})_K + \langle \boldsymbol{\lambda}_{\partial K}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} = 0 \\
 & \langle [[\mathcal{H}]], \mu_{e,i} \rangle_{e \setminus \bar{\Gamma}} + \langle \tilde{\mathcal{F}}^e, \mu_{e,i} \rangle_{e \cap \bar{\Gamma}} = 0
 \end{aligned}$$

If the system is written as $\mathcal{N} = 0$, then the Newton method solves

$$\mathcal{N}'(\mathbf{x}_k) \delta \mathbf{x}_k = -\mathcal{N}(\mathbf{x}_k)$$

with $\delta \mathbf{x}_k = \mathbf{x}_{k+1} - \mathbf{x}_k$.

Solution strategy

The HDG system is solved at steady-state such that

$$\begin{aligned} \left(\frac{\delta \mathbf{w}_h^K}{\tau_{K,k}} - \mathbf{S}_h^K, \varphi_{K,i} \right)_K - \left(\mathbf{F}_{h,c}^K - \mathbf{F}_{h,v}^K, \nabla \varphi_{K,i} \right)_K + \left\langle \mathcal{H}^K, \varphi_{K,i} \right\rangle_{\partial K} &= 0 \\ (\mathbf{q}_K, \boldsymbol{\tau}_{K,i})_K - (\mathbf{u}_K, \nabla \boldsymbol{\tau}_{K',i})_K + \langle \boldsymbol{\lambda}_{\partial K}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_0} + \langle \mathbf{u}_{bc}, \boldsymbol{\tau}_{K,i} \cdot \mathbf{n} \rangle_{\partial K_{bc}} &= 0 \\ \langle [[\mathcal{H}]], \mu_{e,i} \rangle_{e \setminus \bar{\Gamma}} + \langle \tilde{\mathcal{F}}^e, \mu_{e,i} \rangle_{e \cap \bar{\Gamma}} &= 0 \end{aligned}$$

If the system is written as $\tilde{\mathcal{N}} = 0$, then the Newton method solves

$$\tilde{\mathcal{N}}'(\mathbf{x}_k) \delta \mathbf{x} = -\tilde{\mathcal{N}}(\mathbf{x}_k)$$

with $\delta \mathbf{x} = \mathbf{x}_{k+1} - \mathbf{x}_k$.

In order to stabilize the solver, a damping term is added.