




0.6A MAX



For testing




12V INPUT

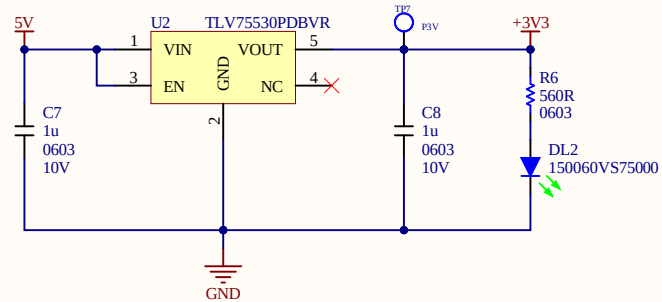


0.5A MAX

Page Contents: PWR.SchDoc			NR DEVELOPMENTS 
Size: A4	Revision:	Variant: [No Variations]	
Date: 12/05/2025			Sheet 1 of 14


Place 10u + 0.1u for each VDD pin

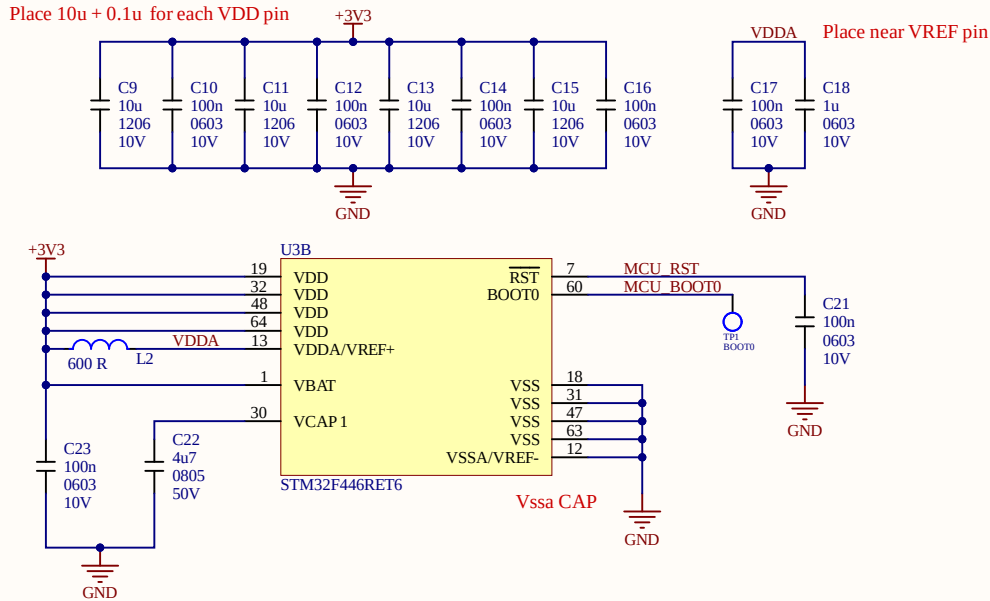


LD_STATUS




ABM8AIG-8.000MHZ-1Z-T

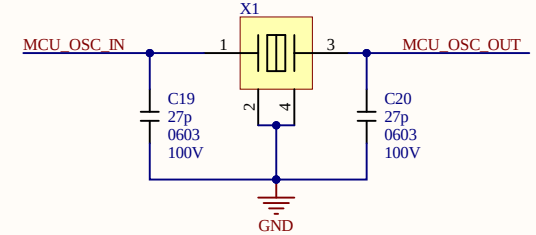


Clock

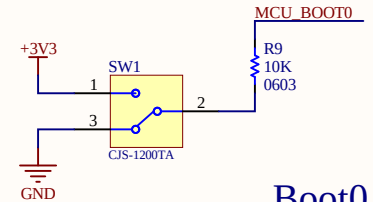


Boot0

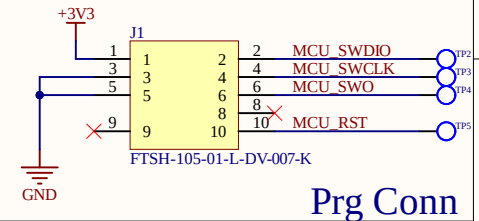



Prg Conn

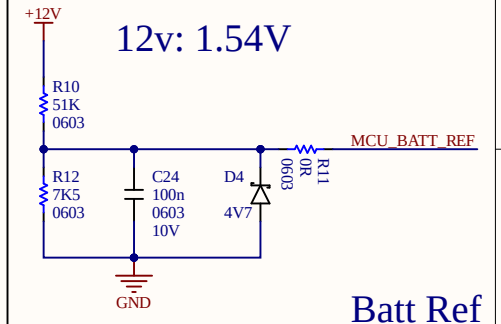


Batt Ref

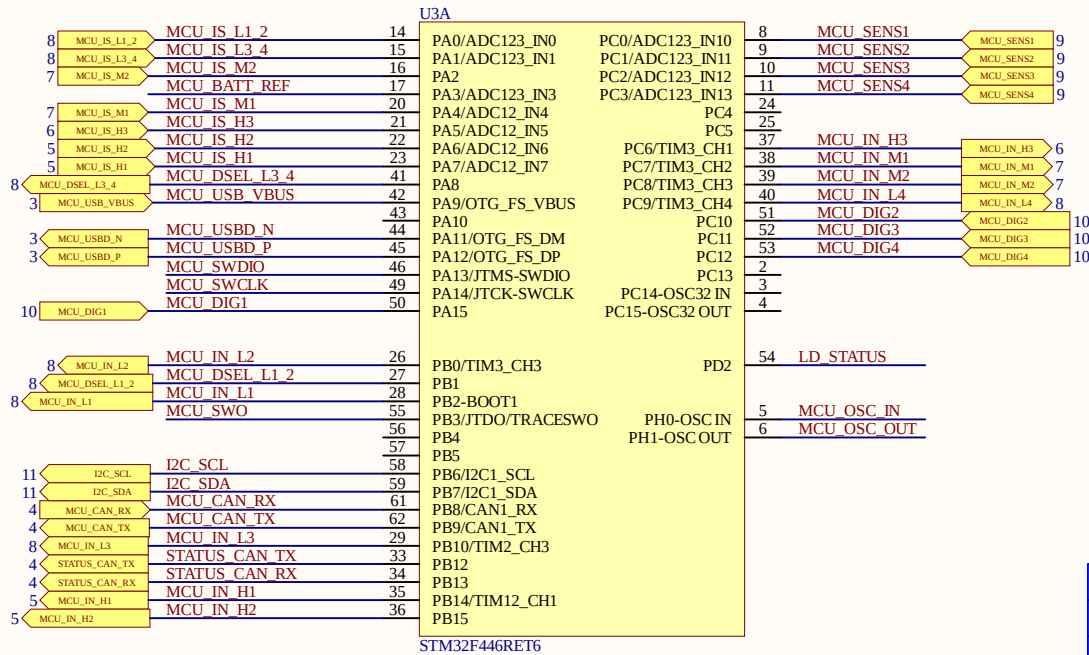



STM32F446RET6

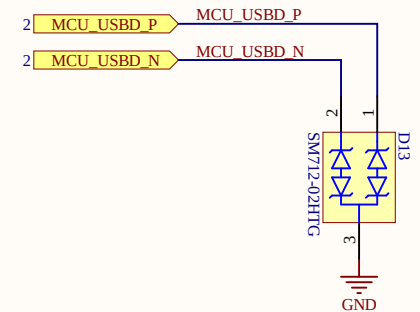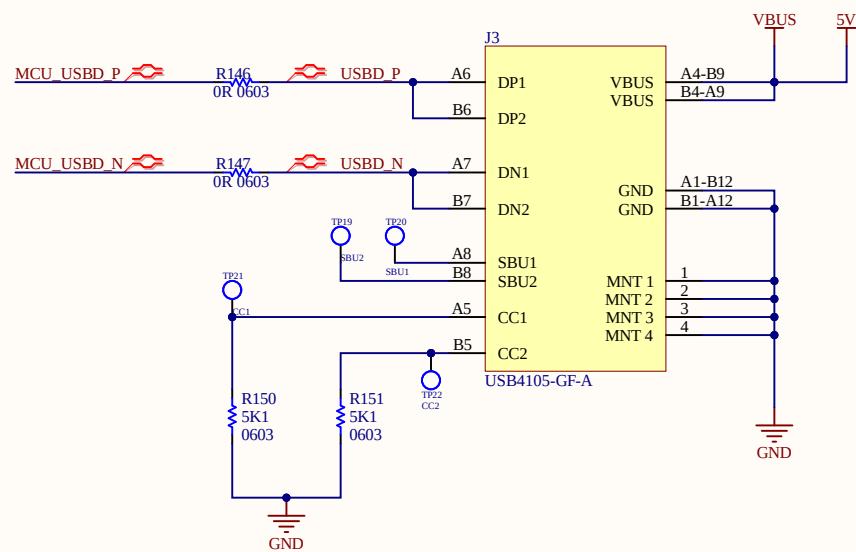


TVS USB DATA

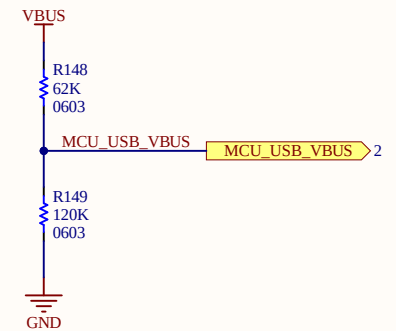




VREF FOR VBUS

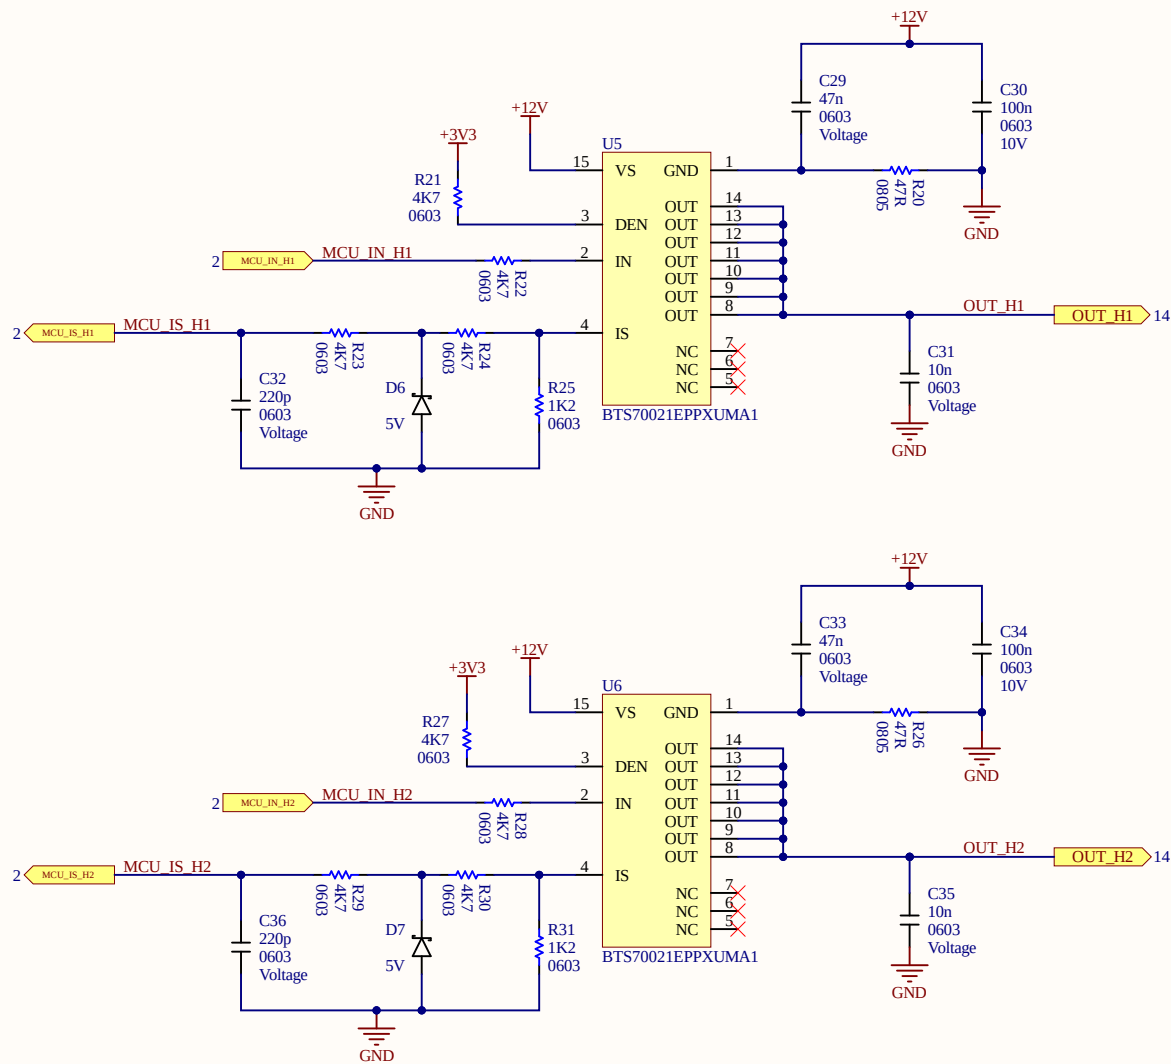

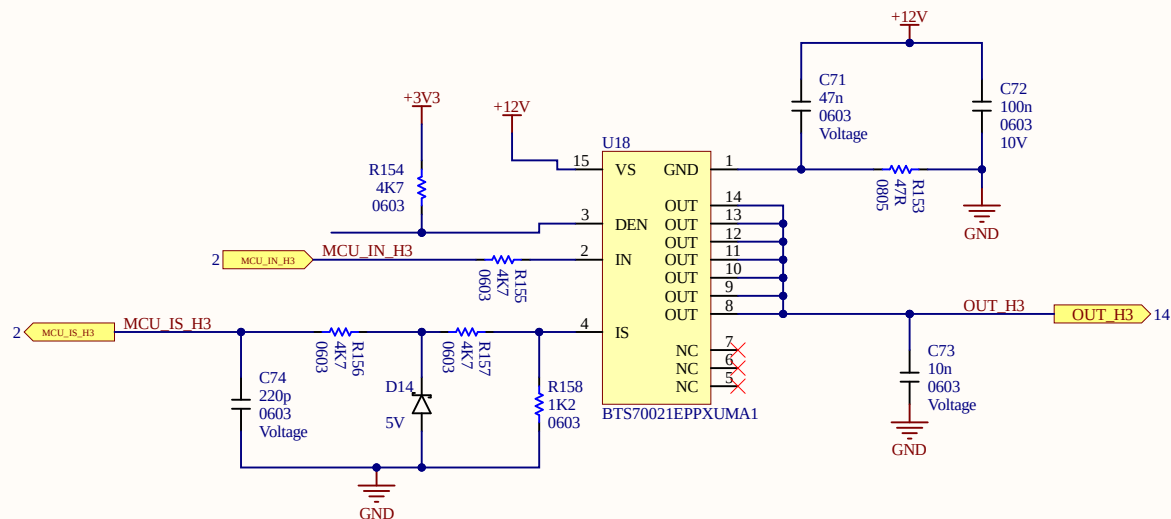



21A MAX each Profet




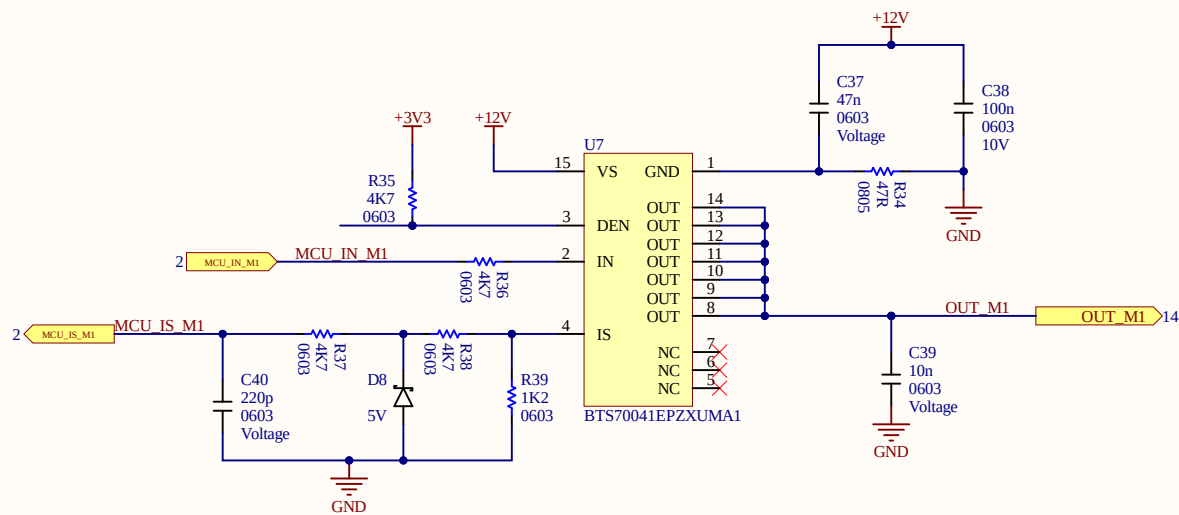






15A MAX each Profet

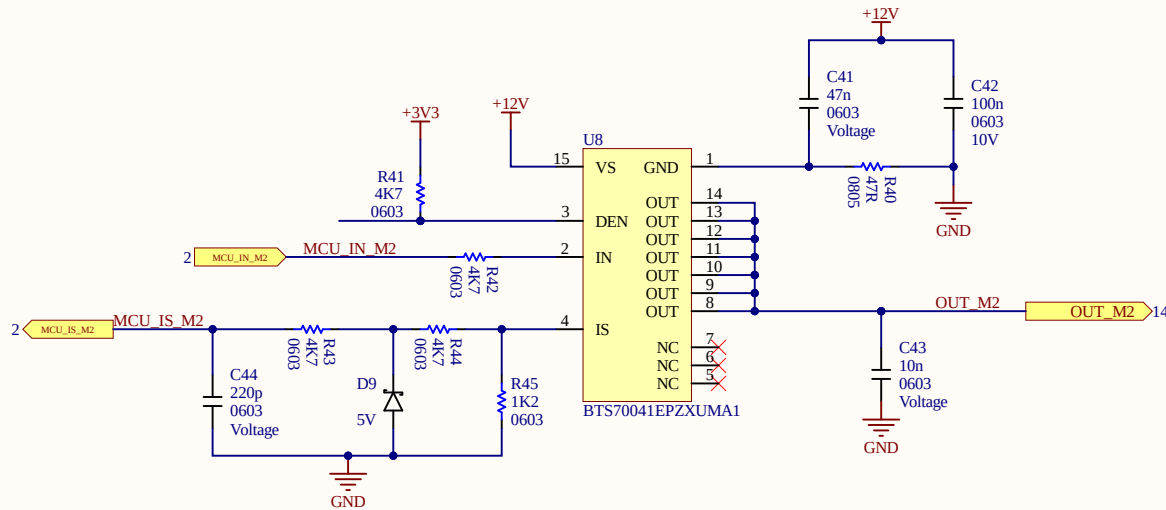

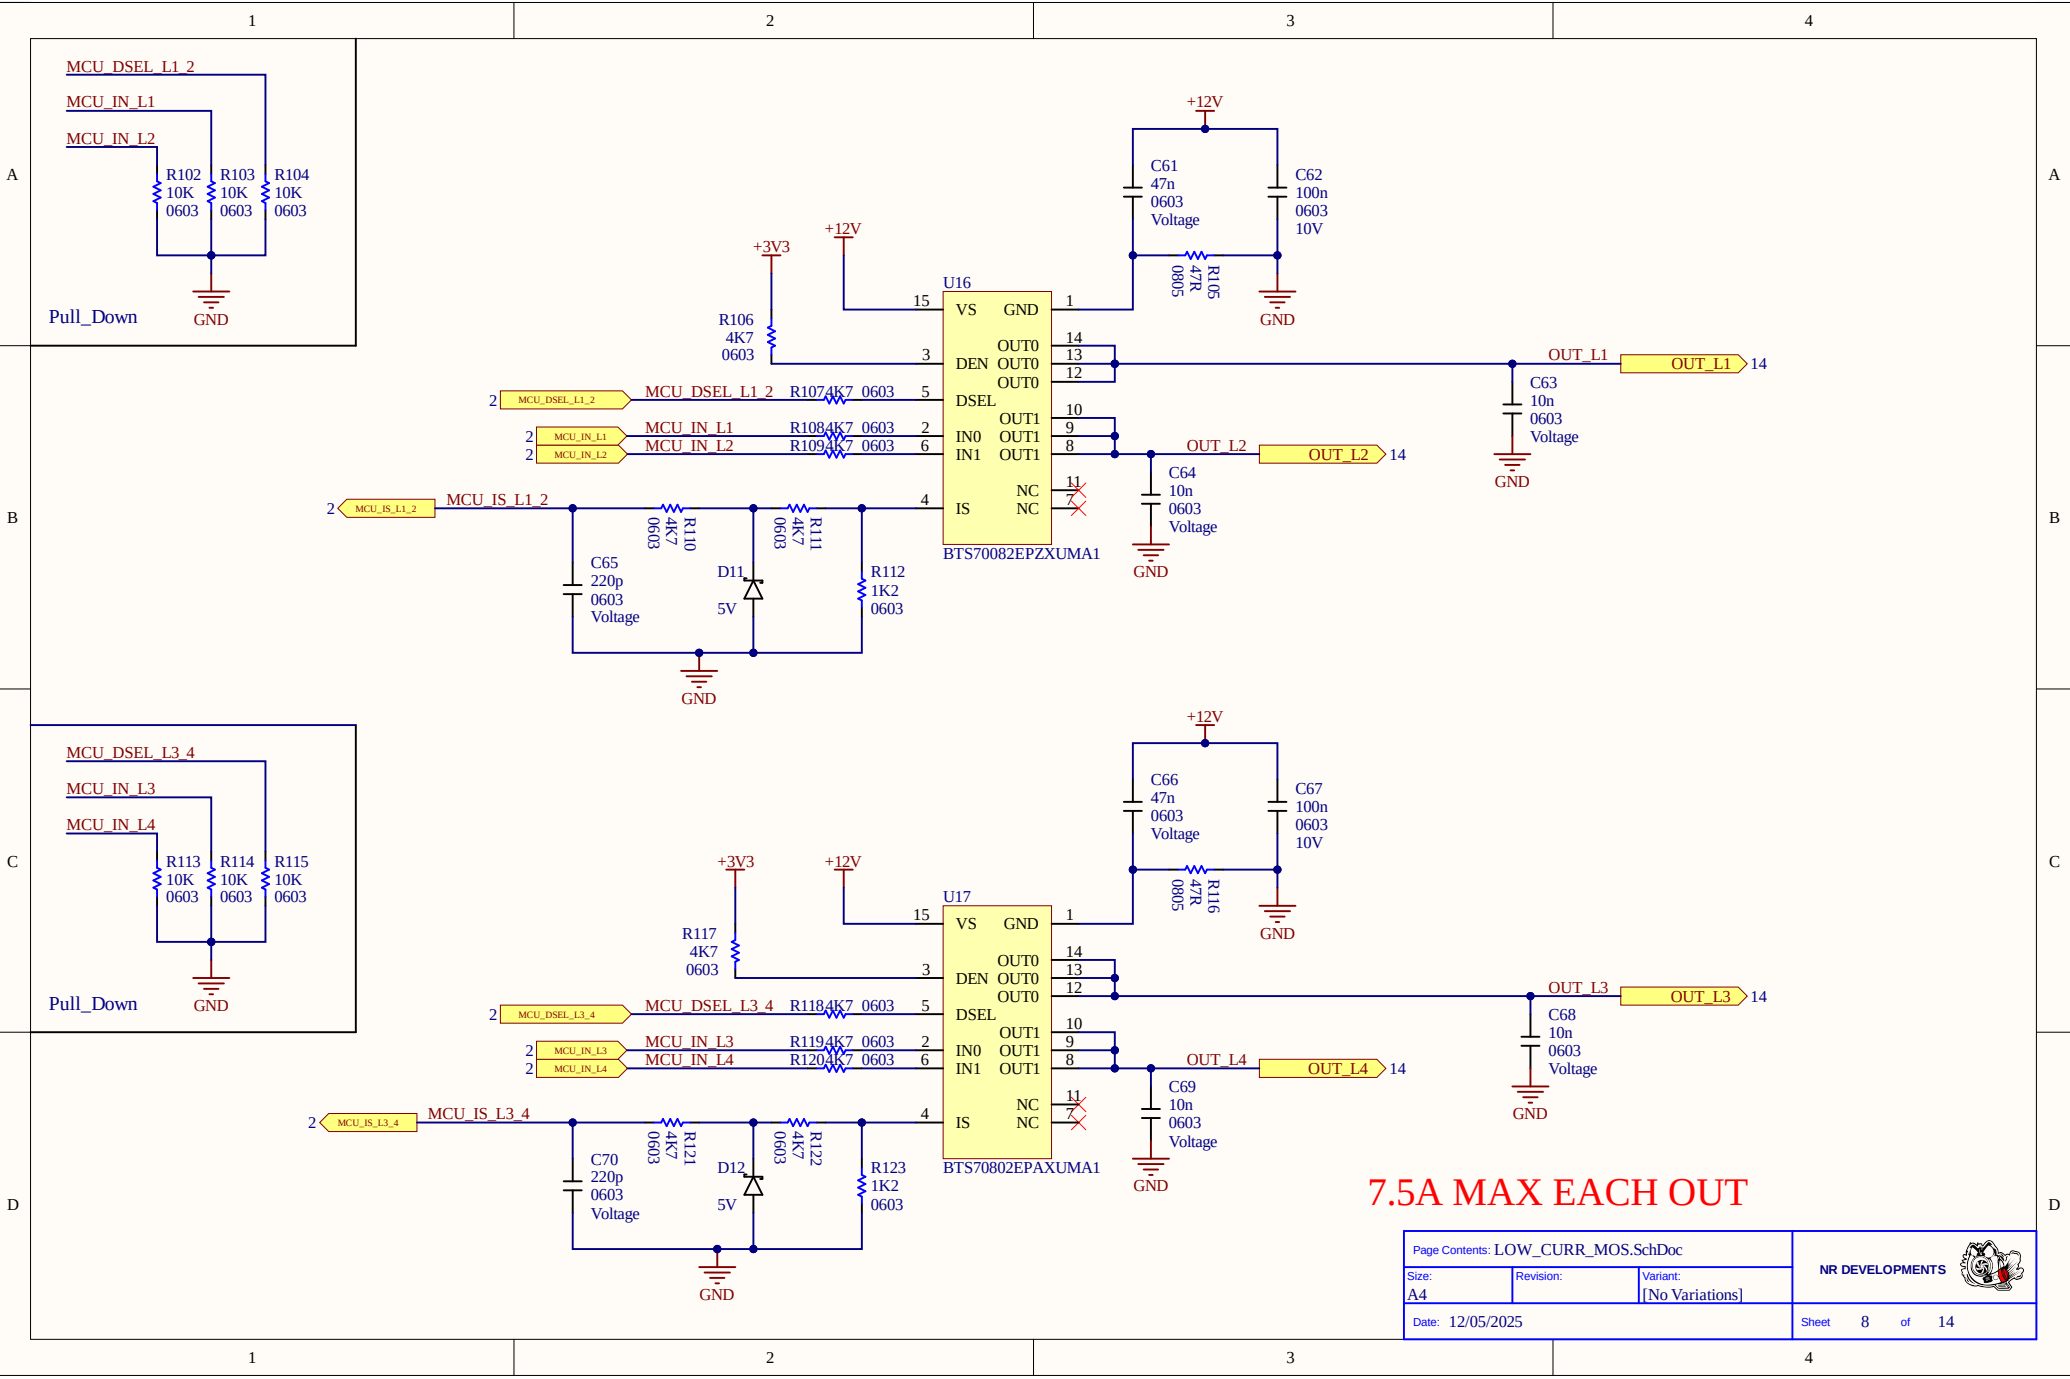

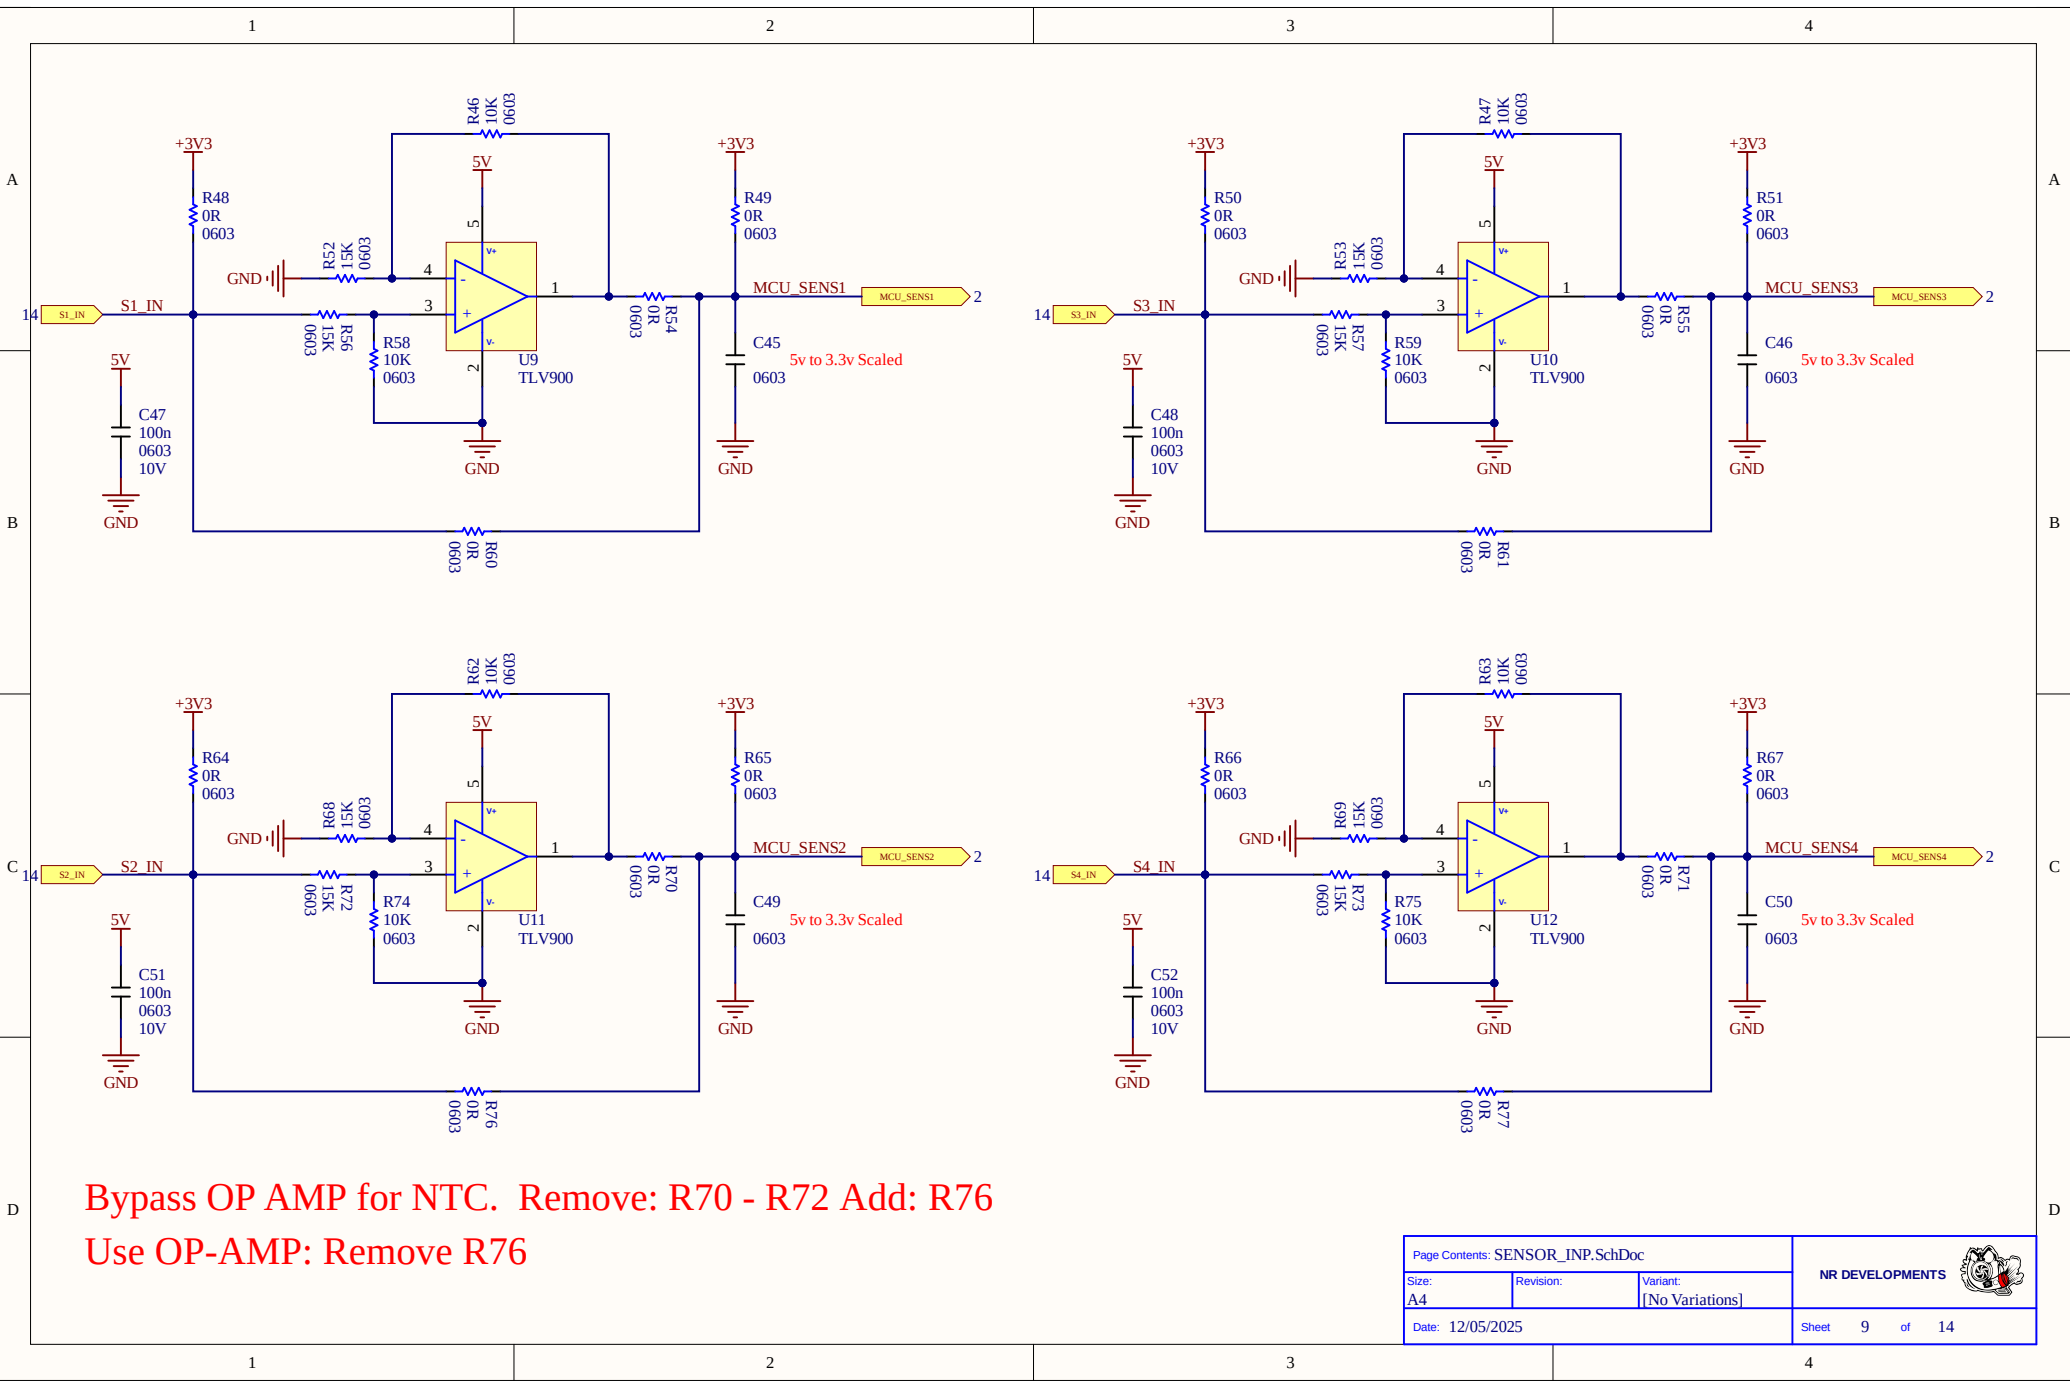

Bypass OP AMP for NTC. Remove: R70 - R72 Add: R76
Use OP-AMP: Remove R76

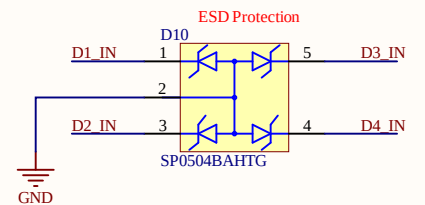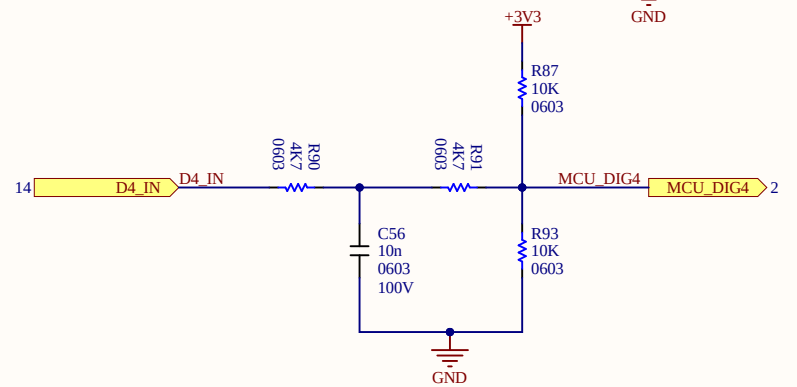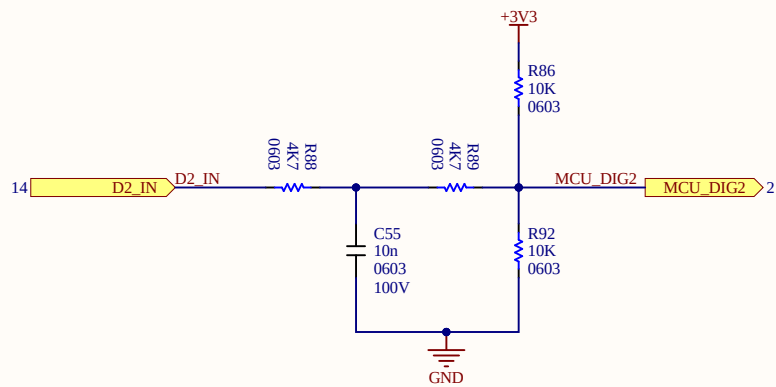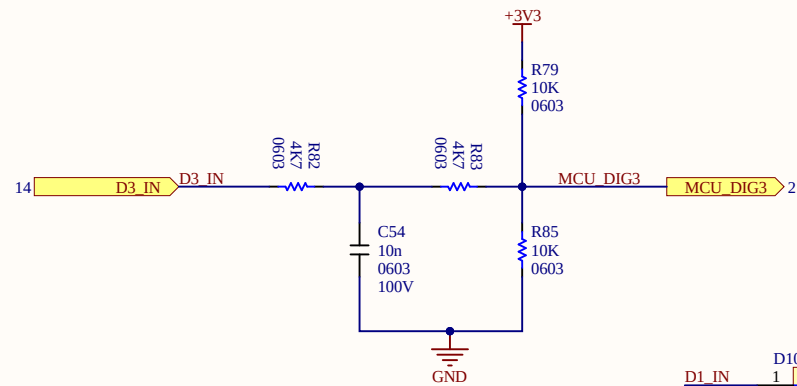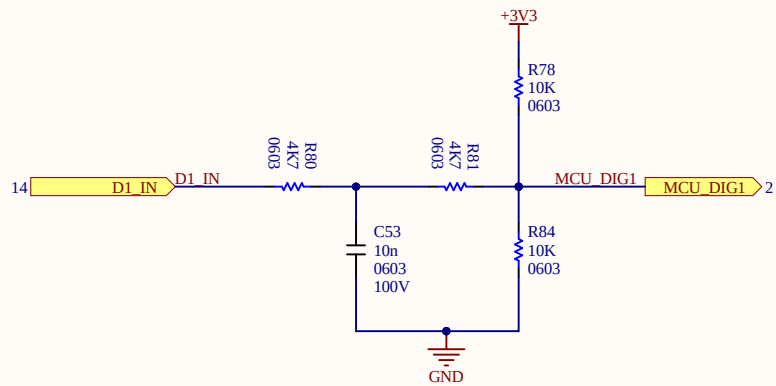

3.3V Logic Input. With pull-up or pull-down



1

2


3

4


I2C_PULL

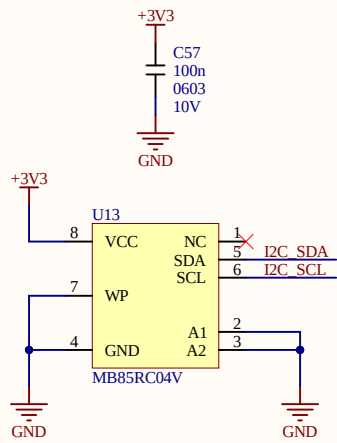


Addr: 0X50
FRAM

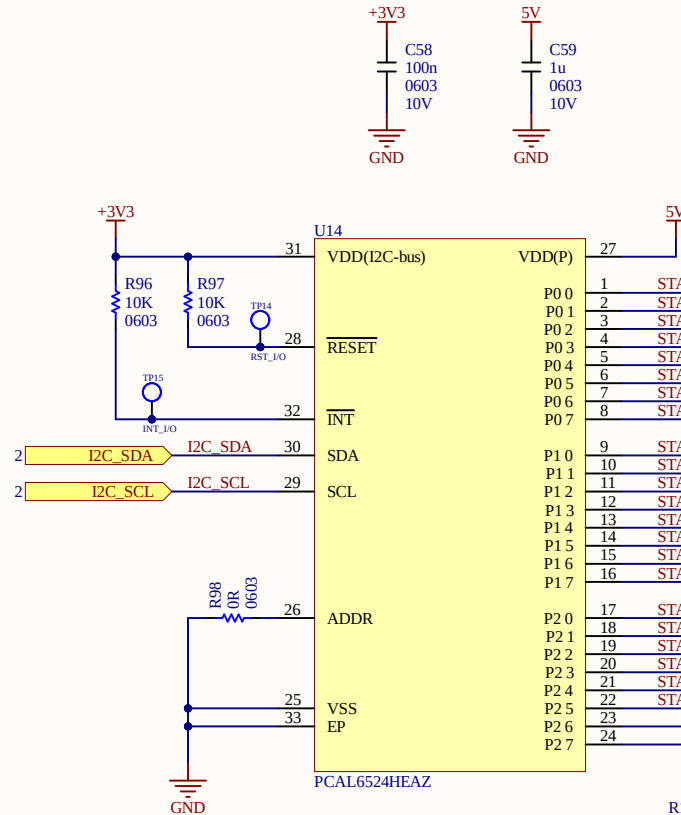

OUT_STATUS
Addr: 0X22

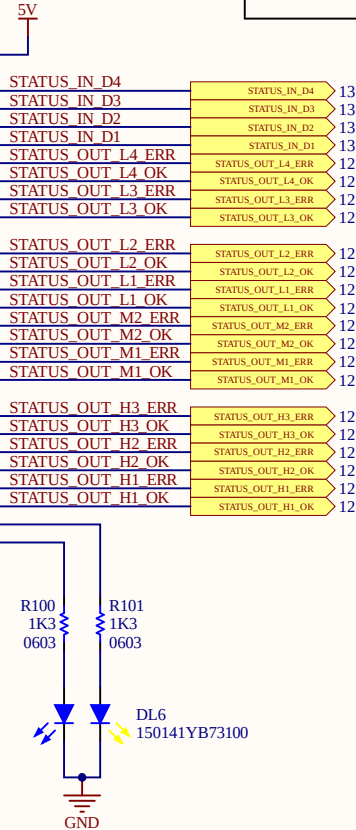

I2C ADDR:
MB85RC04V --> 0X50
P14IOE5V6416 --> 0X22
MCP9808-E/MS --> 0X18

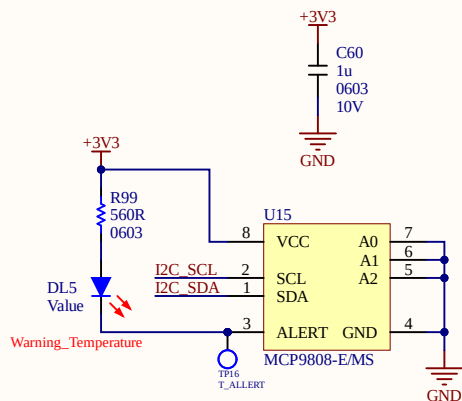

Addr: 0X18
TEMP_S

Page Contents: I2C.SchDoc

Size:

A4

Revision:

Variant:

[No Variations]

Date: 12/05/2025

NR DEVELOPMENTS



Sheet 11 of 14

1

2










3

4


Led Status High Current



Led Status Mid Current

Led Status Low Current

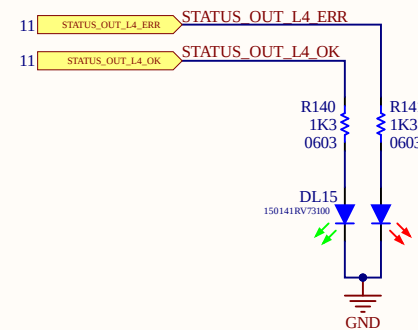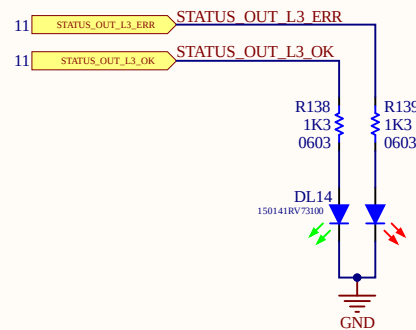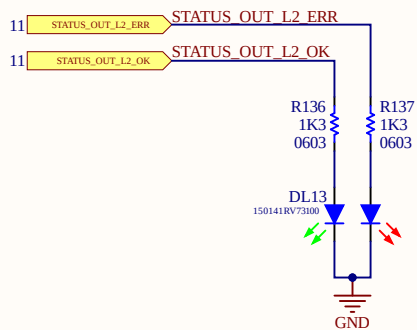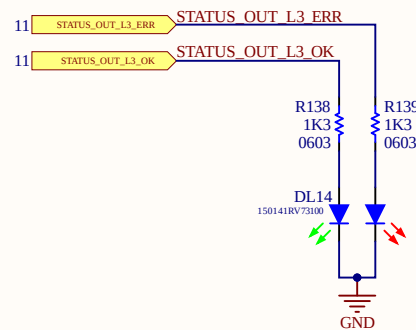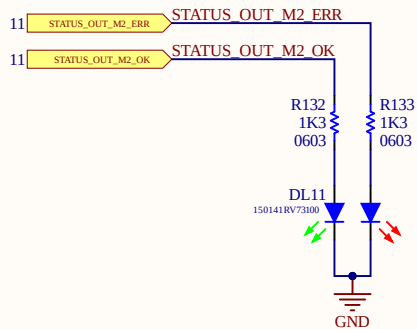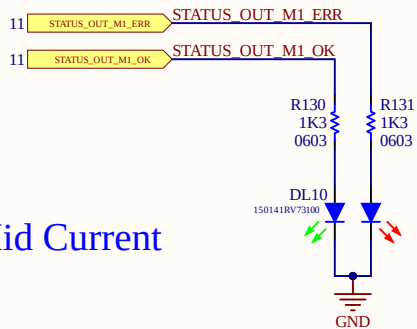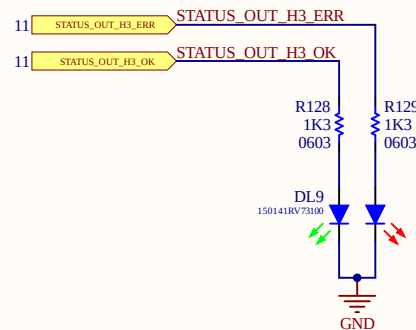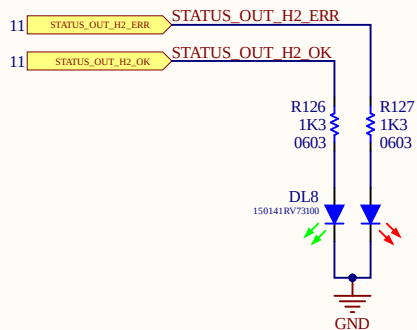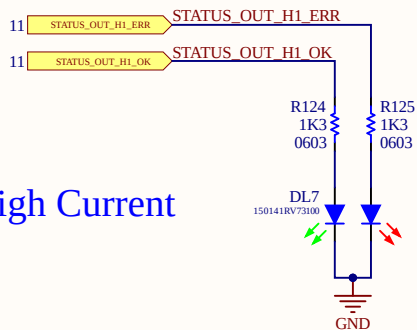

Led Status Logic Input

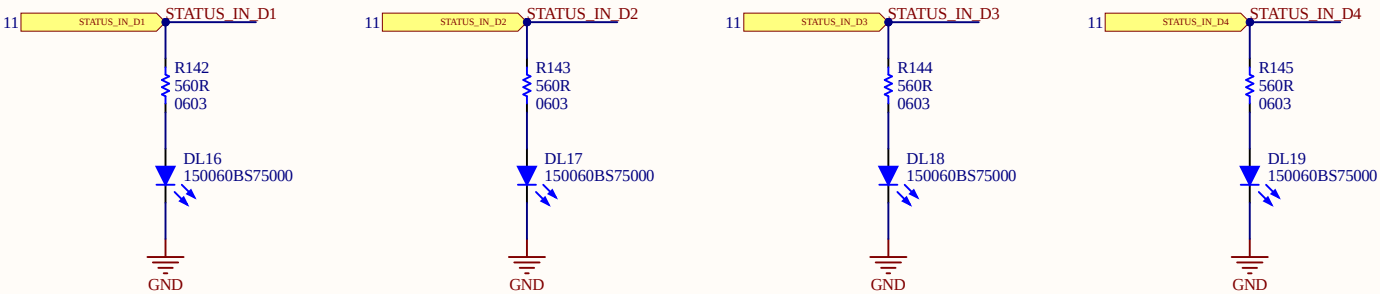

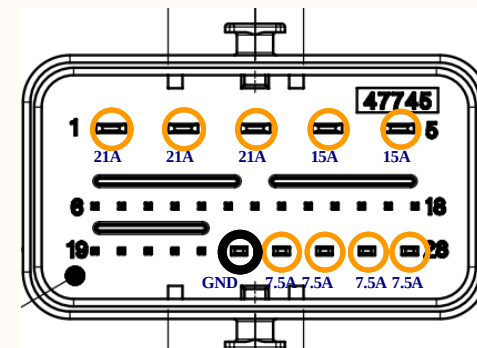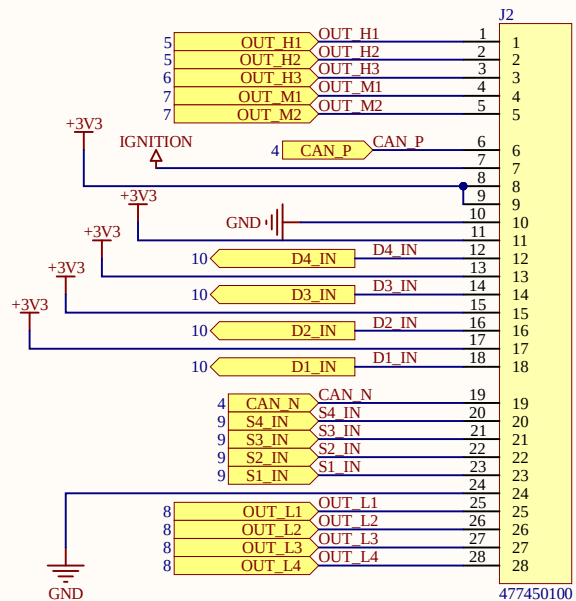

○ High Current