





For testing




12V INPUT

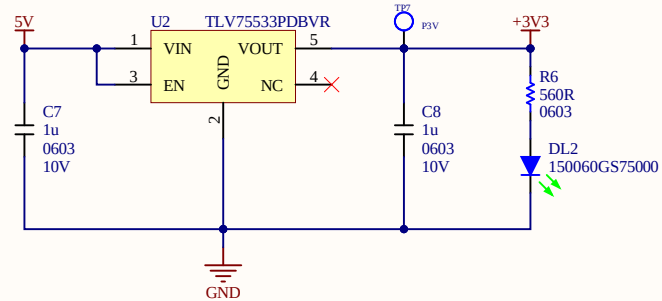


Page Contents: PWR.SchDoc			NR DEVELOPMENTS 
Size: A4	Revision:	Variant: [No Variations]	
Date: 20/06/2025			Sheet 1 of 14

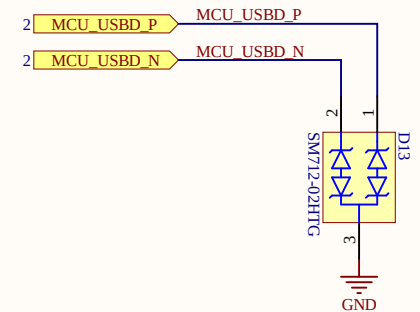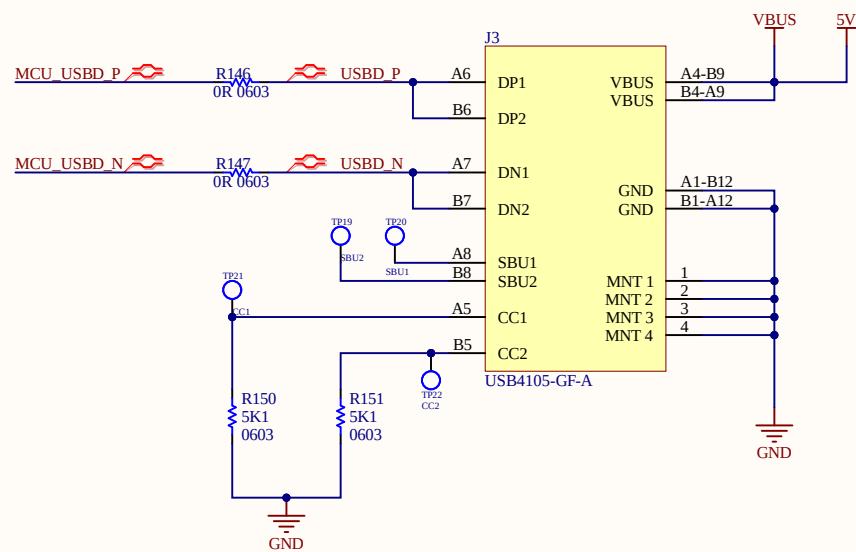


TVS USB DATA

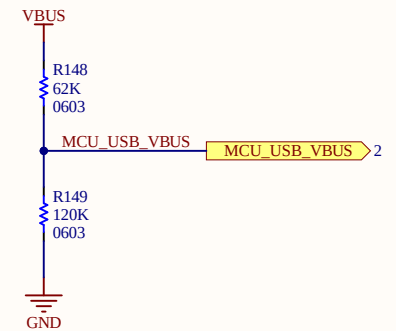


VREF FOR VBUS

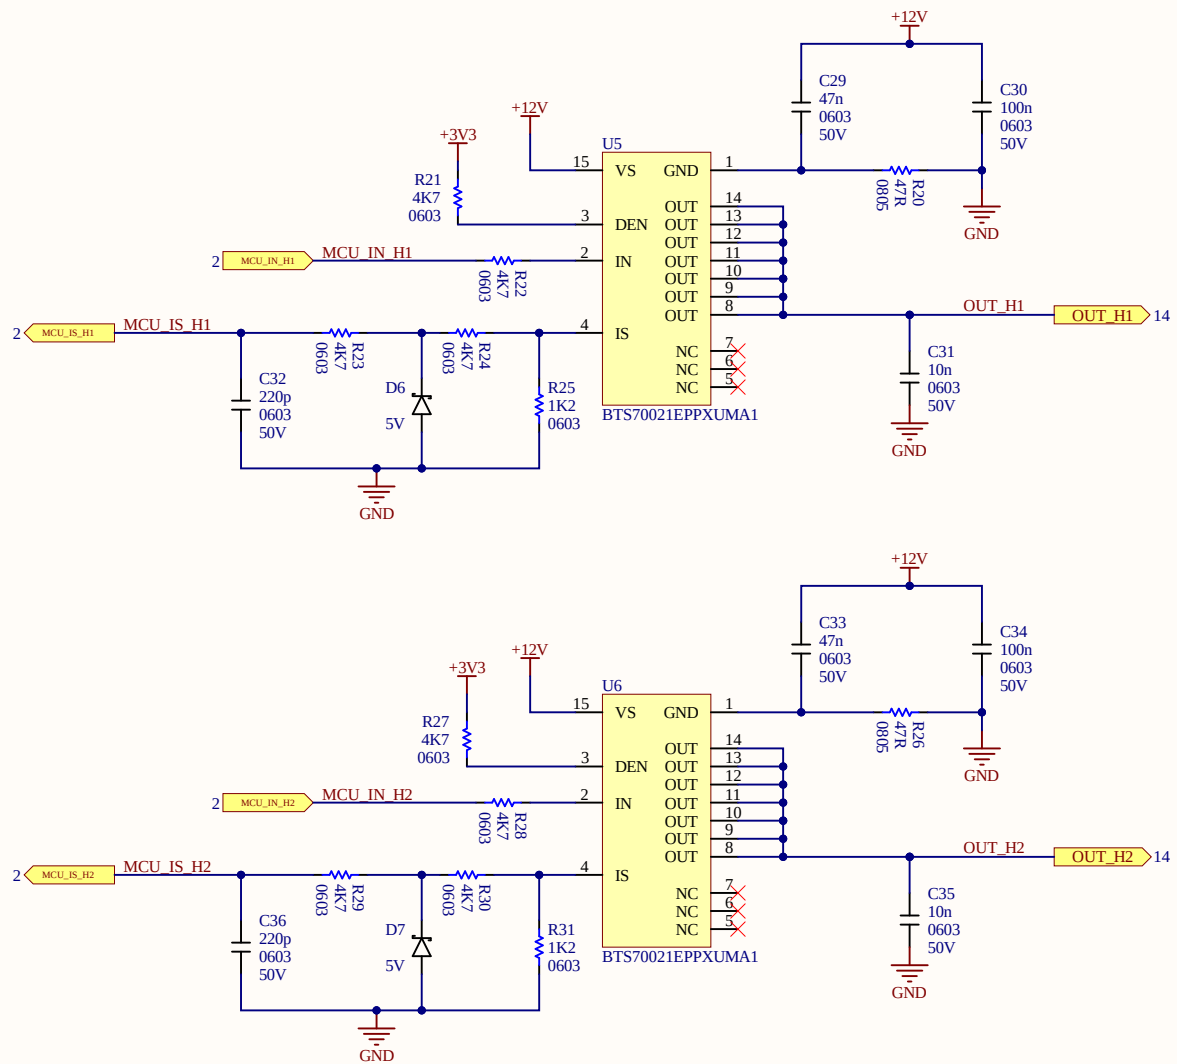




21A MAX each Profet



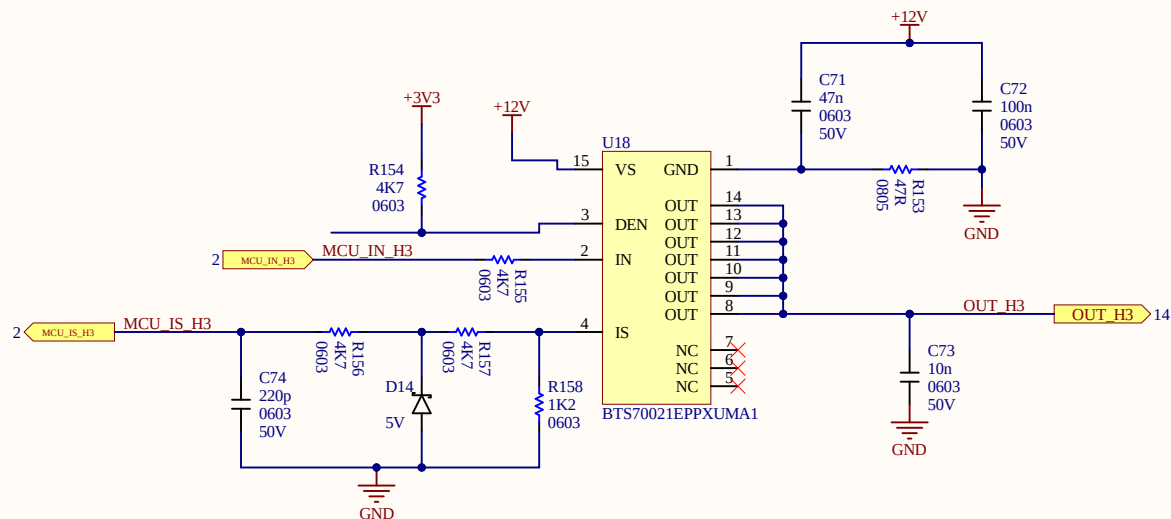



21A MAX each Profet



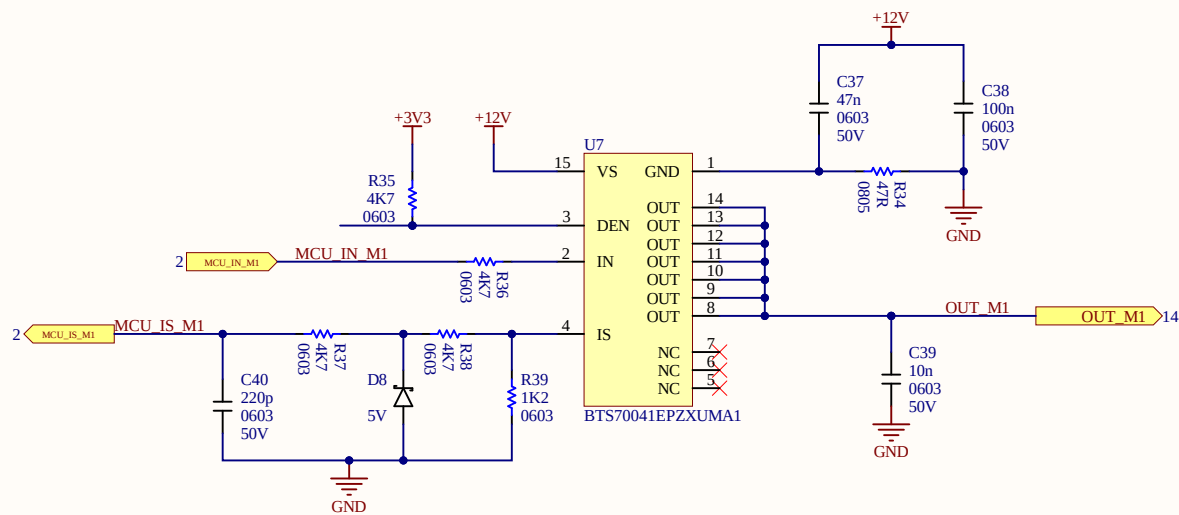


15A MAX each Profet

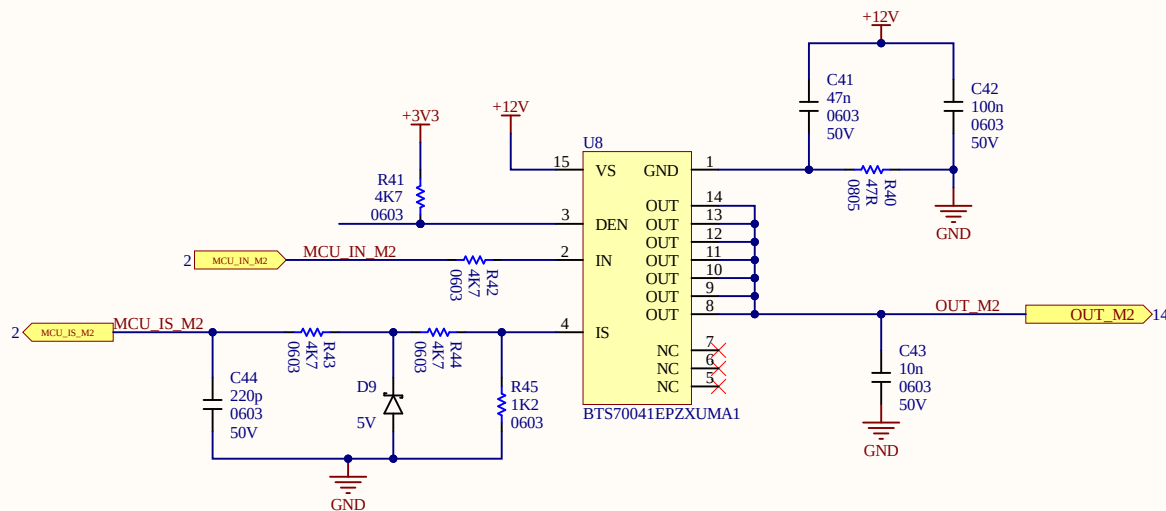





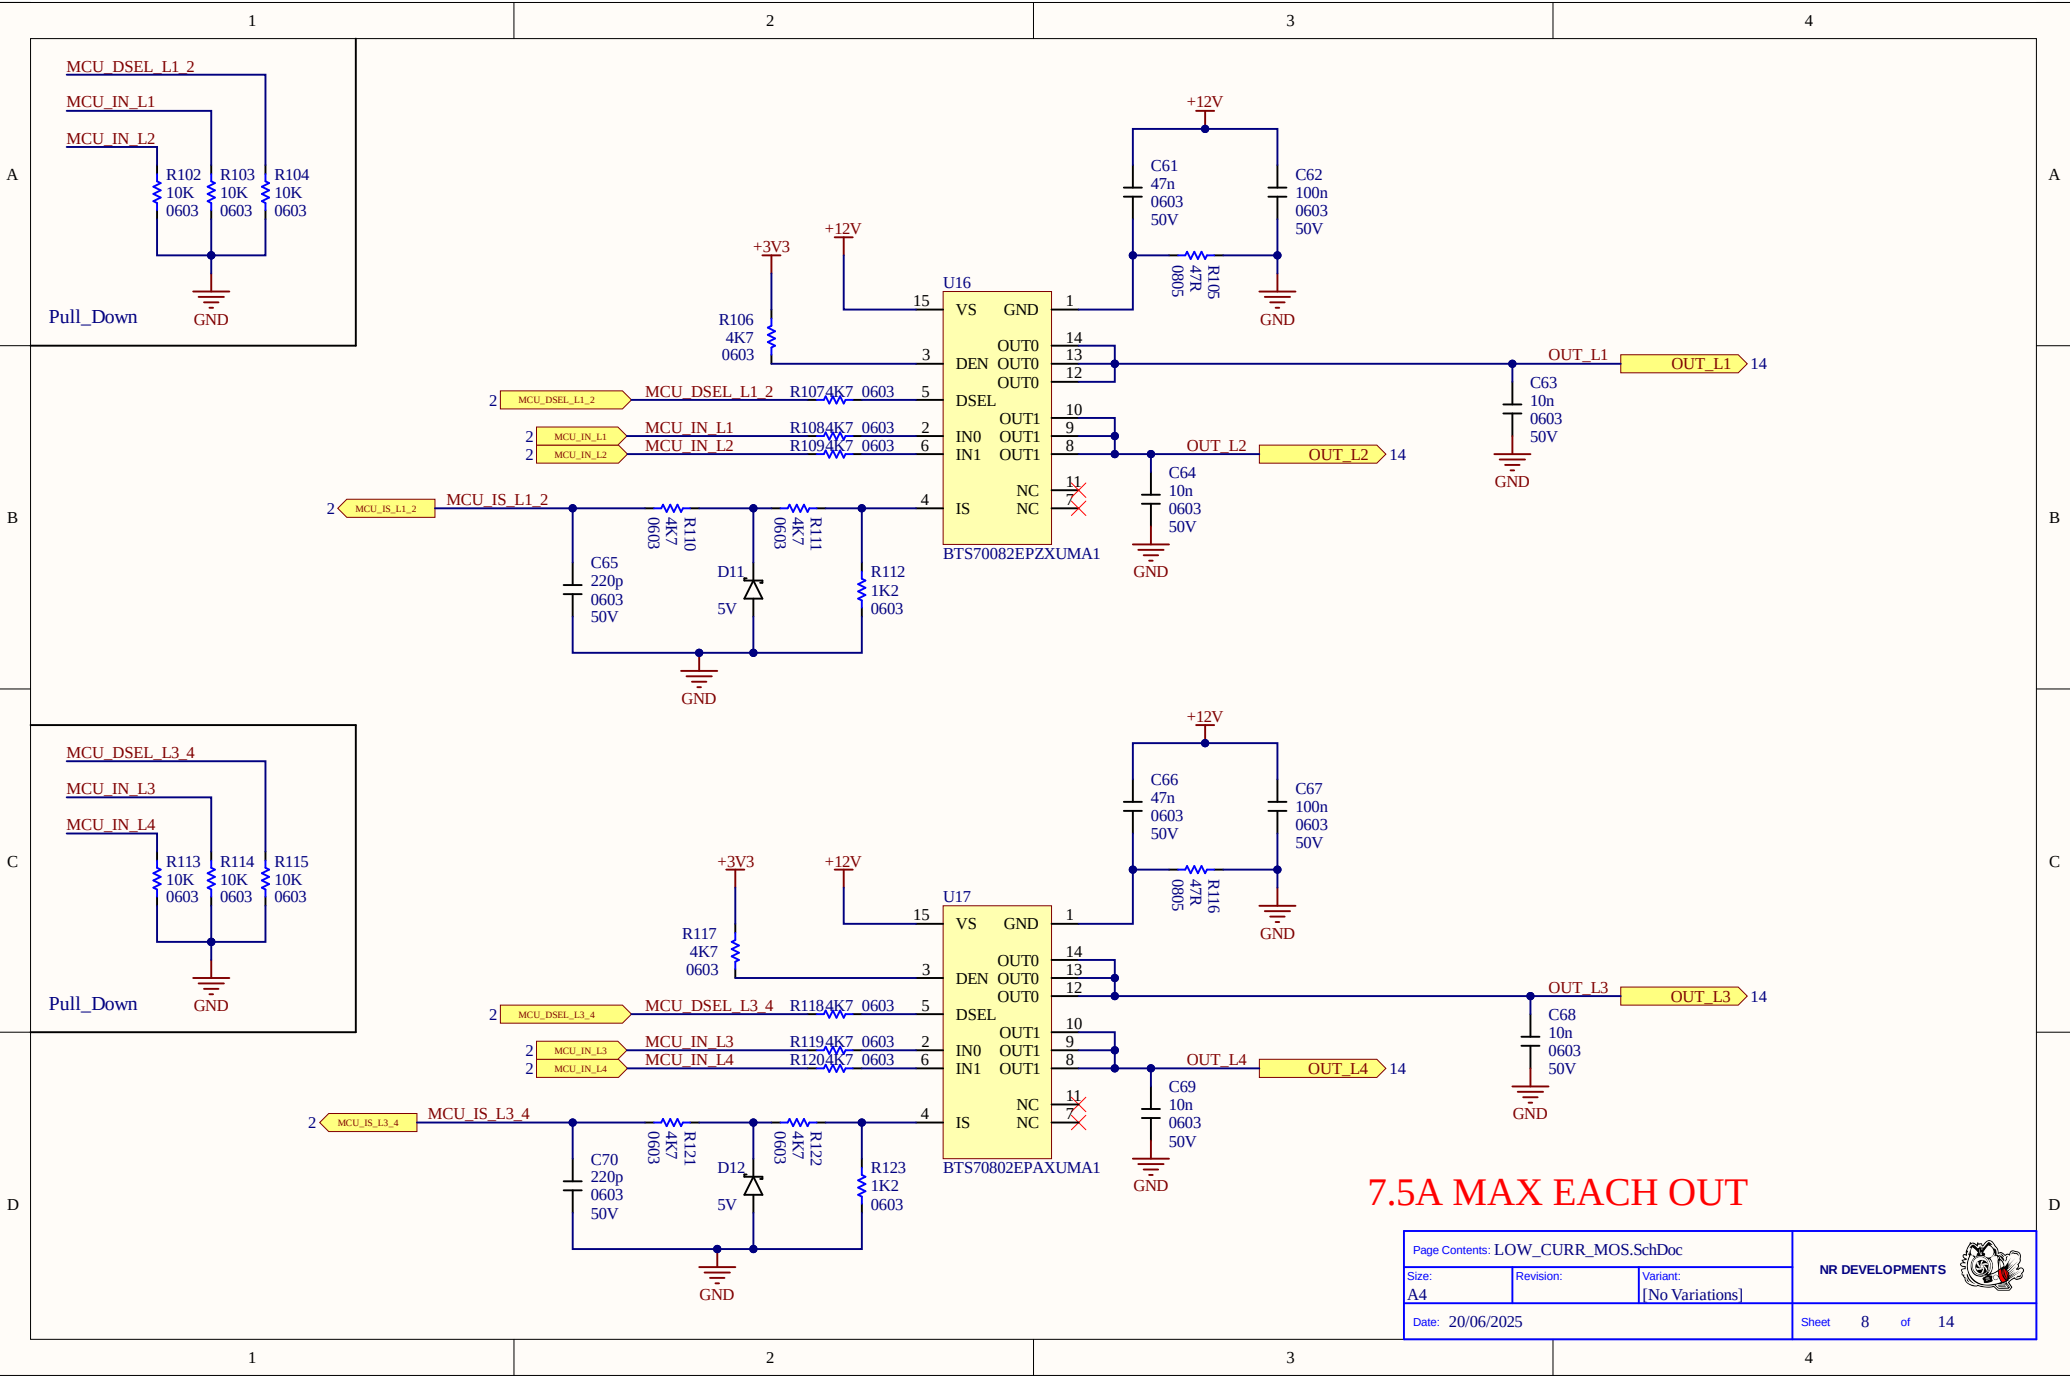


7.5A MAX EACH OUT

Page Contents: LOW_CURR_MOS.SchDoc			NR DEVELOPMENTS
Size: A4	Revision:	Variant: [No Variations]	
Date: 20/06/2025			Sheet 8 of 14

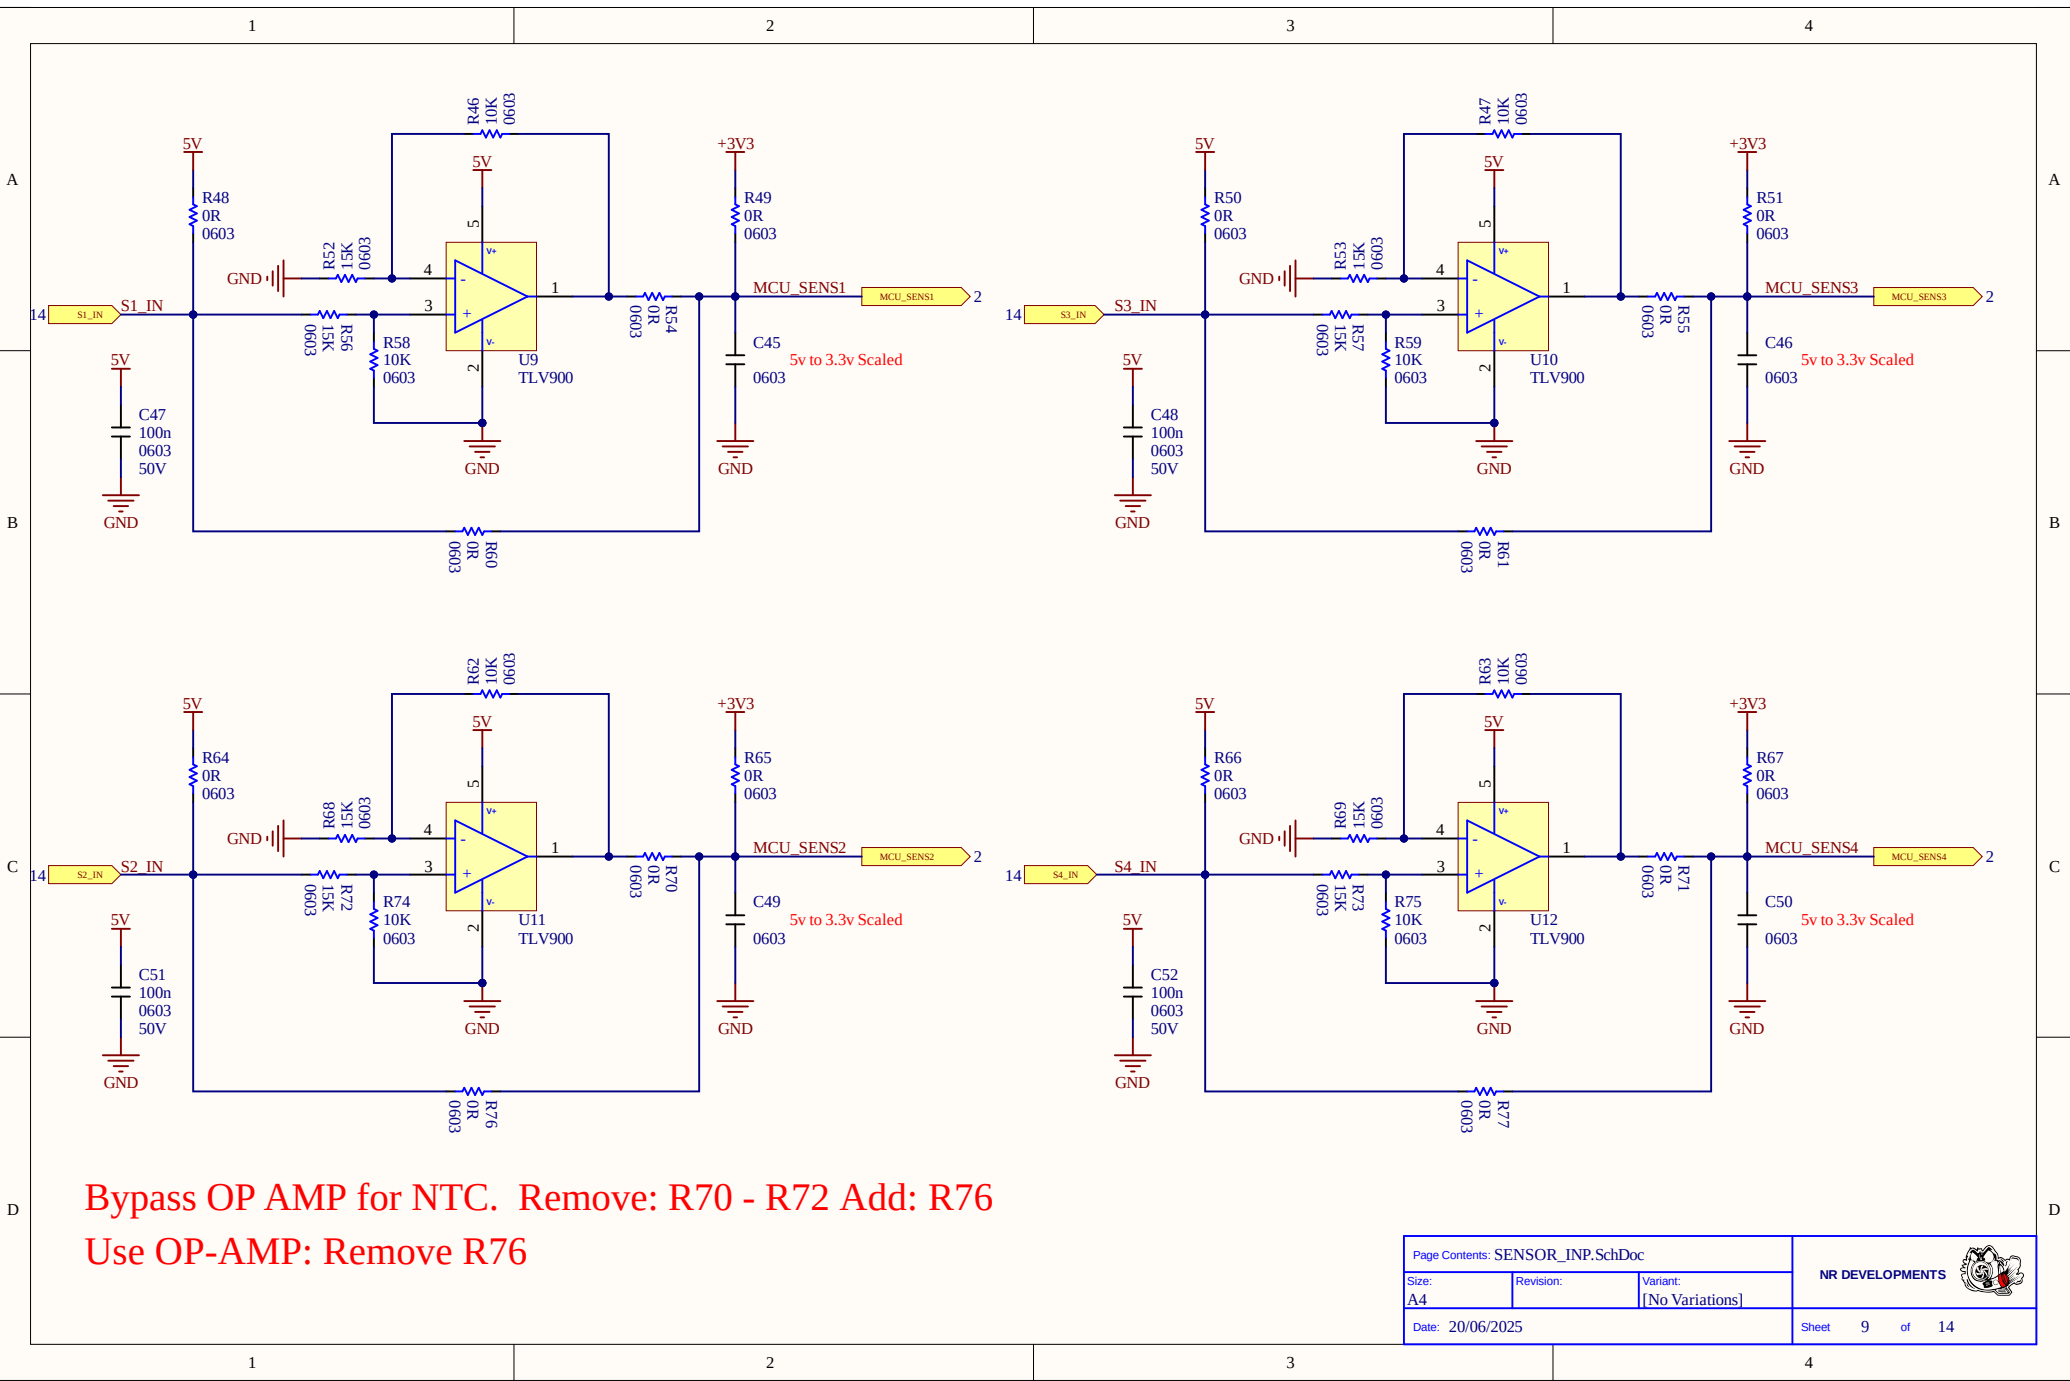

Bypass OP AMP for NTC. Remove: R70 - R72 Add: R76
Use OP-AMP: Remove R76

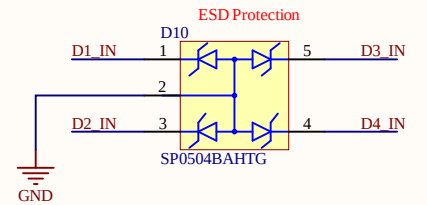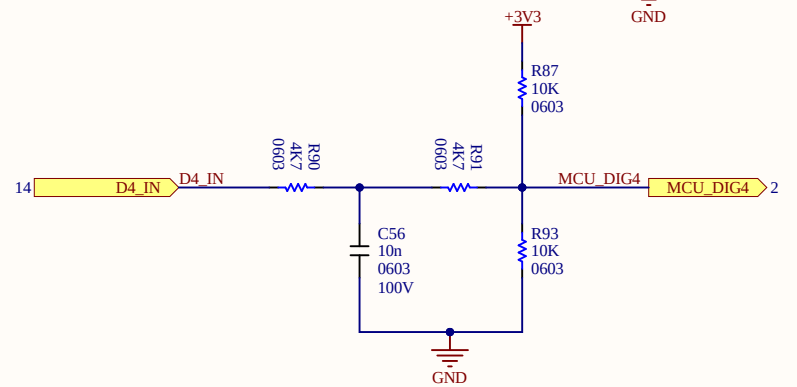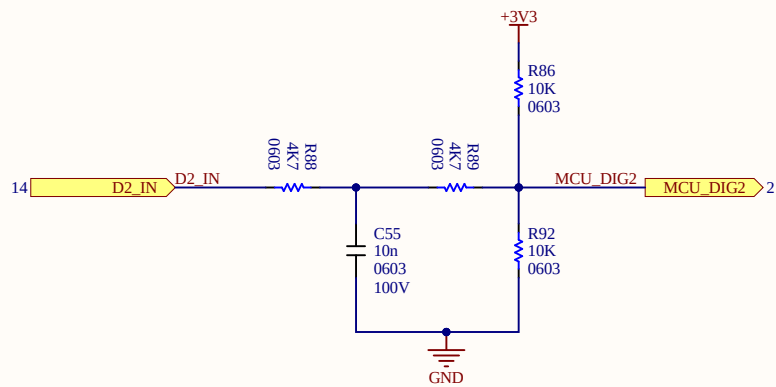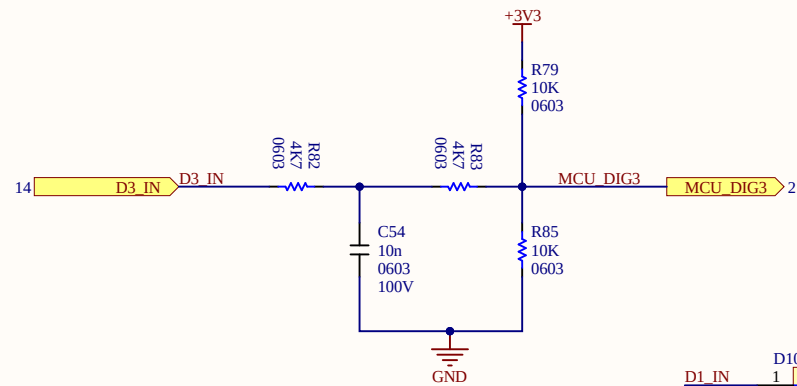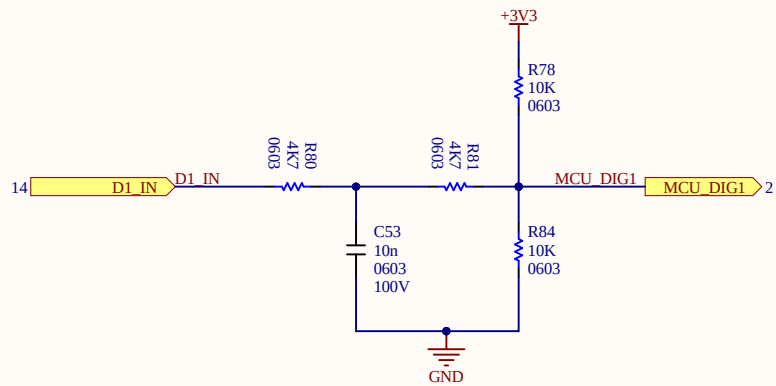

3.3V Logic Input. With pull-up or pull-down


1

2


3

4


I2C_PULL

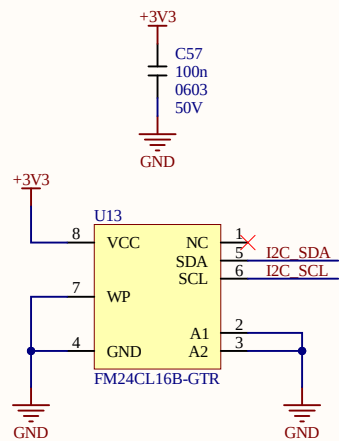

Addr: 0X50
FRAM

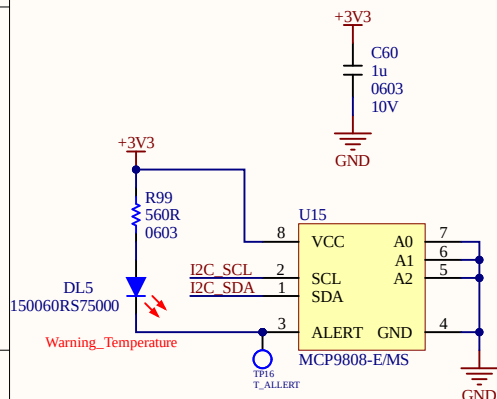

Addr: 0X18
TEMP_S

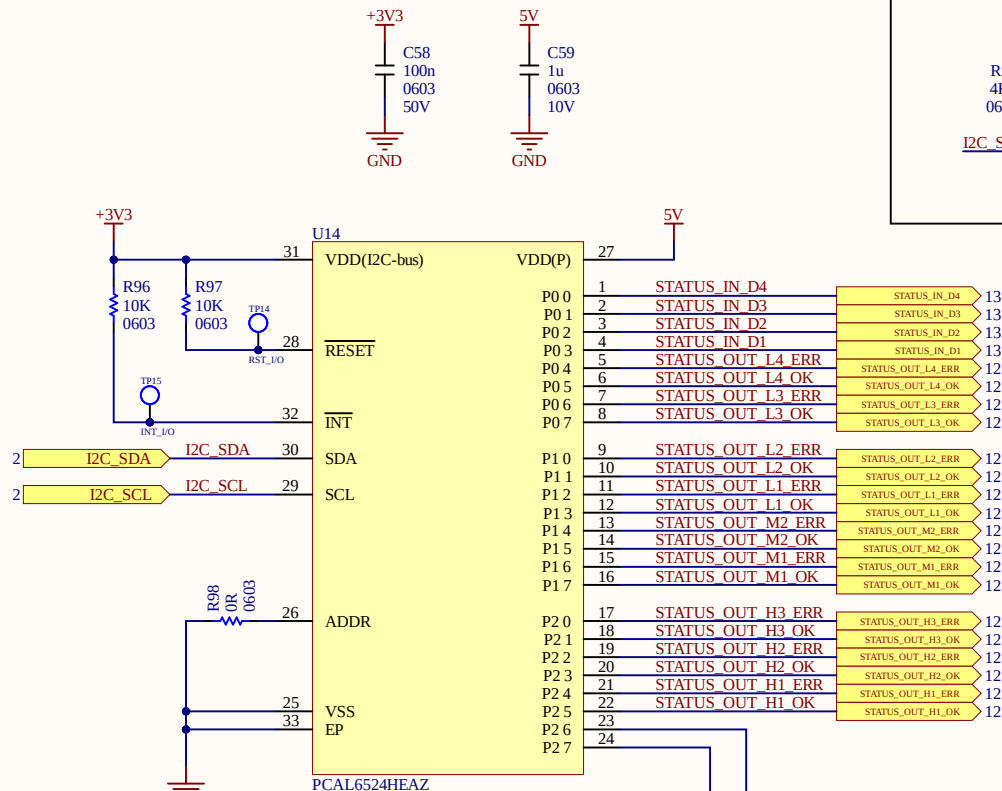

OUT_STATUS
Addr: 0X22

I2C ADDR:
MB85RC04V --> 0X50
P14IOE5V6416 --> 0X22
MCP9808-E/MS --> 0X18

Page Contents: I2C.SchDoc

Size:

A4

Revision:

Variant:

[No Variations]

Date: 20/06/2025

NR DEVELOPMENTS











Sheet 11 of 14


Led Status High Current



Led Status Mid Current

Led Status Low Current

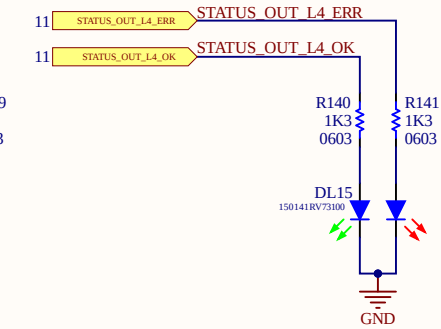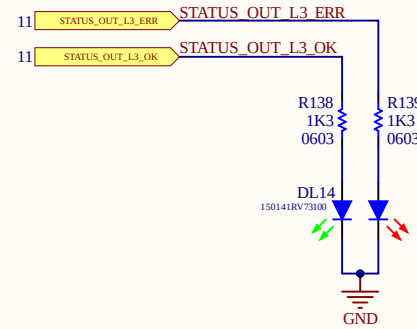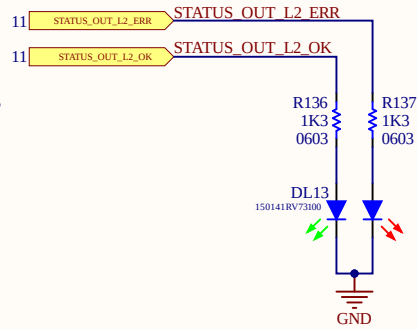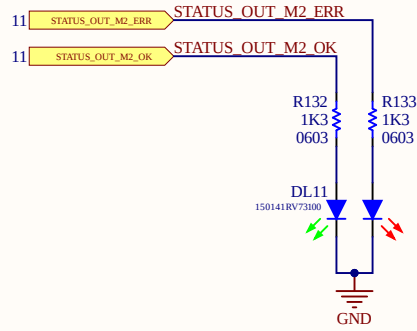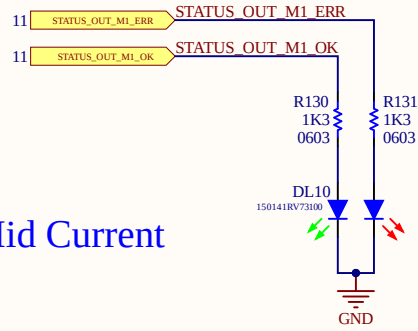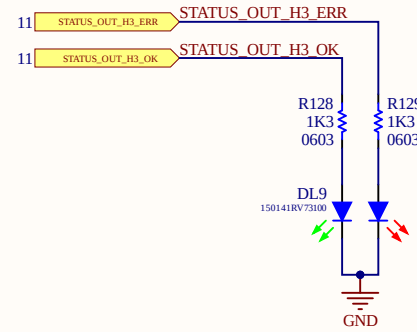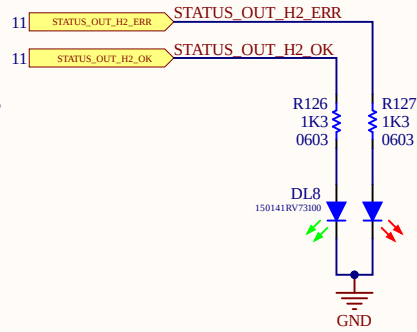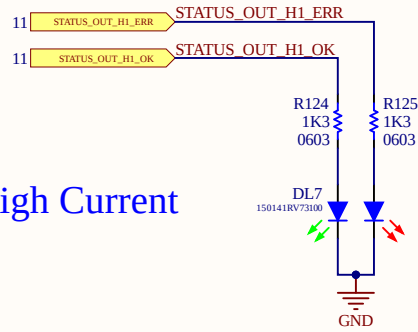


Led Status Logic Input

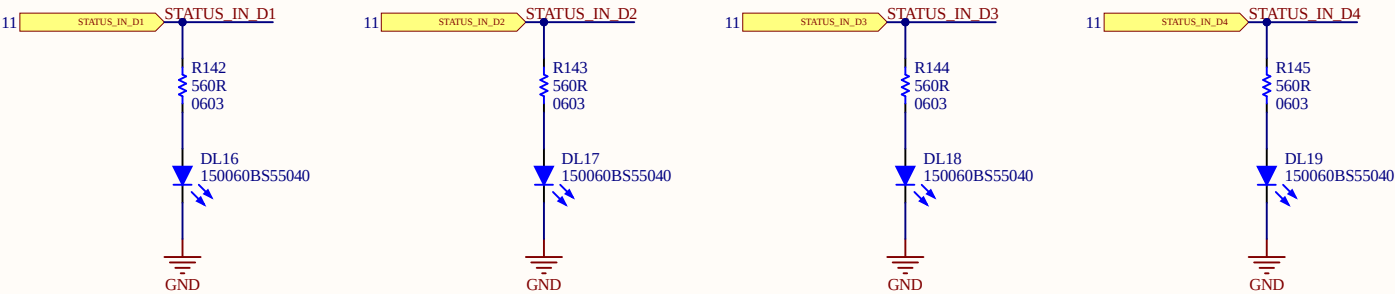

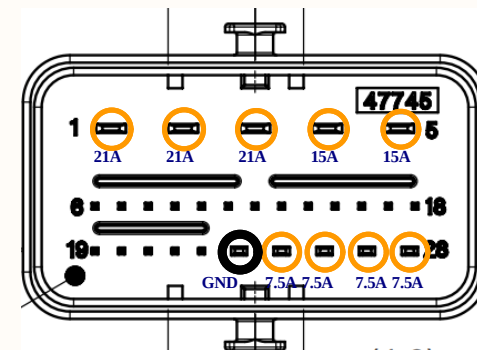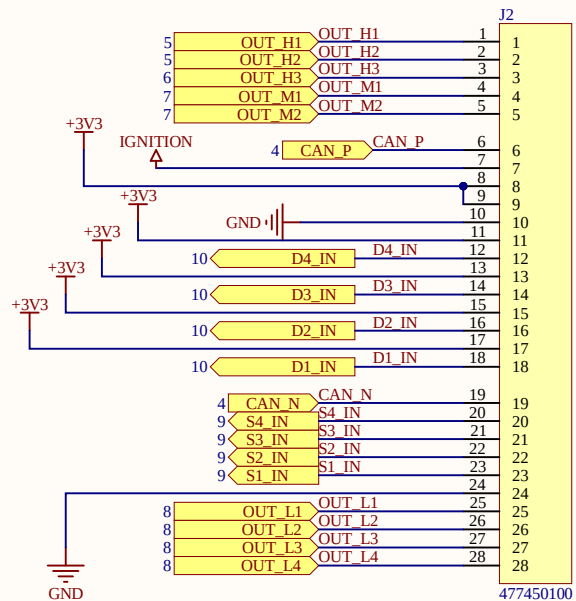

○ High Current

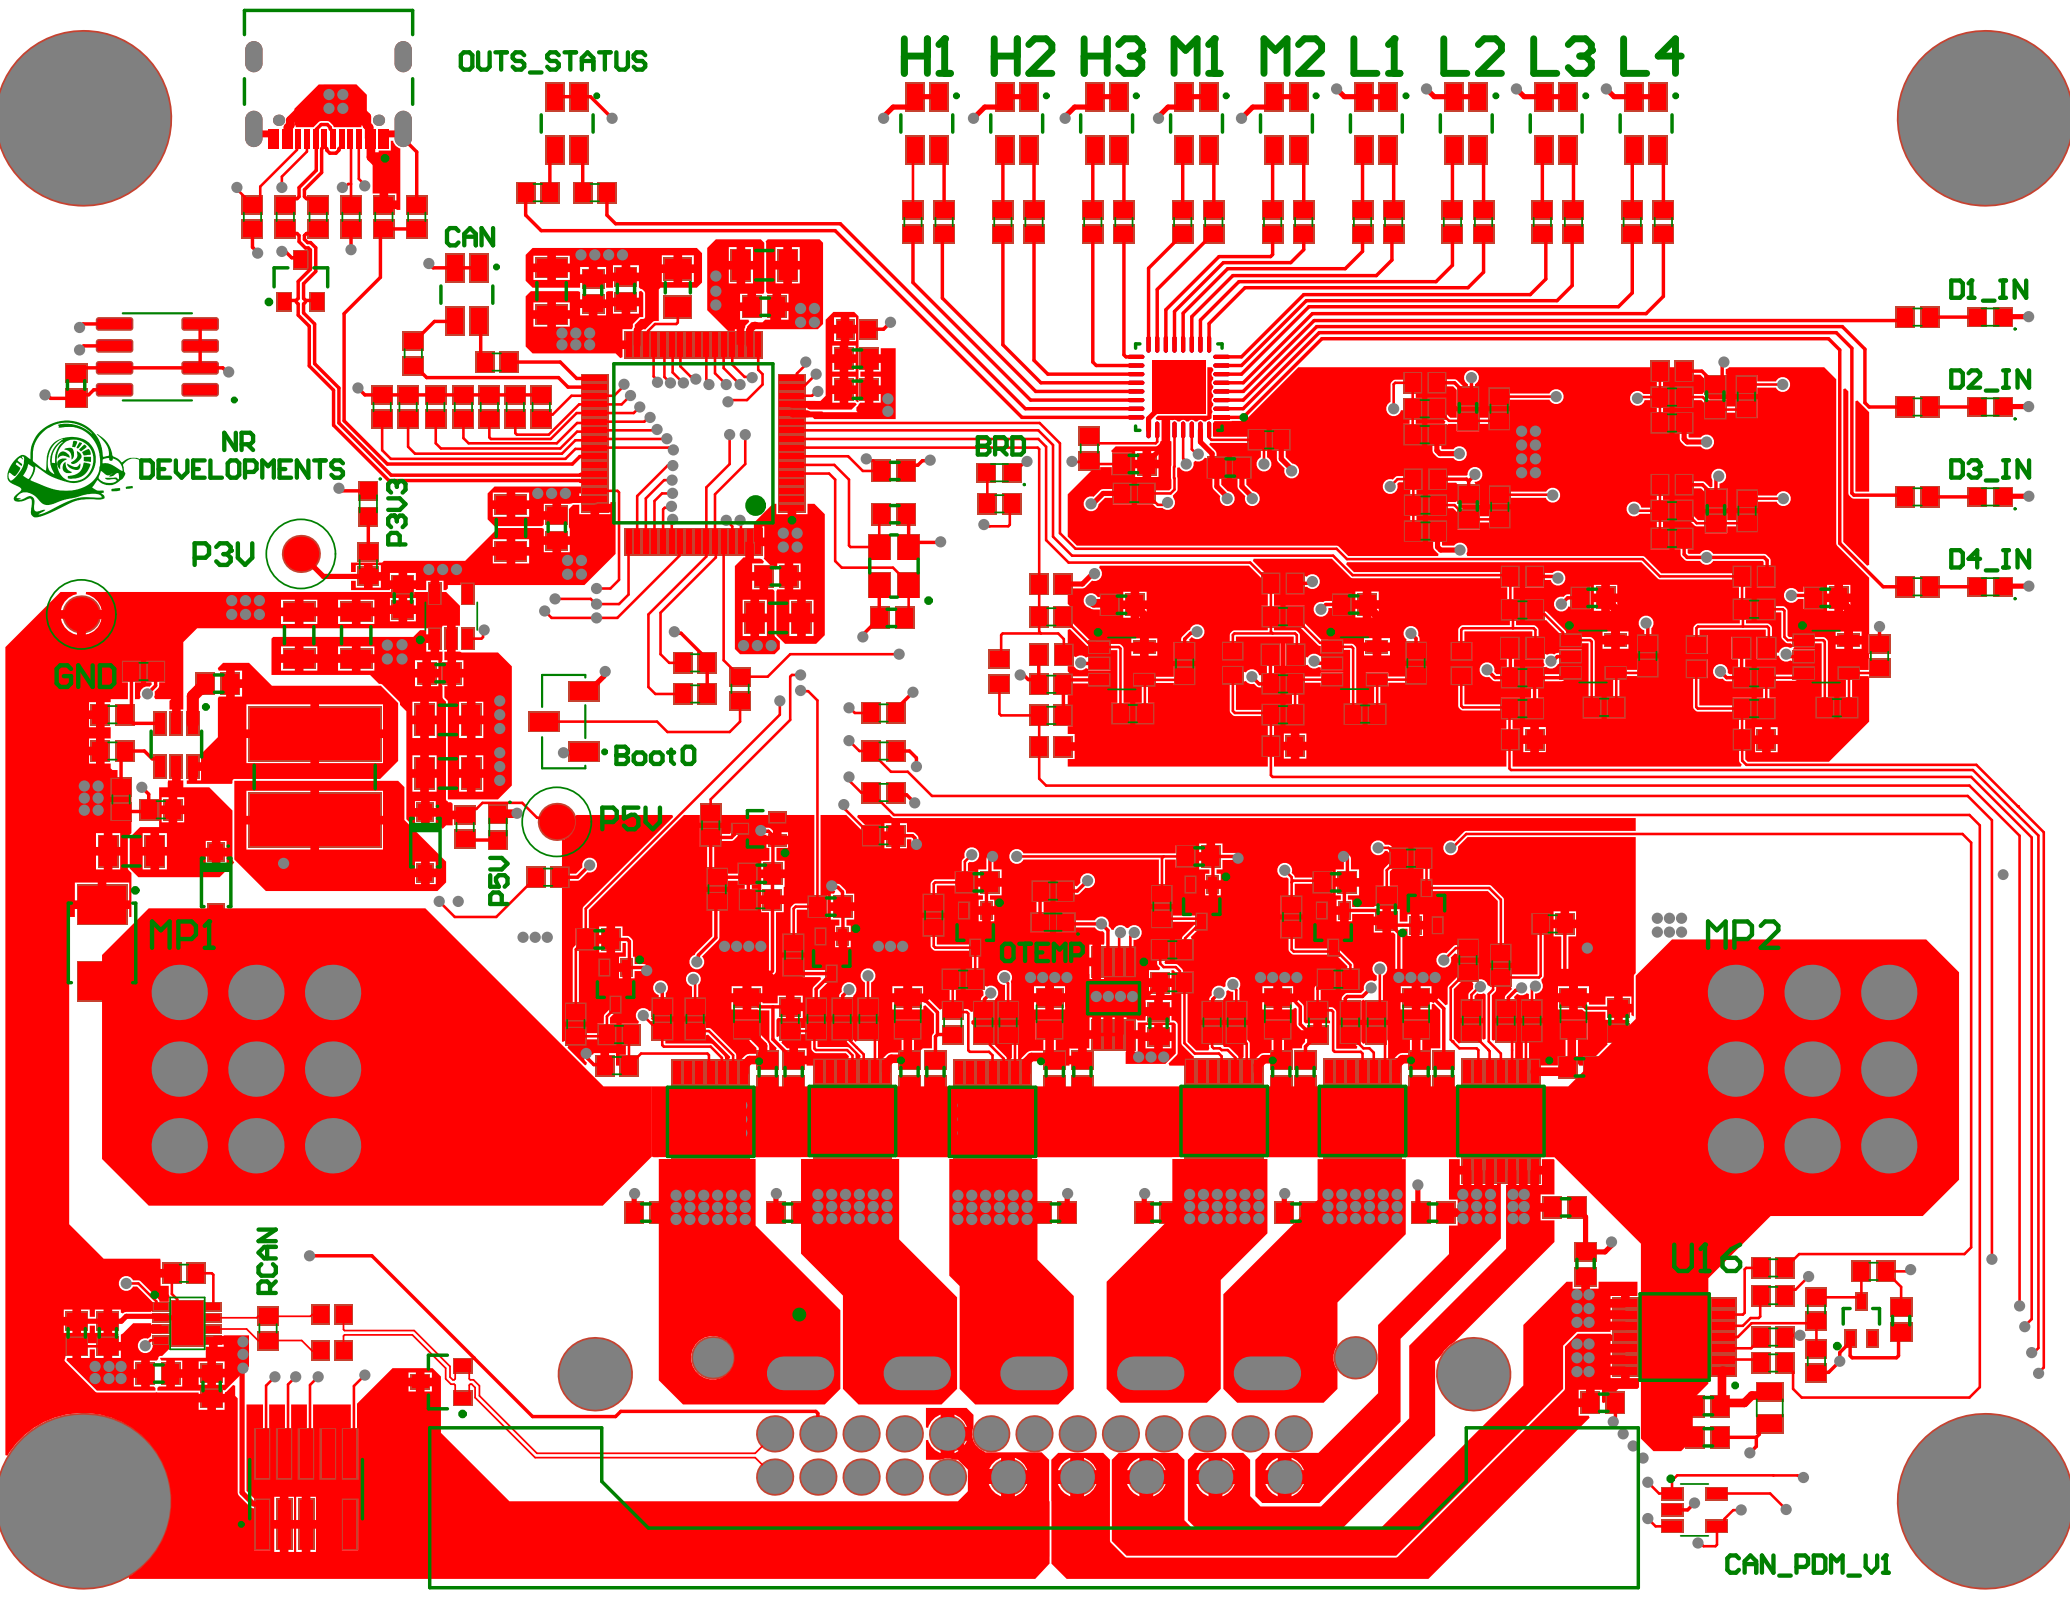

OUTS_STATUS

H1 H2 H3 M1 M2 L1 L2 L3 L4

CAN

NR DEVELOPMENTS

P3U

GND

Boot0

P5U

BRD

D1_IN

D2_IN

D3_IN

D4_IN

MP1

OTEMP

MP2

RCAN

U16

CAN_PDM_U1

