


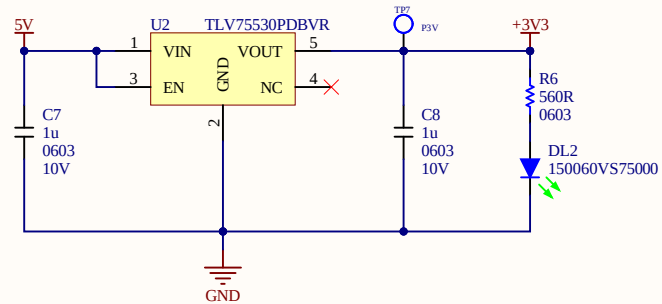


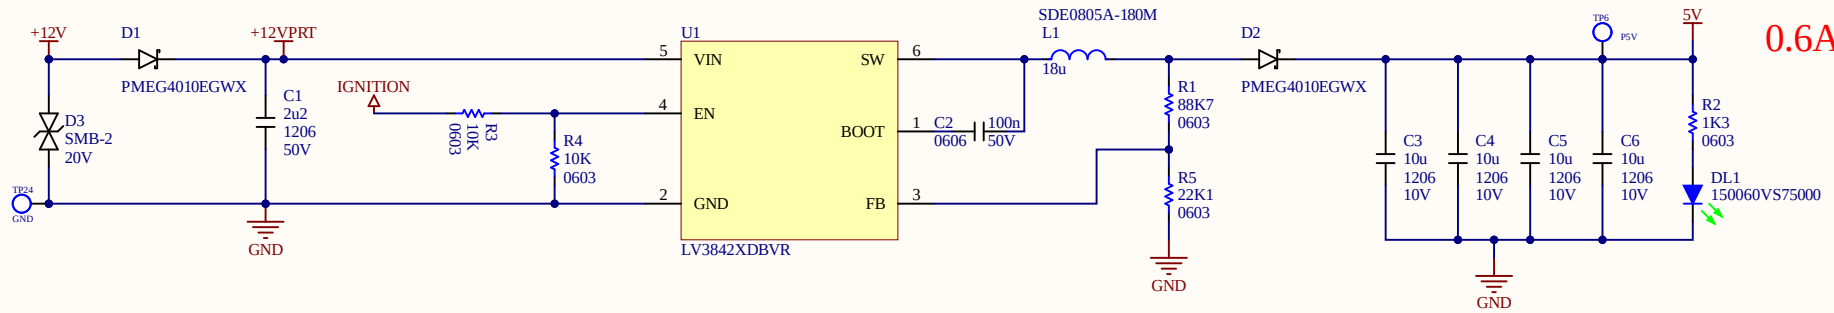
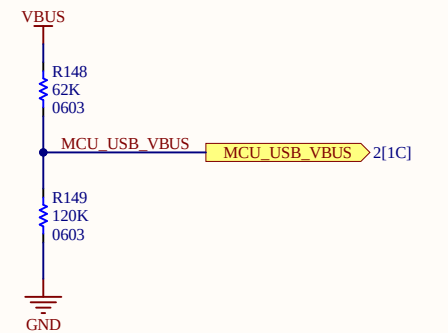


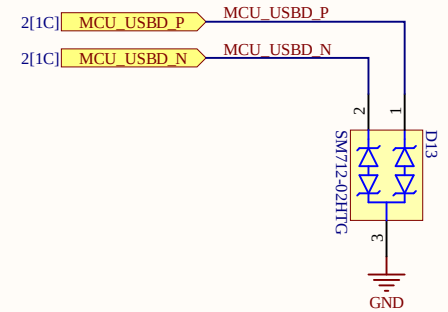


Page Contents: PWR.SchDoc			NR DEVELOPMENTS 
Size: A4	Revision:	Variant: [No Variations]	
Date: 13/05/2025			Sheet 1 of 14

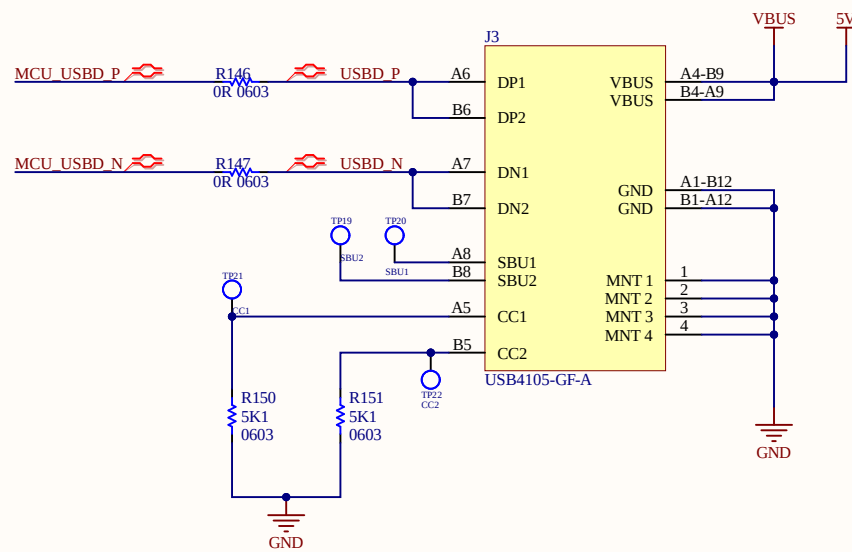


Page Contents: USB.SchDoc			NR DEVELOPMENTS 
Size: A4	Revision:	Variant: [No Variations]	
Date: 13/05/2025			
Sheet 3 of 14			

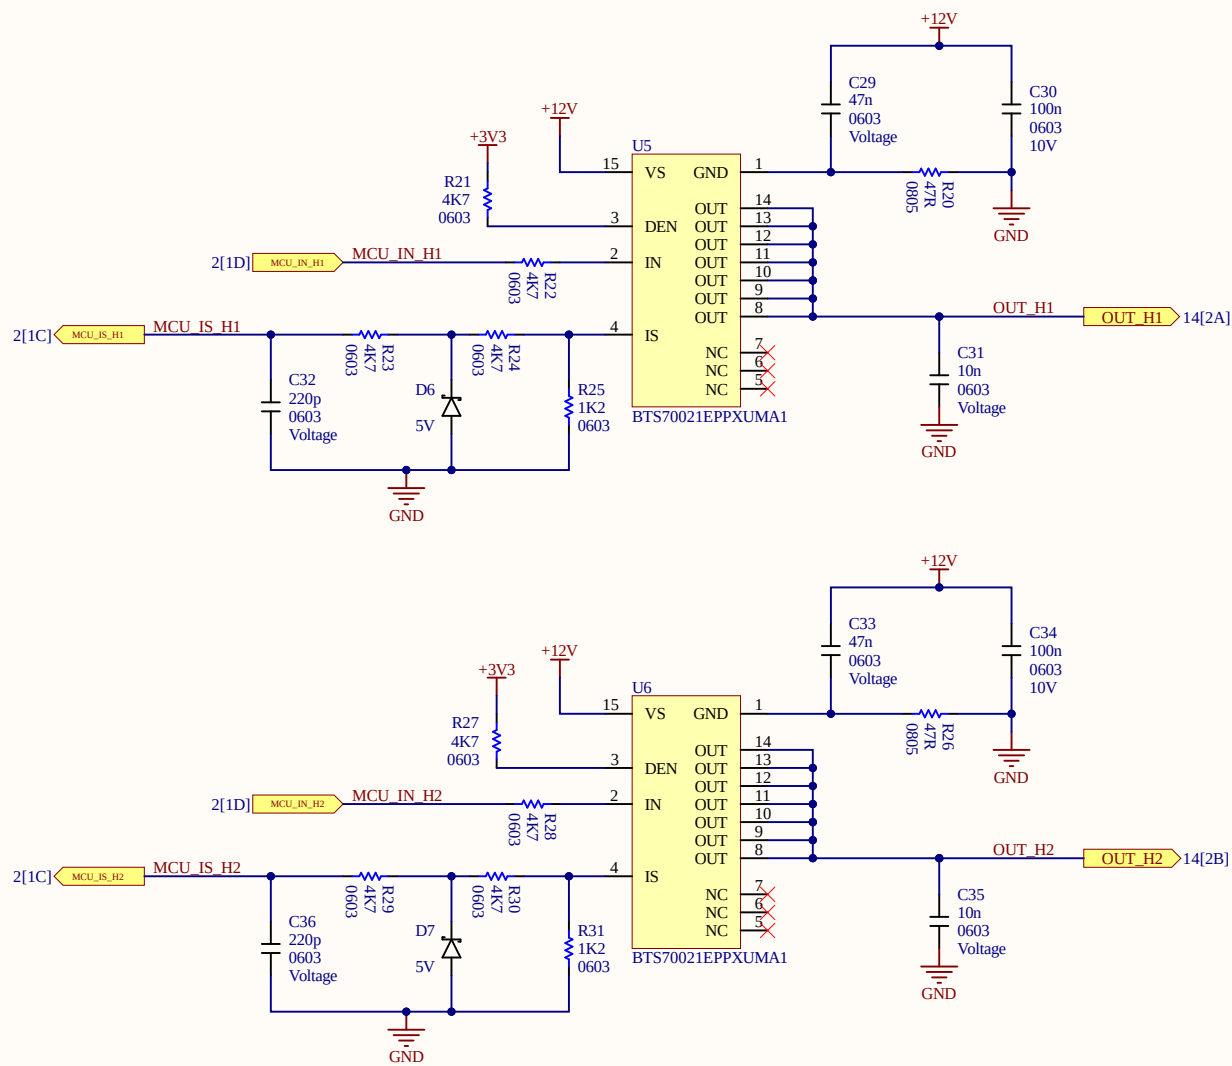


21A MAX each Profet





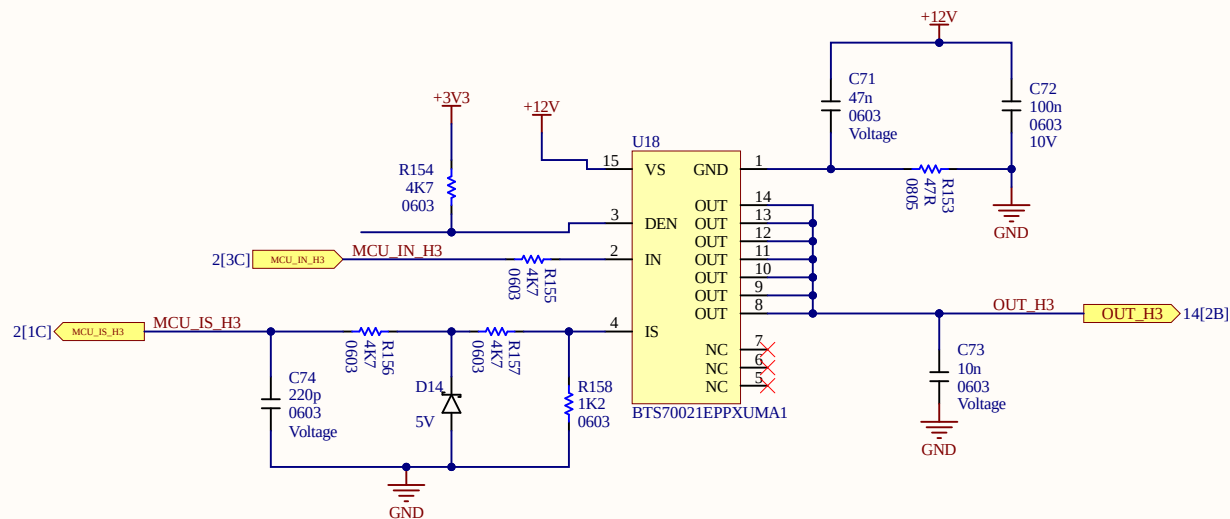


21A MAX each Profet





Page Contents: HIGH_CURR_MOS2.SchDoc			 NR DEVELOPMENTS
Size: A4	Revision:	Variant: [No Variations]	
Date: 13/05/2025			
Sheet 6 of 14			





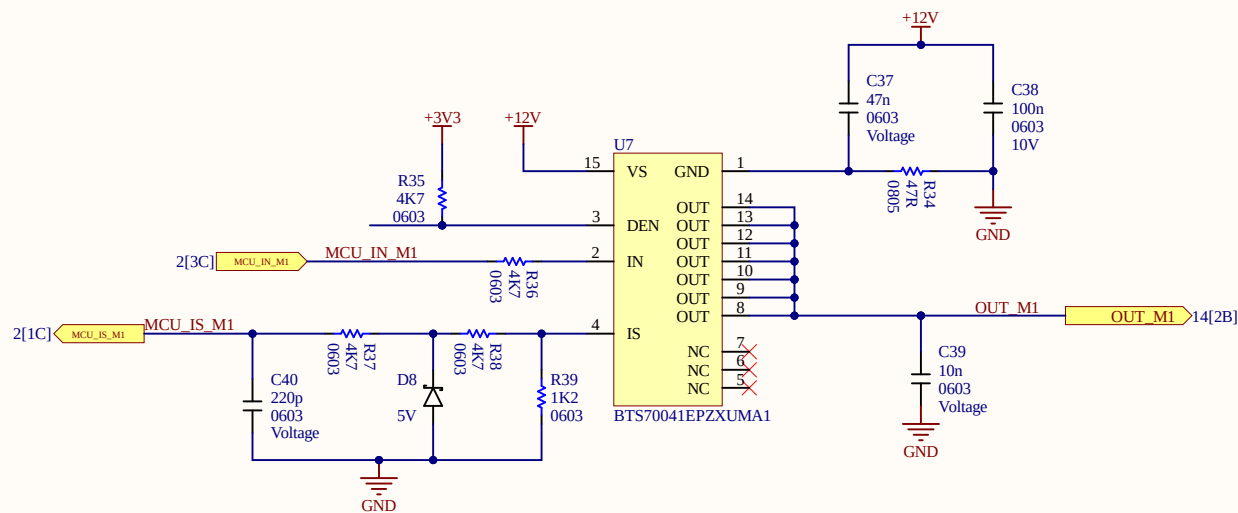


15A MAX each Profet

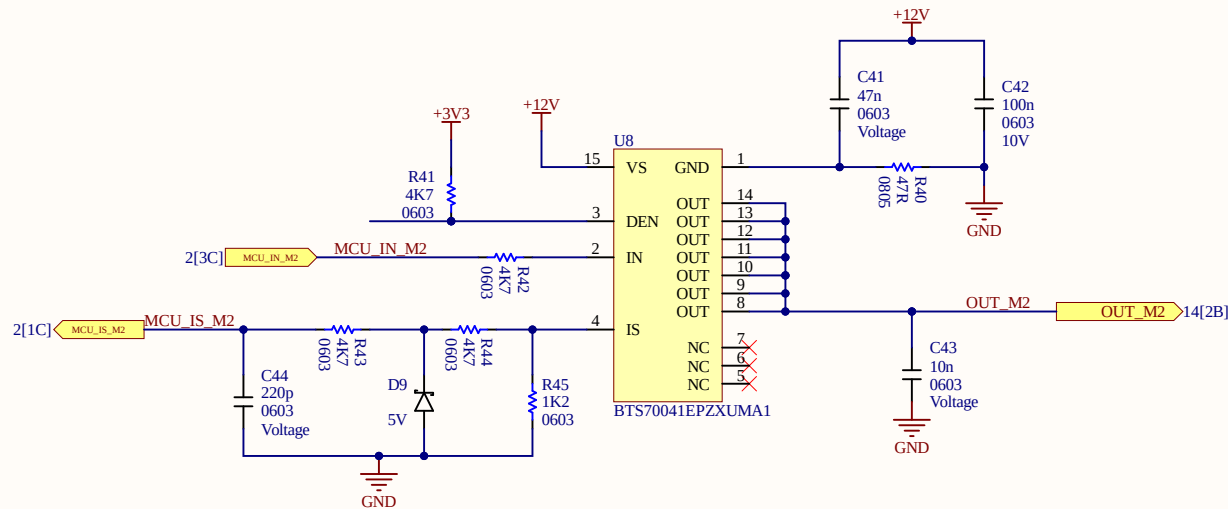

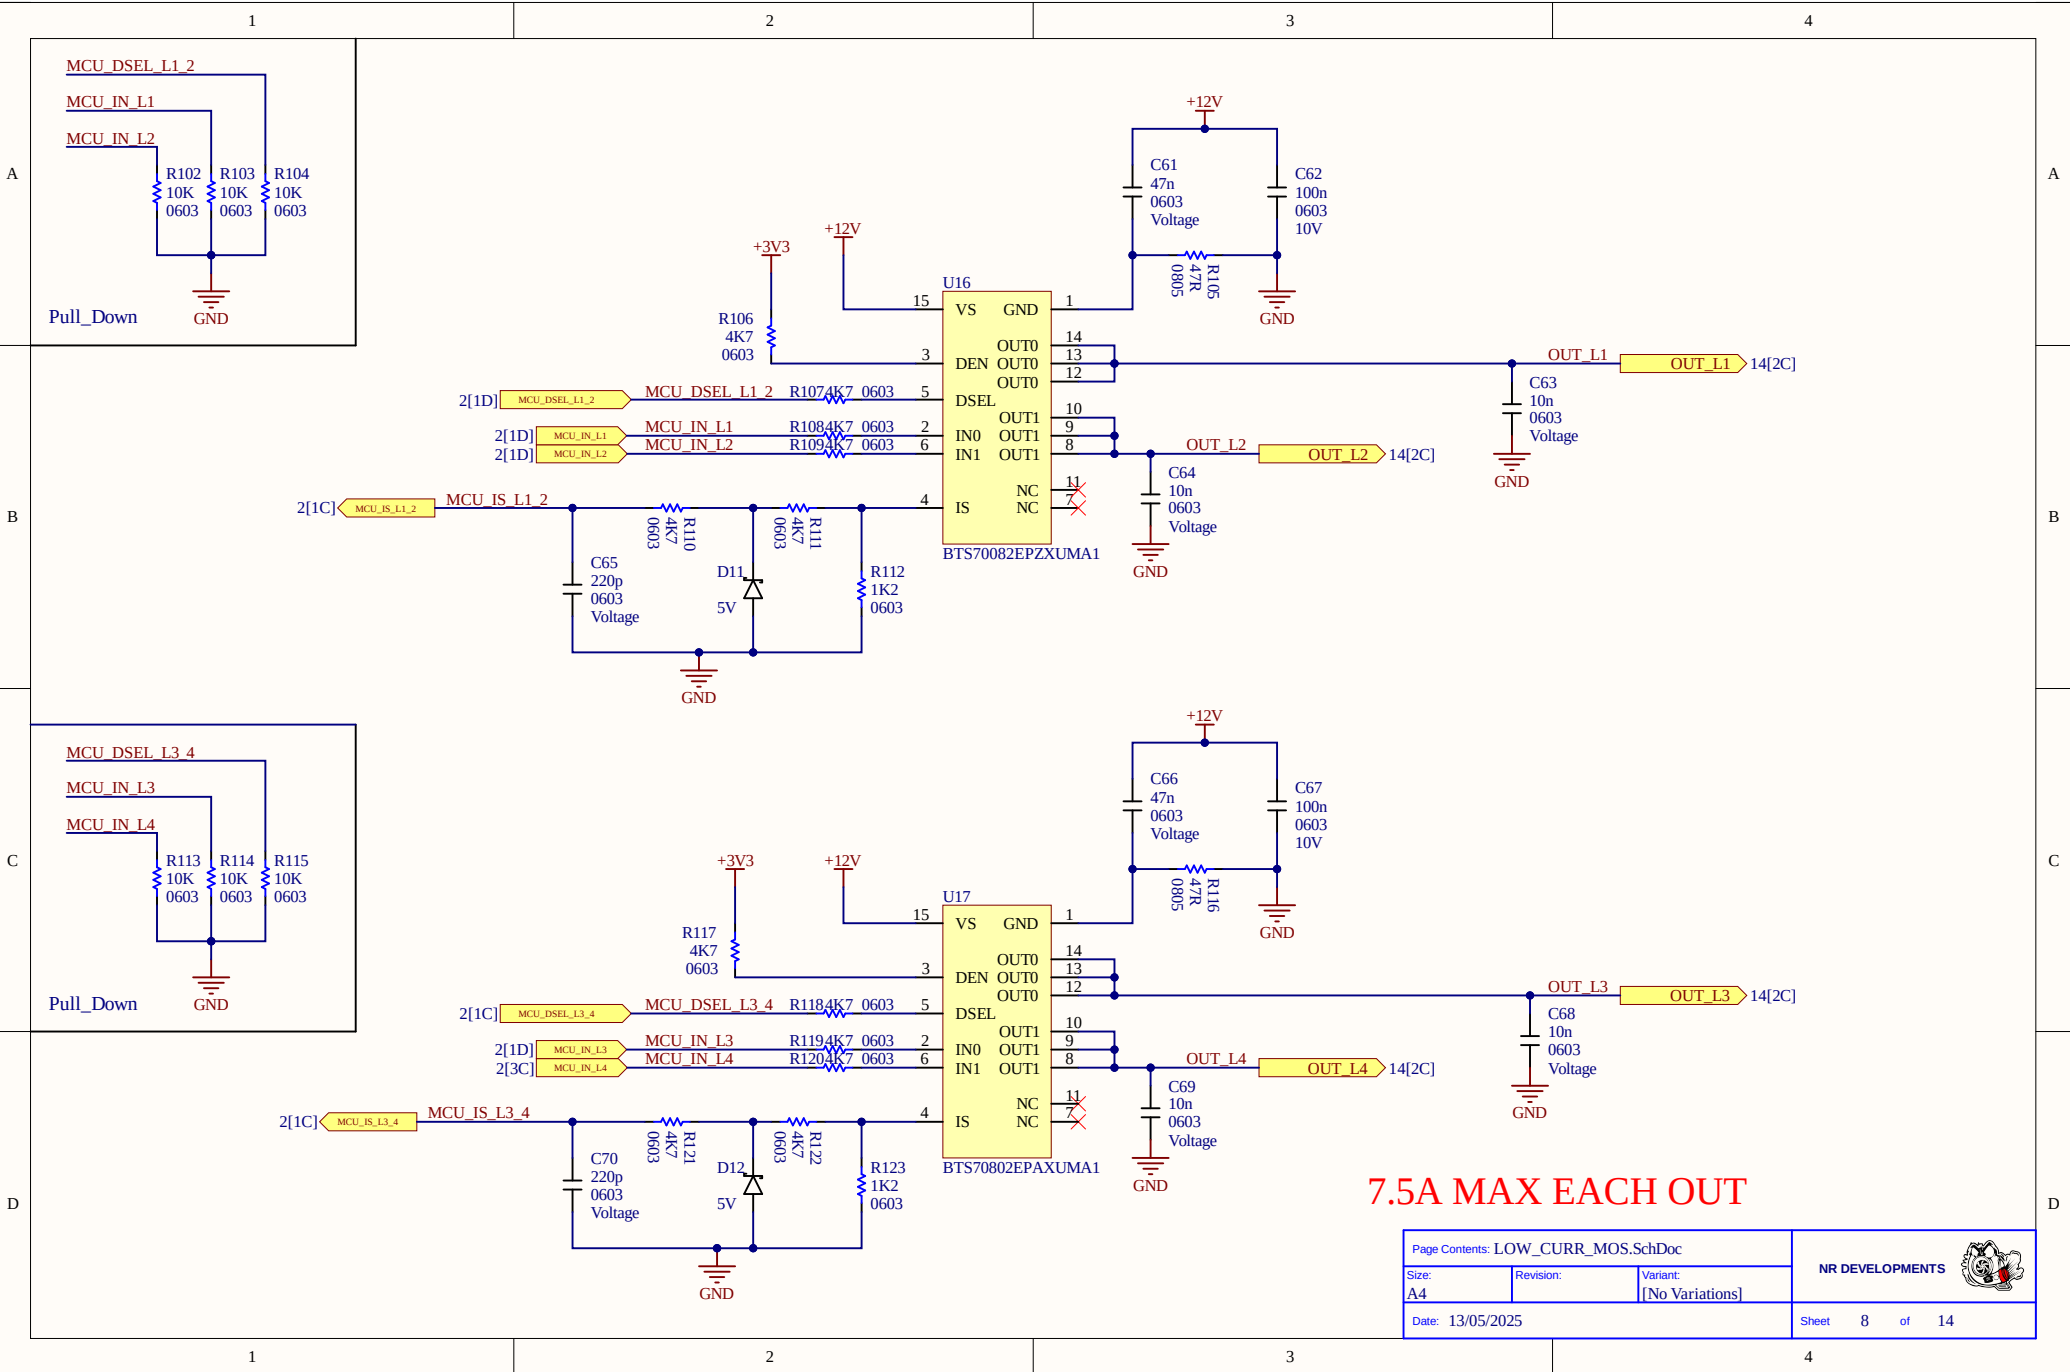

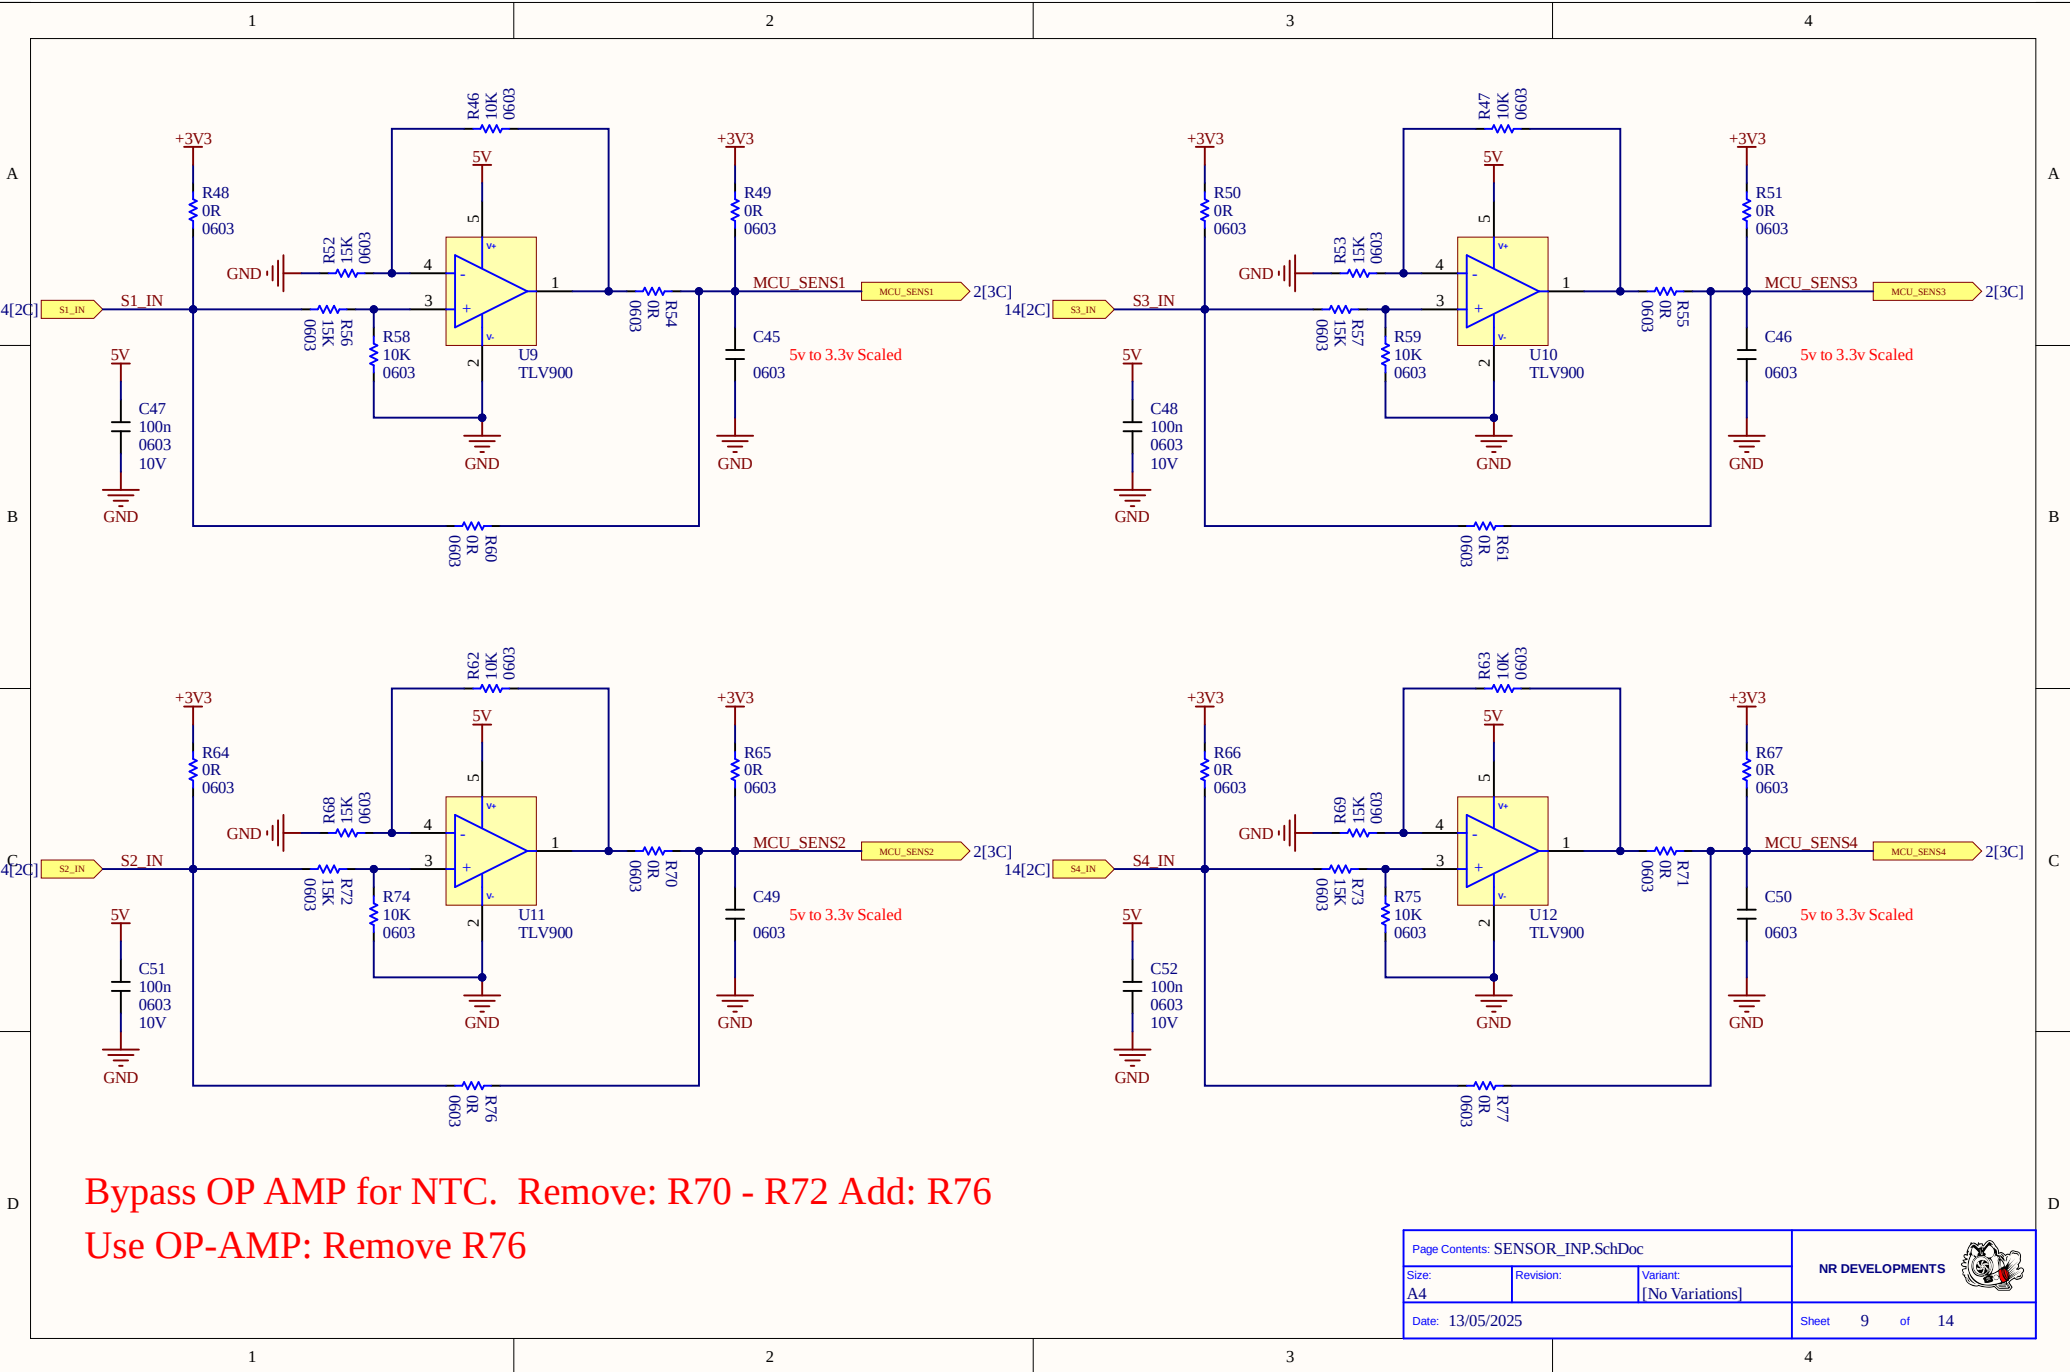

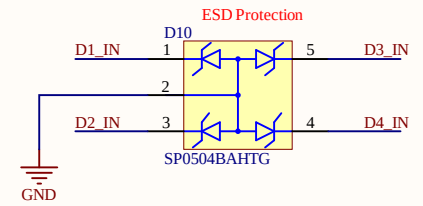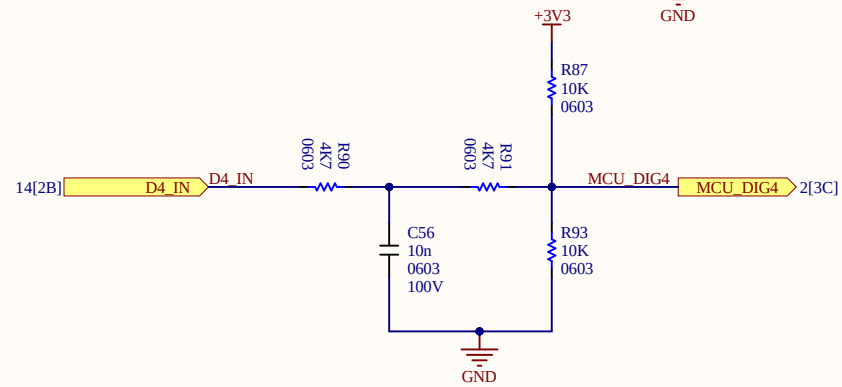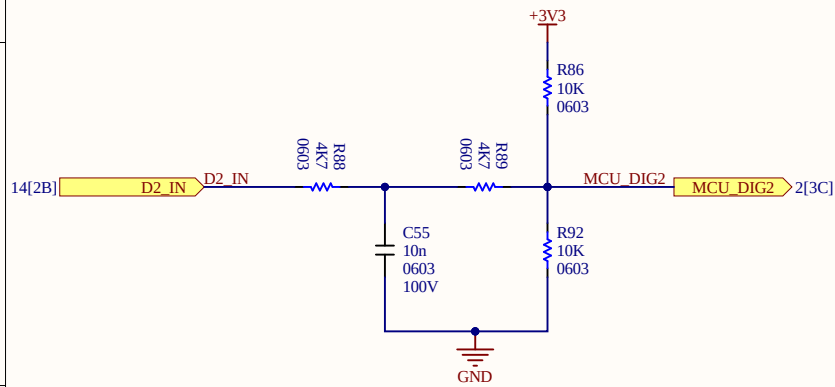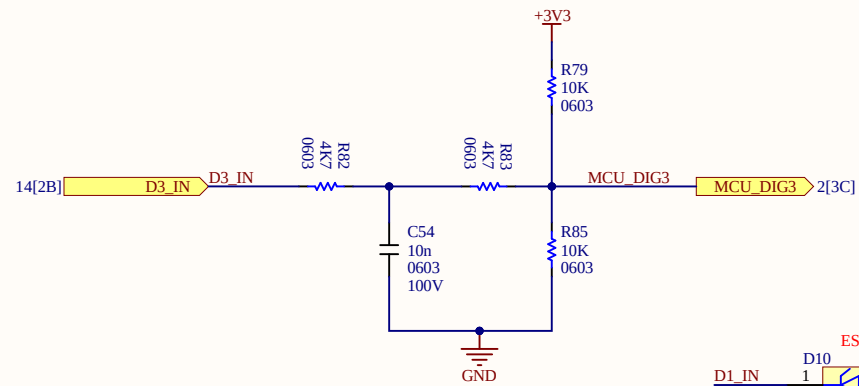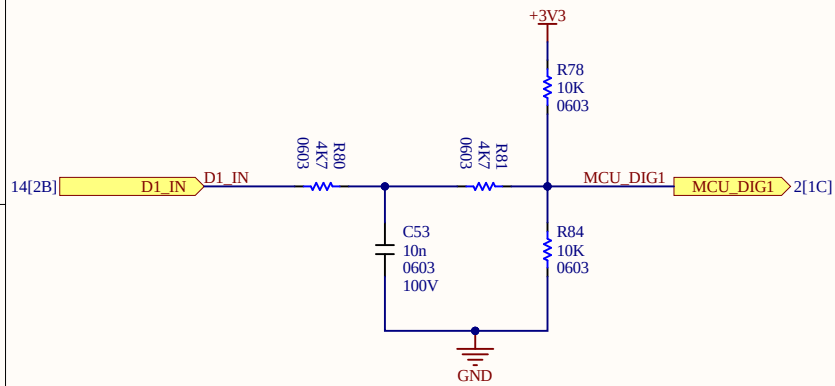

3.3V Logic Input. With pull-up or pull-down


1

2


3

4


I2C_PULL

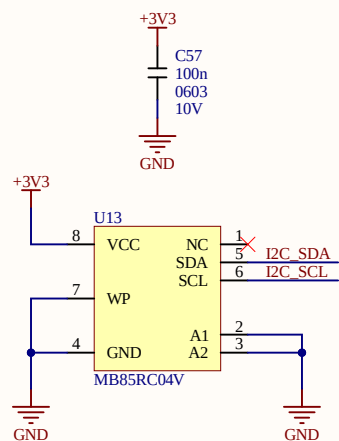

Addr: 0X50
FRAM

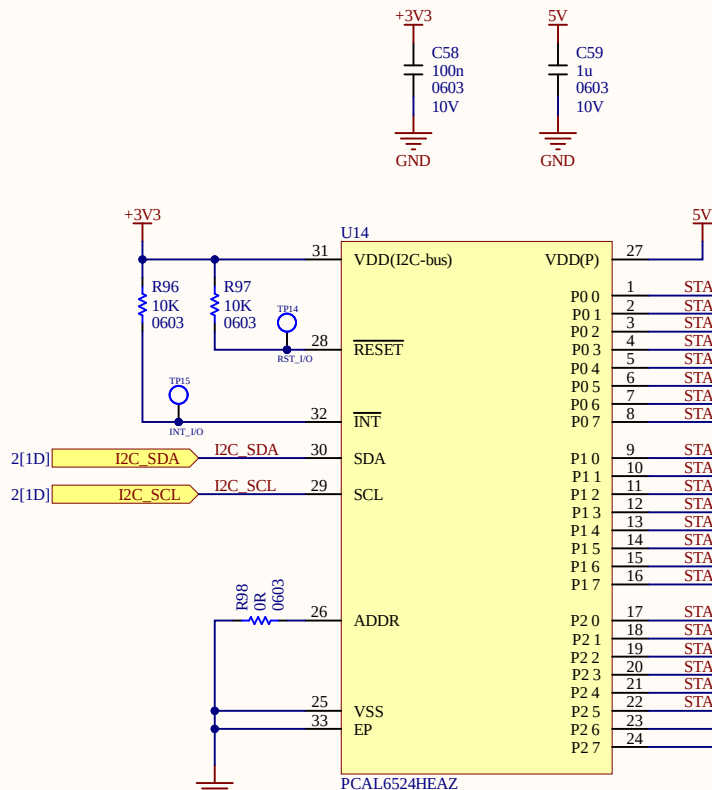

OUT_STATUS
Addr: 0X22



Addr: 0X18
TEMP_S

I2C ADDR:
MB85RC04V --> 0X50
P14IOE5V6416 --> 0X22
MCP9808-E/MS --> 0X18

Page Contents: I2C.SchDoc

Size:
A4

Revision:

Variant:

[No Variations]

NR DEVELOPMENTS










Date: 13/05/2025

Sheet 11 of 14


Led Status High Current



Led Status Mid Current

Led Status Low Current

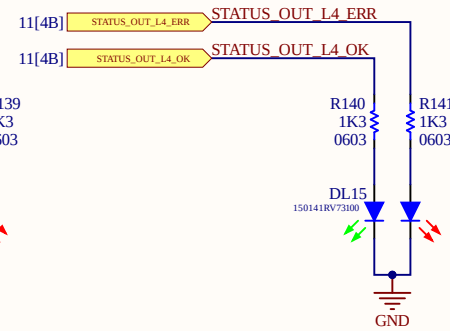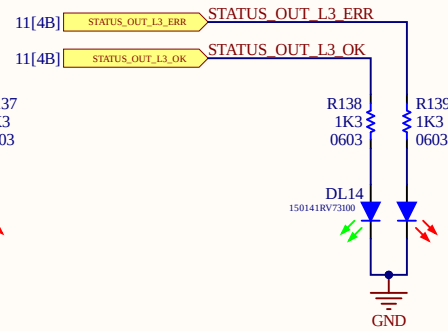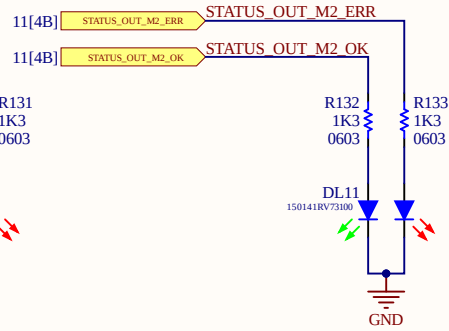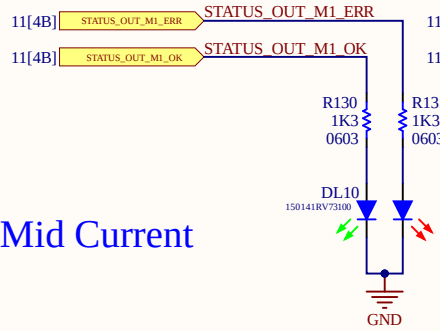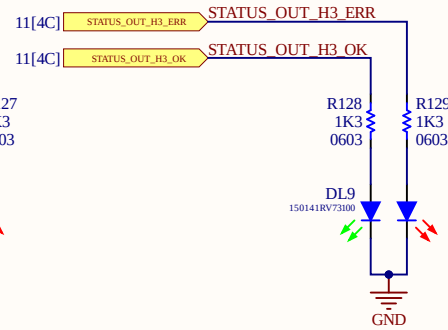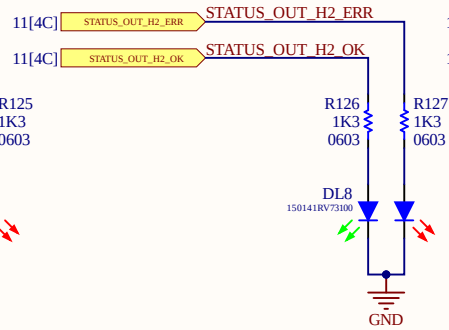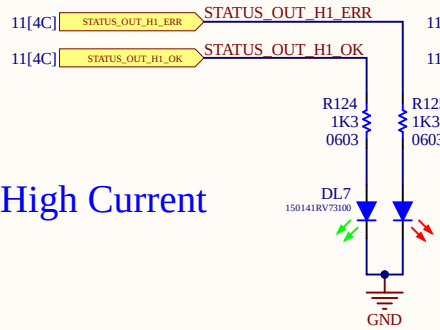

Led Status Logic Input

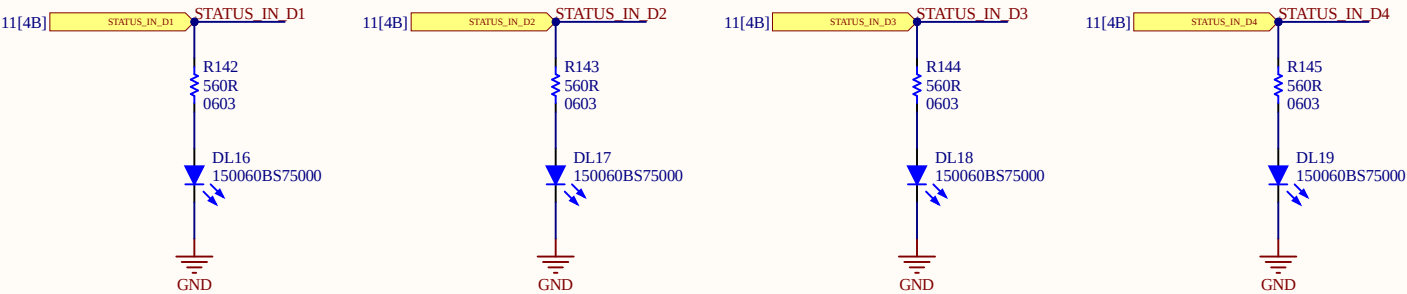

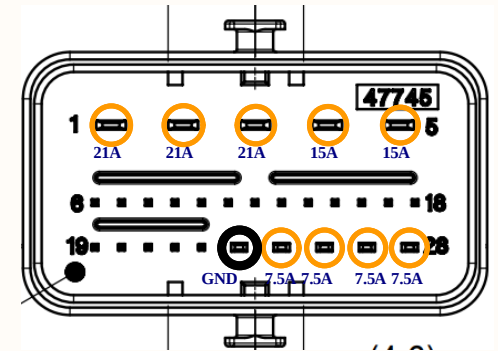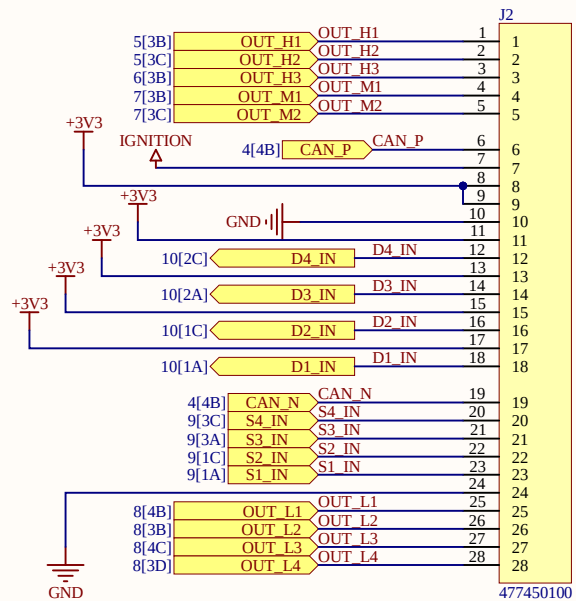

○ High Current