

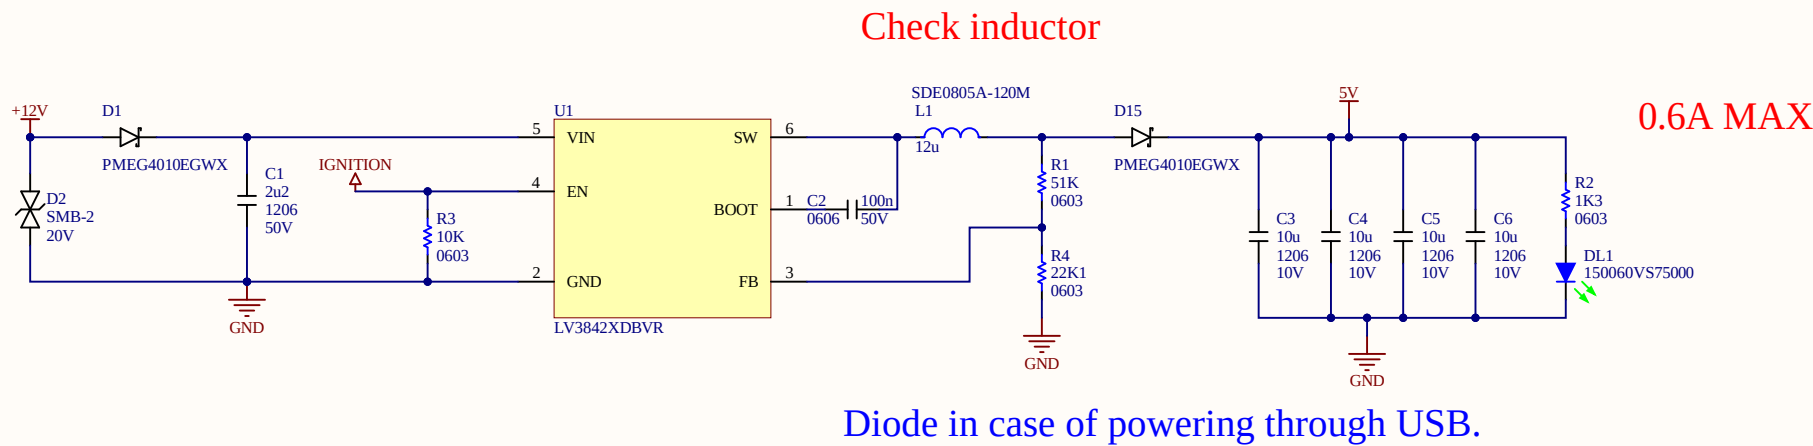
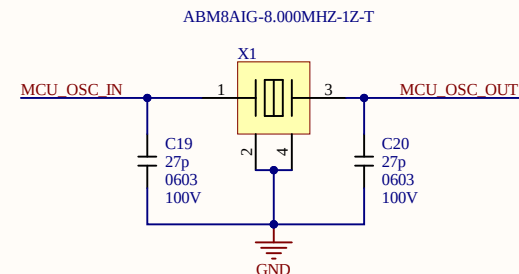



12V INPUT


Page Contents: PWR.SchDoc			 NR DEVELOPMENTS
Size: A4	Revision:	Variant: [No Variations]	
Date: 19/11/2024			
Sheet 1 of 13			

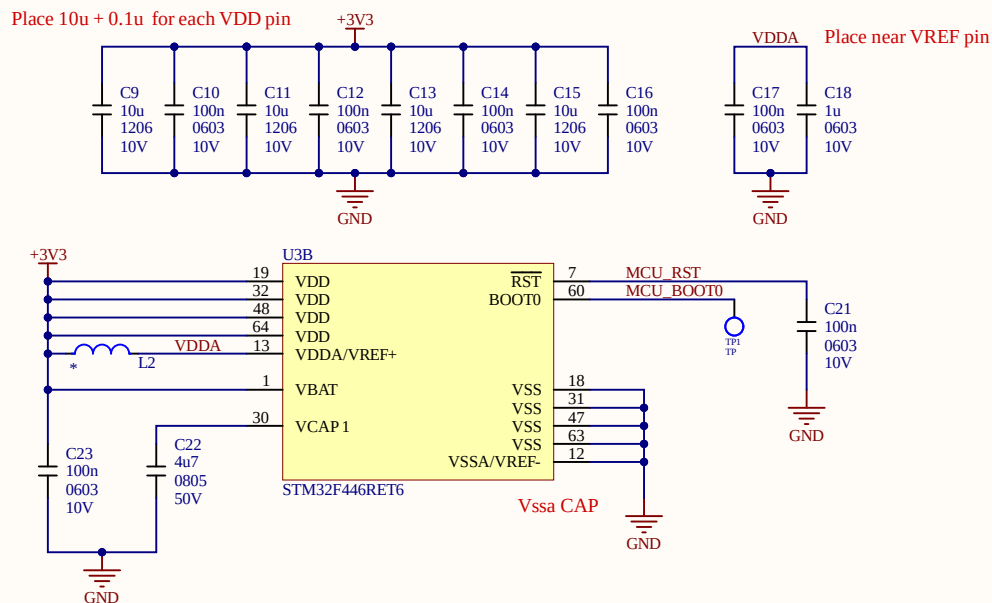


Clock

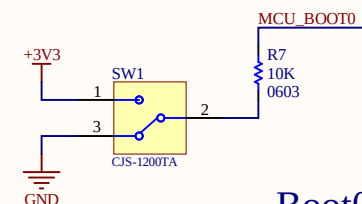


Boot0


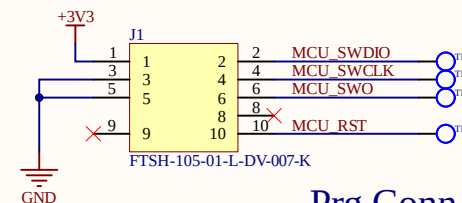


Prg Conn

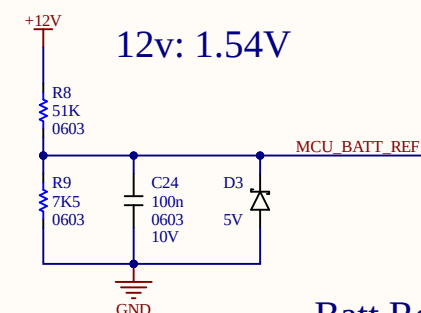


Batt Ref

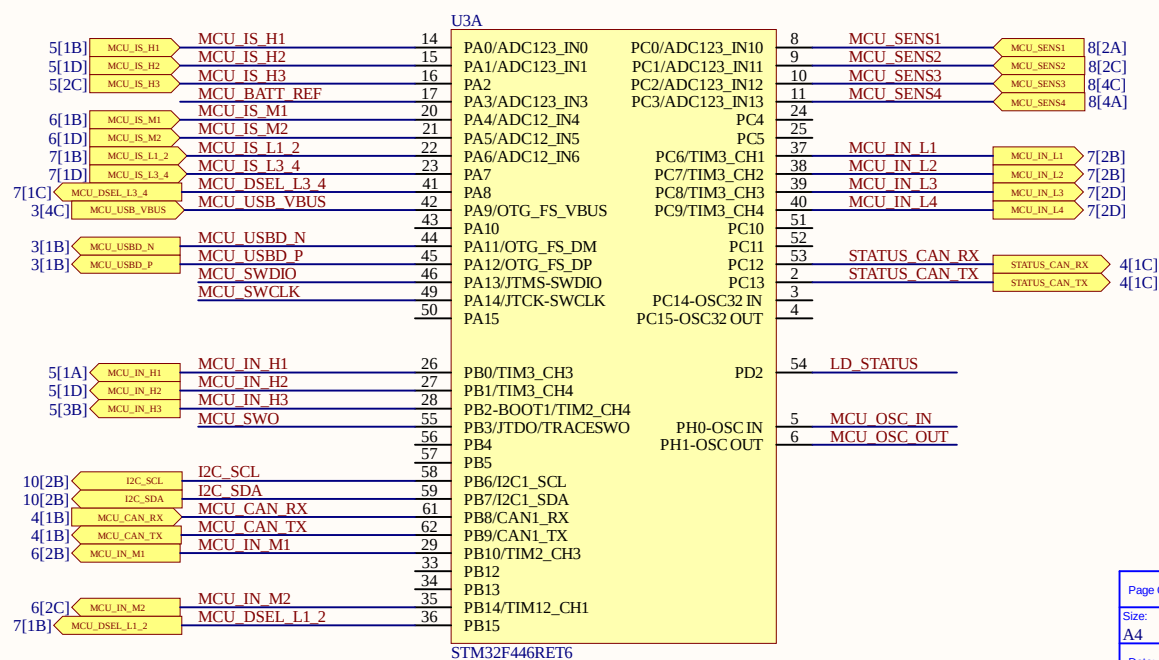


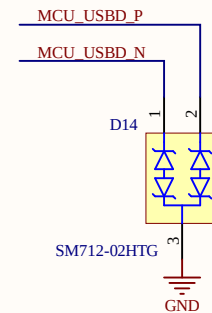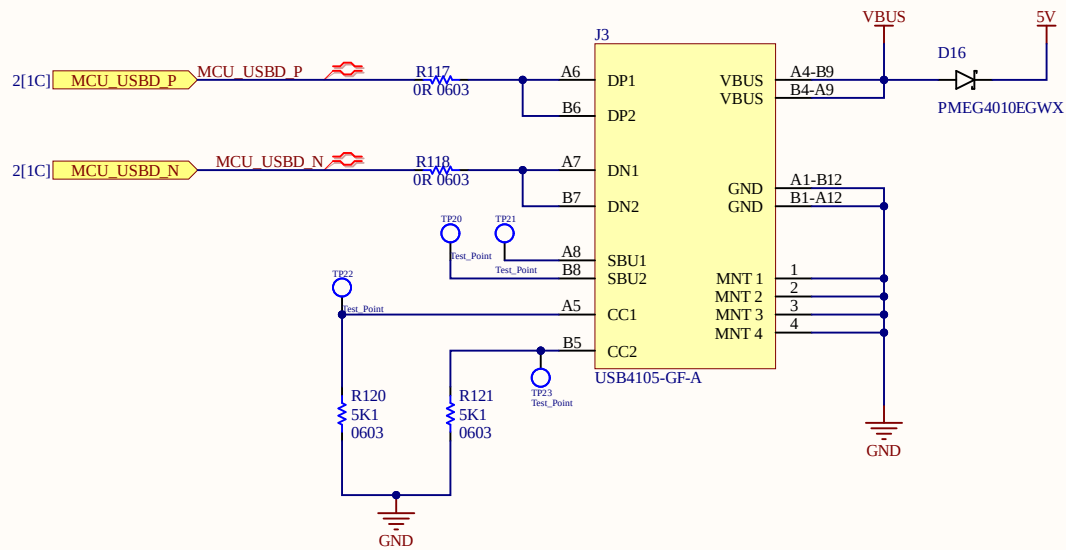

TVS USB DATA

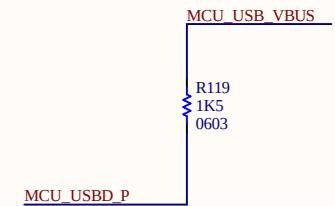

Pull-up for D +

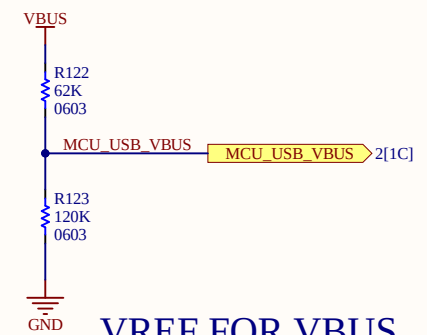

VREF FOR VBUS

1

2

3

4

A

B

C



D

A

B

C

D

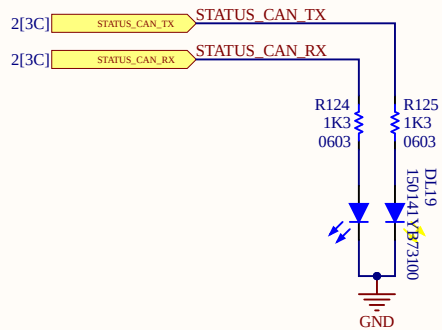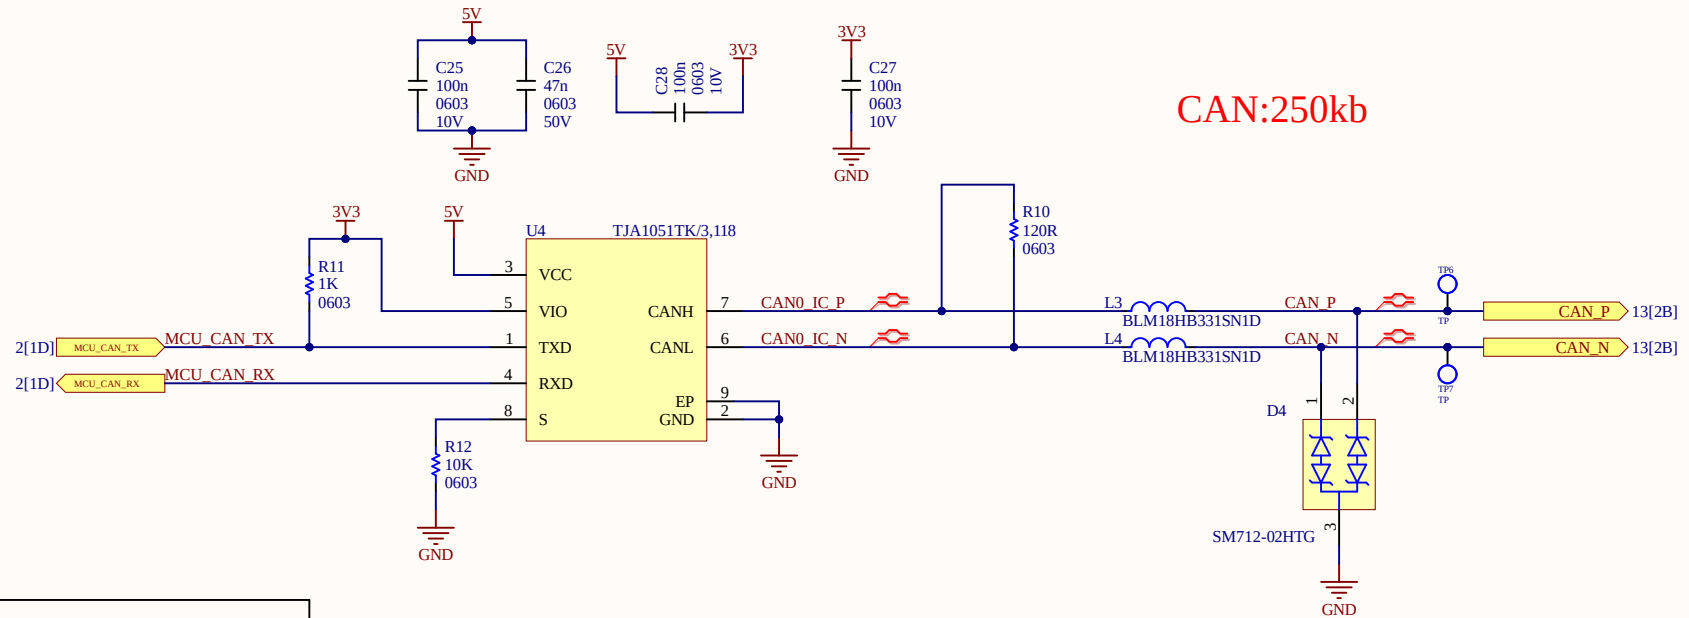

Status can led


1

2


3

4

Page Contents: CAN.SchDoc			NR DEVELOPMENTS 
Size: A4	Revision:	Variant: [No Variations]	
Date: 19/11/2024			Sheet 4 of 13

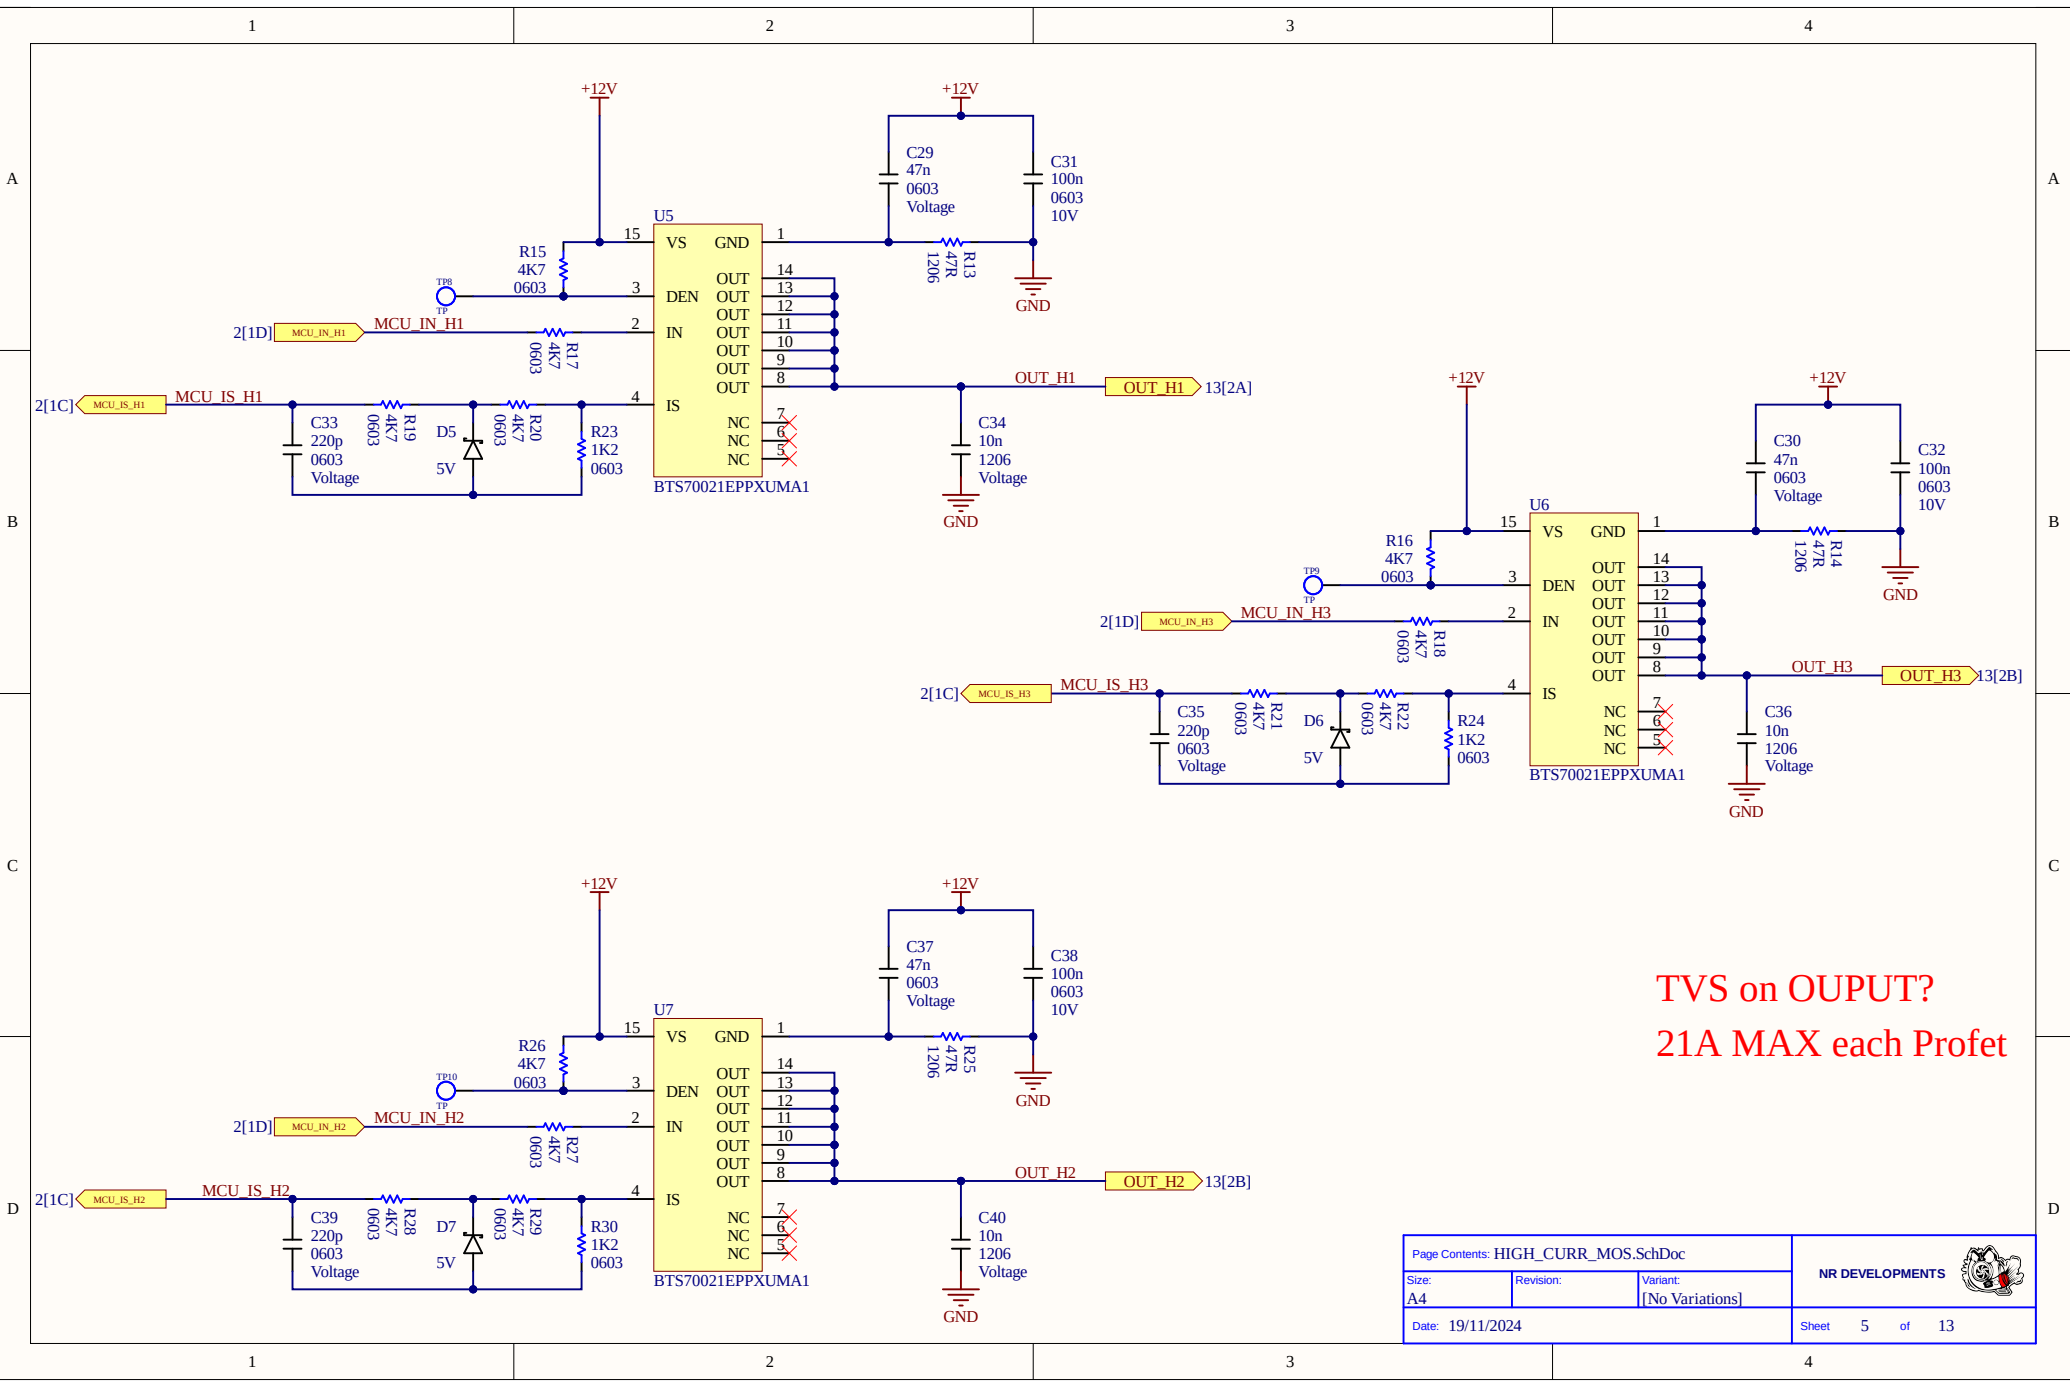


TVS on OUPUT?
21A MAX each Profet

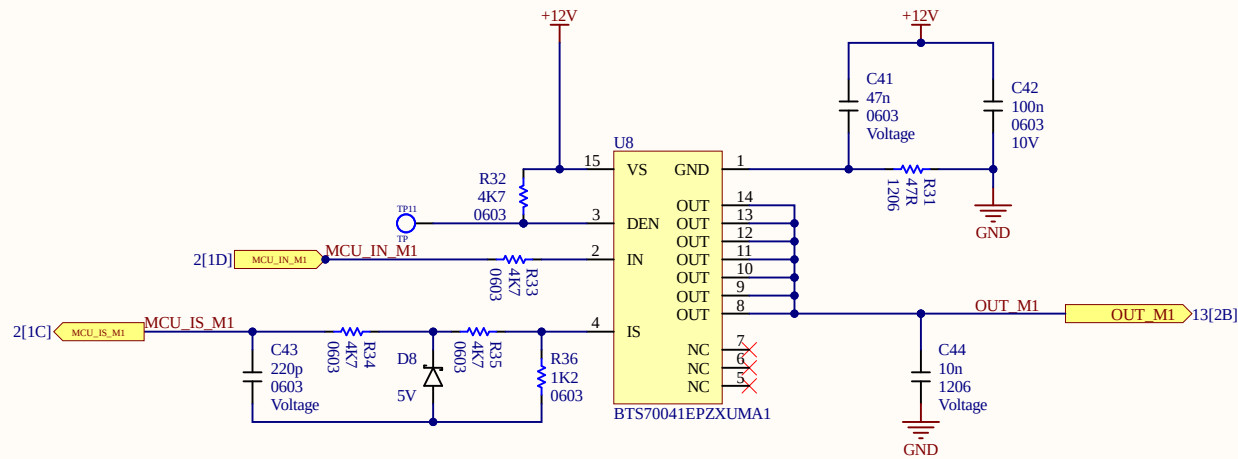


TVS on OUPUT?

15A MAX each Profet

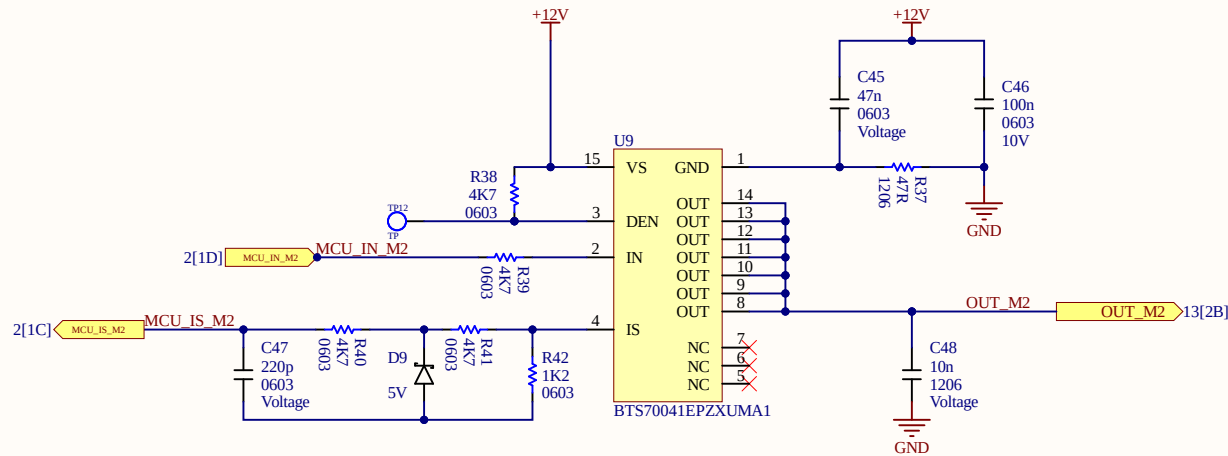


TVS on OUPUT?

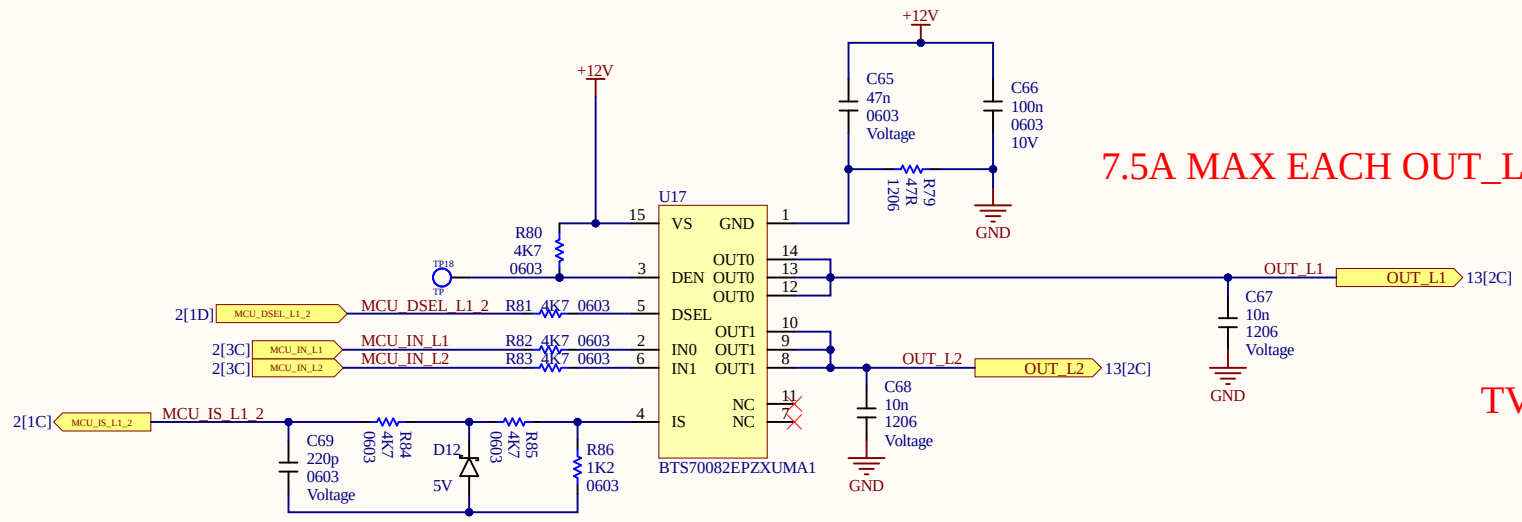





7.5A MAX EACH OUT_L1 E OUT_L2

TVS on OUPUT?


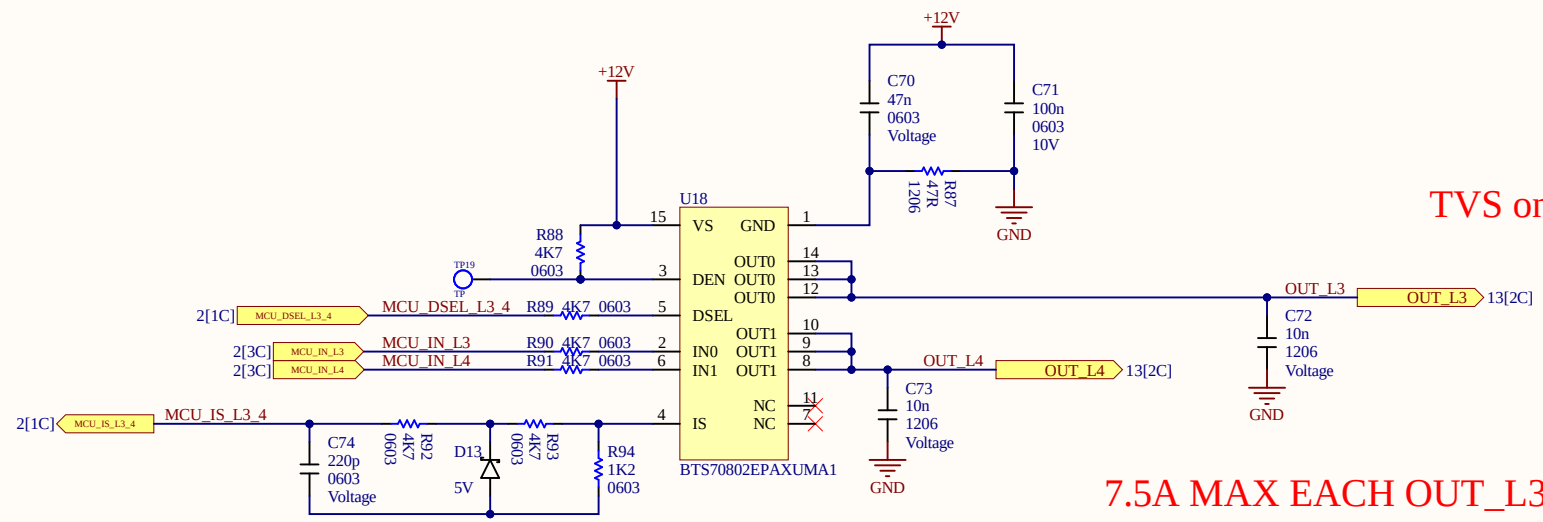


TVS on OUPUT?

7.5A MAX EACH OUT_L3 E OUT_L4

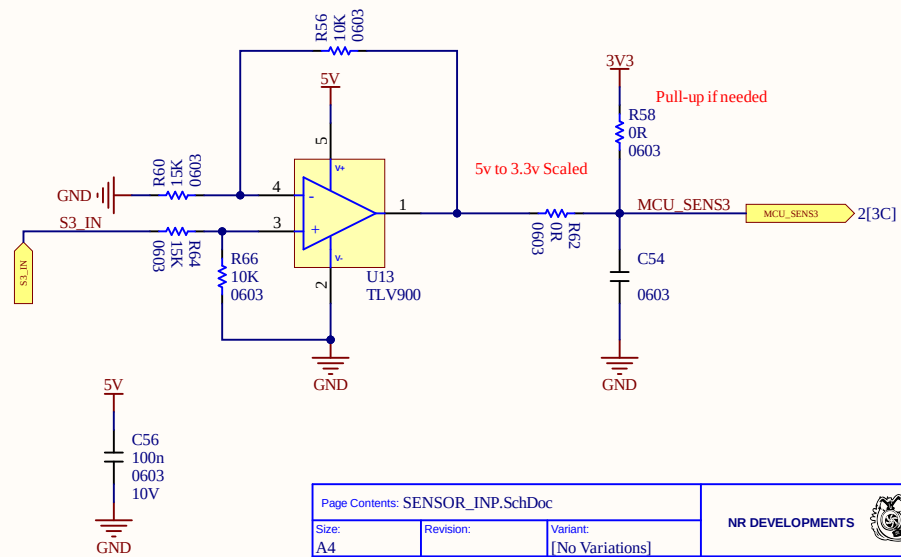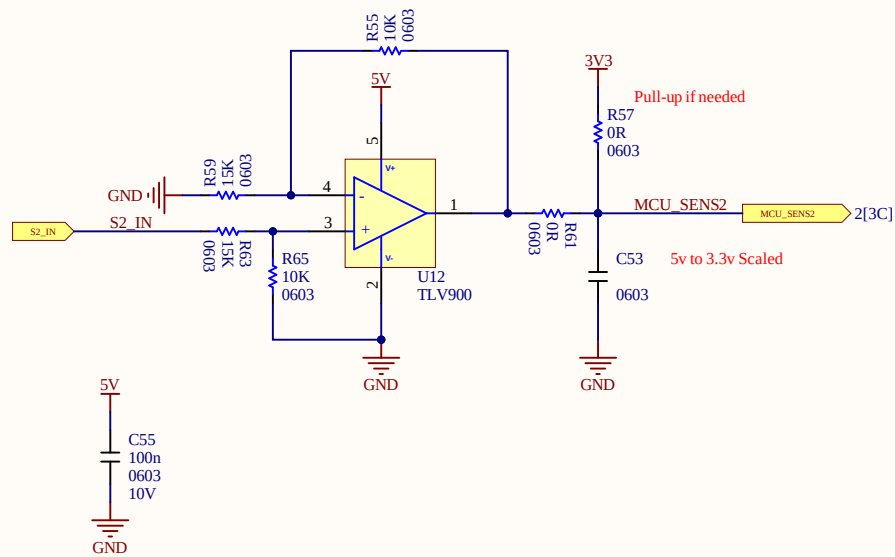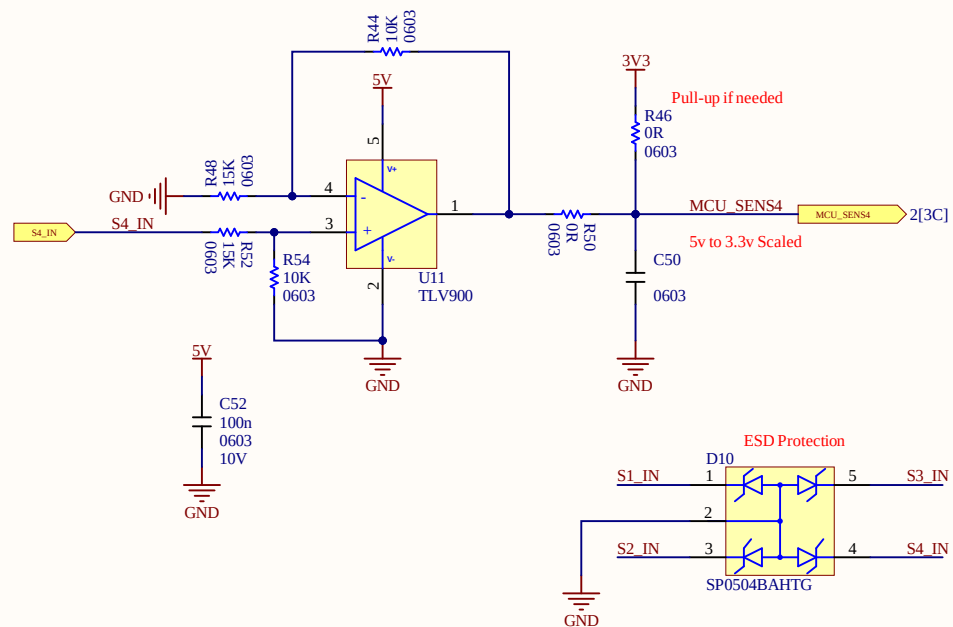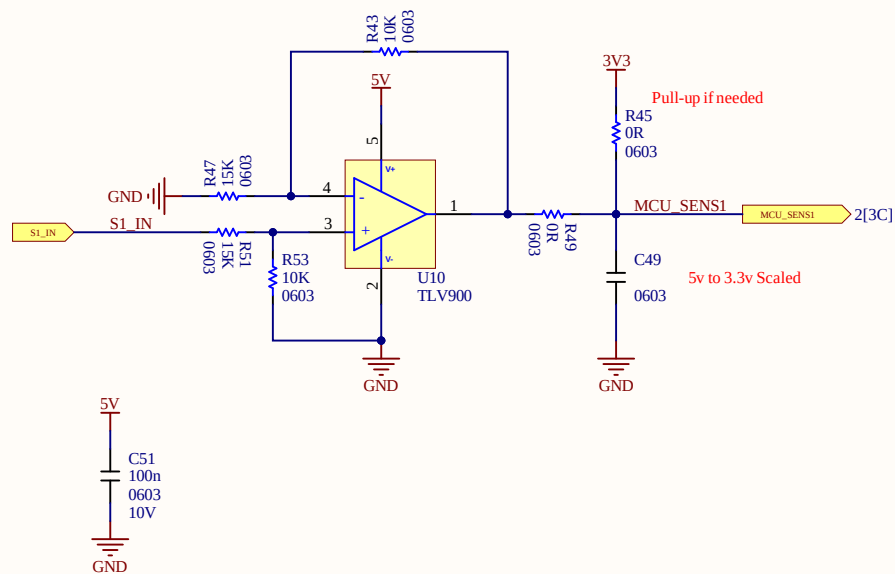

MCU_PULL-UP / PULL-DOWN

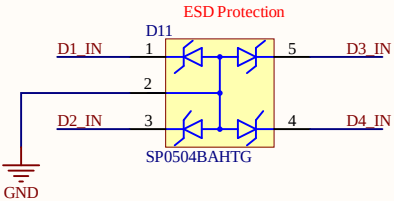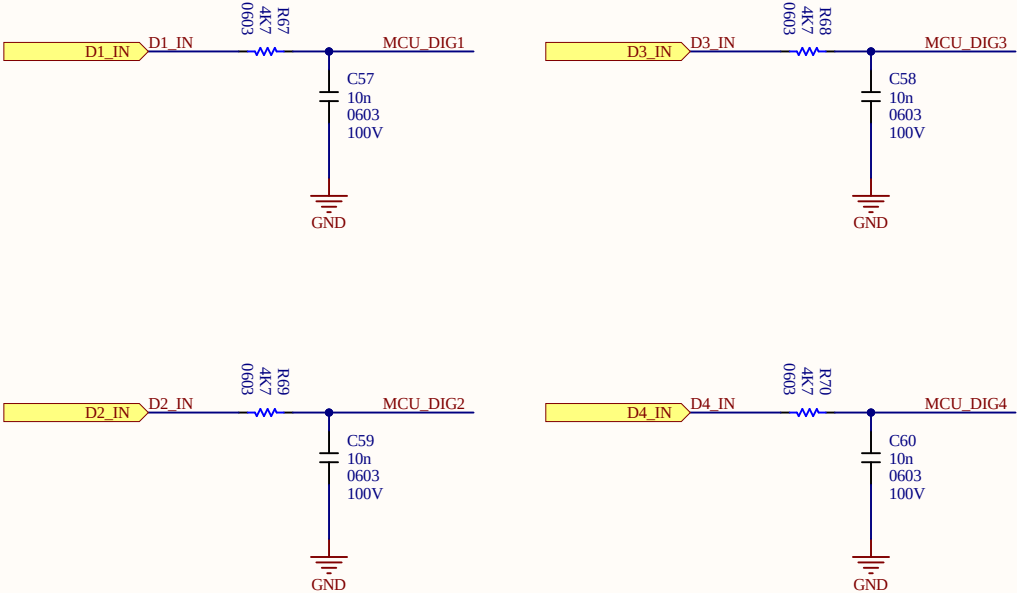

5V Logic Input



1

2


3

4


I2C_PULL

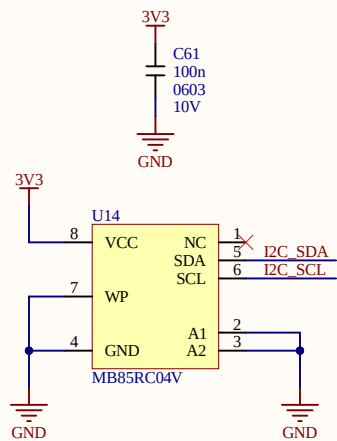

Addr: 0X50
FRAM

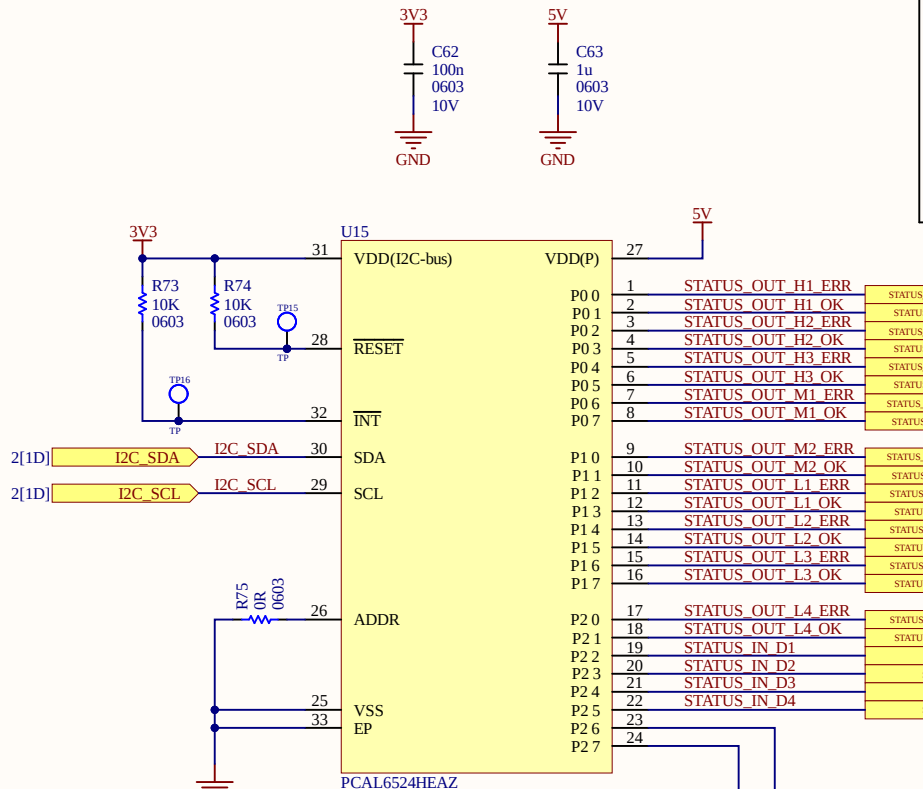

OUT_STATUS
Addr: 0X22







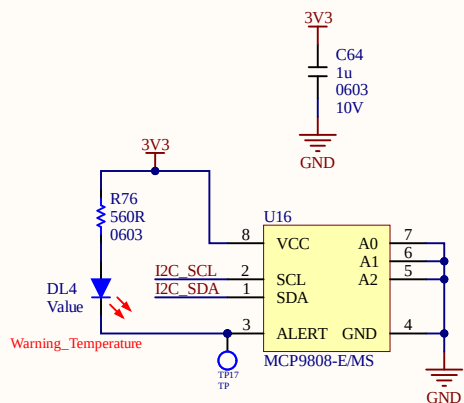


Addr: 0X18
TEMP_S


Led Status High Current



Led Status Mid Current

Led Status Low Current

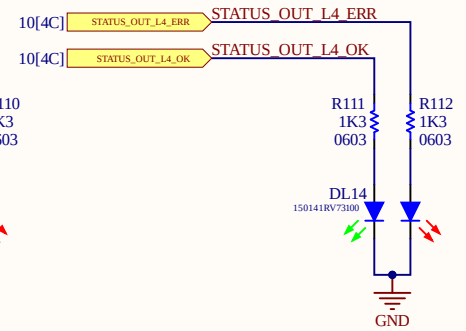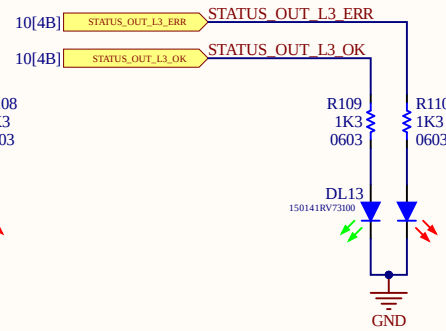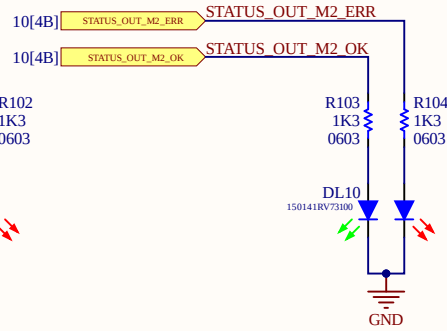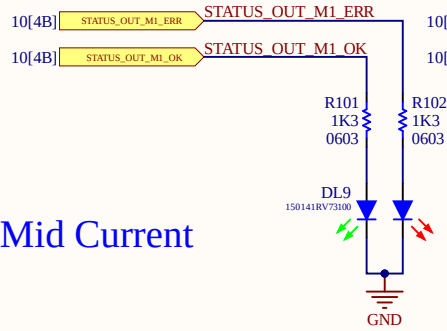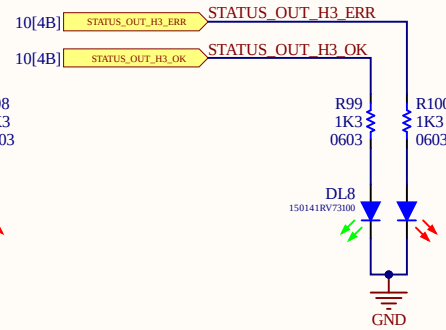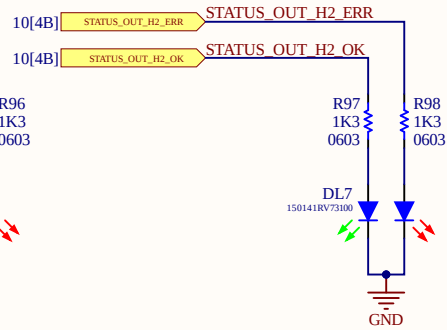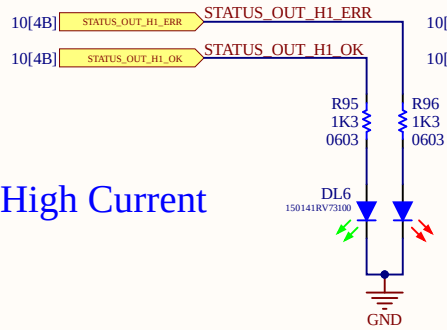

Led Status Logic Input

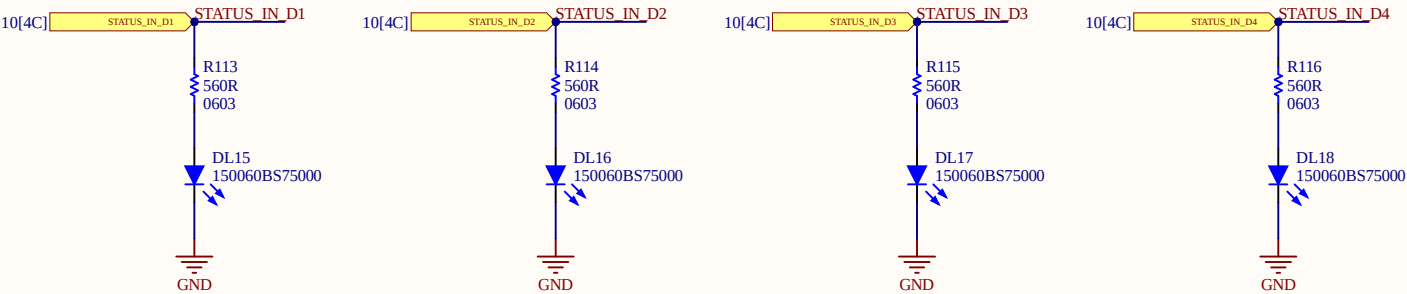

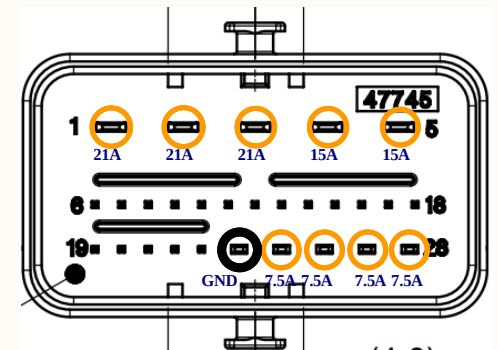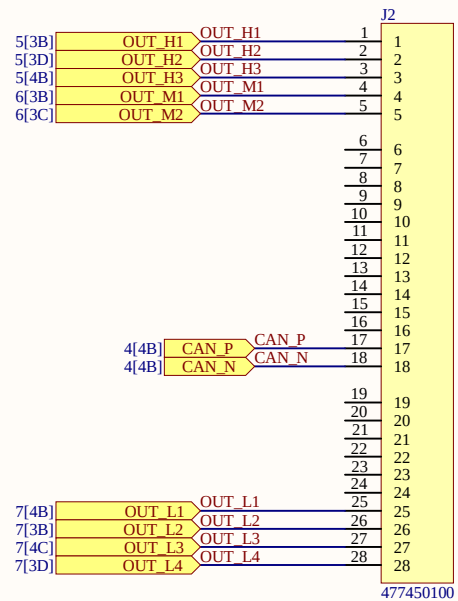

○ High Current