




0.6A MAX



For testing



12V INPUT

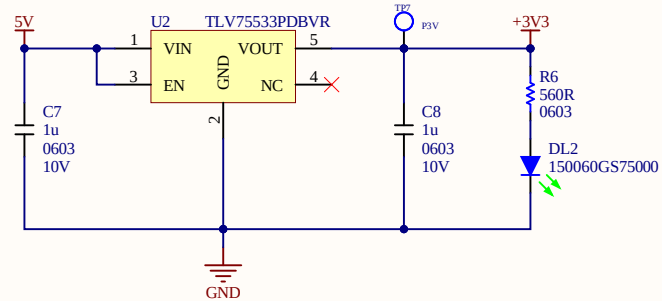

0.5A MAX

Page Contents: PWR.SchDoc			NR DEVELOPMENTS 
Size: A4	Revision:	Variant: [No Variations]	
Date: 27/06/2025			Sheet 1 of 14

1

2

3

4

A

A

B



B

C


C

D


D

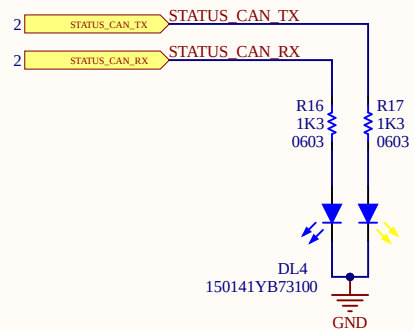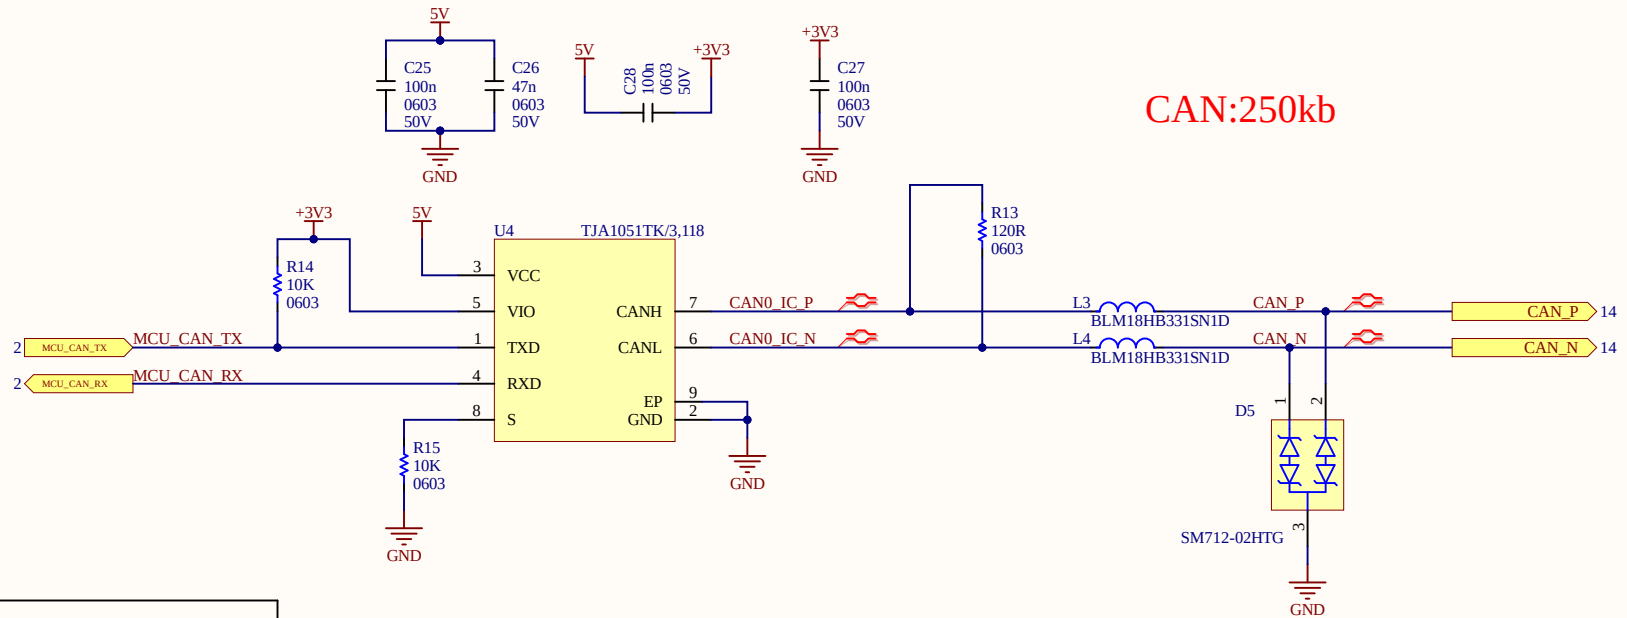


Page Contents: CAN.SchDoc			NR DEVELOPMENTS 
Size: A4	Revision:	Variant: [No Variations]	
Date: 27/06/2025			
Sheet 4 of 14			

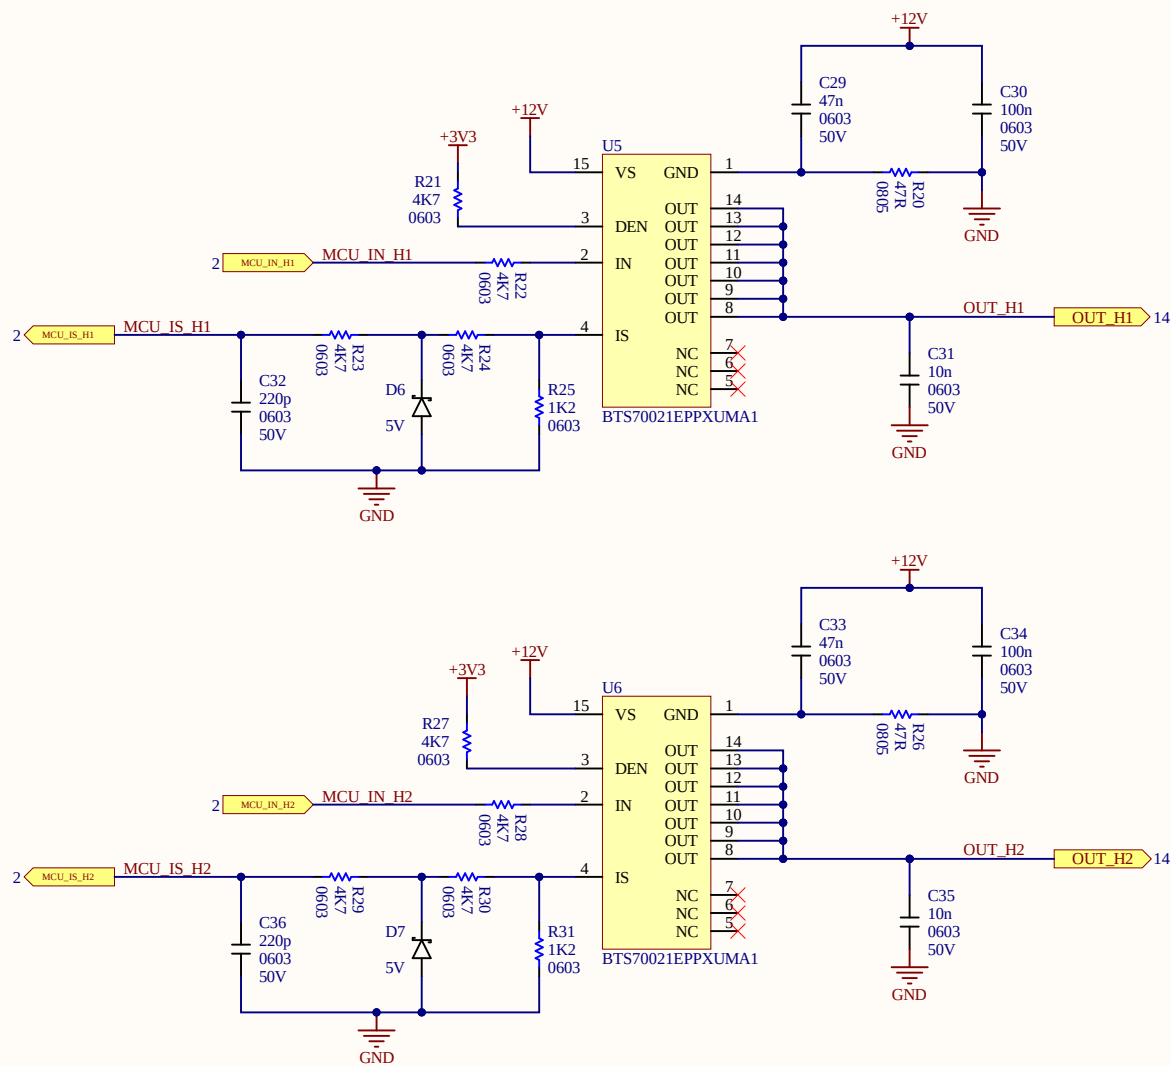



21A MAX each Profet



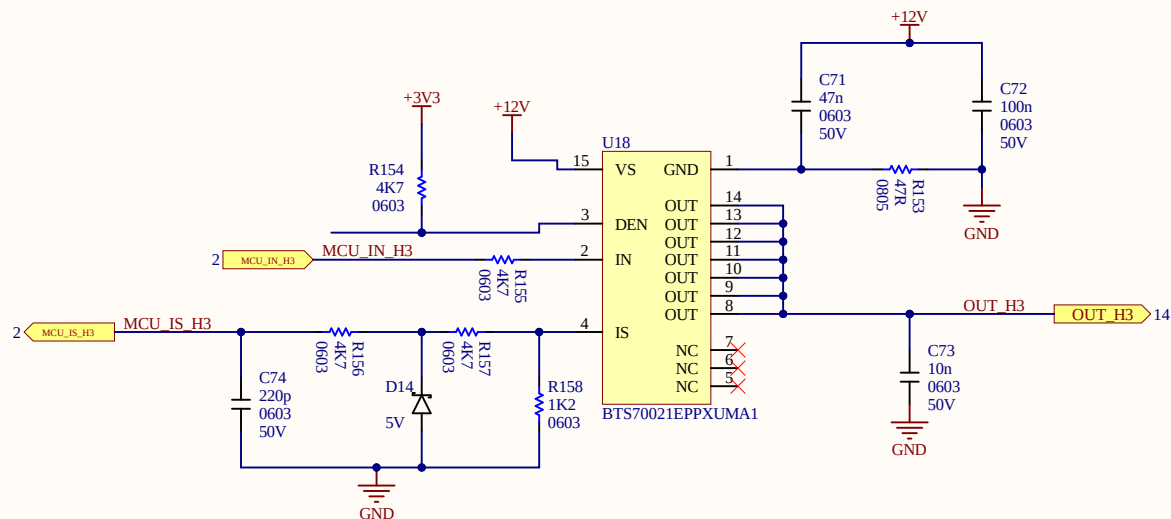



21A MAX each Profet











15A MAX each Profet



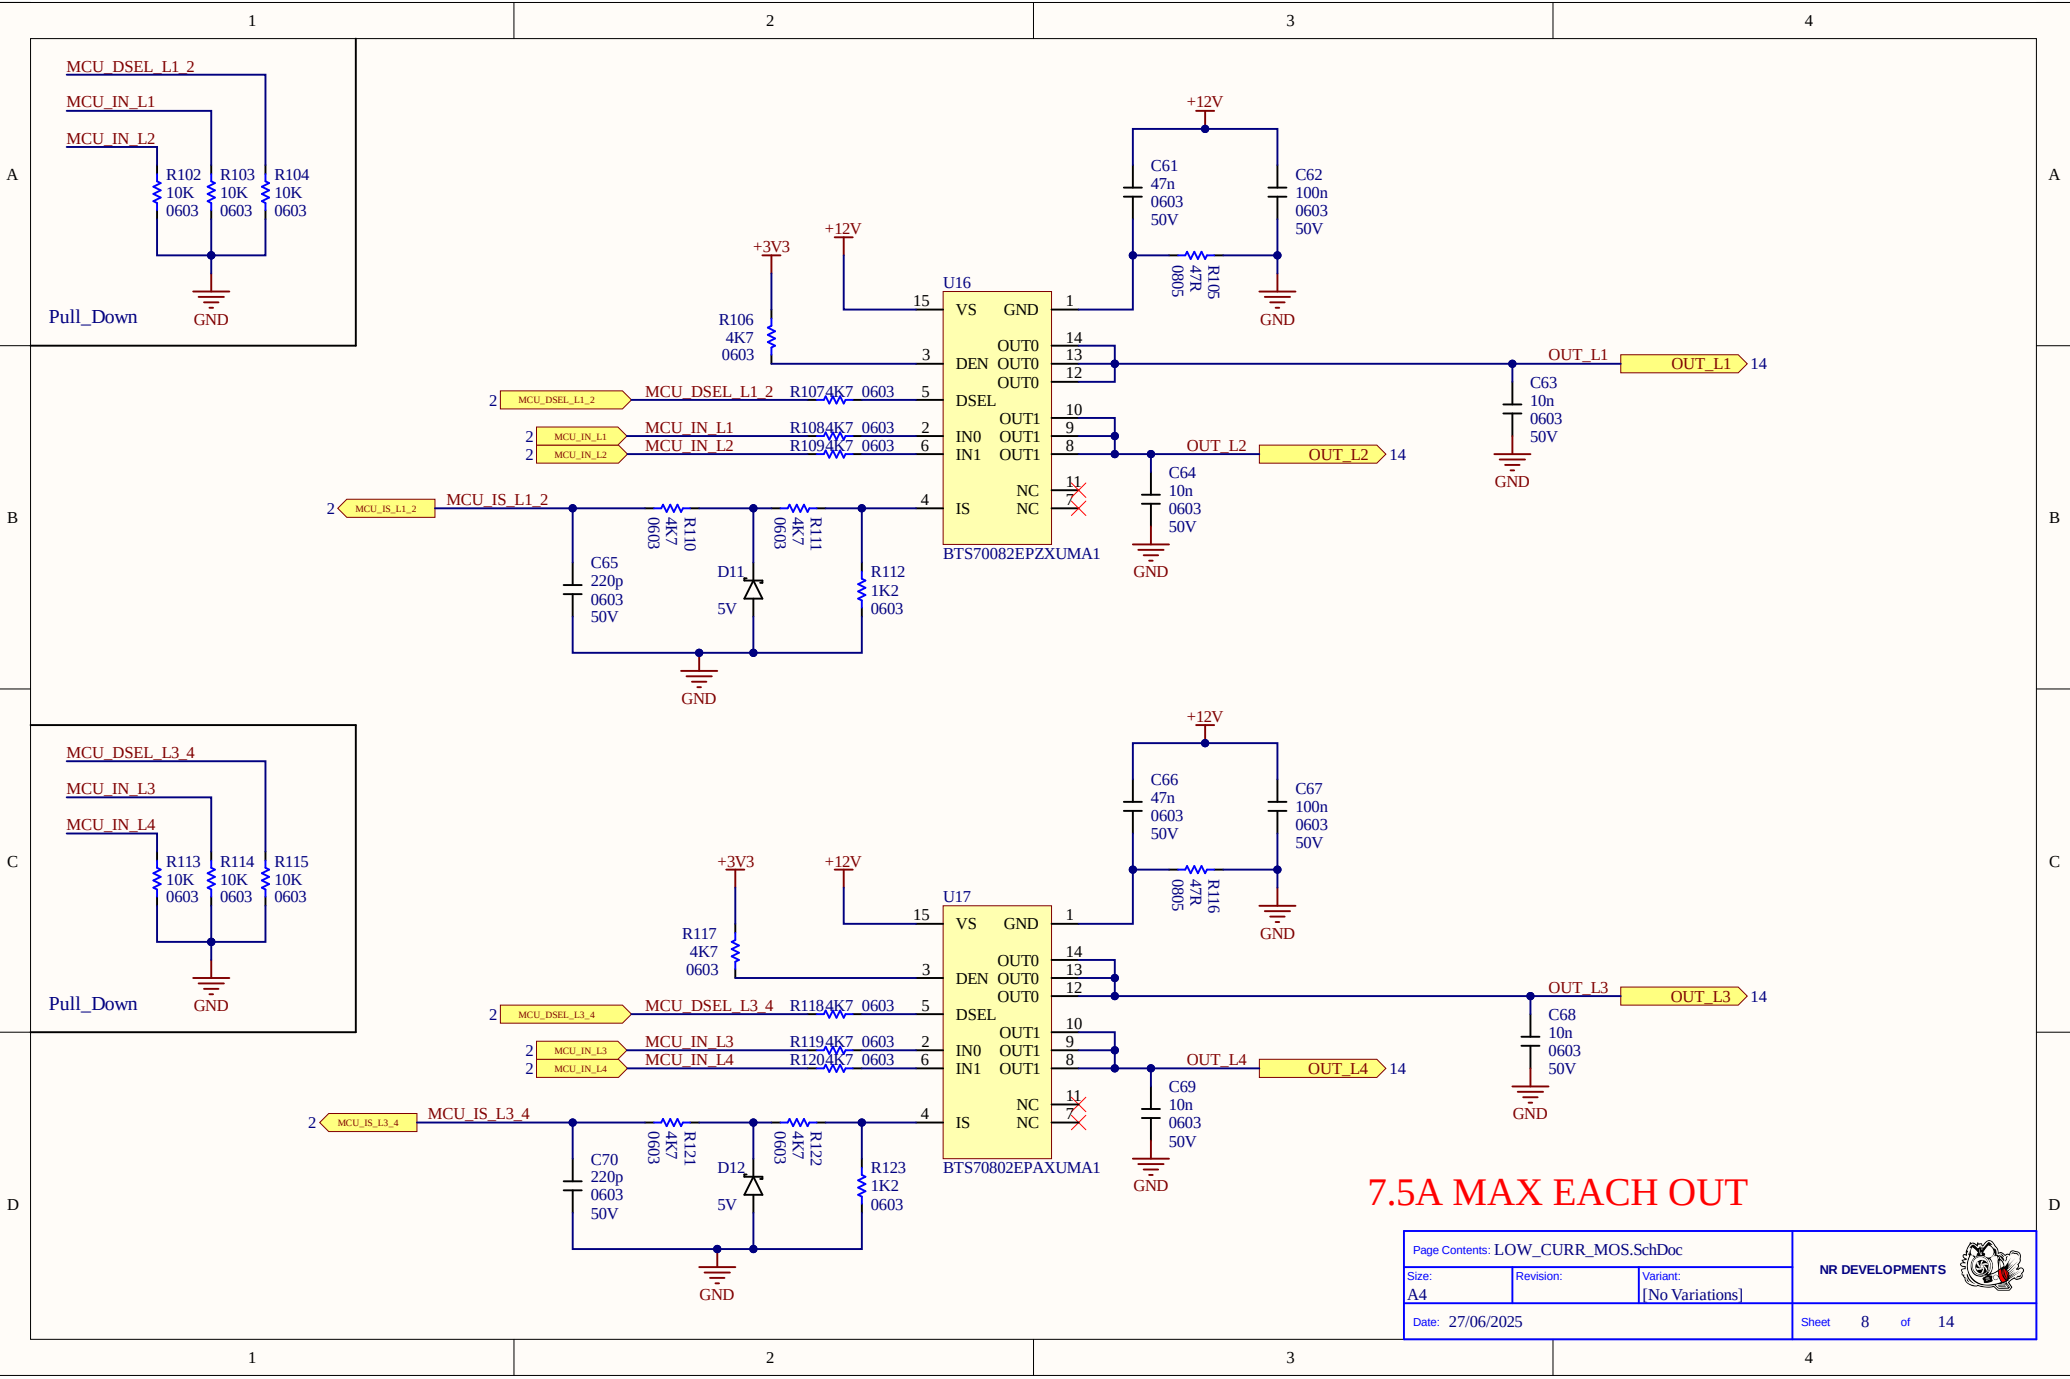

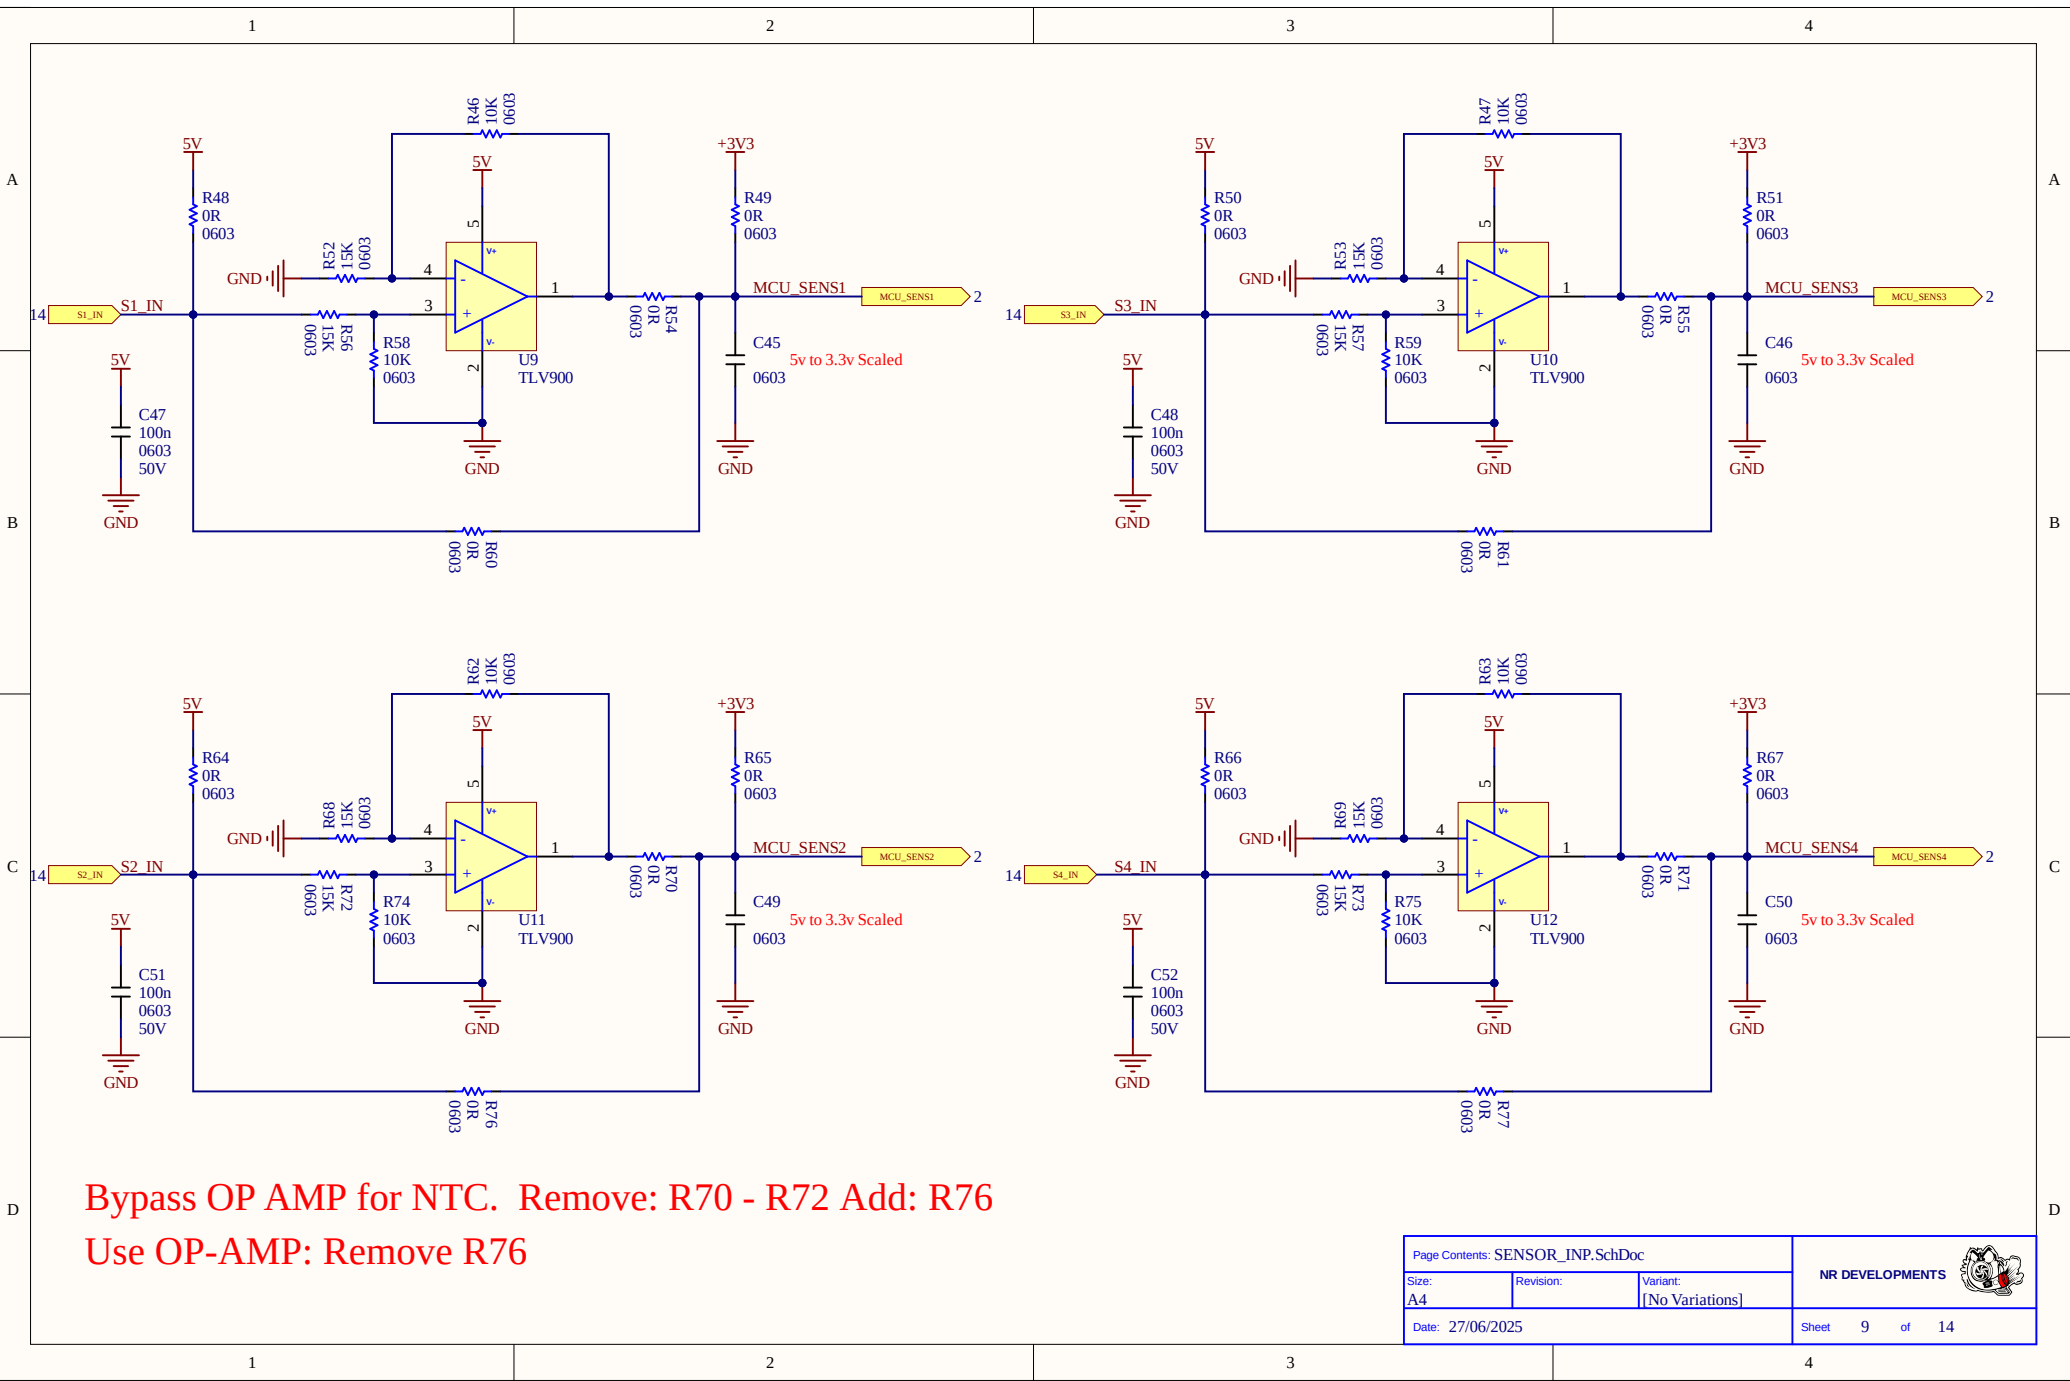

Bypass OP AMP for NTC. Remove: R70 - R72 Add: R76
Use OP-AMP: Remove R76

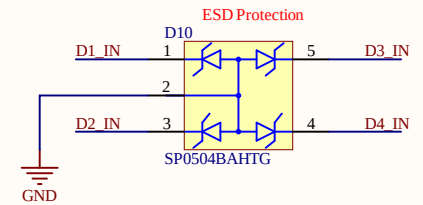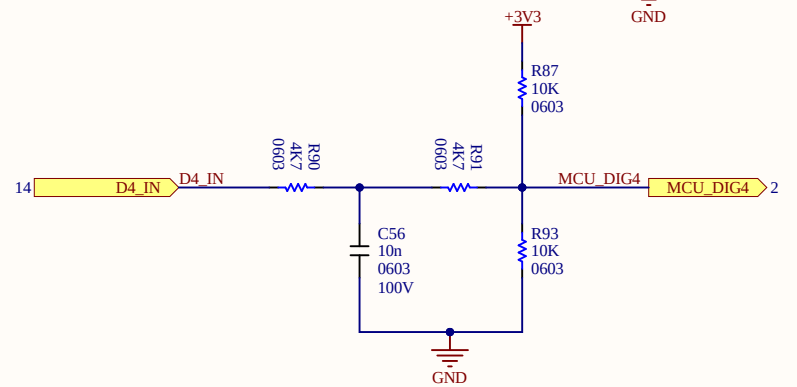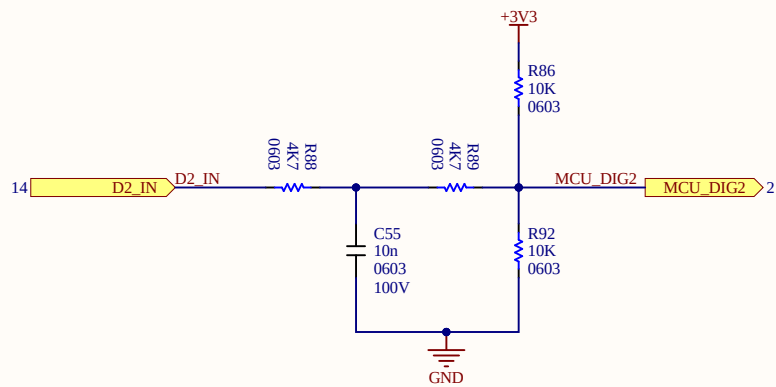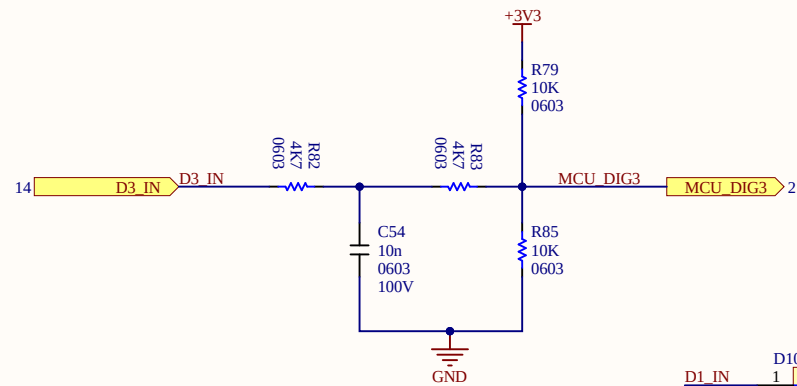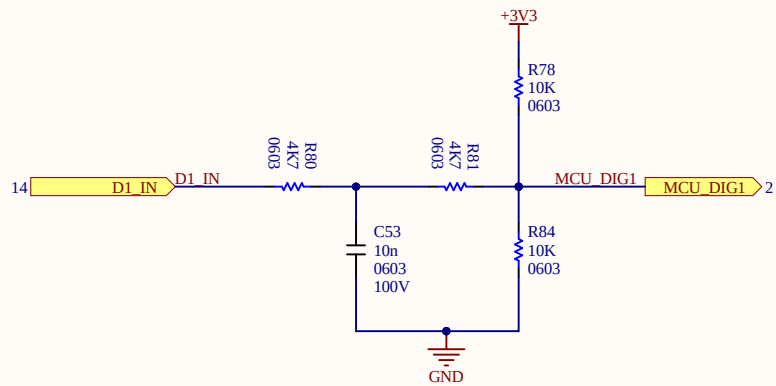

3.3V Logic Input. With pull-up or pull-down



1

2


3

4


I2C_PULL

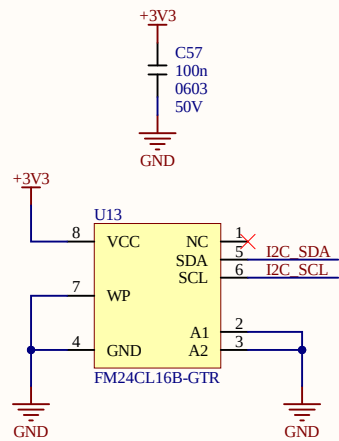


Addr: 0X50
FRAM

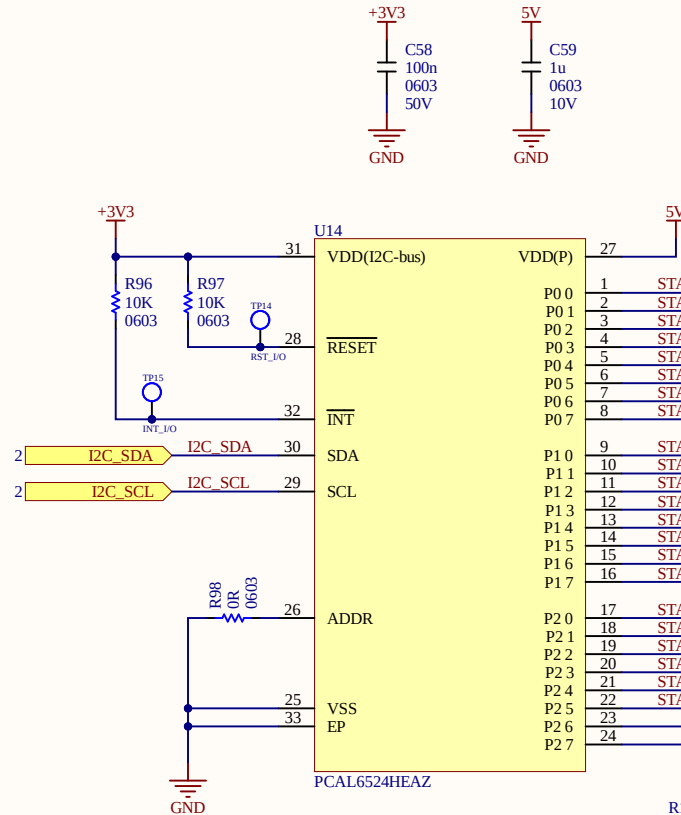

OUT_STATUS
Addr: 0X22

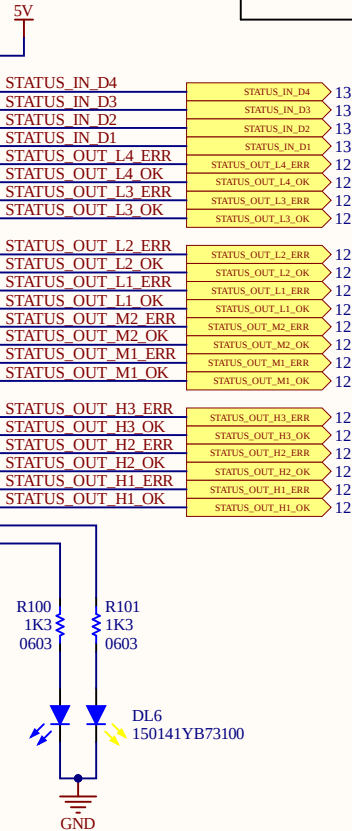

I2C ADDR:
MB85RC04V --> 0X50
P14IOE5V6416 --> 0X22
MCP9808-E/MS --> 0X18







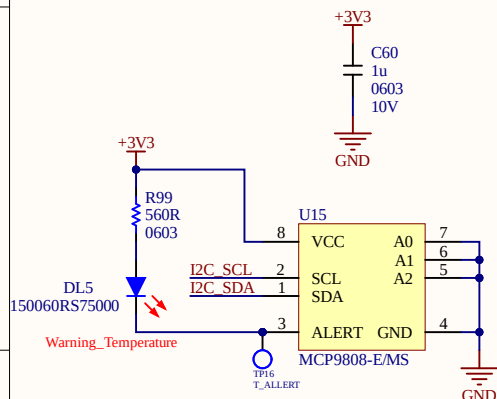


Addr: 0X18
TEMP_S


Led Status High Current



Led Status Mid Current

Led Status Low Current

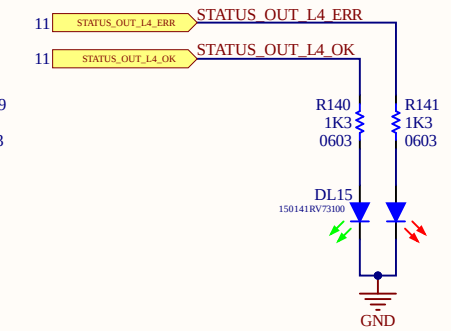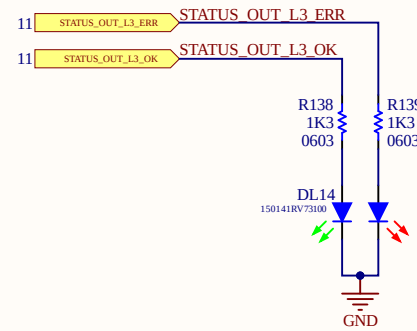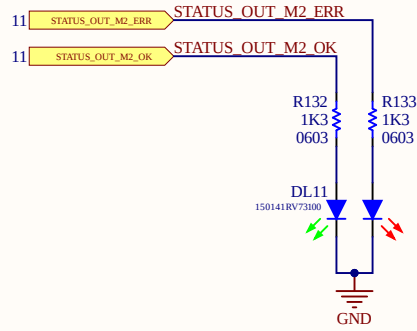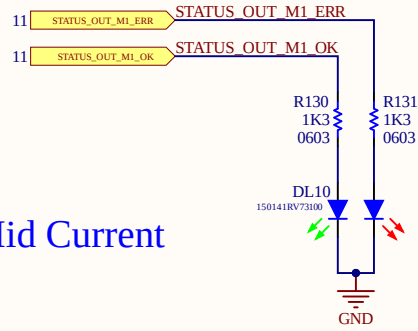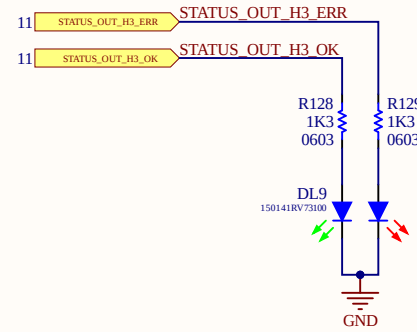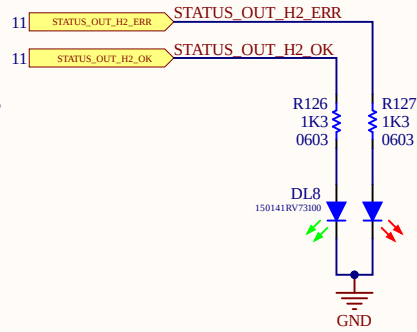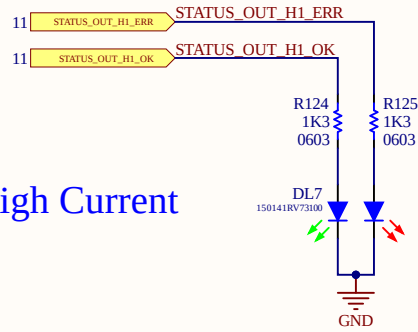

Led Status Logic Input

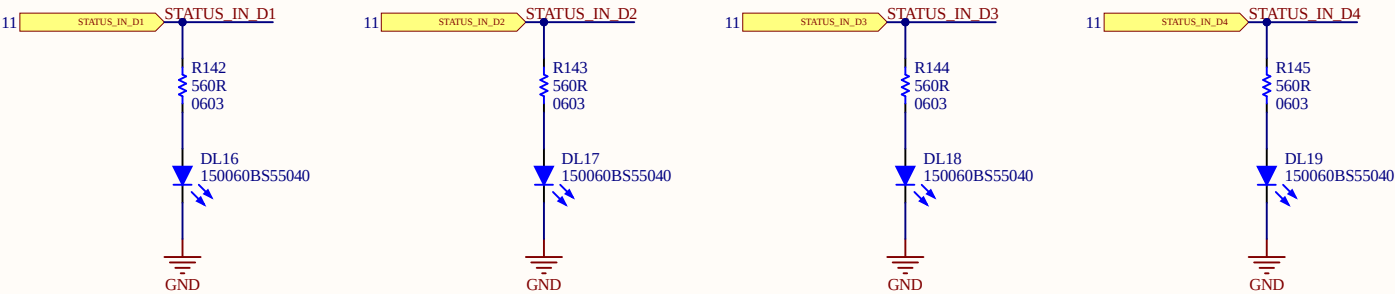

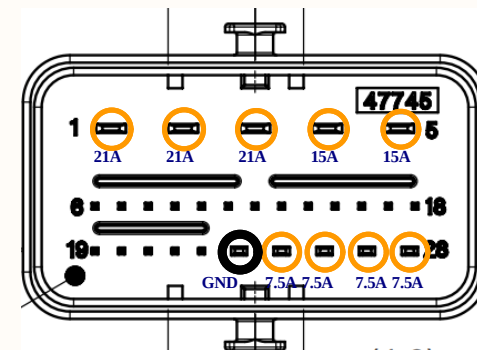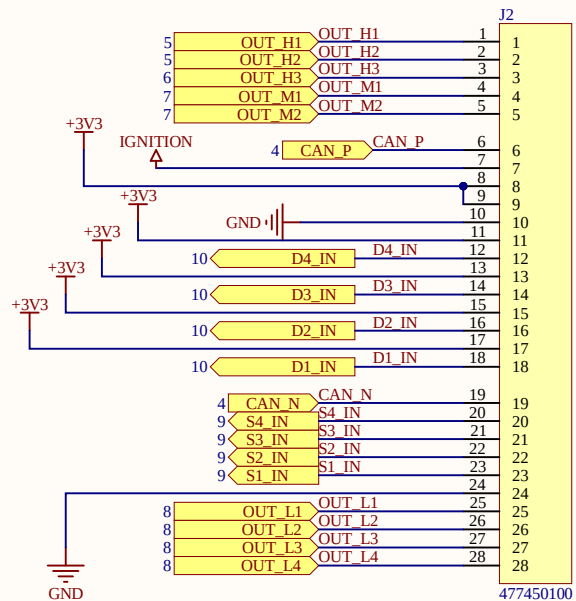

○ High Current

