

Fitted Lines to Bundles

Jeren Suzuki

Last Edited August 7, 2013

Contents

1	Introduction	1
2	Starting Image	1
3	Fitted Lines	2

1 Introduction


With pictures taken with my camera, then fitted lines to edges of slats.

2 Starting Image



Figure 1: Starting Image, red channel


Before we threshold the image to isolate the darkened slats, we have to de-noise the image. There is an option to de-noise the image in third-party post-processing software but it *should* be done in IDL for the sake of completeness and control over data manipulation. FFT filtering is used, but it takes a long time. An option is to crop a region out of just the slats so that the analysis can be done quicker.

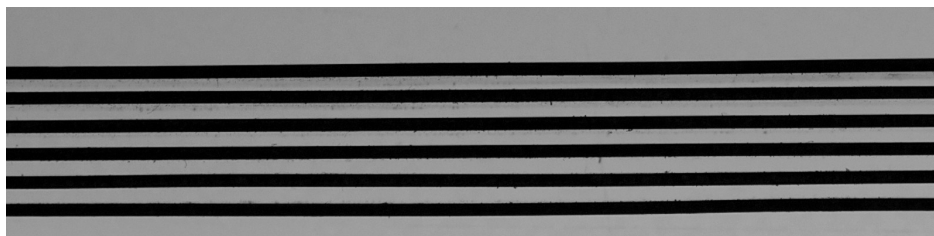

(a) No filtering



(b) FFT'd on whole image, then cropped

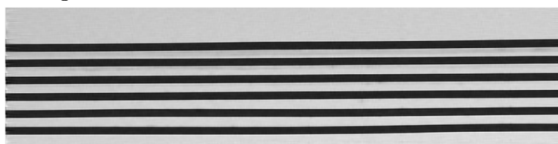


(c) Cropped, then FFT'd

Figure 2: FFT Test


As you can see, using the FFT operator on the whole image resulted in some ringing and artifacts in the cropped region.

3 Fitted Lines

With a filtered image, I set a threshold to find the edges of the slats. The process is scalable to any number of slats. In Figure 3a, a particularly curved edge of a slat results in a weird shape but upon closer inspection, the variance from the edges of the slat only differs by 10 pixels. With all slats edge-fitted, a color check on the processed image is performed, as in Figure 4.

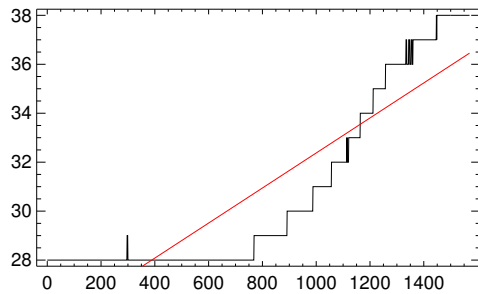

(a) Linear fitting the edge of a slat

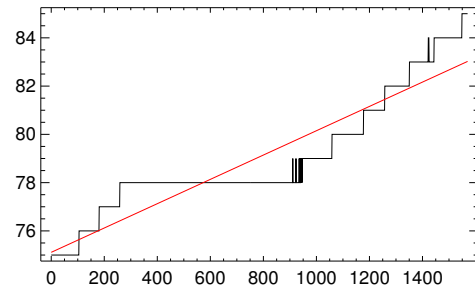

(b) Linear fitting the edge of another slat

Figure 3

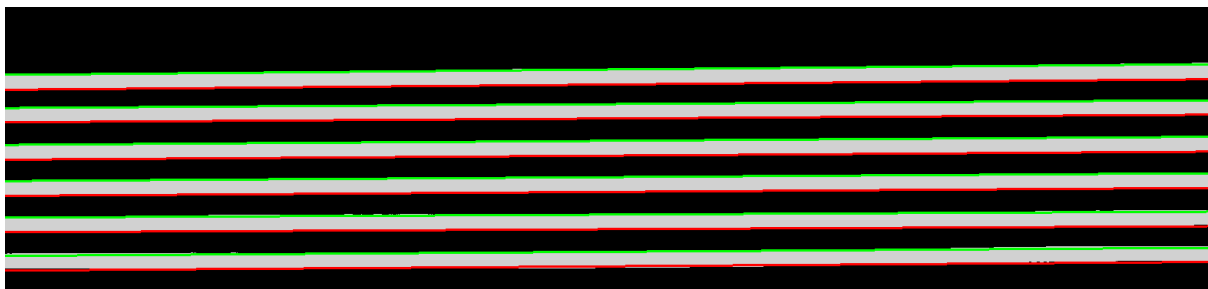


Figure 4: Cropped region of slats with edges of slats marked in color