



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/18/06'		LJC 07/18/06'
B	DRAWING UPDATE	JLZ 06/13/16'	HZW 06/13/16'	LJC 06/13/16'
C	ADD PLATING TYPE	JLZ 06/28/18'		

NOTES:

1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 100mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min

2.PRODUCT NUMBER CODE:

DS1110-01 - X X X

CONTACT PLATING

6: TIN

8: GOLD FLASH

COLOR OF HOUSING:



W: WHITE

B: BLACK


No. OF CONTACTS

2: 2pin 3: 3pin

4: 4pin 5: 5pin

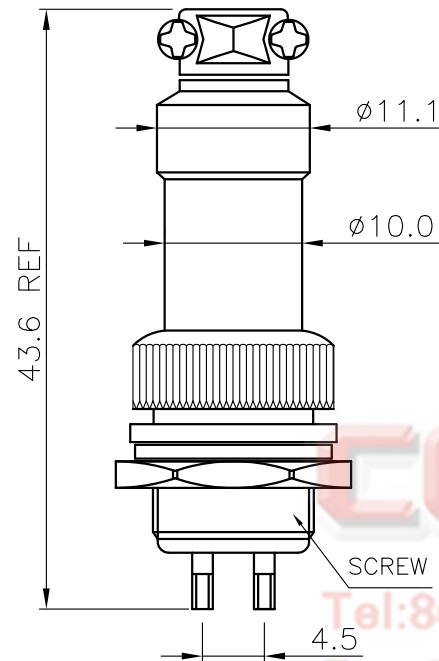


2 PIN




3 PIN





4 PIN

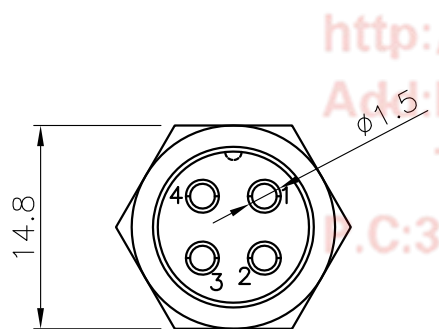

5 PIN



4 PIN

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MICRO JACK CONNECTOR	
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°	SERIES DS1110-01 SERIES			
DRAWING TYPE		CUSTOMER		<div><div>晨翔电子有限公司</div><div>CONNFLY CONNFLY ELECTRONIC CO. LTD</div></div>			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1110-01-XXX-C						