**The university of Azad Jammu and Kashmir ,**

**Muzaffarabad**

| | |
|---|---|
| **Name** | **Nida Mughal** |
| **Roll no** | **2024-SE-41** |
| **Course Title** | **Computer Networking** |
| **Lab** | **2** |
| **Submitted to** | **Engr Asma javeid** |

**Department of Software Engineering**

# Lab #2

# Local Area network(LAN):

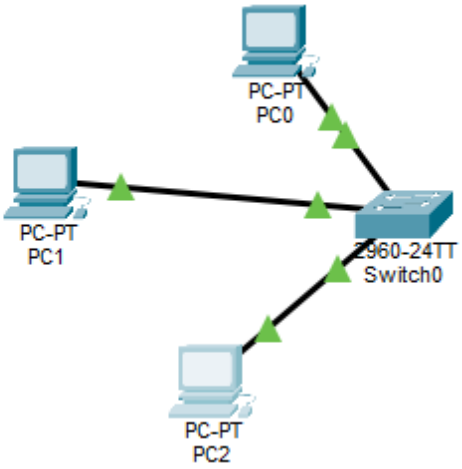


# PC 0

**IP Address of PC 0:**

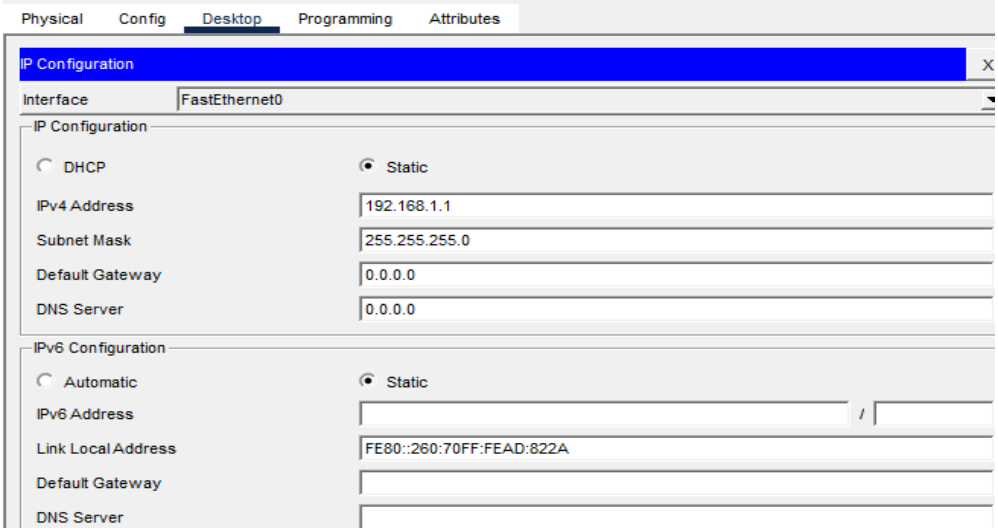


## Ip configuration for pc 0:

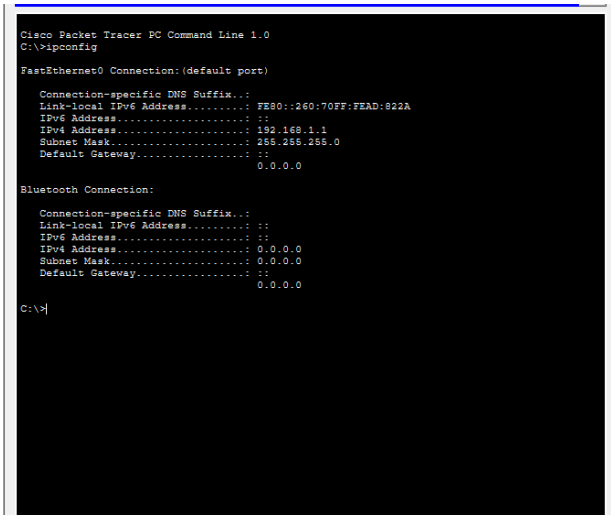


## Pinging of PC 0 with PC 1:

```
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=238ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 238ms, Average = 60ms

C:\>
```

**Tracer route:**

```
C:\>tracert 192.168.1.1

Tracing route to 192.168.1.1 over a maximum of 30 hops:

  1   11 ms     4 ms      3 ms      192.168.1.1

Trace complete.
```

**Address Resolution Protocol:**

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.1.2           00d0.d375.15db        dynamic

C:\>
```

**Network statistics:**

```
C:\>netstat

Active Connections

  Proto  Local Address          Foreign Address        State
```

# PC 1

## IP Address of PC 1:

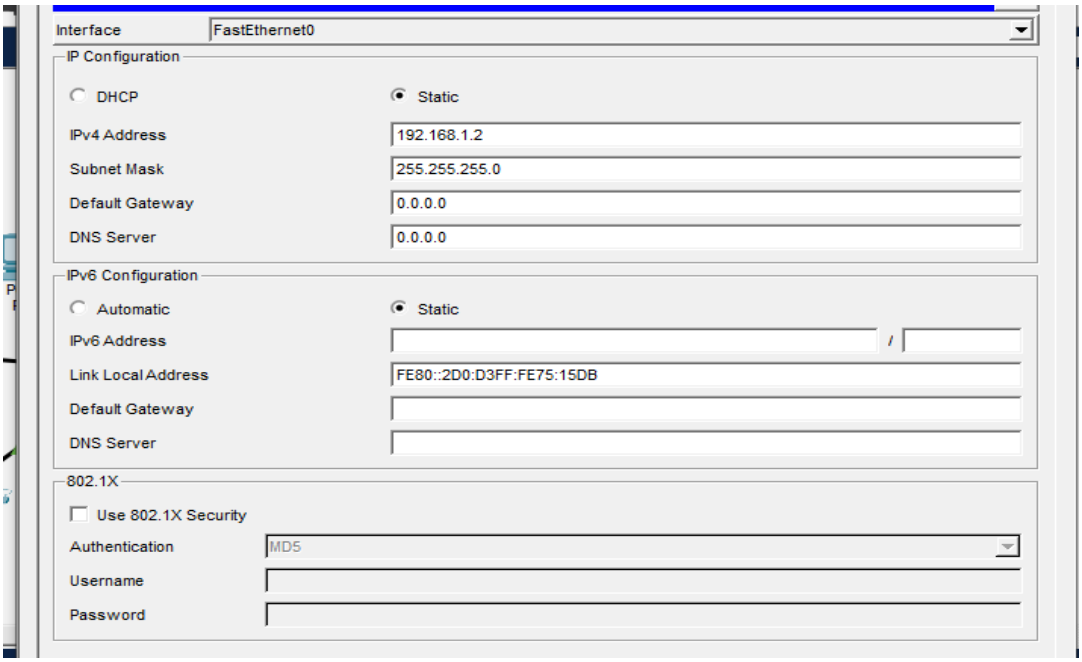


## Ip configuration for pc 1:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: FE80::2D0:D3FF:FE75:15DB
   IPv6 Address....................: ::
   IPv4 Address....................: 192.168.1.2
   Subnet Mask.....................: 255.255.255.0
   Default Gateway.................: ::
                                     0.0.0.0

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: ::
   IPv6 Address....................: ::
   IPv4 Address....................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: ::
                                     0.0.0.0

C:\>
```

## Pinging of PC 1 with PC2:

```
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

## Tracer route:

```
C:\>tracert 192.168.1.2

Tracing route to 192.168.1.2 over a maximum of 30 hops:

  1   11 ms     1 ms      2 ms      192.168.1.2

Trace complete.
```

## Address Resolution Protocol:

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.1.1           0060.70ad.822a        dynamic
  192.168.1.3           0060.4779.8179        dynamic
```

**Network statistics:**

```
C:\>netstat

Active Connections

  Proto  Local Address          Foreign Address        State
```

# PC 2

**IP Address of PC 2:**

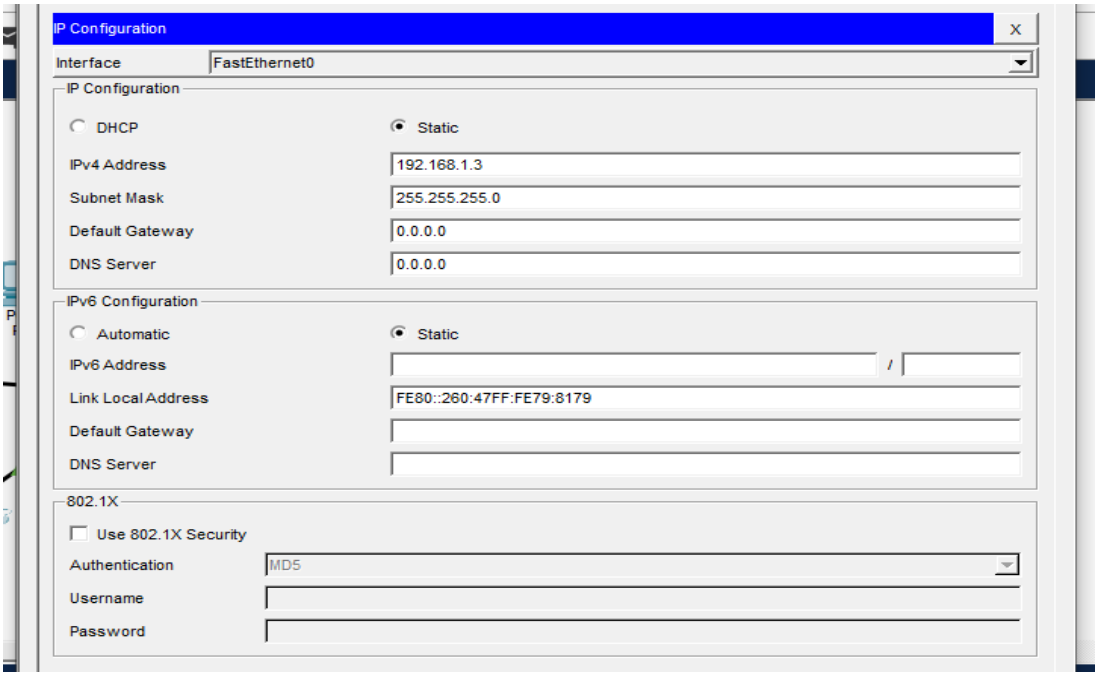


**Ip configuration for pc 2**

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: FE80::260:47FF:FE79:8179
   IPv6 Address....................: ::
   IPv4 Address....................: 192.168.1.3
   Subnet Mask.....................: 255.255.255.0
   Default Gateway.................: ::
                                     0.0.0.0

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: ::
   IPv6 Address....................: ::
   IPv4 Address....................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: ::
                                     0.0.0.0

C:\>
```

## Pinging of PC 2 with PC 0:

```
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

## Tracer route:

```
C:\>tracert 192.168.1.1

Tracing route to 192.168.1.1 over a maximum of 30 hops:

  1   0 ms      0 ms      0 ms      192.168.1.1

Trace complete.
```

## Address Resolution Protocol:

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.1.1           0060.70ad.822a        dynamic
  192.168.1.2           00d0.d375.15db        dynamic
```

## Network statistics:

```
C:\>netstat

Active Connections

  Proto  Local Address          Foreign Address        State
```