


CN LAB-03(30/06/2023)
USN:1BM21CS271

Create a topology of routers in order to depict default and static connection.
TOPOLOGY:

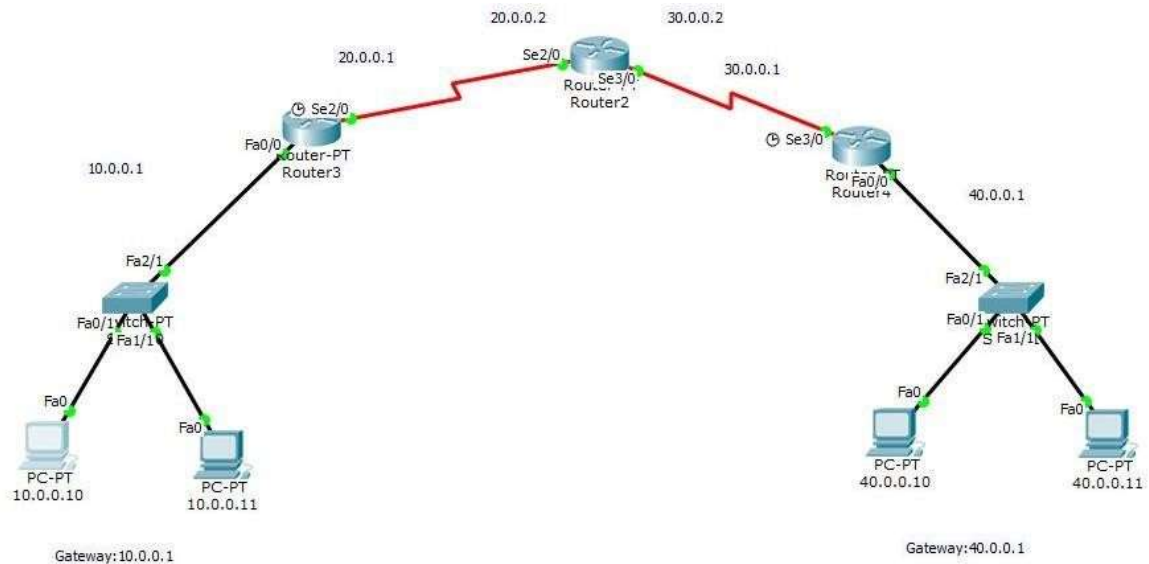

CONFIGURATION COMMANDS:

ROUTER-01

```
Router - 1
Physical Config CLI
IOS Command Line Interface

Continue with configuration dialog? [yes/no]: n


Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
```

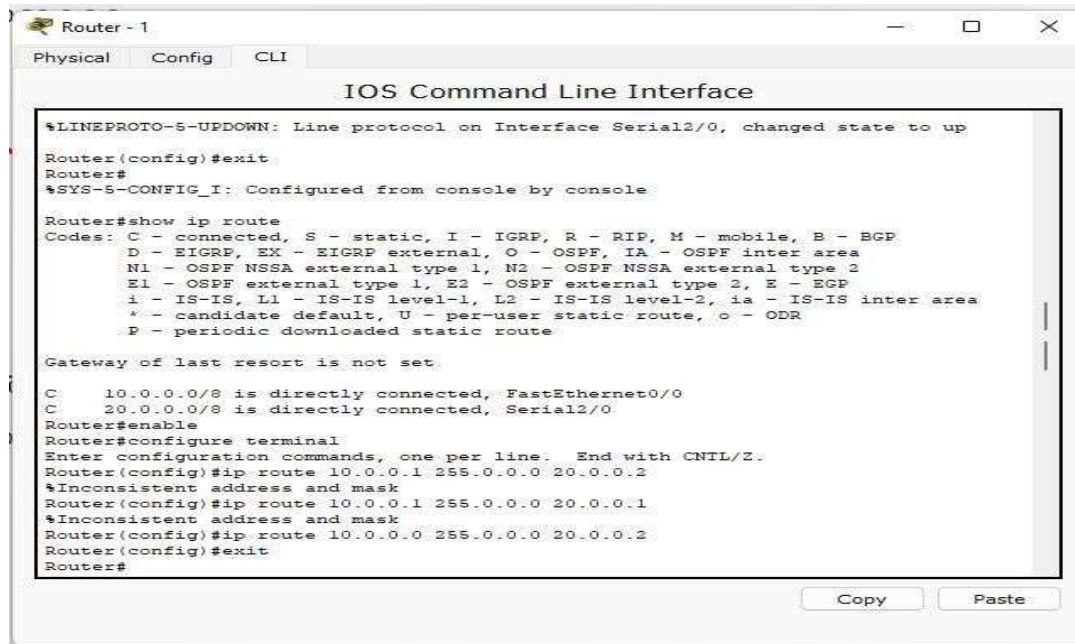

Router - 1

Physical Config CLI

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console


Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

C      10.0.0.0/8 is directly connected, FastEthernet0/0
C      20.0.0.0/8 is directly connected, Serial2/0
Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.1 255.0.0.0 20.0.0.2
%Inconsistent address and mask
Router(config)#ip route 10.0.0.1 255.0.0.0 20.0.0.1
%Inconsistent address and mask
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.2
Router(config)#exit
Router#
```

Copy Paste

SHOW IP ROUTE:

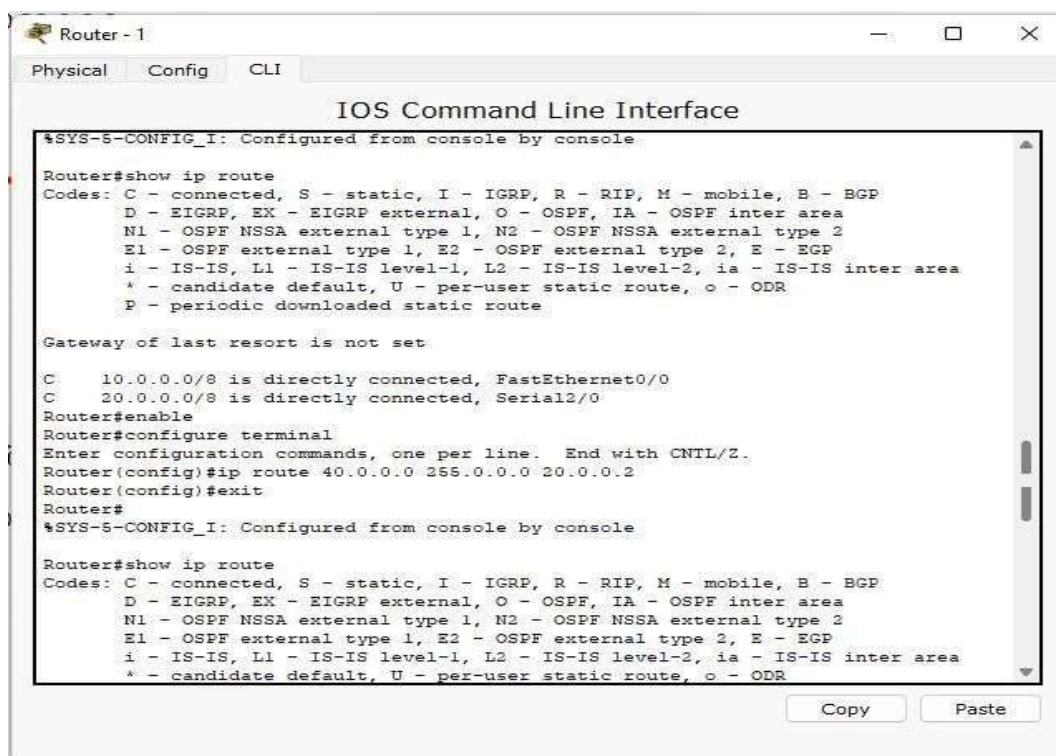

Router - 1

Physical Config CLI

IOS Command Line Interface

```
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

C      10.0.0.0/8 is directly connected, FastEthernet0/0
C      20.0.0.0/8 is directly connected, Serial2/0
Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
```

Copy Paste

ROUTER-02

```
Router - 2
Physical Config CLI
IOS Command Line Interface

Continue with configuration dialog? [yes/no]: n

Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Se2/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-S-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#exit
Router(config)#interface
%LINEPROTO-S-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

% Invalid input detected at '^' marker.

Router(config)#interface Se3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-S-CHANGED: Interface Serial3/0, changed state to up
```

```
Router - 2
Physical Config CLI
IOS Command Line Interface

Router(config-if)#
%LINK-S-CHANGED: Interface Serial3/0, changed state to up

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-S-CONFIG_I: Configured from console by console

Router#
%LINEPROTO-S-UPDOWN: Line protocol on Interface Serial3/0, changed state to up

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

C    20.0.0.0/8 is directly connected, Serial2/0
C    30.0.0.0/8 is directly connected, Serial3/0
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
Router(config)#exit
Router#
%SYS-S-CONFIG_I: Configured from console by console
```

SHOW IP ROUTE:

```
Router - 2
Physical Config CLI
IOS Command Line Interface

* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route


Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
C    20.0.0.0/8 is directly connected, Serial2/0
C    30.0.0.0/8 is directly connected, Serial3/0
S    40.0.0.0/8 [1/0] via 30.0.0.2
Router#

Router con0 is now available

Press RETURN to get started.
```

ROUTER-03

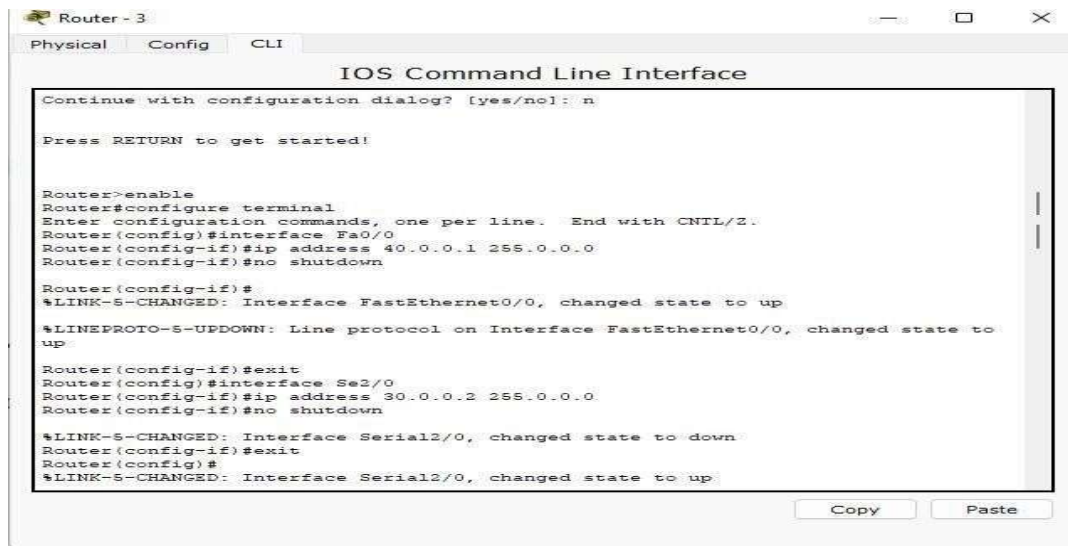

```
Router-3
Physical Config CLI
IOS Command Line Interface


Continue with configuration dialog? [yes/no]: n

Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Fa0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#interface Se2/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
```

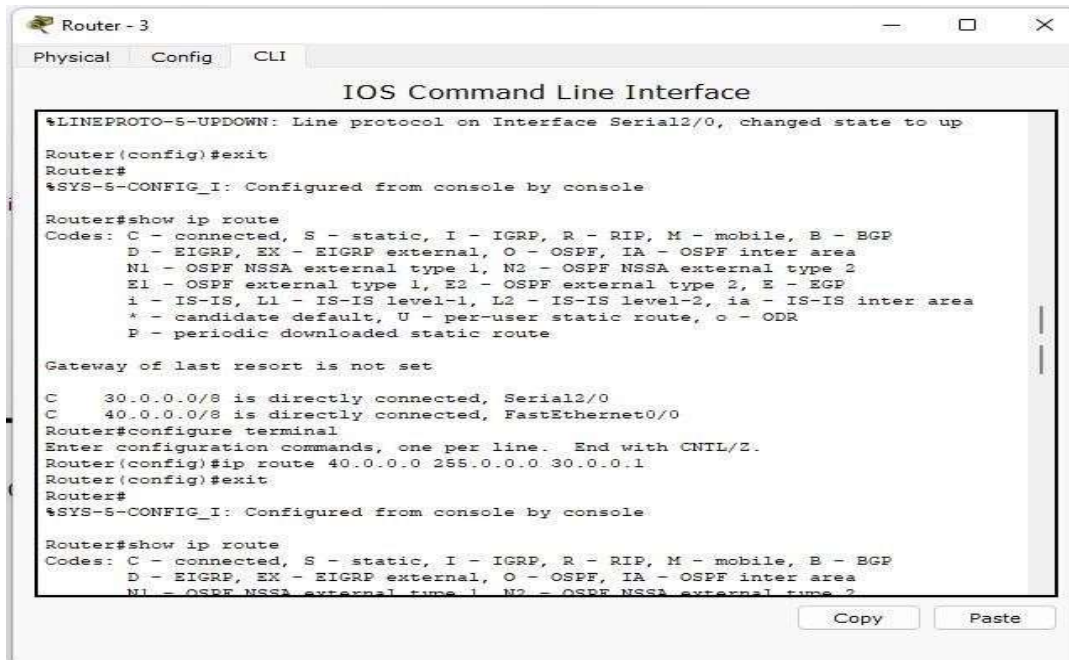

```
Router-3
Physical Config CLI
IOS Command Line Interface

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console


Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

C    30.0.0.0/8 is directly connected, Serial2/0
C    40.0.0.0/8 is directly connected, FastEthernet0/0
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
```

SHOW IP ROUTE:

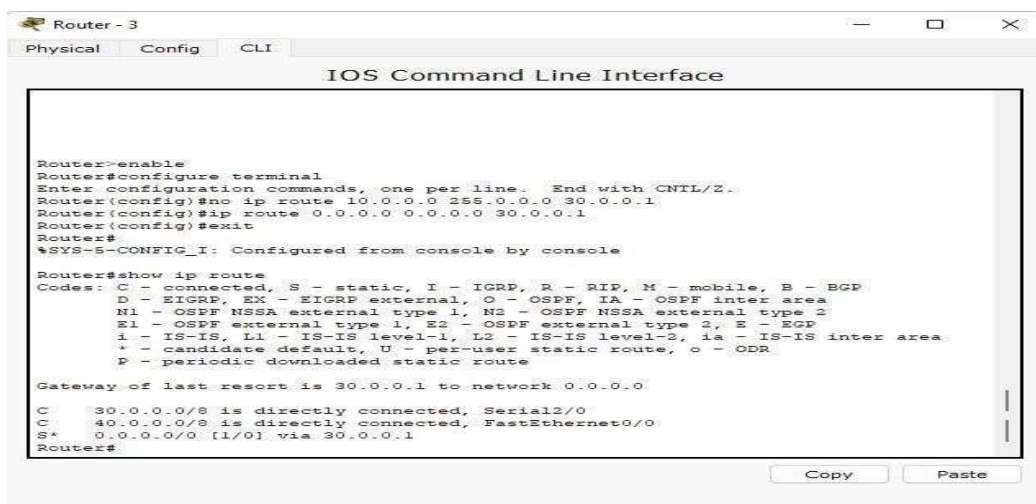

```
Router-3
Physical Config CLI
IOS Command Line Interface


Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is 30.0.0.1 to network 0.0.0.0

C    30.0.0.0/8 is directly connected, Serial2/0
C    40.0.0.0/8 is directly connected, FastEthernet0/0
S*   0.0.0.0/0 [1/0] via 30.0.0.1
Router#
```


PING COMMANDS:

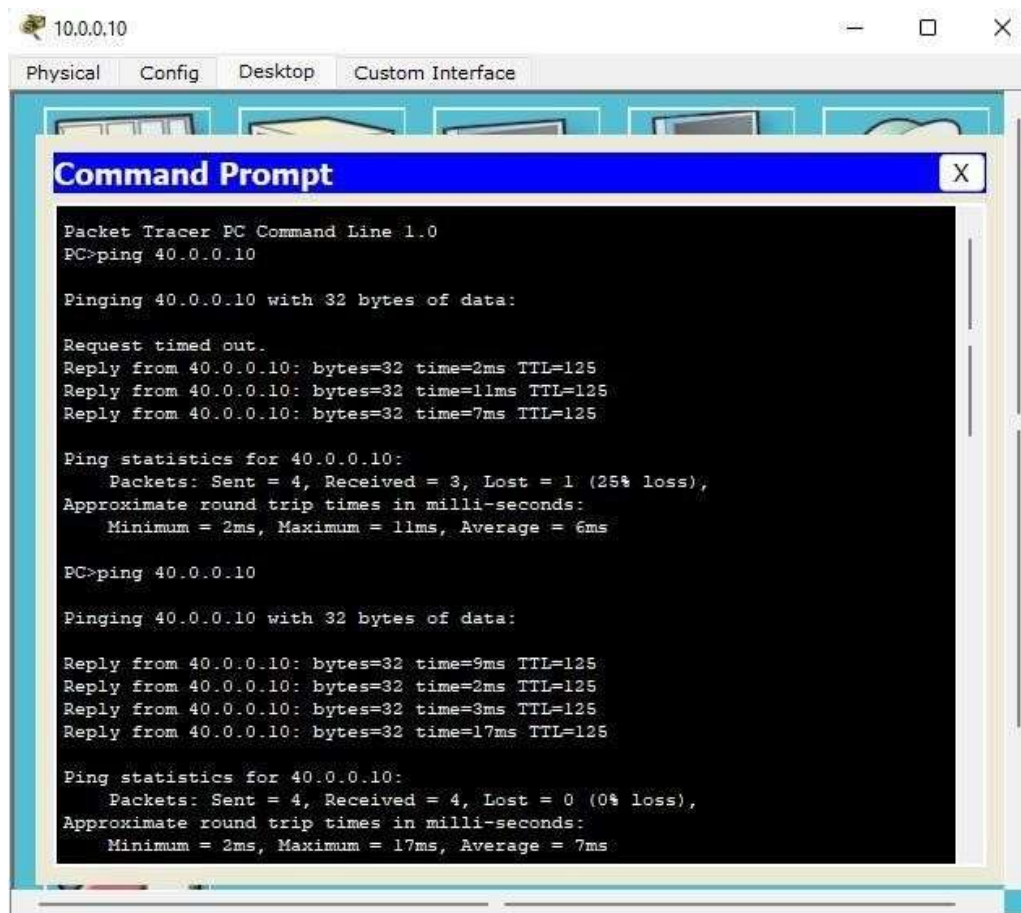

10.0.0.10

Physical Config Desktop Custom Interface

Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=11ms TTL=125
Reply from 40.0.0.10: bytes=32 time=7ms TTL=125


Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 11ms, Average = 6ms

PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=9ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=3ms TTL=125
Reply from 40.0.0.10: bytes=32 time=17ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 17ms, Average = 7ms
```

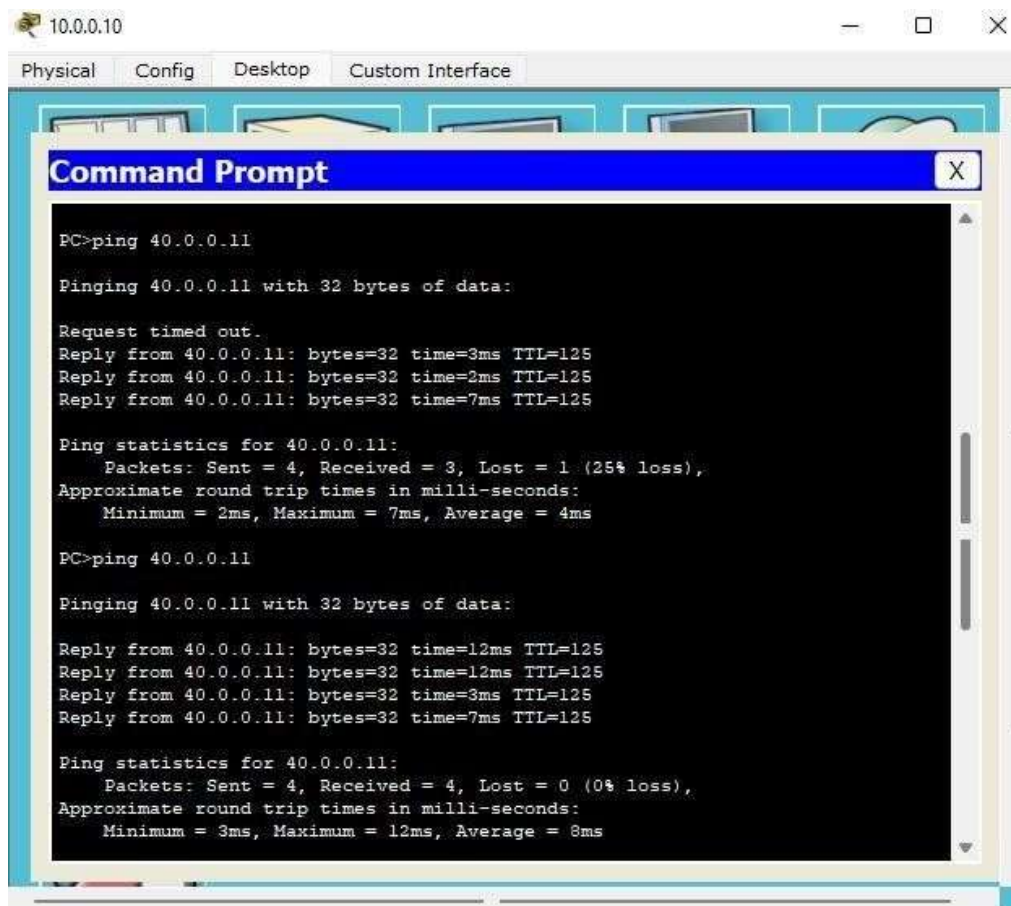

10.0.0.10

Physical Config Desktop Custom Interface

Command Prompt

```
PC>ping 40.0.0.11

Pinging 40.0.0.11 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.11: bytes=32 time=3ms TTL=125
Reply from 40.0.0.11: bytes=32 time=2ms TTL=125
Reply from 40.0.0.11: bytes=32 time=7ms TTL=125

Ping statistics for 40.0.0.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 7ms, Average = 4ms

PC>ping 40.0.0.11

Pinging 40.0.0.11 with 32 bytes of data:

Reply from 40.0.0.11: bytes=32 time=12ms TTL=125
Reply from 40.0.0.11: bytes=32 time=12ms TTL=125
Reply from 40.0.0.11: bytes=32 time=3ms TTL=125
Reply from 40.0.0.11: bytes=32 time=7ms TTL=125

Ping statistics for 40.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 3ms, Maximum = 12ms, Average = 8ms
```