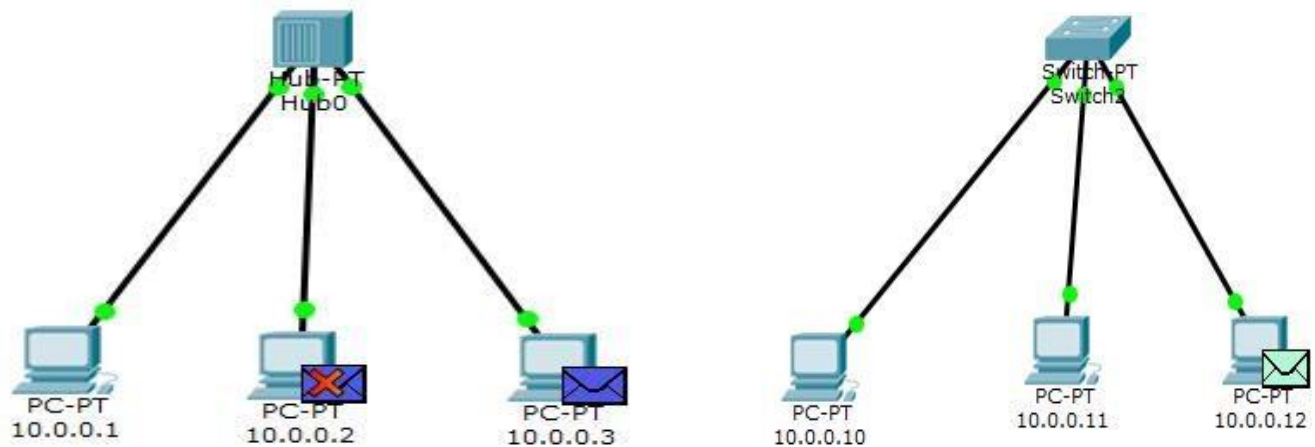1. Create a topology consisting of three or more devices connected with the help of hub, switch and hybrid network.

Command Prompt   X
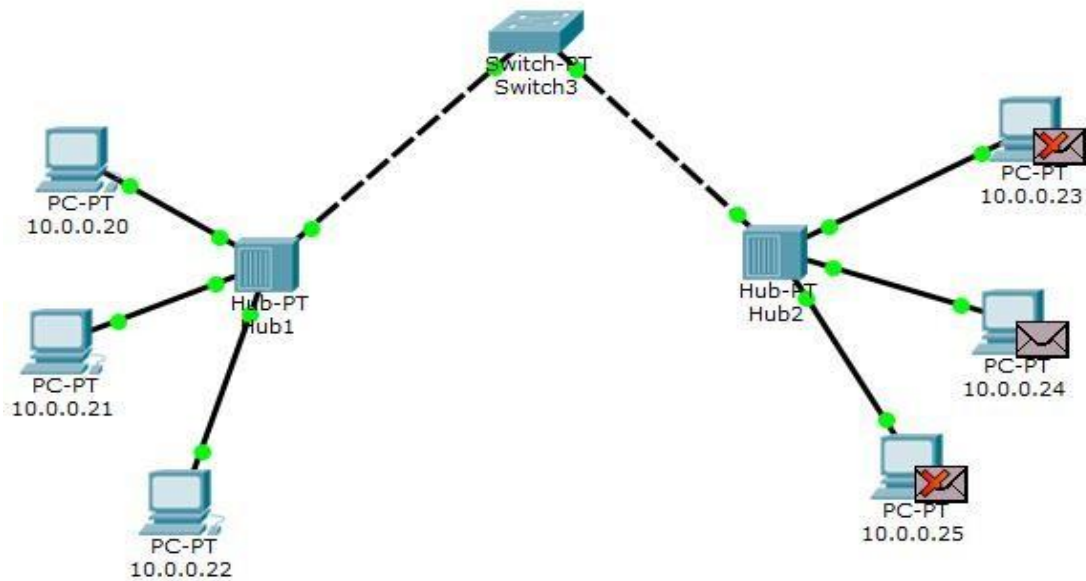
```
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.24

Pinging 10.0.0.24 with 32 bytes of data:

Reply from 10.0.0.24: bytes=32 time=0ms TTL=128
Reply from 10.0.0.24: bytes=32 time=0ms TTL=128
Reply from 10.0.0.24: bytes=32 time=0ms TTL=128
Reply from 10.0.0.24: bytes=32 time=1ms TTL=128

Ping statistics for 10.0.0.24:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

PC>
```