

# Modeling and Simulating Dice

Nidhi Sinha and Hanna Yu

October 30, 2020

## Abstract

We simulate throwing a cube on the ground by modeling the object as a rigid body. The model tracks translational motion and rotational motion in three dimensions, taking into account forces exerted by the ground's friction, stiffness, and damping. Results from the simulation show that to maintain numerical stability, increasing the stiffness of the ground requires decreasing the step size of our numerical scheme.

## 1 Introduction

Following what was taught about rigid-body motion and modeling the ground in the course Modeling and Simulation taught by Professor Charles Peskin at New York University, we develop a model that simulates throwing a cube on an elastic ground. We model both translational motion and rotational motion in three dimensions, taking into account forces exerted by gravity and the ground's friction, stiffness, and damping. Note that while we may at times refer to our cube as a die, we do not plot or track individual faces.

In this paper, we will introduce how we configure the cube and the ground, present our governing equations, and explain our numerical scheme and the way we calculate the inputs of the governing equations. We will also discuss the result of varying stiffnesses in the ground. Finally, we suggest ideas for further study. The simulation was programmed using Matlab and the code can be found in the appendix.

## 2 Configuring the Cube and the Ground

### 2.1 The Cube

In our model, we represent a cube as a set of mass points (nodes) at each of the eight corners of the cube. The cube has a total mass  $m$  divided equally among the nodes, and each node is distance  $r$  from the center of the cube.  $m$  and  $r$  will be the parameters for the cube we create. We will refer to the center of the cube as the center of mass.

It will be useful for us later to calculate the moment of inertia tensor. Luckily, because a cube is a simple shape, a formula exists to calculate the moment of inertia. Let  $s$  be the side length of the cube. Then the moment of inertia is

$$(1/6)ms^2$$

Note that one can derive the side length  $s$  as an expression of  $r$  to be

$$s = -\sqrt{2} + 2\sqrt{0.5 + r^2}$$

Because we will be working in three dimensions, we use the moment of inertia to create the moment of inertia tensor:

$$\begin{bmatrix} (1/6)ms^2 & 0 & 0 \\ 0 & (1/6)ms^2 & 0 \\ 0 & 0 & (1/6)ms^2 \end{bmatrix}$$

In our code,  $I$  refers to the moment of inertia tensor. Note that our particular matrix is a multiple of the identity matrix, made possible by the fact that the side length of the cube is the same in all three dimensions and the mass is evenly distributed. As a result, the moment of inertia tensor does not change under rotation; it stays constant throughout our simulation, hence we only need to compute it once.

## 2.2 The Ground

We represent the ground as a plane through the origin with unit normal  $n$ . We let the ground be elastic with the following parameters:

$S$  = stiffness of the ground

$D$  = damping of the ground

$\mu$  = coefficient of sliding friction

## 3 Governing Equations

Our simulation models the cube as a rigid body. The central assumption in rigid bodies is that the motion of the body is only affected by external forces (e.g. gravity, the ground). This eliminates any internal forces such as the force individual point masses on the body exert on each other.

Our principal physical equations are:

$$F = ma$$

$$L = I\omega$$

where  $F$  denotes the total force exerted on the body,  $m$  denotes mass,  $a$  is the acceleration,  $L$  is the angular moment of the body,  $I$  is the moment of inertia, and  $\omega$  is the angular velocity.

In addition, it is helpful to know these things about the torque  $\tau$ :

$$dL/dt = \tau$$

$$\tau = \tilde{X}_k \times F_k$$

Here  $\tilde{X}_k$  denotes the position of node  $k$  relative to the center of mass and  $F_k$  denotes the force acted upon node  $k$ .

We manipulate these equations to derive our governing differential equations, which determine the motion of a rigid body. Let  $x_{cm}$  and  $u_{cm}$  be the position and velocity at the center of mass. For now, assume that  $\tilde{X}_k$  and  $F_k$  for each moment in time are known:

$$\frac{d}{dt}u_{cm} = F/m = \sum_k F_k/m \quad (1)$$

$$\frac{d}{dt}x_{cm} = u_{cm} \quad (2)$$

$$\frac{d}{dt}L = \tau = \sum_k \tilde{X}_k \times F_k \quad (3)$$

Equation (1) is derived from Newton's Second Law and the definition of acceleration. Equation (2) is the definition of velocity. Equation (3) comes from the definition of torque. These derivatives change when  $\tilde{X}_k$  and the forces  $F_k$  change.

In addition to these governing equations, to animate our simulation and calculate the interaction with the ground later, we need to know the absolute positions  $X$  and velocities  $U$  of our nodes.

Instead of calculating the node positions and velocities directly, we can derive them from  $x_{cm}$ ,  $u_{cm}$  and the angular velocity  $\omega$ . Note that knowing  $L$ , we can calculate  $\omega$  easily since  $L = I\omega$ . So for each node  $k$ ,

$$X_k = x_{cm} + \tilde{X}_k \quad (4)$$

$$U_k = u_{cm} + \omega \times \tilde{X}_k \quad (5)$$

## 4 Numerical Scheme

We adapt our governing equations using a modified forward Euler method:

$$u_{cm}(t + \Delta t) = u_{cm}(t) + \Delta t * F/m \quad (6)$$

$$x_{cm}(t + \Delta t) = x_{cm}(t) + \Delta t * u_{cm} \quad (7)$$

$$L(t + \Delta t) = L(t) + \Delta t \sum_k (\tilde{X}_k \times F_k) \quad (8)$$

Note that  $F = \sum_k F_k$ .

Previously we assumed that  $\tilde{X}_k$  and  $F_k$  for each moment in time were known. We now calculate the changes which determine  $\tilde{X}_k$  and  $F_k$  for each time step.

### 4.1 Updating $\tilde{X}_k$

To update  $\tilde{X}_k$ , we use the equation

$$\tilde{X}_k = R * \tilde{X}_k \quad (9)$$

Here,  $R$  is a rotation matrix updating  $\tilde{X}_k$  according to how much the body has spun in time  $\Delta t$ :

$$R = P + \cos(||\omega|| * \Delta t) * (E - P) + \sin(||\omega|| * \Delta t) * (\omega_{cross}/||\omega||)$$

where

$$P = (\omega/||\omega||) * (\omega/||\omega||)'$$

$$E = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \omega_{cross} = \begin{bmatrix} 0 & -\omega_z & \omega_y \\ \omega_z & 0 & -\omega_x \\ -\omega_y & \omega_x & 0 \end{bmatrix}$$

## 4.2 Updating $F_k$

Now we update the force exerted on node  $k$ . The forces at play are gravitational force and the force exerted by the ground:

$$F_k = F_{gravity} + F_{ground} \quad (10)$$

We know that  $F_{gravity} = mg$ , where  $g$  is the gravitational constant. Finding the force of the ground will take more work.

Any point  $k$  that goes below the ground experiences a force pushing it up, the normal force  $F_n$ , and a tangential force, the friction force  $F_f$ . Then the total force exerted by the ground  $F$  is

$$F_{ground} = F_n + F_f$$

The normal force experienced by a node at position  $X_k$  with velocity  $U_k$  is calculated as

$$F_n = ||F_n|| * n$$

where  $||F_n||$  is the magnitude of the normal force. In our model, we set this to

$$||F_n|| = S < -n, X_k > -D < n, U_k >$$

Recall that  $S$  and  $D$  are the stiffness and damping constants of the ground. Note that  $< -n, X_k >$  is a dot product which calculates the node's distance into the ground and  $< n, U_k >$  calculates how much of the node's velocity is pointing into the ground.

The force of friction experienced by the node follows the physical equation

$$F_f = -mu * ||F_n|| * (U_{tan}/||U_{tan}||)$$

where  $U_{tan}$  is the component of  $U_k$  in the direction tangent to the ground. This is calculated as

$$U_{tan} = U_k - n < n, U >$$

At this point, we can go back to Equation 10 to evaluate the force experienced by a node  $k$  below the ground:

$$F_{ground} = F_n + F_f$$

We have finished calculating the  $\tilde{X}_k$  and  $F_k$  needed to update  $X_k$ ,  $U_k$ , and our governing equations.

## 5 Code

To simulate our model in Matlab, we first wrote a function (`cube.m`) that initialized the variables describing a cube. One note about the cube we haven't mentioned yet is that our code indexes all eight corners of a cube and also indexes the edges (referred to as links) connecting those nodes. Keeping track of links in rigid bodies isn't as important as when modeling objects as a network of springs and dashpots, but it is still useful in simplifying our code for plotting.

In a separate code (`real_throw_cube.m`), we called the cube function to create the cube. We then added the ground, set the initial values for our governing equations, created an initial plot, and set the time variables for our numerical scheme. Note that the initial angular momentum is set to be random with uniform distribution within a specified range in order to mimic the randomness of throwing a die, but the initial angular momentum can also be set to a predetermined value. The for-loop is where we update our variables and animation according to the methods described under Numerical Scheme. We also record the coordinates of the cube's center of mass and the cube's total energy for each time step so we can plot it at the end of our simulation run.

In addition, we have written a program that does not take spinning into account so that we can focus on just the cube's interaction with the ground (`ground_cube.m`). The angular velocity stays constant here. This simplified version of our simulation allows us to better experiment with different parameters for the ground. The results of those experiments will be discussed in the next section.

## 6 Results and Discussion

### 6.1 Running the Simulation

Running `real_throw_cube.m` yields an animation of a cube with initial velocity hitting the ground a couple times before coming to a stop. For all our tests, we set the radius of the cube to be 1, the total mass to be 1, the initial  $x_{cm}$  to be  $[0,0,3]$ , the initial  $u_{cm}$  to be  $[5,0,5]$ , and the run time to be 10 seconds. Figures 1-3 show the simulation at the beginning at the middle, and at the end of a test run.

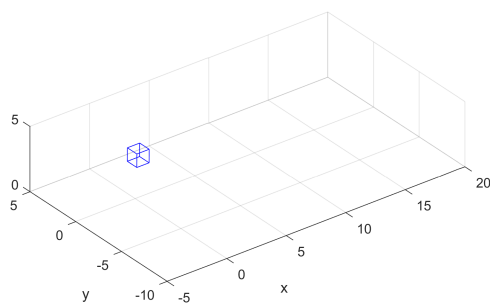


Figure 1: Initial Position

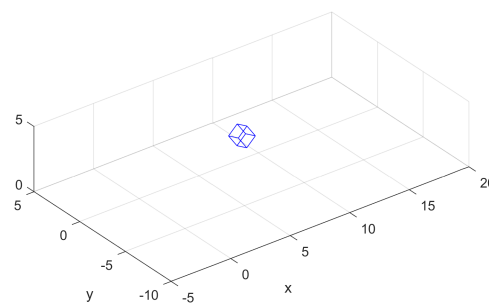


Figure 2: Middle

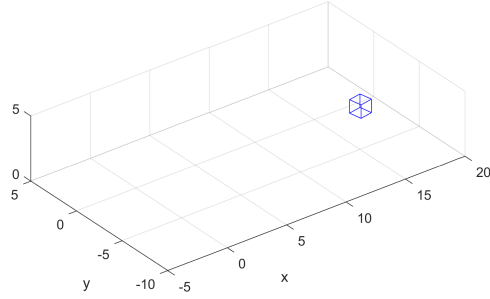


Figure 3: End Position

Figure 4 shows the coordinates of the cube's center of mass in a span of ten seconds for another similar test run. Notice how the z position (in yellow) shows the cube bouncing from the ground, each time with a rebound height lower than the previous. This is due to the ground's damping. The x position increases steadily due to the cube's initial velocity in the x direction but tapers off due to friction with the ground. Finally, note that while there is no initial velocity in the y direction, the cube ends up at a nonzero y position because spinning causes the cube to bounce from the ground at varying angles.

Figure 5 shows the total energy (kinetic energy plus potential energy) of our cube during our simulation. The plot is consistent with the fact that our cube should lose energy through damping and friction. Note that the plotted total energy tapers off but does not reach zero; this is because we have calculated potential energy based on the position of the cube's center of mass, and when the cube is at rest at the end of the run, the center of mass is still above the ground.

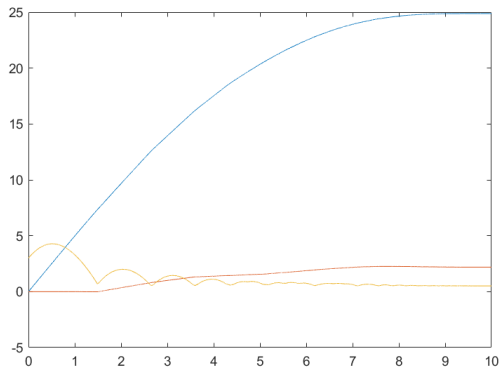


Figure 4: Positions vs Time

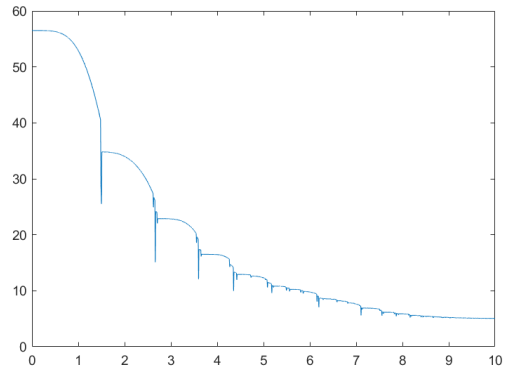


Figure 5: Energy vs Time

## 6.2 Experimenting with Ground Parameters

We used `ground_cube.m` to consider the effects of changing our ground parameters. The original parameters for the ground are  $S = 10^4$ ,  $D = 0.2$ , and  $\mu = 0.075$ . The number of time steps throughout our run is  $clockmax = 10000$  and the total run time is 10.

Figure 6 shows the cube's position if there is no friction. Because of damping, the cube eventually stops bouncing, but the x plot shows that the cube keeps on sliding forever. Figure 7 shows the cube's position if there is friction but no damping. In this case, the cube stops increasing its x position at a certain point, but it never stops bouncing up and down. Essentially, it will keep bouncing in place forever. Figure 8 shows the cube's position when the stiffness is low. Here, the cube dips below 0 on the z axis because the ground is very soft. Figure 9 shows the cube's position when stiffness is high. Keep in mind that the number of time steps is the same as for previous runs.

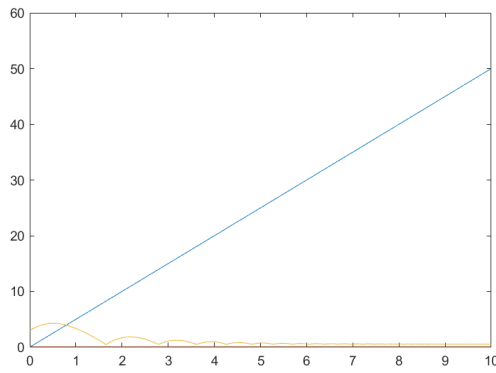


Figure 6: Positions for  $\mu = 0$

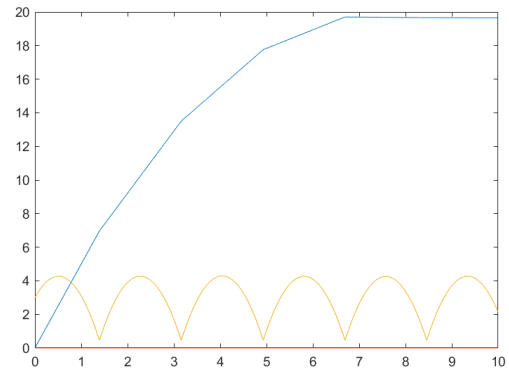


Figure 7: Positions for  $D = 0$

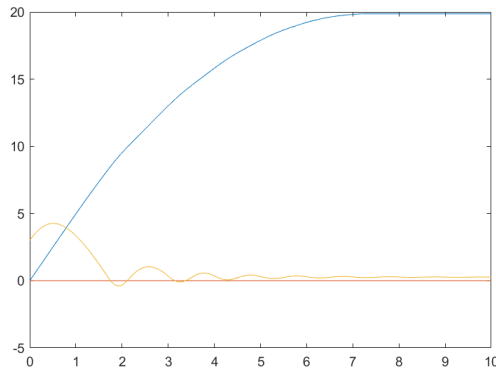


Figure 8: Positions for  $S = 10^1$

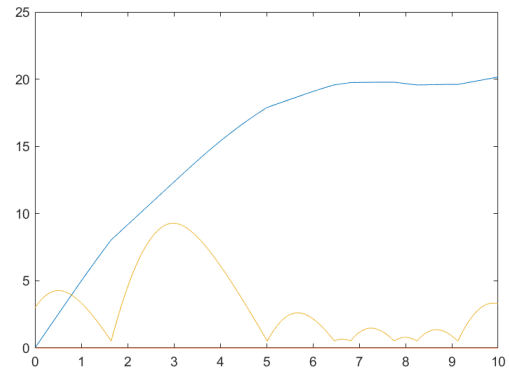


Figure 9: Positions for  $S = 10^6$

Figure 9 shows that after the first collision with the ground, the cube bounces to a height even higher than before. It seems that our cube may be bounding erratically from the ground. Indeed,

that's what it looks like when running the animation. Figure 10 shows the corresponding plot for total energy when stiffness is high. We see that the total energy is also erratic, violating the law of conservation of energy. These are signs that something went wrong in our simulation, because these things don't happen in real life.

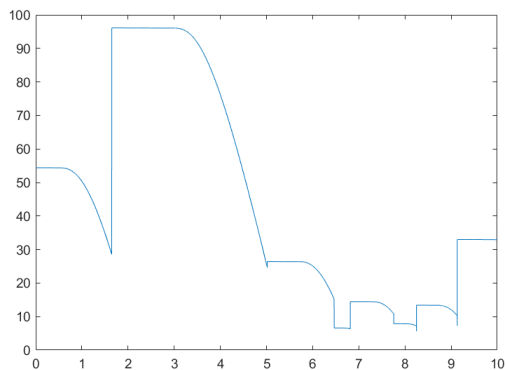


Figure 10: Energy for  $S = 10^6$

Whenever working with numerical methods, it is important to verify that we have chosen an appropriate step size. What we realized is that in order to maintain numerical stability, as the stiffness of the ground increases, the step size has to decrease. Otherwise, as we have shown, our simulation becomes unstable. Indeed, if we use the same stiffness but halve our step size (by doubling *clockmax*), then our plots look normal again (Figures 11 and 12):

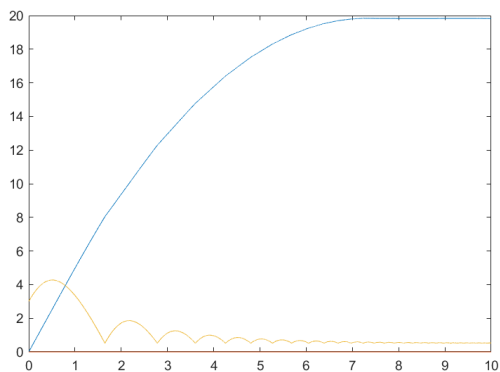


Figure 11: Positions for  $S = 10^6$  and *clockmax* = 20000

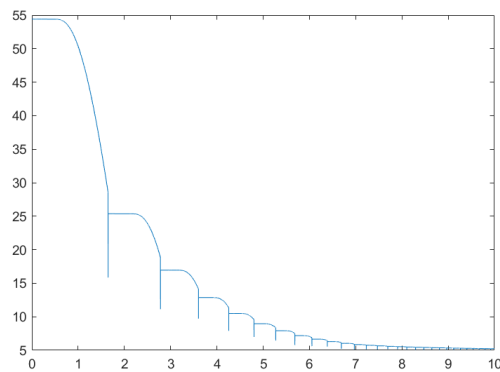


Figure 12: Energy for  $S = 10^6$  and *clockmax* = 20000



In Figure 13, we have plotted the number of time steps we need as a function of stiffness. Note that the step size is the run time divided by *clockmax*. We should mention that the time steps needed to achieve accurate outcomes is a little subjective, because even with different "appropriate" step sizes, simulations of the exact same parameters can lead to slightly different cube trajectories.

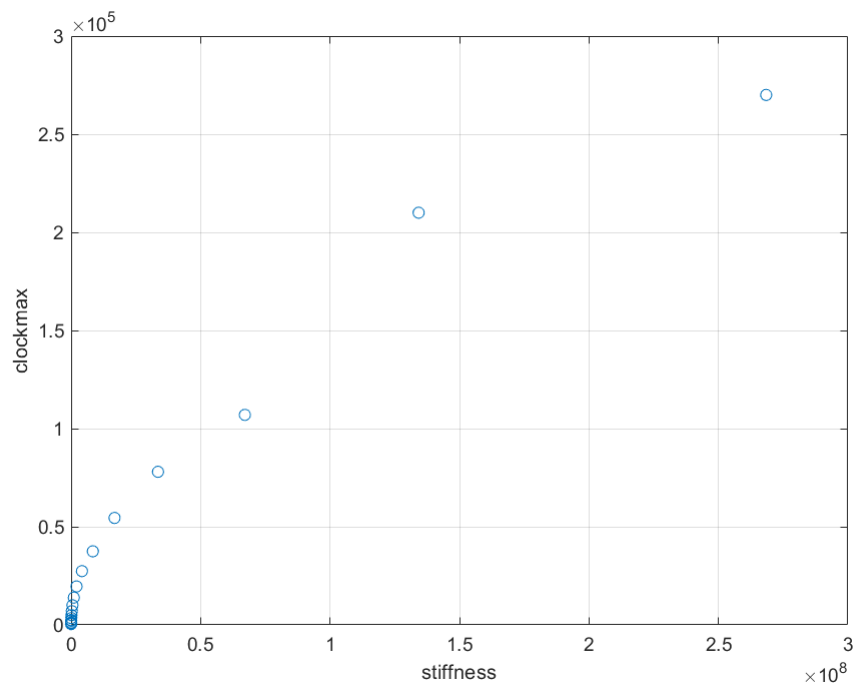


Figure 13

## 7 Ideas for Further Study

In our study, we have modeled and simulated the trajectory of a spinning cube thrown on an elastic ground. We verified various physical facts by changing the parameters of the ground and we found that to maintain numerical stability, increasing the stiffness of the ground requires decreasing the step size.

A natural extension of our simulation is to fully configure our cube as a die by adding and identifying distinct faces to each side. Experiments could track the probability of any side landing face up.

Recall also that in our simulation, we only calculated the moment of inertia tensor once because the properties of our cube lent nicely to a moment of inertia tensor that did not change under rotation. If the mass of our cube was instead unevenly distributed, we would need to recalculate the moment of inertia tensor at every time step. In such a simulation, we could then study the

effects of dealing with an unfair die. How would this change the probability of having any side land face up?

Lastly, further study could involve studying how two cubes would interact with each other when thrown onto the ground. If they were to bump into each other, how would they react? How would their angular velocities change?

## 8 Acknowledgements

We'd like to thank Professor Charles Peskin and Scott Weady from the Courant Institute of Mathematical Sciences at New York University for their assistance with this project.

## 9 References

Charles Peskin lecture on "Dynamics of Rigid Bodies" (Fall 2020)

[https://www.math.nyu.edu/faculty/peskin/modsim\\_lecture\\_notes/rigid\\_body\\_motion.pdf](https://www.math.nyu.edu/faculty/peskin/modsim_lecture_notes/rigid_body_motion.pdf)

Charles Peskin lecture on "Interaction of Dynamic Structures with the Ground" (Fall 2020)

[https://www.math.nyu.edu/faculty/peskin/modsim\\_lecture\\_notes/interaction\\_with\\_ground.pdf](https://www.math.nyu.edu/faculty/peskin/modsim_lecture_notes/interaction_with_ground.pdf)

Wikipedia article on "List of moments of inertia"

[https://en.wikipedia.org/wiki/List\\_of\\_moments\\_of\\_inertia](https://en.wikipedia.org/wiki/List_of_moments_of_inertia)

## 10 Appendix

Listing 1: cube.m

```
1 function [kmax,lmax,X_rel,jj,kk,M,I] = cube(r,total_mass)
2
3 %input parameters:
4 % r = diagonal length from center of mass to corner
5 % M = total mass
6
7 %outputs:
8 % X_rel(k,:) = coordinates of node k relative to the center of mass
9 % jj(l),kk(l) = indices of points connected by link l
10 % M = matrix of point masses
11 % I = moment of inertia for the cube
12
13 kmax = 8;      %8 nodes
14 lmax = 12;     %12 links
15 s = -sqrt(2) + 2*sqrt(0.5 + r^2); %side length
16
17 %create position matrix
18 sign = [1,1,1; 1,-1,1; -1,-1,1; -1,1,1;
```

```

19     1,1,-1; 1,-1,-1; -1,-1,-1; -1,1,-1];
20 X_rel = sign.*s/2;
21
22 %fill jj and kk for each link
23 jj=zeros(lmax,1); kk=zeros(lmax,1);
24 jj(1) = 1; kk(1) = 2;
25 jj(2) = 2; kk(2) = 3;
26 jj(3) = 3; kk(3) = 4;
27 jj(4) = 4; kk(4) = 1;
28 jj(5) = 5; kk(5) = 6;
29 jj(6) = 6; kk(6) = 7;
30 jj(7) = 7; kk(7) = 8;
31 jj(8) = 8; kk(8) = 5;
32 jj(9) = 1; kk(9) = 5;
33 jj(10) = 2; kk(10) = 6;
34 jj(11) = 3; kk(11) = 7;
35 jj(12) = 4; kk(12) = 8;
36
37 M = [(total_mass/8)*ones(kmax,1)]; %mass of each point
38 %moment of inertia tensor
39 I = diag([(1/6)*total_mass*s^2 (1/6)*total_mass*s^2 (1/6)*total_mass*s^2]);

```

Listing 2: real\_throw\_cube.m

```

1 clear all
2 close all
3
4 %% Create the cube
5 r = 1;
6 total_mass = 1;
7 [kmax,lmax,X_rel,jj,kk,M,I] = cube(r,total_mass);
8
9 %% Create the ground
10 %ground will be plane through origin with unit normal [ag,bg,cg]
11 ag = 0; bg = 0; cg = 1;
12 nabcg = sqrt(ag^2+bg^2+cg^2);
13 ag = ag/nabcg; bg = bg/nabcg; cg = cg/nabcg; %normalize
14
15 S_ground = 10^4; %stiffness of ground (Kg/s^2)
16 D_ground = 0.1; %damping of ground (Kg/s^2)
17 mu_ground = .1; %friction coefficient of ground
18
19 %set cutoff velocity for ground friction to avoid
20 %division by zero later if tangential velocity is zero
21 umin = (10^-6)*r*ones(kmax,1);
22
23 %% Initial setup

```

```

24 g = 9.8;
25 x_cm = [0,0,3];           %initial position
26 u_cm = [5,0,5];           %initial velocity
27 L = rand(3,1)*0.75 + (10^-6); %random initial angular momentum
28 omega = I\L;               %initial angular velocity
29
30 %create matrices for node positions and velocities
31 X = repmat(x_cm,kmax,1) + X_rel;
32 U = repmat(u_cm,kmax,1);
33
34 %% Initial drawing
35 figure(1)
36 link = 1:lmax;
37 h = plot3( [X(jj(link),1), X(kk(link),1)]', [X(jj(link),2), X(kk(link),2)]', ...
38           [X(jj(link),3), X(kk(link),3)]', 'b' );
39 %plot settings
40 grid on
41 xlabel('x'); ylabel('y')
42 axis equal; axis([-5,30,-10,10,0,5])
43 set(gcf, 'Position', get(0, 'Screensize'));
44 drawnow
45
46 %% Run the simulation
47 %time and recording
48 nskip = 200;               %frame iteration for animation
49 tmax = 10;                 %duration of simulation (s)
50 clockmax = 100000;         %number of time steps
51 dt = tmax/clockmax;        %step size (s)
52
53 %for future plotting
54 X_save = zeros(clockmax,3);
55 t_save = zeros(clockmax,1);
56
57 for clock=1:clockmax
58     t = clock*dt;
59
60     %% Add gravity to each node
61     F = zeros(kmax,3);
62     F(:,3) = - (total_mass/8)*g;
63
64     %% Add force of ground to each node
65     %for each node, evaluate:
66     dg = max(0, -(ag*X(:,1)+bg*X(:,2)+cg*X(:,3)) ); %distance into the ground
67     un = ag*U(:,1) + bg*U(:,2) + cg*U(:,3); %velocity normal to ground
68     fn = max(0,S_ground*dg - D_ground*un); %magnitude of normal force
69

```

```

70     Utan = U - un*[ag,bg,cg]; %tangential velocity vector
71     Utan_norm = vecnorm(Utan,2,2) + umin; %norm of tangential velocity
72     Utan_dir = Utan./[Utan_norm,Utan_norm,Utan_norm]; %normalize
73
74     %add normal force and friction force
75     F = F + fn*[ag,bg,cg] - mu_ground*[fn,fn,fn].*Utan_dir;
76
77     %% Update governing equations
78     %update center of mass
79     u_cm = u_cm + dt*sum(F,1)./total_mass;
80     x_cm = x_cm + dt*u_cm;
81     %update angular momentum (changes due to force of ground)
82     torque = zeros(3,1);
83     for k=1:kmax
84         torque = torque + cross(X_rel(k,:),F(k,:))';
85     end
86     L = L + dt*torque;
87
88     %% Calculate for animation
89     %update X_rel due to spinning
90     omega = I\L;
91     P = (omega./norm(omega))*(omega./norm(omega))';
92     omega_cross = [0,-omega(3),omega(2); omega(3),0,-omega(1);
93         -omega(2),omega(1),0];
94     R = P + cos(norm(omega)*dt)*(eye(3)-P) + ...
95         sin(norm(omega)*dt)*(omega_cross/norm(omega));
96     for k=1:kmax
97         X_rel(k,:) = (R*X_rel(k,:))';
98     end
99
100    %update nodes velocities and positions
101    product = zeros(kmax,3);
102    for k=1:kmax
103        product(k,:) = cross(omega',X_rel(k,:));
104    end
105    U = repmat(u_cm,kmax,1) + product; %needed for force of the ground
106    X = repmat(x_cm,kmax,1) + X_rel; %needed for animation
107
108    %% Update animation
109    if(mod(clock,nskip)==0)
110        c = 0;
111        for i=link
112            c = c+1;
113            h(c).XData = [X(jj(i),1),X(kk(i),1)];
114            h(c).YData = [X(jj(i),2),X(kk(i),2)];
115            h(c).ZData = [X(jj(i),3),X(kk(i),3)];

```

```

116         end
117         drawnow
118     end
119
120     %% Store results for future plotting
121     X_save(clock,:) = x_cm;
122     t_save(clock) = t;
123     kinetic_save(clock) = .5*total_mass*norm(u_cm)^2 + .5*norm(L)^2 / I(1,1);
124     potential_save(clock) = total_mass*g*x_cm(3);
125     energy_save(clock) = kinetic_save(clock) + potential_save(clock);
126
127 end
128
129 %% Graph trajectory
130 figure(2)
131 plot(t_save',X_save')
132 figure(3)
133 plot(t_save',energy_save')

```

Listing 3: ground\_cube.m

```

1 clear all
2 close all
3
4 %% Create the cube
5 r = 1;
6 total_mass = 1;
7 [kmax,lmax,X_rel,jj,kk,M,I] = cube(r,total_mass);
8
9 %% Create the ground
10 %ground will be plane through origin with unit normal [a,b,c]
11 ag = 0; bg = 0; cg = 1;
12 nabcg = sqrt(ag^2+bg^2+cg^2);
13 ag = ag/nabcg; bg = bg/nabcg; cg = cg/nabcg; %normalize
14
15     S_ground = 10^4;      %stiffness of ground (Kg/s^2)
16     D_ground = 0.2;      %damping of ground (Kg/s^2)
17     mu_ground = 0.075;   %friction coefficient of ground
18
19 %set cutoff velocity for ground friction to avoid
20 %division by zero later if tangential velocity is zero
21 umin = (10^-6)*r*ones(kmax,1);
22
23 %% Initial setup
24 g = 9.8;
25 x_cm = [0,0,3];          %initial position
26 u_cm = [5,0,5];          %initial velocity

```

```

27
28 %create matrices for node positions and velocities
29 X = repmat(x_cm,kmax,1) + X_rel;
30 U = repmat(u_cm,kmax,1);
31
32 %% Initial drawing
33 figure(1)
34 link = 1:lmax;
35 h = plot3( [X(jj(link),1), X(kk(link),1)]', [X(jj(link),2), X(kk(link),2)]',...
36           [X(jj(link),3), X(kk(link),3)]', 'b' );
37 grid on
38 xlabel('x')
39 ylabel('y')
40 axis equal
41 axis([-5,30,-5,5,0,5])
42 drawnow
43
44 %% Animation
45 %time and recording
46     nskip = 10;           %frame iteration for animation
47     tmax = 10;            %duration of simulation (s)
48     clockmax = 10000;     %number of time steps
49     dt = tmax/clockmax;   %(s)
50
51 %for future plotting
52 X_save = zeros(clockmax,3);
53 t_save = zeros(clockmax,1);
54
55 for clock=1:clockmax
56     t = clock*dt;
57
58     %% Add gravity to each node
59     F = zeros(kmax,3);
60     F(:,3) = - (total_mass/8)*g;
61
62     %% Add force of ground to each node
63     %for each node, evaluate:
64     dg = max(0, -(ag*X(:,1)+bg*X(:,2)+cg*X(:,3)) ); %distance into the ground
65     un = ag*U(:,1) + bg*U(:,2) + cg*U(:,3); %velocity normal to ground
66     fn = max(0,S_ground*dg - D_ground*un); %magnitude of normal force
67
68     Utan = U - un*[ag,bg,cg]; %tangential velocity vector
69     Utan_norm = vecnorm(Utan,2,2) + umin; %norm of tangential velocity
70     Utan_dir = Utan./[Utan_norm,Utan_norm,Utan_norm]; %normalize
71
72     %add normal force and friction force

```

```

73     F = F + fn*[ag,bg,cg] - mu_ground*[fn,fn,fn].*Utan_dir;
74
75     %% Update velocities and positions
76     %for center of mass
77     u_cm = u_cm + dt*sum(F,1)./total_mass;
78     x_cm = x_cm + dt*u_cm;
79
80     %for each node
81     X = repmat(x_cm,kmax,1) + X_rel;
82     U = repmat(u_cm,kmax,1);
83
84     %% Update animation
85     if(mod(clock,nskip)==0)
86         c = 0;
87         for i=link %I don't understand what this means but it works
88             c = c+1;
89             h(c).XData = [X(jj(i),1),X(kk(i),1)];
90             h(c).YData = [X(jj(i),2),X(kk(i),2)];
91             h(c).ZData = [X(jj(i),3),X(kk(i),3)];
92         end
93         drawnow
94     end
95
96     %for future plotting
97     X_save(clock,:) = x_cm;
98     t_save(clock) = t;
99     kinetic_save(clock) = .5*total_mass*norm(u_cm)^2;
100    potential_save(clock) = total_mass*g*x_cm(3);
101    energy_save(clock) = kinetic_save(clock) + potential_save(clock);
102 end
103
104 figure(2)
105 plot(t_save',X_save')
106 figure(3)
107 plot(t_save',energy_save')

```