

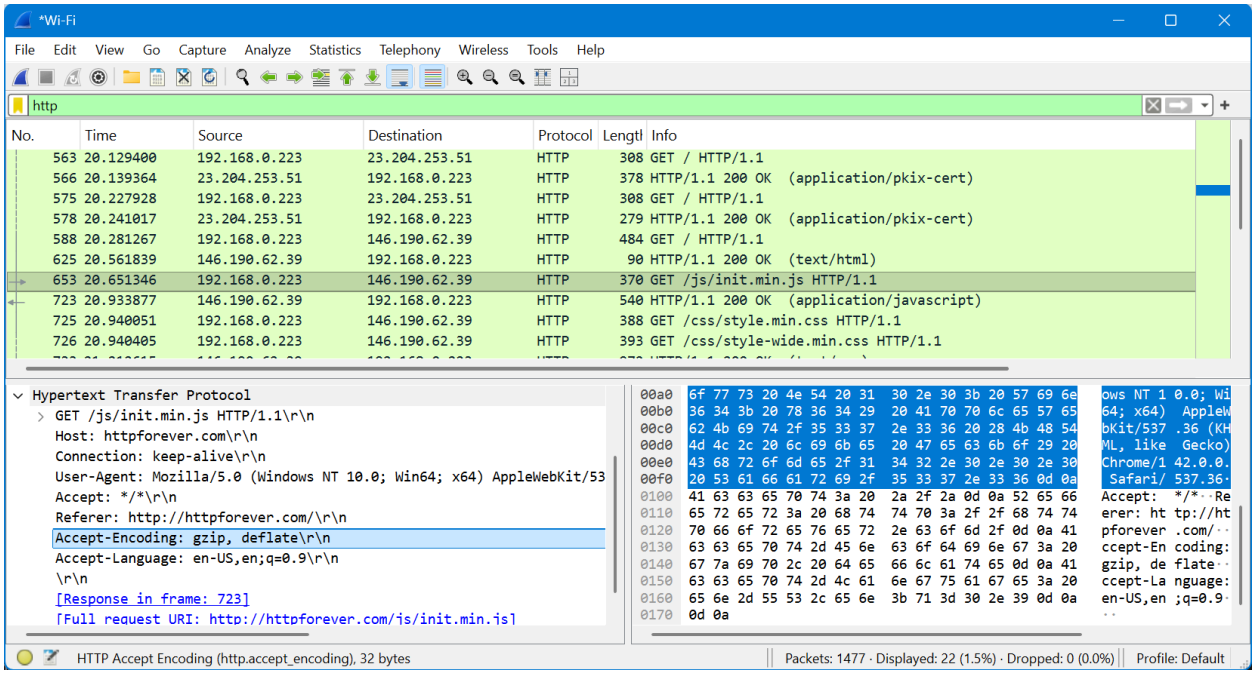



This image shows the Hypertext Transfer Protocol part for an HTTP request. The GET method is used to request the homepage of the website httpforever.com. The Host header tells the server which site the browser is trying to reach. The Connection keep-alive means the browser wants to keep the connection open for further use. The User-Agent shows that the request is coming from which browser on Windows. The Referer header shows that the user clicked the link from Google. The Accept headers tell the server what type of content and formats the browser can handle. The Accept-Language header shows the user prefers English. The If-Modified-Since and If-None-Match headers help the browser avoid downloading the same content again if it hasn't changed. At the end it shows the full URI requested.

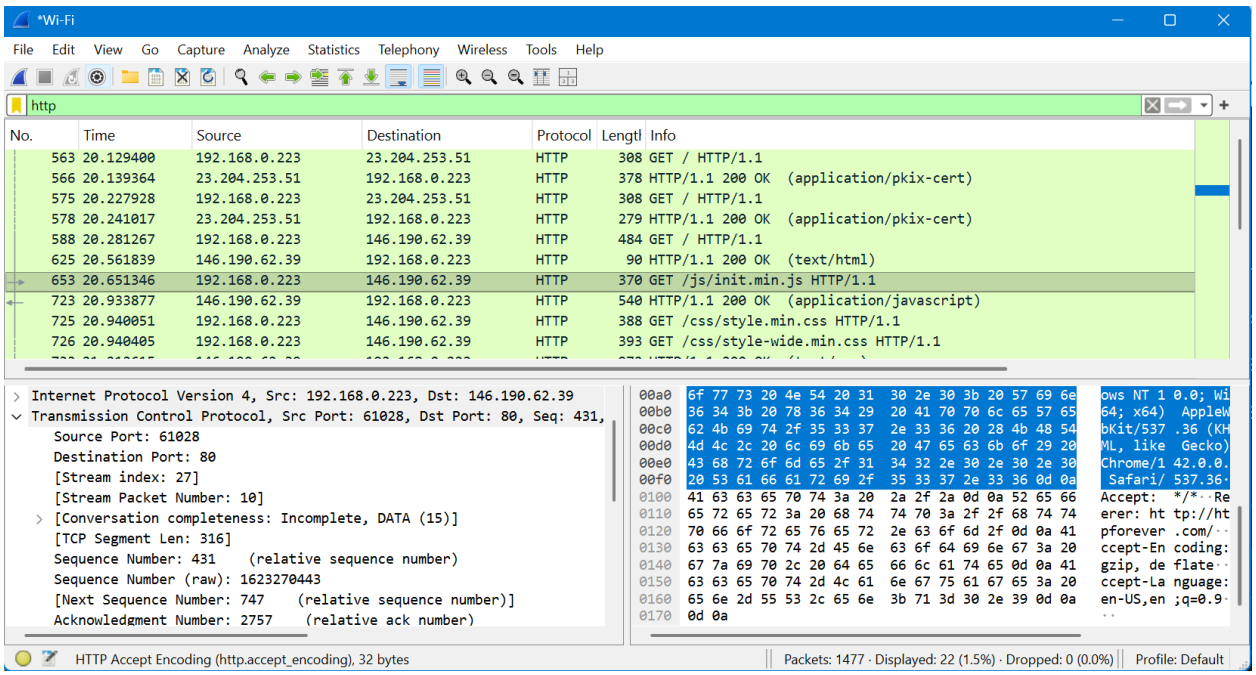


This image shows the Transmission Control Protocol part of the request packet. The source port is 61028 and the destination port is 80 which means this packet is going from the local device to the web server using the HTTP port. The sequence number is 431 and the acknowledgment number is also 2757 which means both sides have already completed the handshake and now they are starting to exchange actual data. The flags PSH and ACK are set which means the sender is pushing the data and confirming it received the previous data from the other side. The window size value 65280 tells how much more data the receiver is ready to accept. Checksum is for error detection. The TCP payload is 316 bytes.

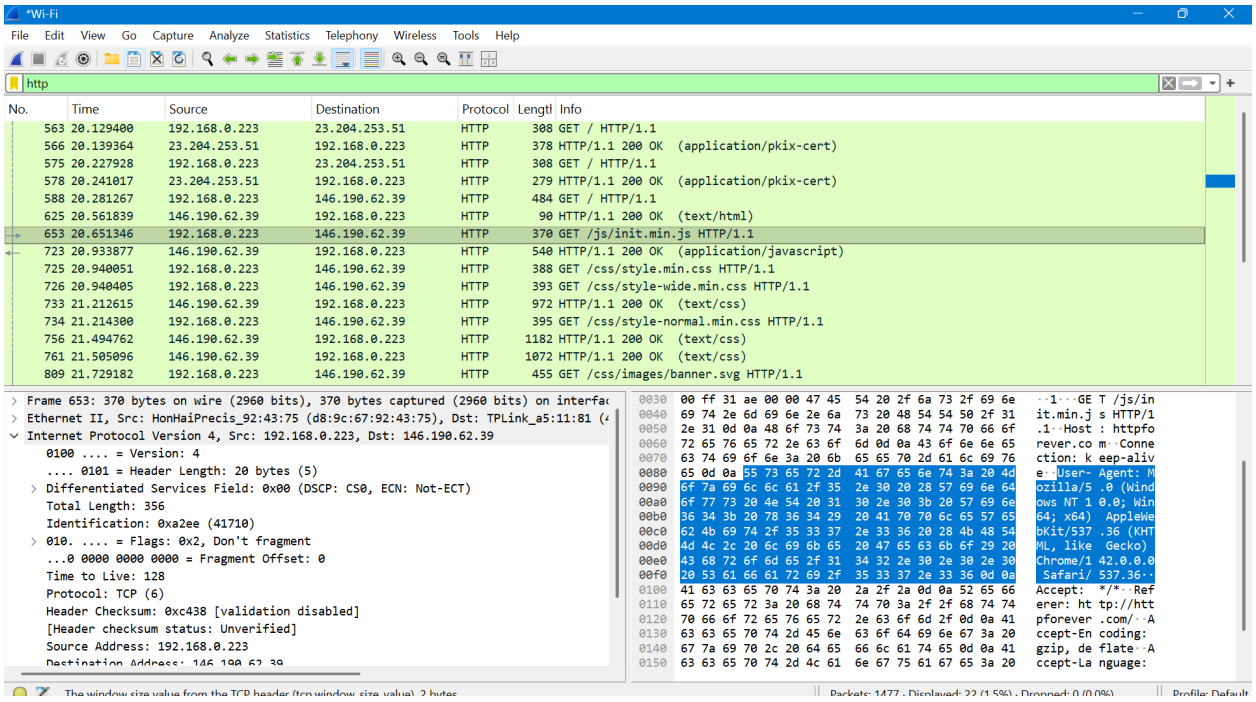


This image shows the Internet Protocol Version 4 part of the packet. The source IP is 192.168.0.223 and the destination IP is 146.190.62.39 which means the local device is sending data to a web server. The version is IPv4 and the header length is 20 bytes. The total length of the packet is 356 bytes. The time to live is 128 which shows the remaining time to expire. The protocol number is 6 which stands for TCP. The identification number is used to track packets and help with reassembly if needed. And finally again the source and destination address infos.

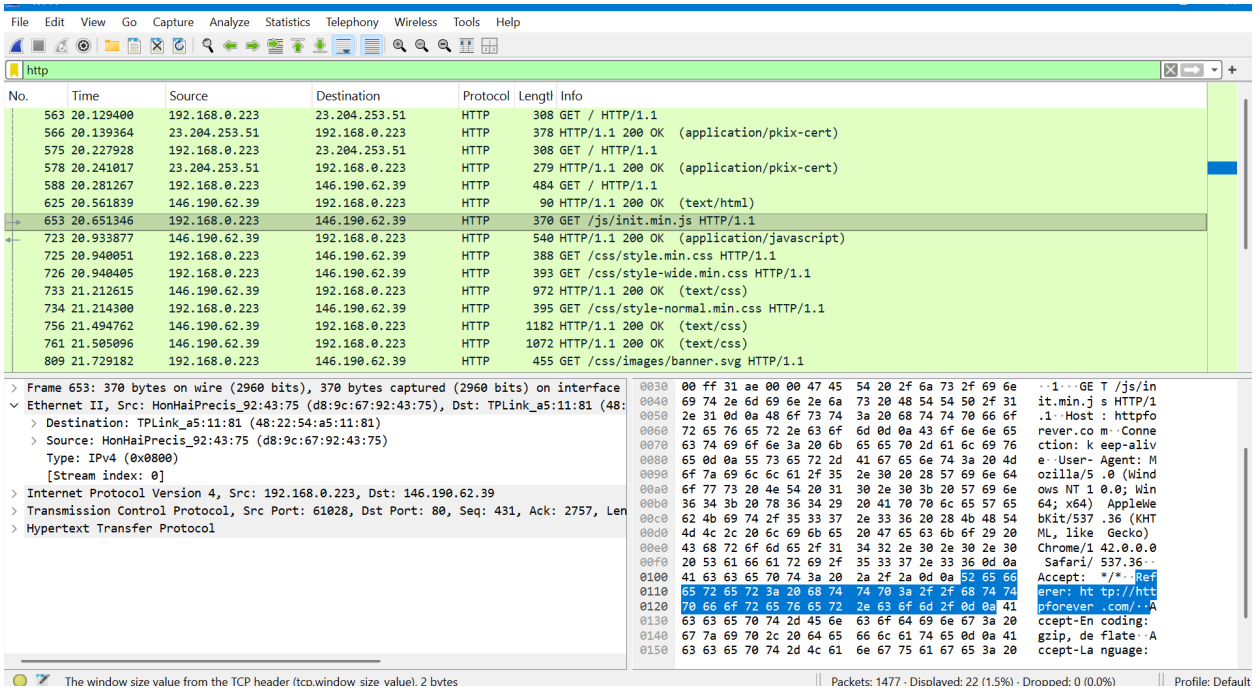


This image shows the Ethernet part of the frame. It includes the MAC addresses used for communication inside the local network. The source MAC address belongs to the device named HonHaiPrecis and the destination MAC address is for a TP Link device. The type is IPv4 which means the data being carried inside is an IP packet. This is the data link layer where frames are created and sent over the physical medium.

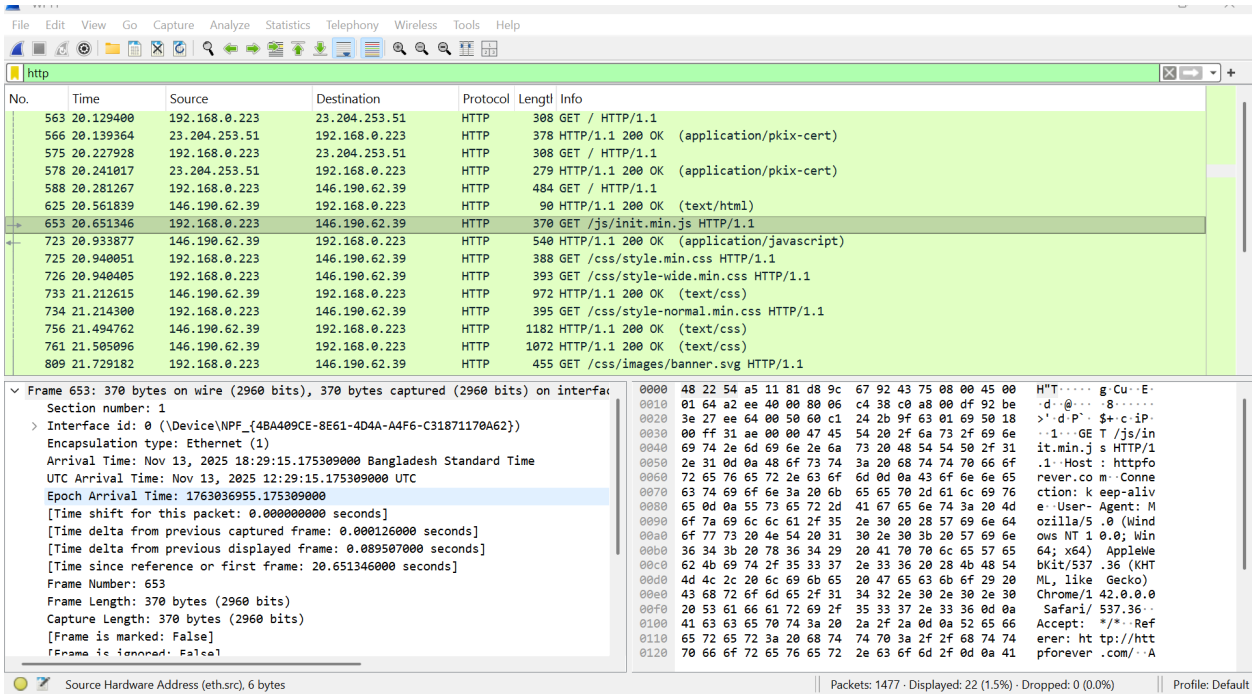


This image shows the Frame level information. The total size of this packet is 370 bytes both on the wire and in capture. The arrival time is in Bangladesh Standard Time and the UTC time. Frame number 653 and the protocols used in this packet are Ethernet, IP, TCP and HTTP. HTTP traffic uses TCP port 80.

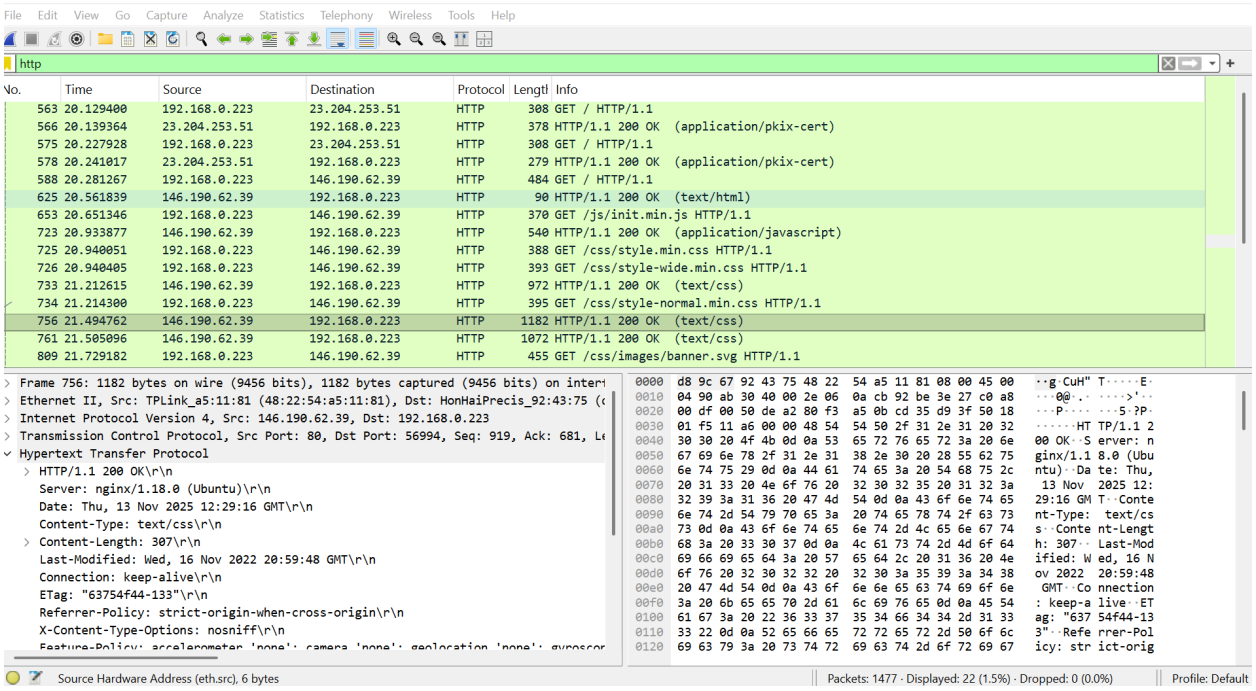


This image shows the Hypertext Transfer Protocol response (HTTP response) from the web server to the client. The server replies with the status code 200 which means the requested is successful. The response headers include information about the server software, date and time of the response, last modification date, connection status etc. The response took about 0.28 seconds to arrive and the full request URL link.

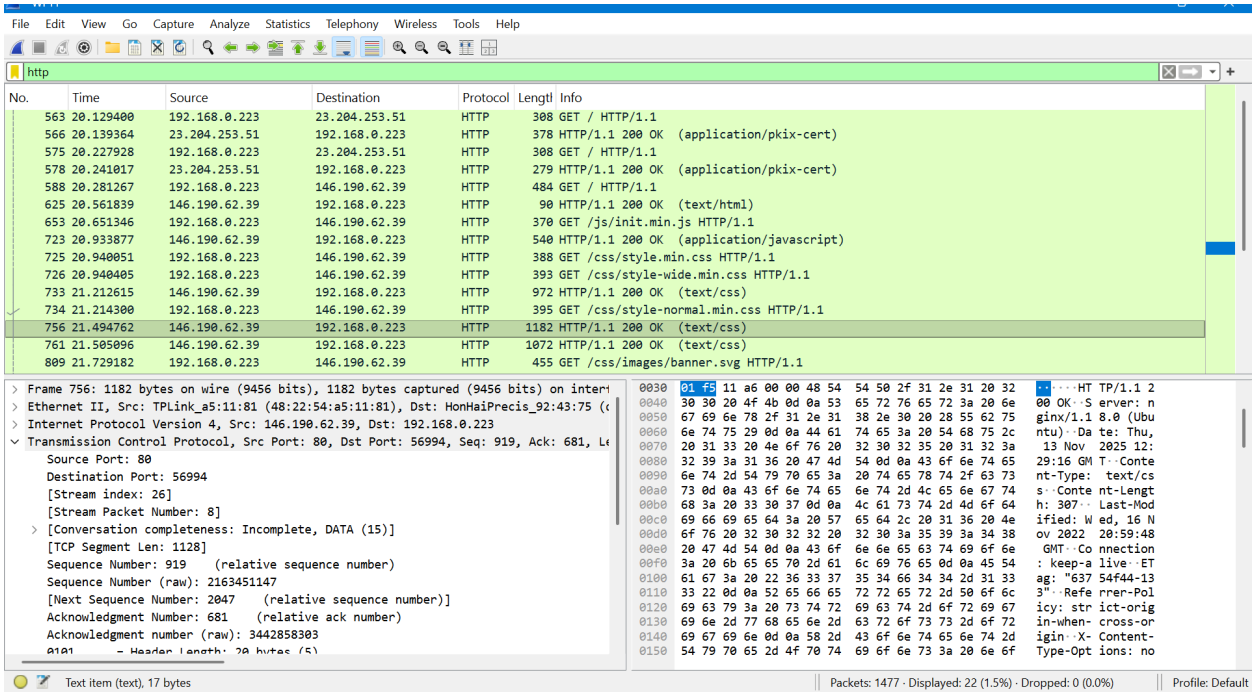


This image shows the Transmission Control Protocol part of the response packet. The source port is 80 and the destination port is 56994 which means this response packet is going from the web server to the local device. The sequence number is 919 and the acknowledgment number is 681 which means data received till 680 bytes. The flags PSH and ACK are set which means the sender (the web server) is pushing the data and confirming it received the previous data from the other side. The window size value 64128 tells how much more data the receiver is ready to accept. Checksum is for error detection. The TCP payload now updated to 1128 bytes.

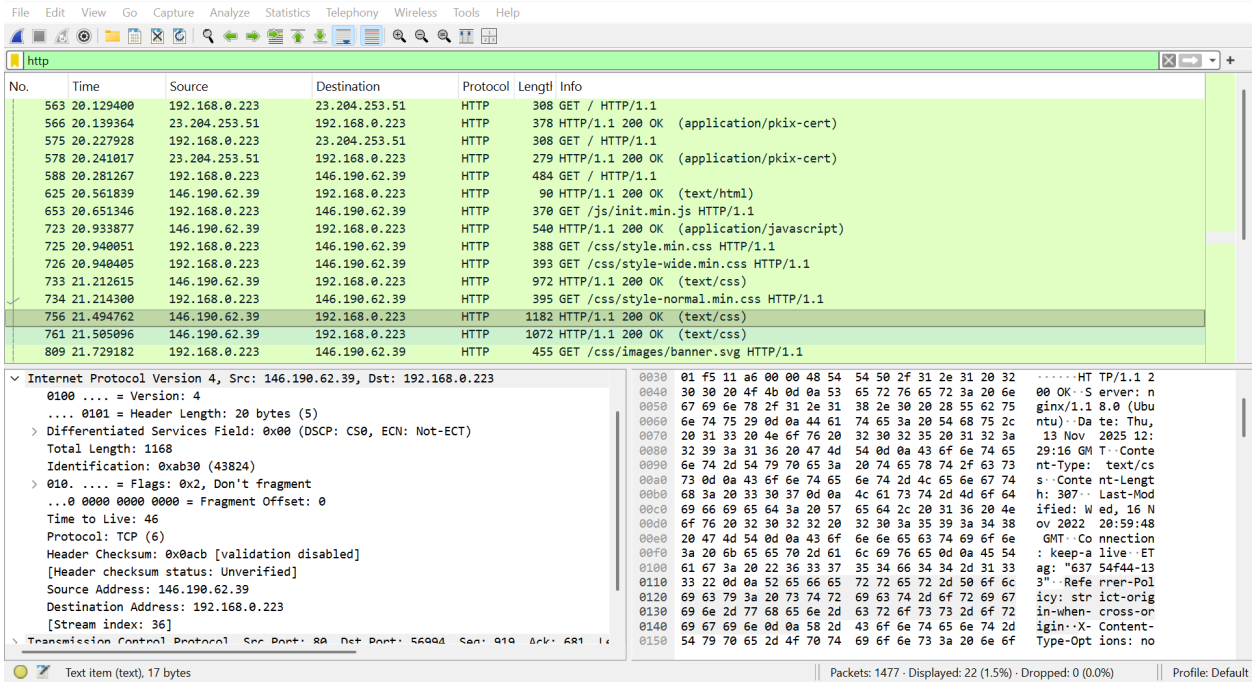

This image shows the Internet Protocol Version 4 part of the packet. Now the source IP is 146.190.62.39 and the destination IP 192.168.0.223 is which means the web server is sending data to local device. The version is IPv4 and the header length is 20 bytes. The total length of the packet is 1168 bytes. The time to live is 46 which shows the remaining time to expire. The protocol number is 6 which stands for TCP. The identification number is used to track packets and help with reassembly if needed. And finally again the source and destination address infos.

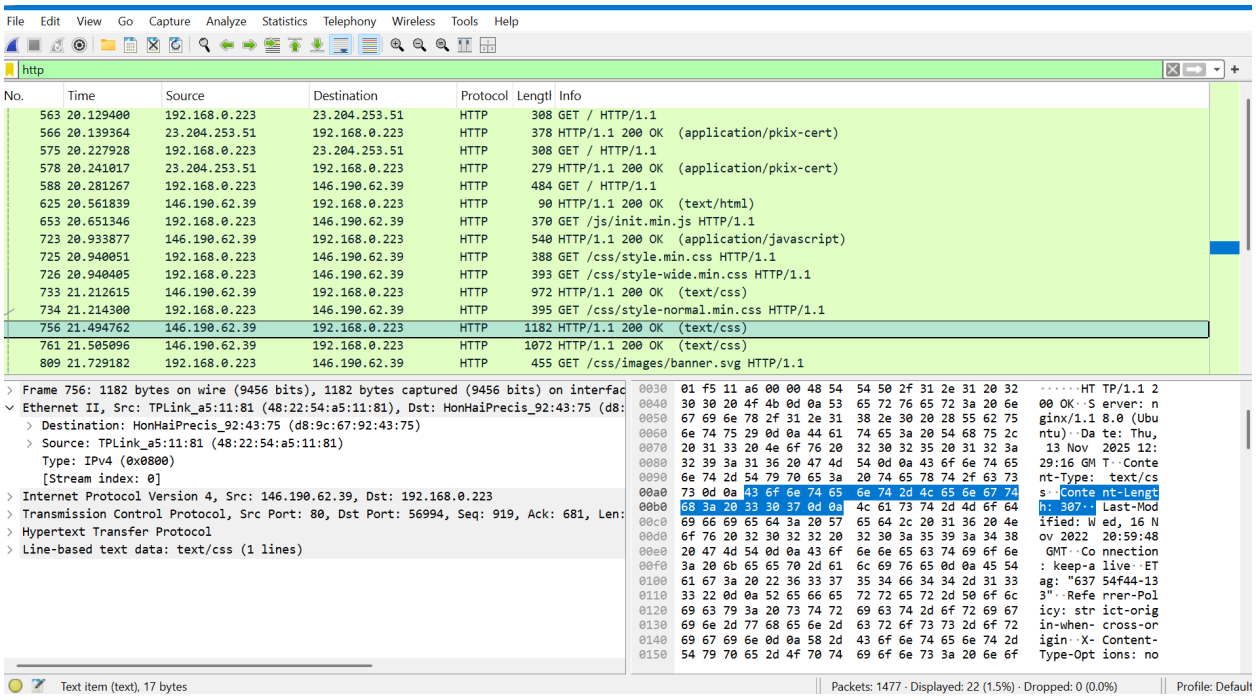

This image shows the Ethernet part of the frame. It includes the MAC addresses used for communication inside the local network. The source MAC address belongs to the device named TP Link device and the destination MAC address is for HonHaiPrecis. The type is IPv4 which means the data being carried inside is an IP packet. This is the data link layer where frames are created and sent over the physical medium.

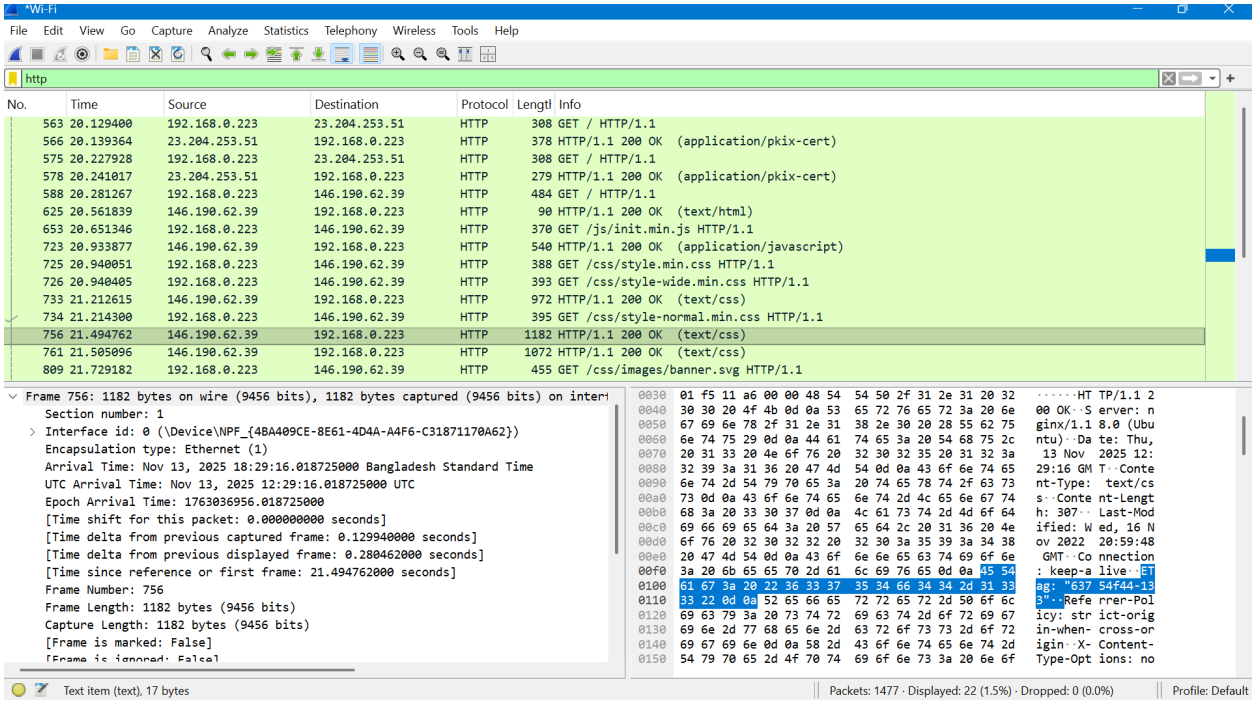

This image shows the Frame level information. The total size of this packet is 1182 bytes both on the wire and in capture. The arrival time is in Bangladesh Standard Time and the UTC time. Frame number 756 and the protocols used in this packet are Ethernet, IP, TCP and HTTP. HTTP traffic uses TCP port 80.