


Local RP2354B controller | DRAFT | no manufacturing release


Eight paired PWM outputs; ADC acquisition uses PIO. ENABLE_REQUEST must pass through independent shutdown logic.

L20 pin 1 is the polarity-dot side and connects to V_CORE. Preserve manufacturer regulator placement and routing.

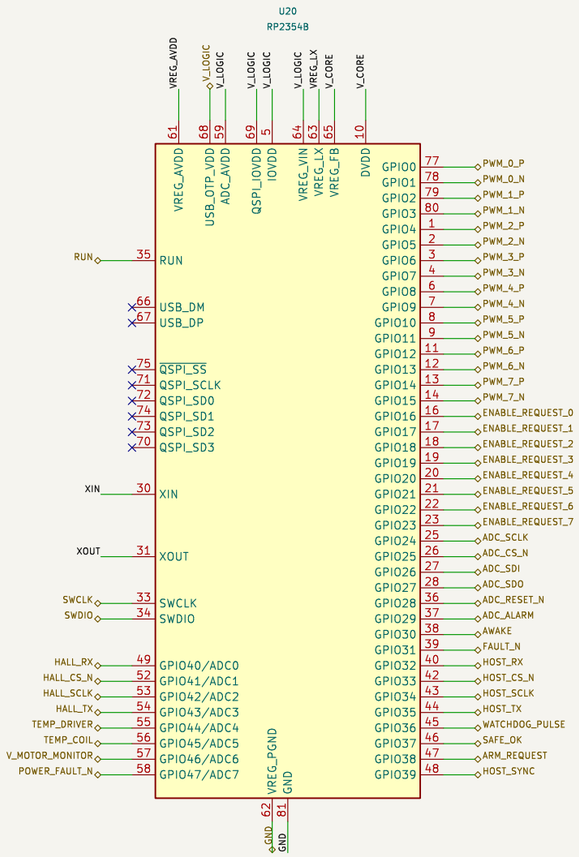


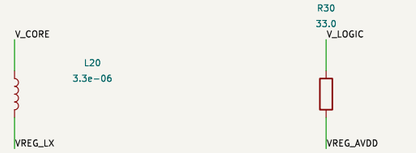
















































SWCLK / SWDIO / RUN: programming interface. USB and external QSPI pins intentionally unused; flash is in-package.

Sheet: /
File: controller.kicad_sch

Title: Eight-coil local controller — DRAFT

Size: A3	Date:	Rev: working
KiCad E.D.A. 9.0.8		Id: 1/1