


Dual-coil low-side reference | DRAFT | no manufacturing release

VREF uses the buffered current reference; V_LOGIC supplies the fault pullup. Shared interfaces remain open.

Each coil has two separate PGND shunts; the amplifier subtracts their voltages. Local return paths match the diagnostic topology.

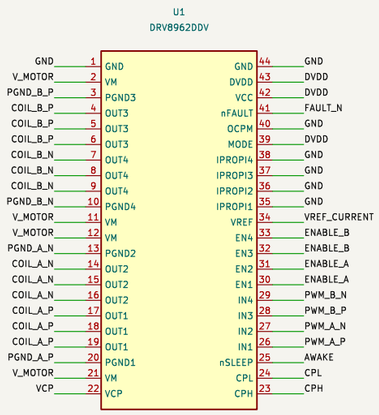

















































































Sheet: /
File: channel.kicad_sch

**Title: Dual-coil low-side reference**

| Size: A3 | Date: | **Rev: draft** |
|---|---|---|
| KiCad E.D.A. 9.0.8 | | Id: 1/1 |