


Shared eight-coil acquisition and bias reference | DRAFT | no manufacturing release


CURRENT inputs come from four dual-coil sheets. Supplies and synchronous SPI control remain external interfaces.


ADC internal reference serves only the ADC. REF5025 supplies the separate current-zero reference.

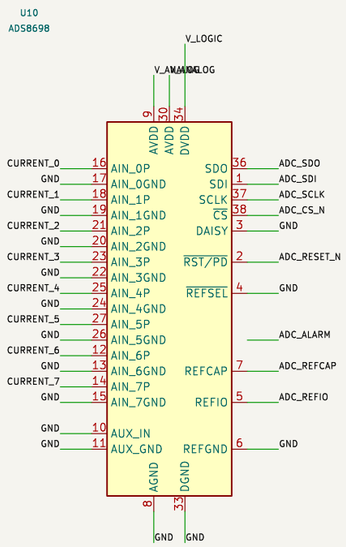

































Bulk capacitor effective value must remain above the datasheet minimum under DC bias and tolerance.

C20/C21 and C22/C23 belong at the two AVDD pin groups; keep all reference and ground return paths short.

Sheet: /		
File: acquisition.kicad_sch		
Title: Shared current acquisition — DRAFT		
Size: A3	Date:	**Rev: working**
KiCad E.D.A. 9.0.8		Id: 1/1