

LOW ENERGY X-RAY SENSOR

Model 312B-L for On-Line Thickness and Basis Weight Measurement

The intelligent Low Energy X-ray Sensor is a new member of NDC's portfolio of productivity solutions. Ideally suited for thickness measurements of light weight packaging, battery separators and nonwovens, this X-ray transmission sensor brings a new level of performance while not requiring licensing in most countries.

Applications:

Extruded Film and Sheet

Coating & Converting

Calendered Products

Aluminum Foil

Nonwovens

Features:

High reliability, fast and accurate measurement

Wider operating weight/thickness range than comparable isotopic gauges

Precisely regulated high-voltage supply for excellent measurement stability

High scan speed (up to 500 mm/20 inches per second)

Non-nuclear gauge minimizes regulatory requirements

Low-energy X-ray requires minimal shielding

Zero radiation hazard when powered down

No degradation of measurement accuracy over time

Optimized for the Highest Performance

NDC's X-ray transmission sensor is designed to provide measurement performance that meets the exacting requirements of plastics extrusion, converting, calendering, nonwovens and textile applications.

Three versions of X-ray sensors are available with different measurement capabilities. The high-resolution 312B-N-L offers excellent, narrow streak resolution and is suitable for most measurement applications.

The ultra-high resolution 312B-XN-L offers even narrower streak resolution down to 0.5 mm. This small beam size enables sharp streak detection and is well suited for calendering applications. Its optimized geometry provides precise measurement through its ability to tune the X-ray tube for maximum resolution.

The ultra low-noise 312B-W-L has a larger measurement patch size of 10 x 19 mm and offers

The X-ray absorption properties of the material permit accurate measurement over a wide range compared to nucleonic sensors.


NDC's X-ray tube features a stable, precisely-tuned power supply running at or below 5 keV that provides high signal-to-noise characteristics and optimum measurement performance. The high-voltage power applied to the X-ray tube cathode generates a stream of electrons that are accelerated toward a metal anode target. Once the electrons hit the metal target, X-rays are released at energies proportional to both the voltage applied and the nature of target material used.

X-ray Tube Operation

The X-rays pass through the product and into an ion chamber where the residual photon energy is converted to an electrical signal that is inversely proportional to the product weight. In common with most thickness and weight sensors, the X-ray sensor calibration is optimized

according to material composition via a simple recipe factor. This is with high atomic number elements. Please consult NDC to determine whether the X-Ray sensor is the most appropriate gauge for the application.

Head Size: 220 W x 195 H x 330 L mm (8.7 x 7.7 x 13.0 in) top & bottom

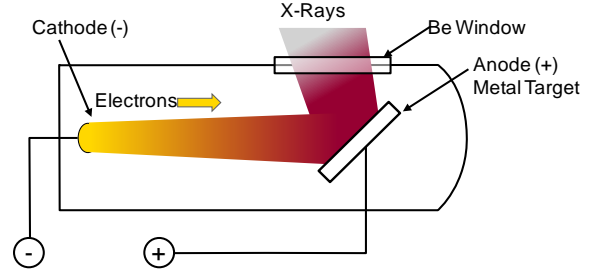

Specifications


Operating Temperature: NDC X-ray transmission sensors require cooling water supplied by the user. In applications where ambient on- or off-sheet temperatures at the X-Ray sensor location do not exceed 50°C (120°F), clean demineralized cooling water must be supplied at a temperature of 21°C (70°F).

Air Supply Requirements: All NDC X-ray sensors use an air-actuated shutter for safety and operation purposes. The actuator requires that clean, dry oil-free "instrument quality" compressed air be supplied by the user in order to operate properly over its life.

Construction: The exterior housing is an aluminum casting. The interior houses a precisely regulated power supply and X-ray tube (transmitter)

| Parameter | 312B-N-L | 312B-XN-L | 312B-W-L |
|--------------------------------------|--|--|--|
| Measurement Range* | 1 - 1,000 g/m ² | 1 - 1,000 g/m ² | 1 - 1,000 g/m ² |
| Nominal X-ray tube energy (Tuneable) | less than 5 keV | less than 5 keV | less than 5 keV |
| Window | 6 x 19 mm (0.24 x 0.75 in) | 3 x 19 mm (0.12 x 0.75 in) | 10 x 19 mm (0.4 x 0.75 in) |
| Air Gap | 20-25 mm (0.79-0.98 in) | 20-25 mm (0.79-0.98 in) | 20-25 mm (0.79-0.98 in) |
| Static & Dynamic** Reproducibility | ±0.05 g/m ² or ±0.035% whichever is greater | ±0.05 g/m ² or ±0.035% whichever is greater | ±0.05 g/m ² or ±0.035% whichever is greater |

~ à|•@^áÁ•] ^&á, &æç[] •Á&[] -[] { ÁÔÒØØÒØÁFHHÎKFJJÎÊ



CAUTION X-RAYS: Model 312B-L Series
This device produces ionizing radiation when energized. For operational safety, the customer must agree to comply with local government regulations regarding X-ray devices and to follow NDC-provided safety shielding guidelines.

* The measurement range can be extended to 2,600 gsm.

Ô[] •~|çÞÔÔÁ~[] !Á•] ^&á, &æç[] |á&æç[] •Á&ç[] ^æ~! ^ { ç] ^!~[] { æ] &^Ê
EEÁV@^Áá~ } æ { á&Á! ^] ! [á~ &á&|ç~^Á•] ^&á, &æç[] Á! ^! ^&ç•Áç@^Á, ^á~@ç^Áá { ^æ] Á~Á
all possible sources of dynamic error, including the maximum allowable
•^• [] ÁYÊÊÁYÊÁæ} áÁZÊÇÇçá•Á { á•æ|á* } { ^} çÊÁ} æ••|á} ^Ø' ~cc^!Áçæ|á&ç[] ÊÁ
temperature change, etc.

NDC Technologies is represented in over 60 countries worldwide. www.ndc.com

a **spectris** company

NDC Americas
Tel: +1 626 960 3300
Email: info@ndc.com

NDC Belgium
Tel: +32 4 239 90 10
Email: sales@ndcinfraed.be

NDC Japan
Tel: +81 3 3255 8157
Email: ndcjapan@ndc.com

NDC Italy
Tel: +39 0331 454 207
Email: ndcitaly@ndc.com

NDC India
Tel: +91 9890800697
Email: ndcindia@ndc.com

NDC United Kingdom
Tel: +44 1621 852244
Email: enquiries@ndc.com

NDC China
Tel: +86 21 6113 3609
Email: info@ndcinfraed.com.cn

NDC Germany
Tel: 08001123194
Email: info@ndcinfraed.com

NDC Singapore
Tel: +65 91994120
Email: apacsales@ndc.com



In line with its policy of continuous improvement, NDC reserves the right to revise or replace its products or services without prior notice. The information contained in this document is for informational purposes only and does not constitute a contract.

Document Number: P-BROC-SENS-LowEnergyXraySensor-2017OCT25
Date of Issue: October 2017
© NDC Technologies 2017