


Power: USB-C in, polyfuse, TVS, 3.3 V LDO, USB ESD





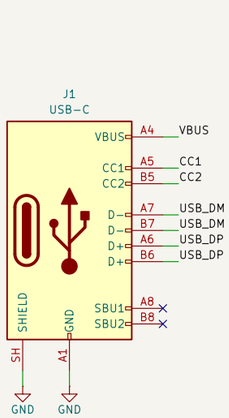











GNSS: MAX-M10S, active antenna bias-T per u-blox UBX-20053088 Fig. 28 (10R / 27nH / 10nF, 47pF DC block)



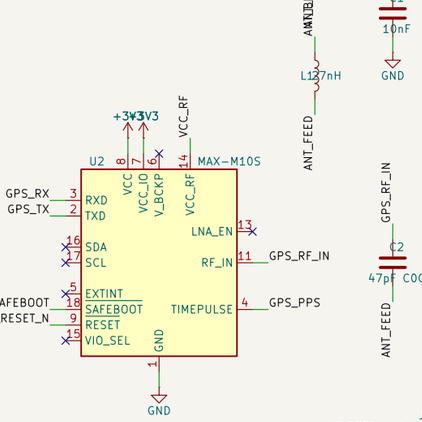



ESP32-C3-MINI-1-H4X: GPIO4/5 UART1 to GNSS, GPIO7 switch, GPIO9 BOOT/SETUP button, GPIO10 status LED

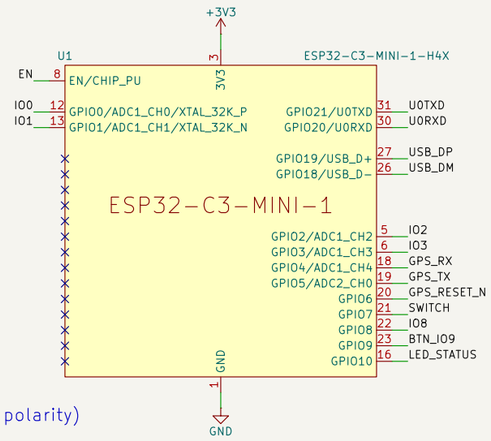

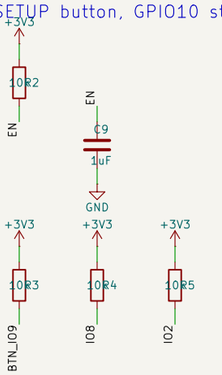









Switch output: CPC1017N PhotoMOS -> screw terminal to the remote's button (either polarity)





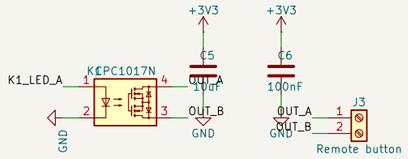

Test pads (bottom side, not assembled)

