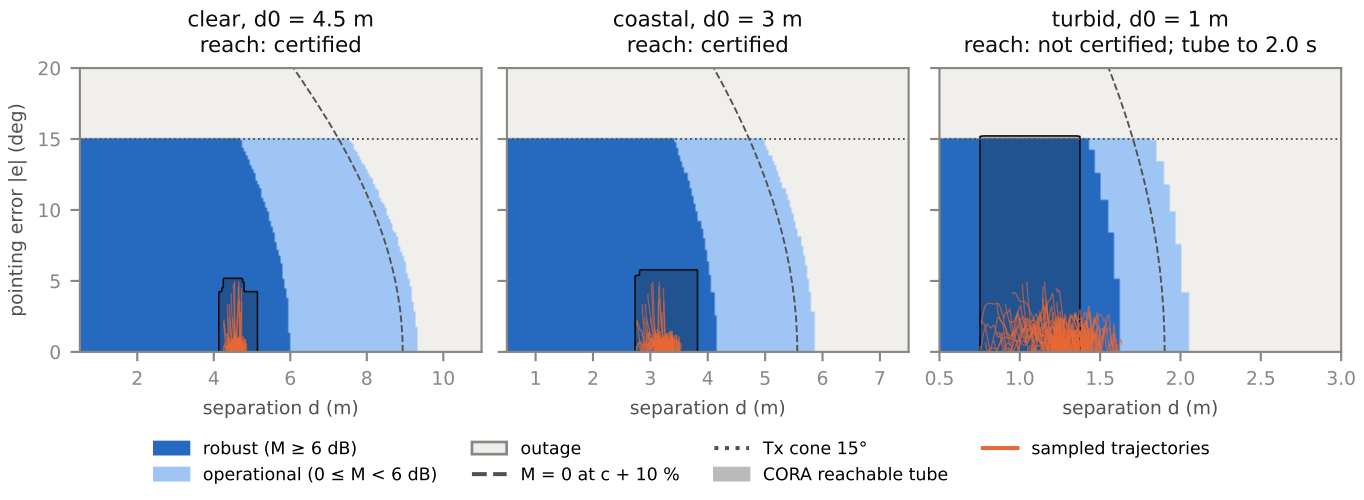

clear, d0 = 4.5 m
reach: certified
coastal, d0 = 3 m
reach: certified
turbid, d0 = 1 m
reach: not certified; tube to 2.0 s
pointing error |e| (deg)
separation d (m)
separation d (m)
separation d (m)
robust (M ≥ 6 dB)
operational (0 ≤ M < 6 dB)
outage
M = 0 at c + 10 %
Tx cone 15°
CORA reachable tube
sampled trajectories