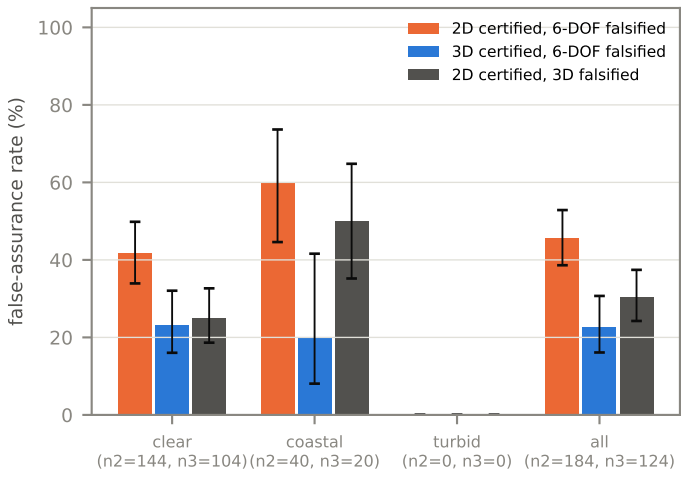
2D certified, 6-DOF falsified
3D certified, 6-DOF falsified
2D certified, 3D falsified
false-assurance rate (%)
100
80
60
40
20
0
clear
(n2=144, n3=104)
coastal
(n2=40, n3=20)
turbid
(n2=0, n3=0)
all
(n2=184, n3=124)

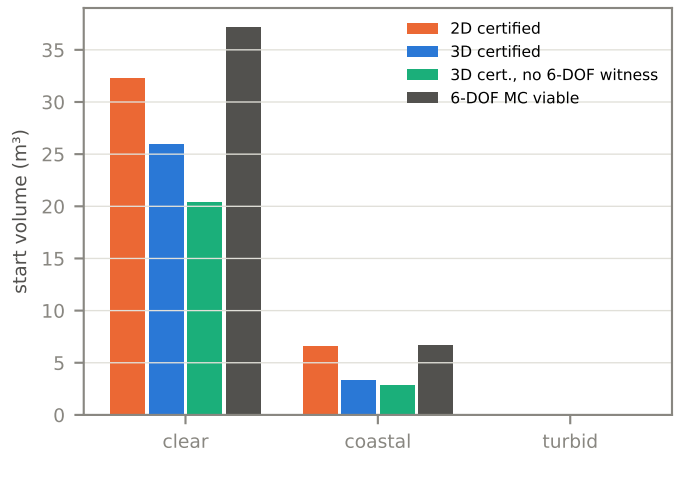
2D certified
3D certified
3D cert., no 6-DOF witness
6-DOF MC viable
start volume (m³)
35
30
25
20
15
10
5
0
clear
coastal
turbid