
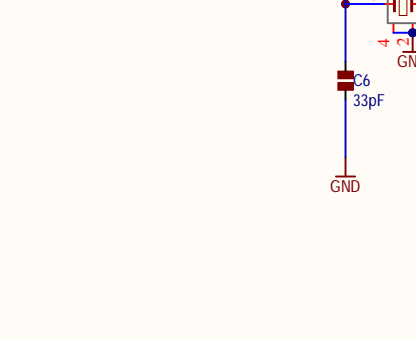
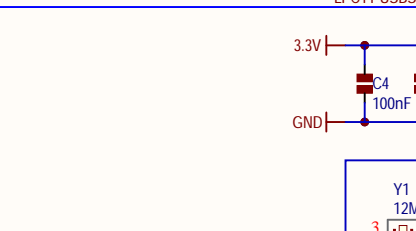


N-BB

TO ENTER ISP MODE:
PRESS BOTH BUTTONS, THEN RELEASE FIRST SW3(RESET)
RELEASE SW4(ISP)
IF THE BOARD IS CONNECTED TO A HOST VIA USB,
IT WILL APPEAR AS CRP DISABLD()

If flashed with CMSIS-DAP interface firmware,
Then Pressing SWx while powering:
N_RESET_FB_BL - mbed bootloaer
N_RESET_FB_ISP - ROM MSC bootloaer

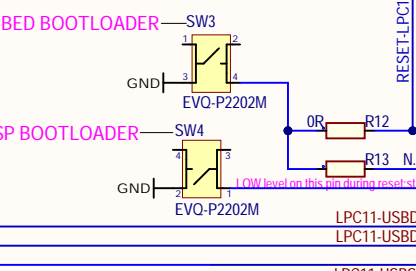

CPU

