
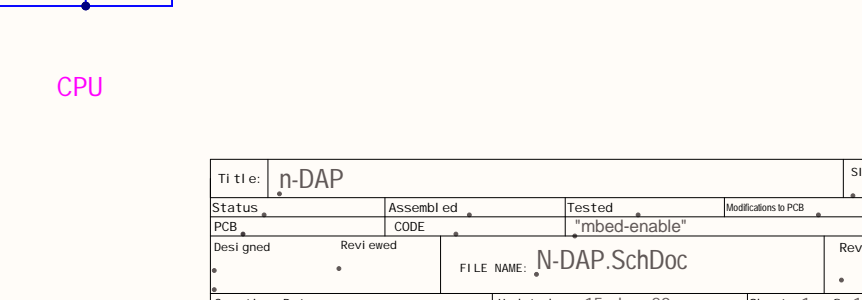
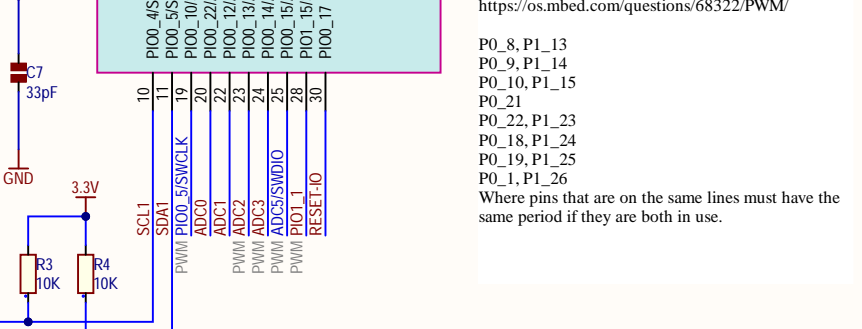
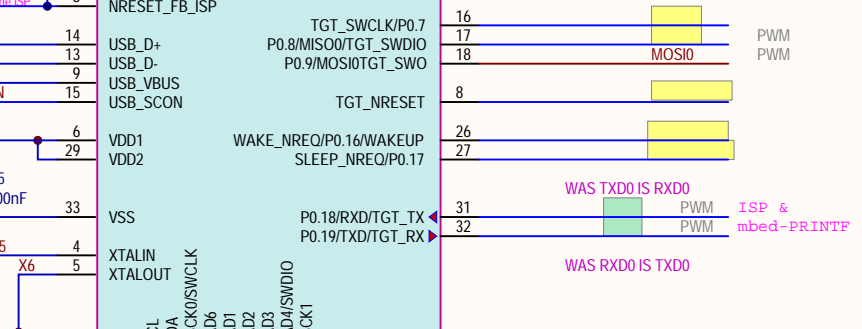
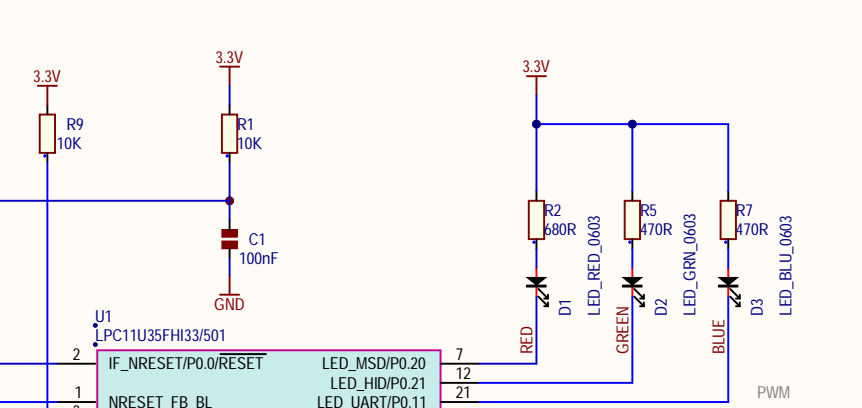
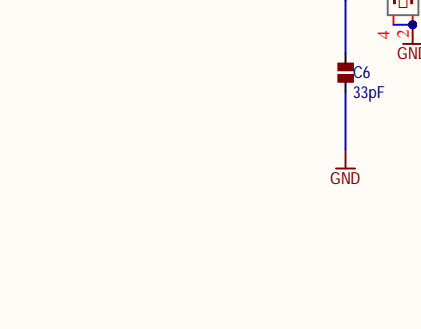
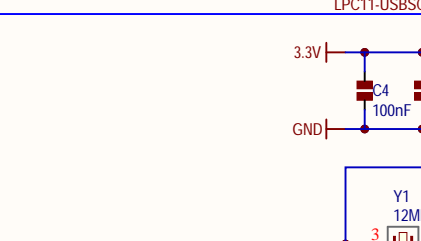


TO ENTER ISP MODE:
PRESS BOTH BUTTONS, THEN RELEASE FIRST SW3(RESET)
RELEASE SW4(ISP)
IF THE BOARD IS CONNECTED TO A HOST VIA USB,
IT WILL APPEAR AS CRP DISABLD()

If flashed with CMSIS-DAP interface firmware,
Then Pressing SWx while powering:
N_RESET_FB_BL - mbed bootloader
N_RESET_FB_ISP - ROM MSC bootloader

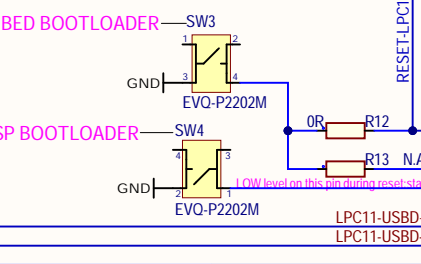

<https://os.mbed.com/questions/68322/PWM/>

P0_8, P1_13
P0_9, P1_14
P0_10, P1_15
P0_21
P0_22, P1_23
P0_18, P1_24
P0_19, P1_25
P0_1, P1_26

Where pins that are on the same lines must have the same period if they are both in use.