2020 EDITION

PRODUCT CATALOGUE

Quik SERIES

LAFIT®

#BeTheLight

LED LIGHTING SOLUTION

ABOUT US

LAFIT LIGHTING is one of the leading manufacturers in the architectural lighting market, featuring a comprehensive catalogue of proven quality, high-reliability lighting fixtures capable of offering the industry professionals the most innovative and alternative solutions at all times.
A full range of acclaimed architectural lighting products.

We are proud to be an example of the **Made in INDIA** branding ,with a flair for innovation & a profound appreciation of the architectural project. For the last two decades, we have been unstoppable, always focused on realizing new technical objectives & increasing product performance, with particular attention on our human capital, a team of highly trained, motivated people.

Lafit lighting always involves more resources in Research, Innovation & Design. The products studied and designed at Research & Development center by experts subject to constant and meticulous quality.

Our products can meet the multiple needs of the architectural & design studies and the most demanding & refined customers. The business philosophy is the same Lafit Lighting have always done. Design & Delivery of the whole system & not the individual product.

Our goal has always been to offer our customers a first-class product backed by unparalleled service, focused on solving our clients illumination challenges.

LAFIT®
#BeTheLight

THE POWER OF
Smart lighting
WITH ARCHITECTURAL DESIGNER RANGE

CHOOSE
#BeTheLight
RIGHT

Lights on your fingertips
Smart lighting for a reason.
From smart light to smart control.
With **SMARTNEXT** you are able to manage indoor lighting from your smart device.

Our **BRILLO Range**, a series dedicated to the building the most updated state of the art technology centric products in the Architectural range is now combatable with **SMARTNEXT** technology.

Contents

Down Lights Spotlights	Recessed Fixed / Adjustable Downlights / Spotlights	4
	Recessed Linear Spotlights	24
	Recessed Wall Washer	28
	Recessed Waterproof Spotlights	29
	Recessed Rimless Spotlights	31
	Recessed Modular Spotlights	32
	Retrofit Lamps	38
	Receesed Cabinet Spotlights	43
	Receesed Panel Lights	48
Surface Series	Surface Cabinet Spotlights	52
	Surface Lights	55
Track Lights	Track Lights	59
Office Lights	Office Lights	60
Indoor Lights	Indoor Fixture	63
	T5 Battens	65
Bulkhead Lights	Outdoor Lights	67
	Outdoor Bulkhead Lights	68
UV Lamps	UV+ Ozone Disinfection Lamps	72
Outdoor Lights	Foot Lights	74
	Underwater Lights	77
	Flood Lights	79
	Street Lights	80
	Highbay Lights	81
Profile Lights	Profile Lights	82
Strip Lights	Strip Lights	103
Strip Lights	Power Supply	104
	Controllers	106

GRIMLOCK - A

LFSL1104X

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE

TUNEABLE

DIMMABLE

TILTABLE 30°

Accessories

Honeycomb

Beam Soft

Snoot

	Wattage (W)	24W	33W	40W
LUMEN OUTPUT	N 4000K	2358	3128	4048
	W 3000K	2358	2924	3784
	W 2700K	2196	2720	3520
SYSTEM EFFICIENCY	No. of LEDs	1	1	1
	THD (%)	20	20	20
	Power Factor	>0.95	>0.95	>0.95
	Driver Rating	36V DC 600mA	36V DC 700mA	36V DC 1000mA
DIMENSIONS (in mm)	Diameter X	130	130	138
	Height H	102	102	113
	Cutout Ø	115	115	125

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	BAG
	Dimming	Triac / Analog / Dali

BEAM ANGLES



COLOUR OPTIONS	Housing	White



CRI	TEMP	IP RATING	INPUT
80	0-45°	IP-20	240V/ 50Hz

GRIMLOCK - B

LFSL1105X

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE

TUNEABLE

DIMMABLE

TILTABLE 30°

ROTATABLE 355°

Accessories



Honeycomb

Beam Soft

Snoot

			24W	33W
LUMEN OUTPUT	N	4000K	2358	3128
	W	3000K	2358	2924
	W	2700K	2196	2720
SYSTEM EFFICIENCY		No. of LEDs	1	1
		THD (%)	20	20
		Power Factor	>0.95	>0.95
		Driver Rating	36V DC 600mA	36V DC 700mA
DIMENSIONS (in mm)		Diameter X	112	112
		Height H	97	97
		Cutout Ø	102	102

SYSTEM SPECS

Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES

24W,33W

15° 24° 38° 60°

COLOUR OPTIONS

Housing: White



CRI	TEMP	IP RATING	INPUT
80	0-45°	IP-20	240V/ 50Hz

LAFIT

GRIMLOCK - C

LFSL1106X

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE

TUNEABLE

DIMMABLE

Accessories

Honeycomb

Beam Soft

Snoot

	Wattage (W)		24W	33W
LUMEN OUTPUT	N	4000K	2358	3128
	W	3000K	2358	2924
	W	2700K	2196	2720
SYSTEM EFFICIENCY	No. of LEDs		1	1
	THD (%)		20	20
	Power Factor		>0.95	>0.95
	Driver Rating		36V DC 600mA	36V DC 700mA
DIMENSIONS (in mm)	Diameter	X	130	130
	Height	H	117	117
	Cutout	Ø	115	115

SYSTEM SPECS

Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali



BEAM ANGLES



COLOUR OPTIONS

Housing	White

CRI	TEMP	IP RATING	INPUT
80	0-45°	IP-20	240V/ 50Hz

LAFIT

BAFFLE

LFDL1112R

SMD DOWN LIGHT

DIMMABLE

TILTABLE 20°

Wattage (W)		11W
LUMEN OUTPUT	C 6000K	1045
	N 4000K	990
	W 3000K	935

SYSTEM EFFICIENCY	No. of LEDs	SMD - 24
	THD (%)	-
	Power Factor	0.5
	Driver Rating	25V DC 350mA

DIMENSIONS (in mm)	Diameter	X	92
	Height	H	44
	Cutout	Ø	80

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Eaglerise

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

LAFIT

BRAVO

LFDL1075R

RIMLESS RECESSED FIXED DOWNLIGHT

REMOTE TUNEABLE

SWITCH TUNEABLE

SWITCH DIMMABLE

	Wattage (W)	8W	16W	24W
LUMEN OUTPUT	C 6500K	540	1290	2100
	N 4000K	535	1274	2066
	W 3000K	524	1248	2023
SYSTEM EFFICIENCY	No. of LEDs	22	48	72
	THD (%)	20	20	10
	Power Factor	0.9	0.9	0.9
	Driver Rating	30-40V DC 200mA	30-40V DC 350mA	30-40V DC 600mA
DIMENSIONS (in mm)	Diameter X	90	135	165
	Height H	35	35	35
	Cutout Ø	82	127	156

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit
Dimming	Switch / Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BRAVO

LFDL1075S

RIMLESS RECESSED FIXED DOWNLIGHT

REMOTE TUNEABLE

SWITCH TUNEABLE

SWITCH DIMMABLE

	Wattage (W)	8W	16W	24W
LUMEN OUTPUT	C 6500K	540	1290	2100
	N 4000K	535	1274	2066
	W 3000K	524	1248	2023
SYSTEM EFFICIENCY	No. of LEDs	22	48	72
	THD (%)	20	20	10
	Power Factor	0.9	0.9	0.9
	Driver Rating	30-40V DC 200mA	30-40V DC 350mA	30-40V DC 600mA
DIMENSIONS (in mm)	Size L	90	135	165
	Size W	90	135	165
	Height H	35	35	35
	Cutout L	82	127	156
	Cutout W	82	127	156

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit
Dimming	Switch / Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BLEACH

LFDL1062R

RECESSED FIXED DOWNLIGHT

REMOTE TUNEABLE

SWITCH TUNEABLE

SWITCH DIMMABLE

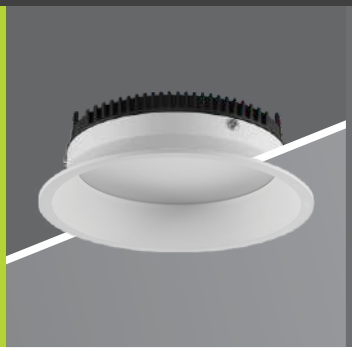

	Wattage (W)		8W	16W	24W
LUMEN OUTPUT	C	6500K	540	1290	2100
	N	4000K	535	1274	2066
	W	3000K	524	1248	2023
SYSTEM EFFICIENCY	No. of LEDs		21	48	72
	THD (%)		20	20	20
	Power Factor		0.9	0.9	0.9
	Driver Rating		30-40V DC 200mA	30-40V DC 350mA	30-40V DC 600mA
DIMENSIONS (in mm)	Diameter	X	120	155	175
	Height	H	52	52	52
	Cutout	Ø	110	145	165

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit
Dimming	Switch / Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BLEACH

LFDL1062S

RECESSED FIXED DOWNLIGHT

REMOTE TUNEABLE

SWITCH TUNEABLE

SWITCH DIMMABLE

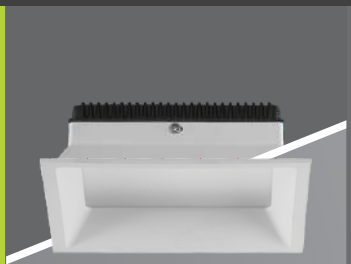

			8W	16W	24W
	Wattage (W)				
LUMEN OUTPUT	C	6500K	540	1290	2100
	N	4000K	535	1274	2066
	W	3000K	524	1248	2023
SYSTEM EFFICIENCY	No. of LEDs		21	48	72
	THD (%)		20	20	20
	Power Factor		0.9	0.9	0.9
	Driver Rating		30-40V DC 200mA	30-40V DC 350mA	30-40V DC 600mA
DIMENSIONS (in mm)	Size	L	110	155	185
		W	110	155	185
	Height	H	52	52	52
	Cutout	L	100	145	175
		W	100	145	175

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit
Dimming	Switch / Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BEAT

LFDL1074R

RECESSED FIXED DOWNLIGHT

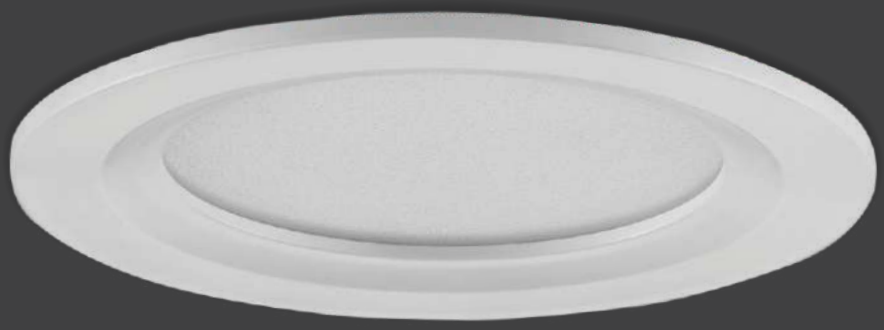

REMOTE TUNEABLE

SWITCH TUNEABLE

SWITCH DIMMABLE

SUPER SLIM

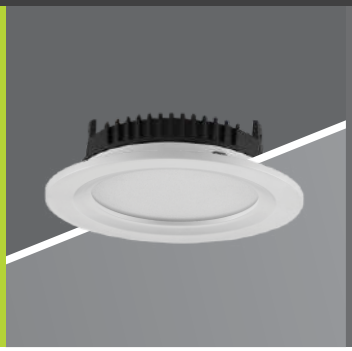

		Wattage (W)	8W	16W	24W
LUMEN OUTPUT	C	6500K	540	1290	2100
	N	4000K	535	1274	2066
	W	3000K	524	1248	2023
SYSTEM EFFICIENCY		No. of LEDs	21	48	72
		THD (%)	20	20	20
		Power Factor	0.9	0.9	0.9
		Driver Rating	30-40V DC 200mA	30-40V DC 350mA	30-40V DC 600mA
DIMENSIONS (in mm)		Diameter X	110	150	180
		Height H	30	30	30
		Cutout Ø	80	130	160

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit
Dimming	Switch / Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BEAT

LFDL1074S

RECESSED FIXED DOWNLIGHT

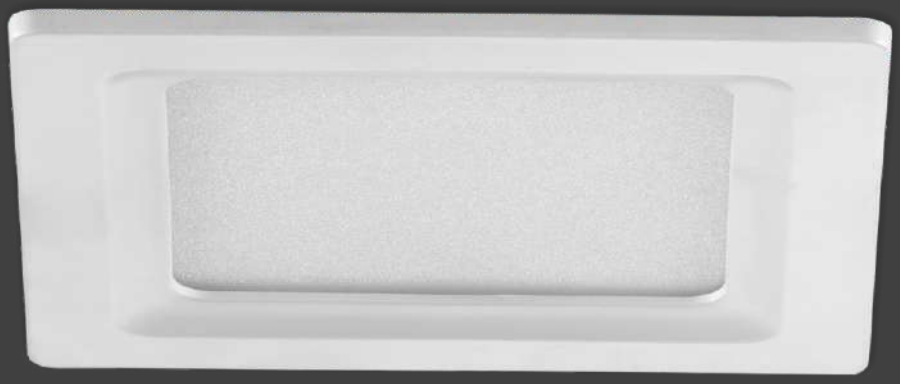

REMOTE TUNEABLE

SWITCH TUNEABLE

SWITCH DIMMABLE

SUPER SLIM

		Wattage (W)	8W	16W	24W
LUMEN OUTPUT	C	6500K	540	1290	2100
	N	4000K	535	1274	2066
	W	3000K	524	1248	2023
SYSTEM EFFICIENCY		No. of LEDs	21	48	72
		THD (%)	20	20	20
		Power Factor	0.9	0.9	0.9
		Driver Rating	30-40V DC 200mA	30-40V DC 350mA	30-40V DC 600mA
DIMENSIONS (in mm)		Size L	110	150	180
		W	110	150	180
		Height H	30	30	30
		Cutout L	80	130	160
		W	80	130	160

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit
Dimming	Switch / Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ISHAN

LFDL1010R

RECESSED FIXED DOWNLIGHT

TUNEABLE

DIMMABLE

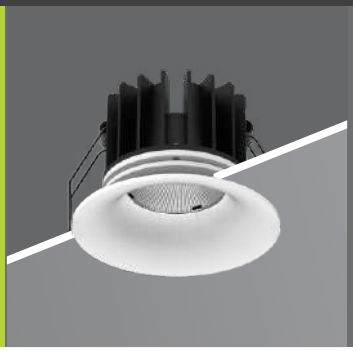

		Wattage (W)	7W	9W	12W	15W	18W	22W
LUMEN OUTPUT	C	6500K	NA	NA	NA	NA	NA	NA
	N	4000K	641	824	1215	1500	1875	2063
	W	3000K	594	763	1134	1350	1753	2063
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1	1	1
		THD (%)	-	<55	60	60	60	10
		Power Factor	0.5	0.8	0.85	0.85	0.85	0.95
		Driver Rating	38V DC 150mA	28-40V DC 200mA	38V DC 300mA	21-42V DC 350mA	38V DC 400mA	36V DC 500mA
DIMENSIONS (in mm)		Diameter X	70	85	85	95	95	121
		Height H	59	64	64	80	80	99
		Cutout Ø	62	76	76	85	85	110

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips(7w/9w/12w)
	Fulham / BAG(15w/18w/22w)
Dimming	Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ZAIN

LFDL1036

RECESSED FIXED DOWNLIGHT

TUNEABLE

DIMMABLE

		Wattage (W)	10W	15W	20W	30W	40W	50W
LUMEN OUTPUT	C	6500K	992	1742	2669	3824	4884	5789
	N	4000K	960	1688	2590	3710	4739	5621
	W	3000K	936	1646	2526	3618	4622	5478
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1	1	1
		THD (%)	≥ 55	60	10	10	10	≥10
		Power Factor	0.8	0.85	0.97	0.98	0.98	0.95
		Driver Rating	28-40V DC 200mA	21-42V DC 350mA	27-40V DC 500mA	18-37V DC 750mA	18-38V DC 1000mA	18-44V DC 1200mA
DIMENSIONS (in mm)		Diameter X	86	115	142	169	217	217
		Height H	33	42	50	58	70	70
		Cutout Ø	75	105	130	155	200	200

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (10W),Fulham(15W), Fulham / BAG(20w,30w,40w,50w)
Dimming	Triac / Analog

BEAM ANGLES

15W	10W, 20W, 40W, 50W	30W
42°	50°	53°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SPIRO

LFSL892A

RECESSED ADJUSTABLE SPOTLIGHT

TILTABLE 30°

SUPER SLIM

		Wattage (W)	3W	7W	12W	18W
LUMEN OUTPUT	C	6500K	343	855	1432	2524
	N	4000K	338	842	1429	2517
	W	3000K	325	835	1415	2504
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1
		THD (%)	-	-	-	-
		Power Factor	0.5	0.8	>0.85	>0.9
		Driver Rating	9V DC 300mA	22V DC 250mA	38V DC 250mA	58V DC 300mA
DIMENSIONS (in mm)		Diameter X	64	85	108	128
		Height H	27	39	45	54
		Cutout Ø	55	70	92	117

SYSTEM SPECS	
Housing	Aluminium
LED Make	Bridgelux
Driver Brand	Lafit
Dimming	Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

PASTURE

LFDL1002

RECESSED ADJUSTABLE SPOTLIGHT

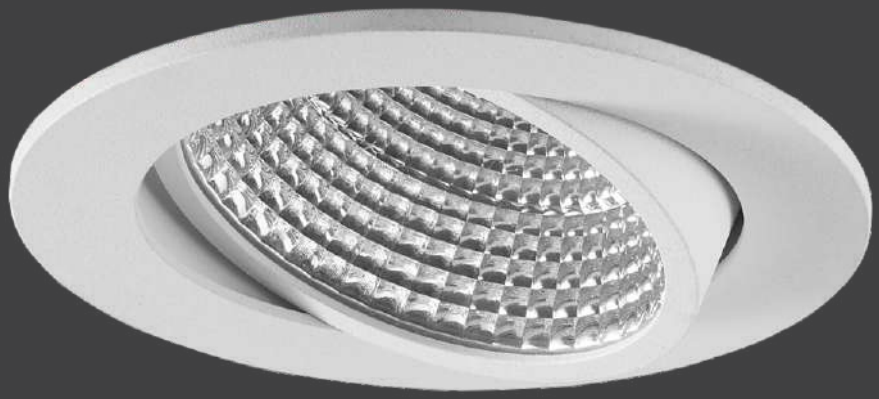

TUNEABLE

DIMMABLE

TILTABLE 30°

LFDL1002R

	Wattage (W)	3W	7W	12W	18W	30W	40W
LUMEN OUTPUT	C 6500K	201	646	1179	1795	2684	3698
	N 4000K	177	614	1709	1709	2573	3578
	W 3000K	161	554	1062	1638	2523	3478
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1
	THD (%)	<15	<15	<60	<60	<10	<10
	Power Factor	0.6	0.9	>0.85	>0.85	>0.93	0.98
	Driver Rating	9V 300mA	21V 300mA	37V DC 250mA	56V DC 300mA	37V DC 700mA	38V DC 1000mA
DIMENSIONS (in mm)	Diameter X	64	85	85	108	160	170
	Height H	40	60	70	75	102	120
	Cutout Ø	55	70	70	90	135	150

SYSTEM SPECS	
Housing	Aluminium
LED Make	Bridgelux
Driver Brand	Lafit (3W, 7W) / Fulham(40W) Philips (12W, 18W, 30W)
Dimming	Triac / Analog

BEAM ANGLES

3W, 7W, 12W, 18W, 30W, 40W

24° & 60°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

MATEO

LFSL929R

RECESSED FIXED DOWNLIGHT

TUNEABLE

DIMMABLE



		Wattage (W)	3W	5W	7W	9W	12W
LUMEN OUTPUT	N	4000K	190	390	641	824	1098
	W	3000K	190	354	594	763	1018
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1	1
		THD (%)	-	-	-	55	55
		Power Factor	NA	0.5	0.5	0.8	0.8
		Driver Rating	2.5-5V DC 700mA	38-58V DC 120mA	27-40V DC 150mA	28-40V DC 200mA	28-40V DC 250mA
DIMENSIONS (in mm)		Diameter X	46	46	62	62	62
		Height H	60	60	78	93	107
		Cutout Ø	40	40	55	55	55

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Lafit (3W,5W), Philips/BAG (7W, 9W, 12W)
Dimming	Triac / Analog (3w,5w Non-dimmable)

BEAM ANGLES

COLOUR OPTIONS: White | Black | Copper | Ch. Gold



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

CREDAI

LFSL926R

RECESSED FIXED DOWNLIGHT

SWITCH TUNEABLE

DIMMABLE

IP32
12-22w

		Wattage (W)	7W	9W	12W	15W	18W	22W	30W
LUMEN OUTPUT	N	4000K	641	824	1215	1500	1875	2060	2653
	W	3000K	594	763	1134	1350	1753	2060	2653
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1	1	1	1
		THD (%)	-	<55	<55	60	60	10	10
		Power Factor	NA	0.8	0.85	0.8	0.85	0.95	0.95
		Driver Rating	27-40VDC 150mA	28-40VDC 200mA	38VDC 300mA	21-42VDC 350mA	38VDC 400mA	36VDC 500mA	37VDC 700mA
DIMENSIONS (in mm)		Diameter X	74	85	85	100	100	120	120
		Height H	68	78	78	95	95	115	115
		Cutout Ø	66	76	76	90	90	110	110

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips/Bag(7w,9w,12w) Fulham/Bag(15w,18w,22w,30w)
Dimming	Triac / Analog

BEAM ANGLES

7w — 24°

9W, 12W, 15W, 18W, 22W — 38°



COLOUR OPTIONS							
Housing	White	Black					
Inner-Ring	White	Black	Chrome	Copper	Ch. Gold	Bronze	

CRI	TEMP	IP RATING		INPUT
		7w	12-30w	
80	0-50°	IP-20	IP-32	240V/ 50Hz

CHEER

LFSL1004

RECESSED FIXED DOWNLIGHT

SWITCH TUNEABLE

DIMMABLE

3W

		Wattage (W)	3W	7W	30W
LUMEN OUTPUT	C	6500K	201	645	2685
	N	4000K	177	615	2575
	W	3000K	161	555	2425
SYSTEM EFFICIENCY		No. of LEDs	1	1	1
		THD (%)	-	55	<10
		Power Factor	0.6	0.8	>0.93
		Driver Rating	9V DC 300mA	21V DC 300mA	37V DC 700mA
DIMENSIONS (in mm)		Diameter X	37	59	118
		Height H	34	64	130
		Cutout Ø	30	51	108

SYSTEM SPECS	
Housing	Aluminium
LED Make	Bridgelux
Driver Brand	Lafit (3W,7w) / Bag (30W)
	Philips (7W, 12W, 18W)
Dimming	Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

IKER

LFSL927R

RECESSED FIXED DOWNLIGHT

TUNEABLE

DIMMABLE

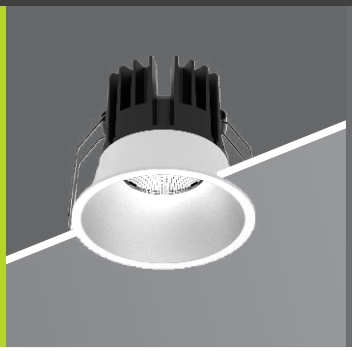

		Wattage (W)	7W	9W	12W	15W	18W	22W	30W
LUMEN OUTPUT	N	4000K	641	824	1215	1500	1875	2063	2653
	W	3000K	594	736	1134	1350	1753	2063	2653
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1	1	1	1
		THD (%)	-	<55	<55	60	60	10	10
		Power Factor	NA	0.8	0.85	0.85	0.85	0.95	0.93
		Driver Rating	27-40VDC 150mA	28-40VDC 200mA	38VDC 300mA	21-42VDC 350mA	38VDC 400mA	36VDC 500mA	37VDC 700mA
DIMENSIONS (in mm)		Diameter X	68	85	85	95	95	120	120
		Height H	65	75	75	93	93	114	114
		Cutout Ø	60	75	75	85	85	110	110

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips/Bag (7w,9w,12w) Fulham/Bag(15w,18w,22w,30w)
Dimming	Triac / Analog

BEAM ANGLES



COLOUR OPTIONS

Housing	White	Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



BLESS

LFDL1003

RECESSED ADJUSTABLE SPOTLIGHT

SWITCH TUNEABLE

DIMMABLE

TILTABLE 30°

	Wattage (W)	3W	7W	12W	18W	24W	30W	40W
LUMEN OUTPUT	C 6500K	201	646	1163	1768	2236	2684	3698
	N 4000K	176	614	1125	1657	2112	2573	3578
	W 3000K	161	554	1077	1604	2009	2723	3478
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1	1
	THD (%)	>15	>15	>60	>60	20	>10	10
	Power Factor	≥0.6	0.9	>0.85	>0.85	0.98	>0.93	0.98
	Driver Rating	9V 300mA	21V 300mA	37V DC 250mA	56V DC 300mA	37V DC 610mA	37V DC 700mA	38V DC 1000mA
DIMENSIONS (in mm)	Diameter X	64	85	85	108	136	160	170
	Height H	38	60	70	75	80	102	120
	Cutout Ø	56	70	70	90	115	135	150

SYSTEM SPECS	
Housing	Aluminium
LED Make	Bridgelux
Driver Brand	Lafit (3W, 7W), Fulham (24W, 40W), Philips (12W, 18W, 30W)
Dimming	Triac / Analog

BEAM ANGLES

3W, 7W, 12W, 18W, 24W, 30W, 40W



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ALTROS

LFDL106

RECESSED FIXED DOWNLIGHT

DIMMABLE

	Wattage (W)	9W	15W	25W
LUMEN OUTPUT	C 6500K	824	1605	2798
	N 4000K	824	1605	2798
	W 3000K	755	1471	2564
SYSTEM EFFICIENCY	No. of LEDs	6	12	24
	THD (%)	60	60	10
	Power Factor	0.85	0.85	0.97
	Driver Rating	18V DC 350mA	37V DC 350mA	37V DC 610mA
DIMENSIONS (in mm)	Diameter X	120	175	175
	Height H	55	81	88
	Cutout Ø	98	157	157

SYSTEM SPECS	
Housing	Aluminium
LED Make	Bridgelux
Driver Brand	Philips / Fulham
Dimming	Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ORCUS

LFSL1049

RECESSED LINEAR SPOTLIGHTS

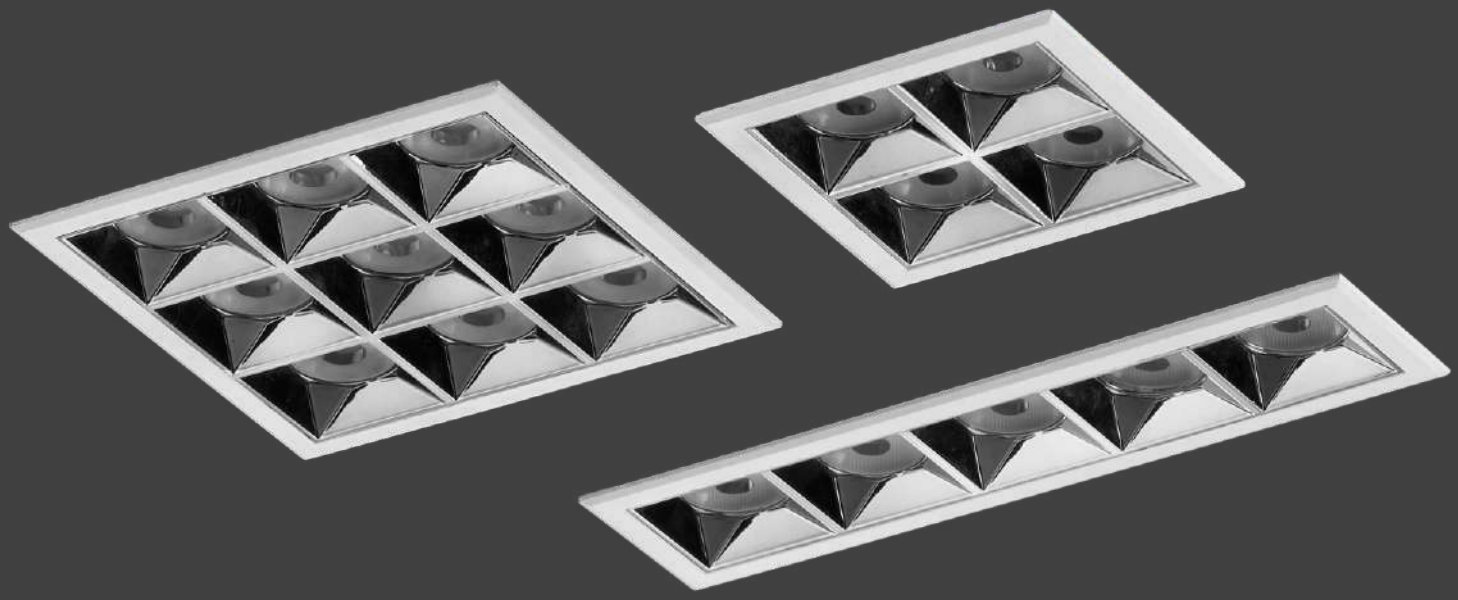

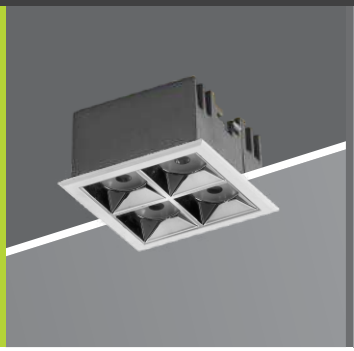

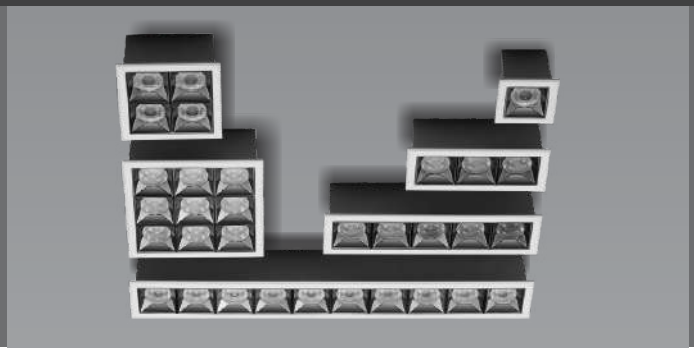

		Wattage (W)	5W	15W	20W	25W	45W	50W
LUMEN OUTPUT	N	4000K	447	1617	2156	2696	4852	5392
	W	3000K	414	1497	1997	2496	4492	4992
SYSTEM EFFICIENCY		No. of LEDs	1	3	4	5	9	10
		THD (%)	-	60	10	10	10	10
		Power Factor	0.5	0.85	0.9	0.93	0.95	0.9
		Driver Rating	2-10V DC 500mA	12-21V DC 700mA	18-27V DC 700mA	37V DC 700mA	36-75V DC 700mA	18-44V DC 1500mA
DIMENSIONS (in mm)		Diameter L	54	130	92	206	130	396
		W	54	54	92	54	130	54
		Height H	50	52	52	52	52	52
		Cutout L	49	125	87	201	125	390
		W	49	49	87	49	125	49

SYSTEM SPECS	
Housing	Aluminium
LED Make	Osram
Driver Brand	Lafit (5W), Fulham (15W) Philips (20W, 25W, 45W, 50W)
Dimming	Triac / Analog

BEAM ANGLES

5W, 15W, 20W, 25W, 45W, 50W

38°



CRI	TEMP	IP RATING	INPUT
70	0-50°	IP-20	240V/ 50Hz

ORCUS

LFSS1049

SURFACE SPOTLIGHTS

		Wattage (W)	15W	40W
LUMEN OUTPUT	C	6500K	1490	4188
	N	4000K	1490	4188
	W	3000K	1411	3969
SYSTEM EFFICIENCY		No. of LEDs	4	9
		THD (%)	60	20
		Power Factor	0.9	0.95
		Driver Rating	30-38V DC 350mA	25-40V DC 900mA
DIMENSIONS (in mm)		Diameter L	82	120
		W	82	120
		Height H	80	90

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
70	0-50°	IP-20	240V/ 50Hz

ANGLE

LFSL930

RECESSED LINEAR SPOTLIGHTS

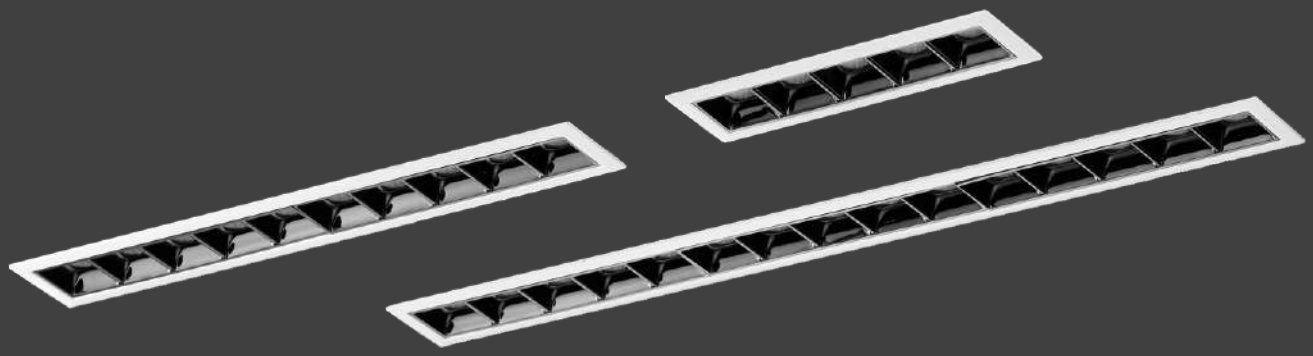

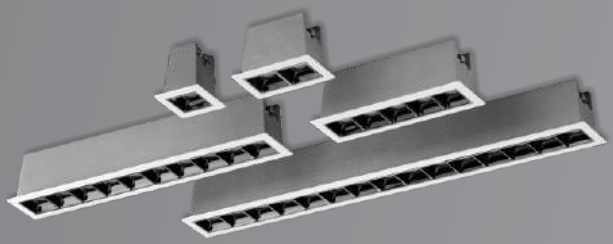

	Wattage (W)	2W	5W	10W	20W
LUMEN OUTPUT	N 4000K	98	342	1067	1952
	W 3000K	91	319	997	1824
SYSTEM EFFICIENCY	No. of LEDs	1	2	5	10
	THD (%)	-	-	60	10
	Power Factor	NA	>0.9	0.85	0.97
	Driver Rating	3-10V DC 300mA	9.3V DC 510mA	12-21V DC 640mA	18-36V DC 610mA
DIMENSIONS (in mm)	Diameter L	45	75	150	280
	W	45	45	45	45
	Height H	50	50	50	50
	Cutout L	35	65	135	265
	W	35	35	35	35

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Allooking (5W), Fulham (10W, 20W) Philips (2W)
Dimming	Triac / Analog (2W, 5W Non dimmable)



BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
70	0-50°	IP-20	240V/ 50Hz

ANGLE

LFSL930A

RECESSED LINEAR WALLWASHER

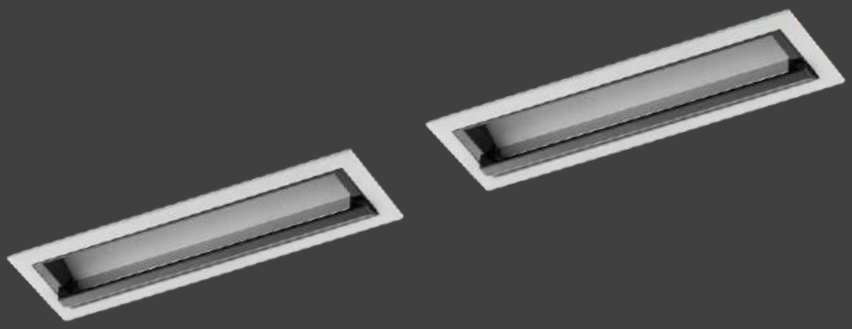

WALL WASHER

DIMMABLE

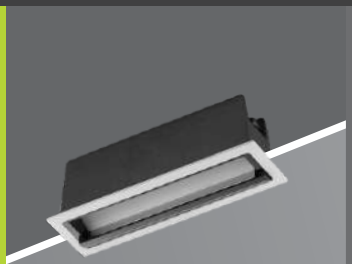

	Wattage (W)		10W	20W
LUMEN OUTPUT	N	4000K	1196	2268
	W	3000K	1101	2088
SYSTEM EFFICIENCY	No. of LEDs		5	10
	THD (%)		60	10
	Power Factor		0.85	0.97
	Driver Rating		12-21V DC 640mA	18-36V DC 610mA
DIMENSIONS (in mm)	Diameter	L	147	280
		W	45	45
	Height	H	49	49
	Cutout	L	140	273
		W	37	37

SYSTEM SPECS	
Housing	Aluminium
LED Make	Osram
Driver Brand	Fulham
Dimming	Triac / Analog



CRI	TEMP	IP RATING	INPUT
70	0-50°	IP-20	240V/ 50Hz

CANDE

LFDL854A

WALL WASHER DOWNLIGHT

ZOOM TILT | WALL WASHER | TUNEABLE | DIMMABLE | ROTATABLE 350° | ZOOM 60°

	Wattage (W)	10W	15W	25W	35W
LUMEN OUTPUT	C 6500K	992	1742	3190	4258
	N 4000K	960	1688	3095	4132
	W 3000K	936	1646	3019	4030
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	<55	60	10	10
	Power Factor	0.8	0.85	0.97	0.98
	Driver Rating	28-40V DC 200mA	21-42V DC 350mA	18-36V DC 610mA	21-38V DC 850mA
DIMENSIONS (in mm)	Diameter X	94	94	148	148
	Height H	72	72	121	121
	Cutout Ø	85	85	138	138

SYSTEM SPECS	
Housing	Aluminum
LED Make	Citizen - JAPAN
Driver Brand	Philips (10W)
	Fulham (15W,25W, 35W)

BEAM ANGLES: 10W, 15W, 25W, 35W — 40°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

REVA

LFSL1051, LFOD1051

RECESSED WATERPROOF SPOTLIGHT

IP65 WATER PROOF — LFOD1051

IP54 WATER PROOF — LFSL1051

	Wattage (W)	10W	20W	30W	40W
LUMEN OUTPUT	C 6500K	1062	2205	2940	4160
	N 4000K	1062	2063	2751	4160
	W 3000K	991	2063	2751	3872
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	<55	≤10	10	10
	Power Factor	0.8	0.85	0.98	0.98
	Driver Rating	28-40V DC 250mA	36V DC 500mA	18-37V DC 750mA	30-40V DC 1000mA
DIMENSIONS (in mm)	Diameter X	100	140	185	230
	Height H	75	90	112	128
	Cutout Ø	85	125	160	200

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (10W, 20W, 40W) Fulham (30W) Fulham (IP-65 All Wattages)

BEAM ANGLES

10W, 20W, 30W	40W
45°	30°



CRI	TEMP	IP RATING		INPUT
80	0-50°	IP-65 LFOD1051	IP-54 LFSL1051	240V/ 50Hz

NERVA

LFSL564

RECESSED WATERPROOF SPOTLIGHT

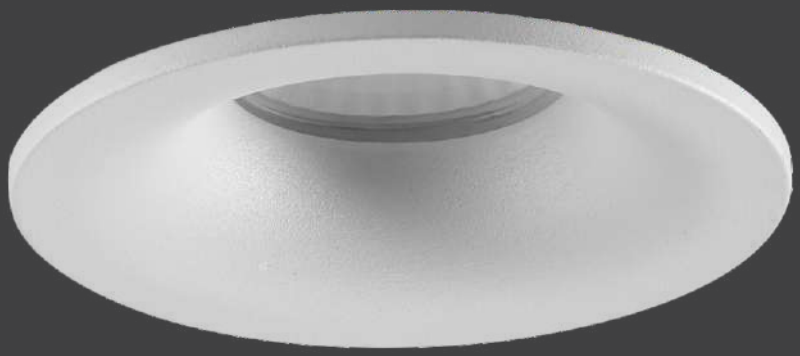

IP54
WATER PROOF

	Wattage (W)		7W
LUMEN OUTPUT	C	6500K	875
	N	4000K	840
	W	3000K	805

SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Power Factor	0.5
	Driver Rating	38V DC 150mA

DIMENSIONS (in mm)	Diameter	X	75
	Height	H	45
	Cutout	Ø	68

SYSTEM SPECS	Housing	Aluminium
	LED Make	Citizen - Japan
	Driver Brand	Philips

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-54	240V/ 50Hz

OPTIMUS

LFSL1058 A, B, C, D

TRIMLESS DOWNLIGHT

TUNEABLE

DIMMABLE



PUSH BUTTON
Outer Ring

Retrofit

	Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	C 6500K	750	938	1125	1500
	N 4000K	720	900	1080	1350
	W 3000K	672	840	1008	1260
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	-	<55	<55	60
	Power Factor	≥0.5	0.8	0.8	0.85
	Driver Rating	27-40V DC 150mA	28-40V DC 200mA	28-40V DC 250mA	21-42V DC 350mA
DIMENSIONS (in mm)	Diameter X	84	84	84	84
	Height H	106	106	120	137
	Cutout Ø	90	90	90	90

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (7W,9W,12W) / Fulham (15W)
Dimming	Triac / Analog

BEAM ANGLES

7W, 9W, 12W, 15W

15° 24° 36° 60°



COLOUR OPTIONS						
Housing	White	Black				
Reflector	White	Black	Chrome	Copper	Gold	

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

LAFIT

FEBIO

LFSL1055

RECESSED MODULAR SPOTLIGHT

TUNEABLE

DIMMABLE

TILTABLE 25°

Outer Ring

+

Retrofit

	Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	C 6500K	750	938	1125	1500
	N 4000K	720	900	1080	1350
	W 3000K	672	840	1008	1260
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	-	<55	<55	60
	Power Factor	≥0.5	0.8	0.8	0.85
	Driver Rating	27-40V DC 150mA	28-40V DC 200mA	28-40V DC 250mA	21-42V DC 350mA
DIMENSIONS (in mm)	Diameter X	79	79	79	79
	Height H	96	96	110	128
	Cutout Ø	70	70	70	70

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (7W, 9W, 12W) / Fulham (15W)
Dimming	Triac / Analog

BEAM ANGLES

7W, 9W, 12W, 15W

15° 24° 38° 60°



COLOUR OPTIONS						
Outer-Ring	White	Black				
Reflector	White	Black	Silver	Rose	Gold	

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

LAFIT

TESLA

LFSL1059 A

RECESSED MODULAR SPOTLIGHT (OVAL CUT)

TUNEABLE

DIMMABLE

TILTABLE 30°

OVAL CUT
Outer Ring

+

Retrofit

	Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	C 6500K	750	938	1125	1500
	N 4000K	720	900	1080	1350
	W 3000K	672	840	1008	1260
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	-	<55	<55	60
	Power Factor	≥0.5	0.8	0.8	0.85
	Driver Rating	27-40V DC 150mA	28-40V DC 200mA	28-40V DC 250mA	21-42V DC 350mA
DIMENSIONS (in mm)	Diameter X	79	79	79	79
	Height H	106	106	120	137
	Cutout Ø	70	70	70	70

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (7W, 9W, 12W) / Fulham (15W)
Dimming	Triac / Analog

BEAM ANGLES



COLOUR OPTIONS	
Outer-Ring	White
Housing	Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



TESLA

LFSL1059 B

RECESSED MODULAR SPOTLIGHT (PIN HOLE)

TUNEABLE

DIMMABLE

TILTABLE 30°

PIN HOLE
Outer Ring

+

Retrofit

	Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	C 6500K	750	938	1125	1500
	N 4000K	720	900	1080	1350
	W 3000K	672	840	1008	1260
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	-	<55	<55	60
	Power Factor	≥0.5	0.8	0.8	0.85
	Driver Rating	27-40V DC 150mA	28-40V DC 200mA	28-40V DC 250mA	21-42V DC 350mA
DIMENSIONS (in mm)	Diameter X	79	79	79	79
	Height H	86	86	110	128
	Cutout Ø	70	70	70	70

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (7W, 9W, 12W) / Fulham (15W)
Dimming	Triac / Analog

BEAM ANGLES



COLOUR OPTIONS

Outer-Ring	White
Housing	Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



BOTHO

LFGL664A

RECESSED GIMBLE LIGHT

TUNEABLE

DIMMABLE

TILTABLE 45°

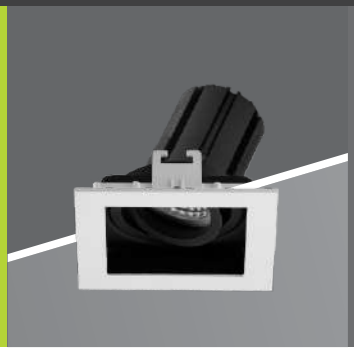

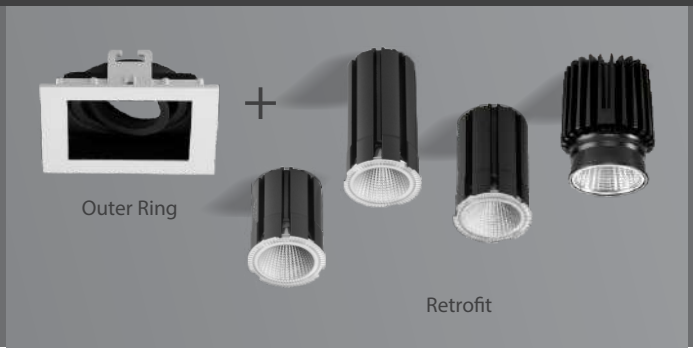

	Wattage (W)	7W	9W	12W	15W	20W
LUMEN OUTPUT	C 6500K	750	938	1125	1500	2026
	N 4000K	720	900	1080	1350	1967
	W 3000K	672	840	1008	1260	1918
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1
	THD (%)	-	<55	<55	60	-
	Power Factor	≥0.5	0.8	0.8	0.85	0.85
	Driver Rating	27-40V DC 150mA	28-40V DC 200mA	28-40V DC 250mA	21-42V DC 350mA	38V DC 400mA
DIMENSIONS (in mm)	Size L	100	100	100	100	100
	Size W	100	100	100	100	100
	Height H	90	90	107	107	117
	Cutout L	88	88	88	88	88
	Cutout W	88	88	88	88	88

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (7W, 9W, 12W) Fulham (15W, 20W)
Dimming	Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BOTHO

LFGL664B

RECESSED GIMBLE LIGHT

TUNEABLE

DIMMABLE

TILTABLE 45°

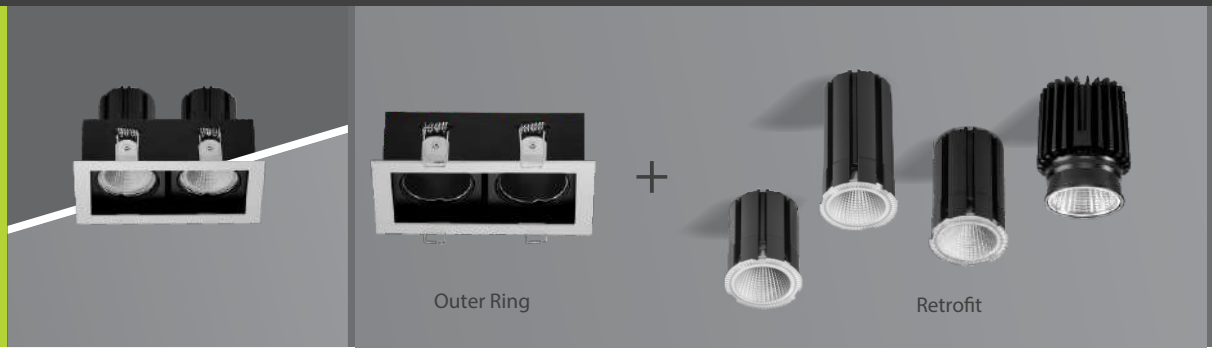

		Wattage (W)	14W	18W	24W	30W	40W
LUMEN OUTPUT	C	6500K	1500	1876	2250	3000	4052
	N	4000K	1440	1800	2160	2700	3934
	W	3000K	1344	1680	2016	2520	3836
SYSTEM EFFICIENCY		No. of LEDs	2	2	2	2	2
		THD (%)	-	<55	<55	60	-
		Power Factor	≥0.5	0.8	0.8	0.85	0.85
		Driver Rating	27-40V DC 150mA x 2	28-40V DC 200mA x 2	28-40V DC 250mA x 2	21-42V DC 350mA x 2	38V DC 400mA x 2
DIMENSIONS (in mm)	Size	L	185	185	185	185	185
		W	100	100	100	100	100
	Height	H	90	90	107	107	117
	Cutout	L	170	170	170	170	170
		W	88	88	88	88	88

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (14W,18W,24W)
	Fulham (30W,40W)
Dimming	Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BOTHO

LFGL664C

RECESSED GIMBLE LIGHT

TUNEABLE

DIMMABLE

TILTABLE 45°

Outer Ring

Retrofit

	Wattage (W)	21W	27W	36W	45W	60W
LUMEN OUTPUT	C 6500K	2250	2814	3375	4500	6078
	N 4000K	2160	2700	3240	4050	5901
	W 3000K	2016	2520	3024	3780	5754
SYSTEM EFFICIENCY	No. of LEDs	3	3	3	3	3
	THD (%)	-	<55	<55	60	-
	Power Factor	≥0.5	0.8	0.8	0.85	0.85
	Driver Rating	27-40V DC 150mA x 3	28-40V DC 200mA x 3	28-40V DC 250mA x 3	21-42V DC 350mA x 3	38V DC 400mA x 3
DIMENSIONS (in mm)	Size L	270	270	270	270	270
	Size W	100	100	100	100	100
	Height H	90	90	107	107	117
	Cutout L	252	252	252	252	252
	Cutout W	88	88	88	88	88

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (21W,27W,36W)
	Fulham (45W, 60W)
Dimming	Triac / Analog

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ARKA

LFRT1014

RETROFIT LAMP (GU10)

	Wattage (W)	7W
LUMEN OUTPUT	W 3000K	600
SYSTEM EFFICIENCY	No. of LEDs	Lens
	THD (%)	-
	Power Factor	0.9
	Driver Rating	IN-BUILT
DIMENSIONS (in mm)	Diameter X	50
	Height H	55

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	In-built



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	240V/ 50Hz

CONVEX

LFRT911

RETROFIT LAMP (GU10)

TRIAC DIMMABLE

	Wattage (W)	7W
LUMEN OUTPUT	W 3000K	510
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Power Factor	0.5
	Driver Rating	IN-BUILT
DIMENSIONS (in mm)	Diameter X	50
	Height H	55

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	In-built
	Dimming	Triac

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

RIONE

LFBL912X,N

CANDLE LAMP
(E14)

DIMMABLE

		Dimmable	Non-Dimmable
	Wattage (W)	5W	5W
LUMEN OUTPUT	W 3000K	400	400
SYSTEM EFFICIENCY	No. of LEDs	1	1
	THD (%)	-	-
	Driver Rating	IN-BUILT	IN-BUILT
DIMENSIONS (in mm)	Diameter X	37	37
	Height H	105	105

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	In-built
	Dimming	Triac

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ELIOR

LFRT1053

RETROFIT LAMP

TUNEABLE

DIMMABLE

		Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	C	6500K	750	938	1125	1500
	N	4000K	720	900	1080	1350
	W	3000K	672	840	1008	1260
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1
		THD (%)	-	<55	<55	60
		Power Factor	≥0.5	0.8	0.8	0.85
		Driver Rating	27-40V DC 150mA	28-40V DC 200mA	28-40V DC 250mA	21-42V DC 350mA
DIMENSIONS (in mm)		Diameter X	50	50	50	50
		Height H	70	70	82	100

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	Philips (7W, 9W, 12W) / Fulham (15W)
Dimming	Triac / Analog

BEAM ANGLES



COLOUR OPTIONS: Gray

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



NITSA

LFRT665

RETROFIT LAMP

TUNEABLE

DIMMABLE

	Wattage (W)		20W
LUMEN OUTPUT	C	6500K	2026
	N	4000K	1967
	W	3000K	1918
SYSTEM EFFICIENCY	No. of LEDs		1
	THD (%)		-
	Power Factor		0.85
	Driver Rating		38V DC 400mA
DIMENSIONS (in mm)	Diameter	X	72
	Height	H	103
	Top Ring	Y	50

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Fulham / Bag
	Dimming	Triac / Analog

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SHIELD

LFDL1076R

RECESSED WATERPROOF SPOTLIGHT

IP54
STEAM PROOF

Wattage (W)		6W
LUMEN OUTPUT	C 6500K	547
	N 4000K	520
	W 3000K	490

SYSTEM EFFICIENCY	No. of LEDs	14
	THD (%)	<20
	Power Factor	>0.5
	Driver Rating	42V DC 130mA

DIMENSIONS (in mm)	Diameter	X	85
	Height	H	26
	Cutout	Ø	75

SYSTEM SPECS	Housing	Polycarbonate
	LED Make	Epistar
	Driver Brand	Lafit

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-54	240V/ 50Hz

ATOM

LFSL1113R

CABINET SPOT LIGHT

SUPER SLIM

	Wattage (W)		2W
LUMEN OUTPUT	C	6500K	126
	N	4000K	118
	W	3000K	109

SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	
	Power Factor	-
	Driver Rating	9.5V DC / 95mA
	Surge	2.5kV

DIMENSIONS (in mm)	Dia.	Ø	41.5
		H	16.5
	Cutout	Ø	35

SYSTEM SPECS	Housing	Plastic + Aluminium
	LED Make	Epistar
	Driver Brand	LAFIT

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

MELROY

LFSL1038

RECESSED SPOTLIGHTS

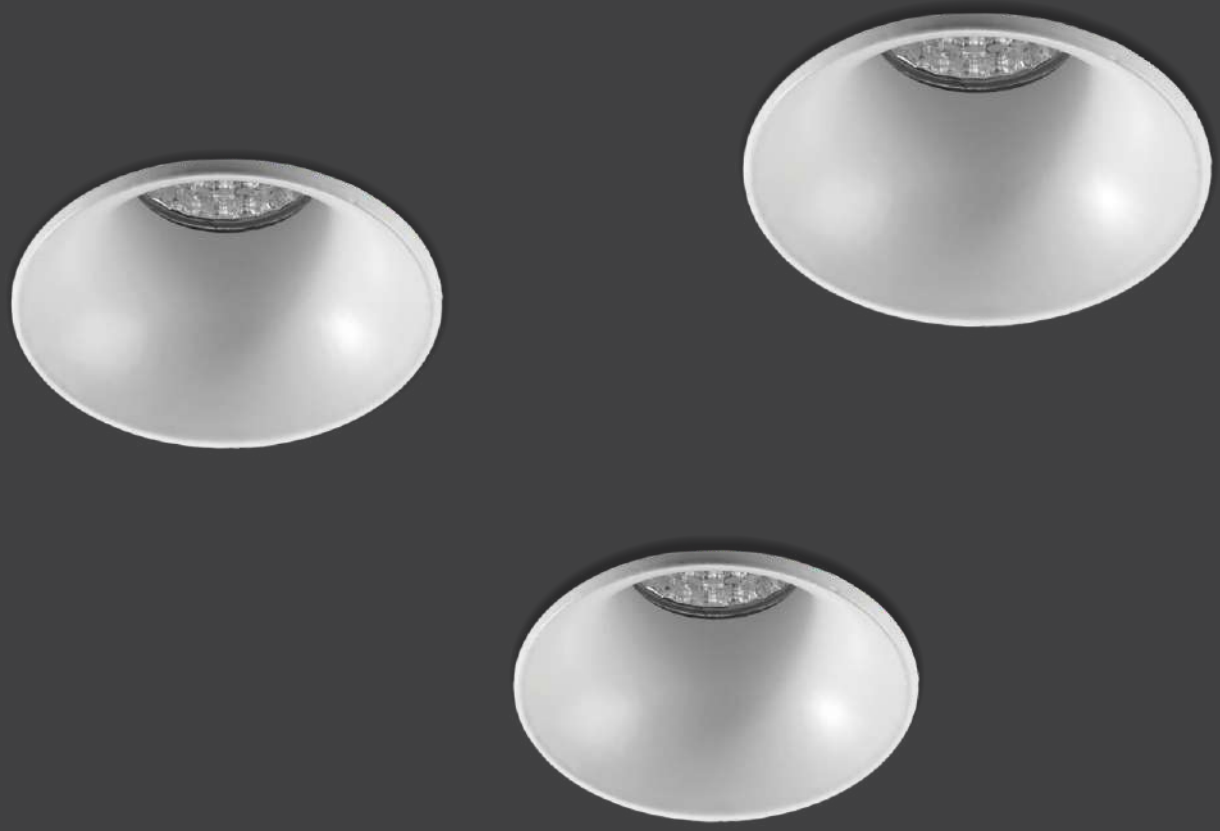

	Wattage (W)		3W	5W
LUMEN OUTPUT	C	6500K	230	431
	N	4000K	230	431
	W	3000K	230	431
SYSTEM EFFICIENCY	No. of LEDs		1	1
	THD (%)		-	-
	Power Factor		0.5	0.5
	Driver Rating		10VDC 250mA	15VDC 250mA
DIMENSIONS (in mm)	Diameter	X	35	45
	Height	H	38	41
	Cutout	Ø	30	40

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

PRISMA

LFSL889A

RECESSED SPOTLIGHTS

TILTABLE 25°

	Wattage (W)		3W
LUMEN OUTPUT	C	6500K	343
	N	4000K	335
	W	3000K	320
SYSTEM EFFICIENCY	No. of LEDs		1
	THD (%)		-
	Power Factor		0.5
	Driver Rating		9VDC 300mA
DIMENSIONS (in mm)	Diameter	X	51
	Height	H	18
	Cutout	Ø	45

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

GLEAM

LFSL774X

RECESSED SPOTLIGHTS

Wattage (W)		2W
LUMEN OUTPUT	C 6500K	99
	N 4000K	97
	W 3000K	95
	RGB	94

SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Power Factor	0.5
	Driver Rating	2-4VDC 200mA

DIMENSIONS (in mm)	Diameter	X	25
	Height	H	18
	Cutout	Ø	22

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

MYSIE

LFPL858R

PANEL LIGHT

	Wattage (W)	6W	15W	22W	30W
LUMEN OUTPUT	C 6500K	750	1735	2120	2720
	N 4000K	695	1708	2086	2600
	W 3000K	650	1585	1950	2475
SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD	SMD	SMD
	THD (%)	-	<55	<55	60
	Power Factor	≥0.5	0.8	0.8	0.85
	Driver Rating	16-20V DC 285mA	42-48V DC 285mA	50-59V DC 295mA	70-135V DC 350mA
DIMENSIONS (in mm)	Diameter X	120	170	225	300
	Height H	22	22	22	22
	Cutout Ø	112	160	210	285

SYSTEM SPECS	
Housing	Aluminium
LED Make	Everlight
Driver Brand	Lafit

BEAM ANGLES

6W, 15W, 22W, 30W

120°

COLOUR OPTIONS

Gray



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

MYSIE

LFPL858S

PANEL LIGHT

		Wattage (W)	6W	15W	22W	30W
LUMEN OUTPUT	C	6500K	750	1735	2120	2720
	N	4000K	695	1708	2086	2600
	W	3000K	650	1585	1950	2475
SYSTEM EFFICIENCY		No. of LEDs	SMD	SMD	SMD	SMD
		THD (%)	-	<55	<55	60
		Power Factor	0.5	0.8	0.8	0.85
		Driver Rating	16-20V DC 285mA	42-48V DC 285mA	50-59V DC 295mA	70-135V DC 350mA
DIMENSIONS (in mm)		Size L	120	170	225	300
		W	120	100	100	100
		Height H	22	22	22	22
		Cutout L	112	160	210	285
		W	112	160	210	285

SYSTEM SPECS	Housing	Aluminium
	LED Make	Everlight
	Driver Brand	Lafit

BEAM ANGLES

6W, 15W, 22W, 30W

120°

COLOUR OPTIONS

Gray

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



ASYA

LFPL524A

RECESSED PANEL LIGHT

SUITABLE FOR **2' x 2'** GRID CEILING

EDGELIT

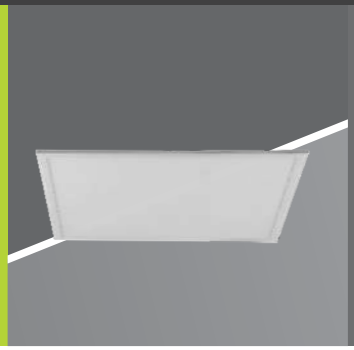

Wattage (W)		36W
LUMEN OUTPUT	C 6500K	4000
	N 4000K	3900
	W 3000K	3800
SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	10
	Power Factor	0.98
	Driver Rating	26-42V DC 1200mA
DIMENSIONS (in mm)	Size L	595
	W	595
	Height H	10

SYSTEM SPECS	Housing	Aluminium
	LED Make	Everlight / Bridgelux
	Driver Brand	Fulham / Bag

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

REGINA

LFPL861A

RECESSED PANEL LIGHT

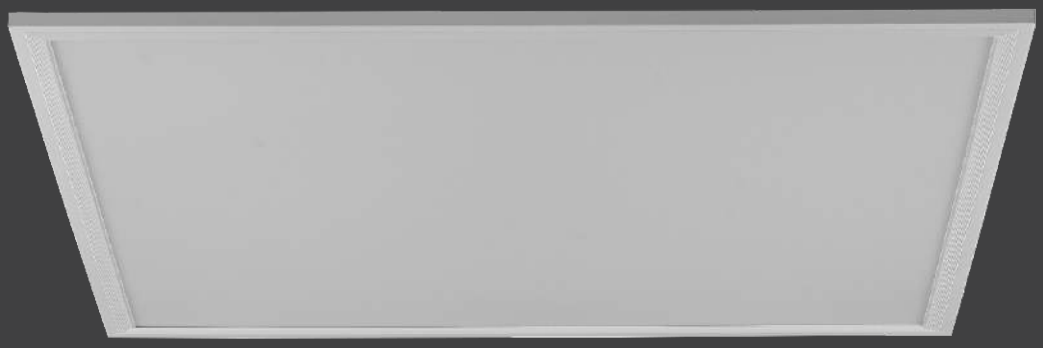

SUITABLE FOR **2' x 2'** GRID CEILING

BACKLIT

	Wattage (W)		36W
LUMEN OUTPUT	C	6500K	3500
	N	4000K	3400
	W	3000K	3300
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		10
	Power Factor		0.9
	Driver Rating		38V DC 1000mA
DIMENSIONS (in mm)	Size	L	595
		W	595
	Height	H	48
	Cutout	L	575
		W	575

SYSTEM SPECS	Housing	Plastic + Aluminium Frame
	LED Make	Everlight / Bridgelux
	Driver Brand	Fulham / Bag

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

PELSAN

LFSS921S

SURFACE SPOTLIGHTS

	Wattage (W)		3W
LUMEN OUTPUT	C	6500K	290
	N	4000K	290
	W	3000K	290
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Power Factor		0.8
	Driver Rating		DOB
DIMENSIONS (in mm)	Size	L	57
		W	57
	Height	H	9

SYSTEM SPECS	Housing	Aluminium
	LED Make	Edison
	Driver Brand	In-built



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

PELSAN

LFSS9218

SURFACE SPOTLIGHTS

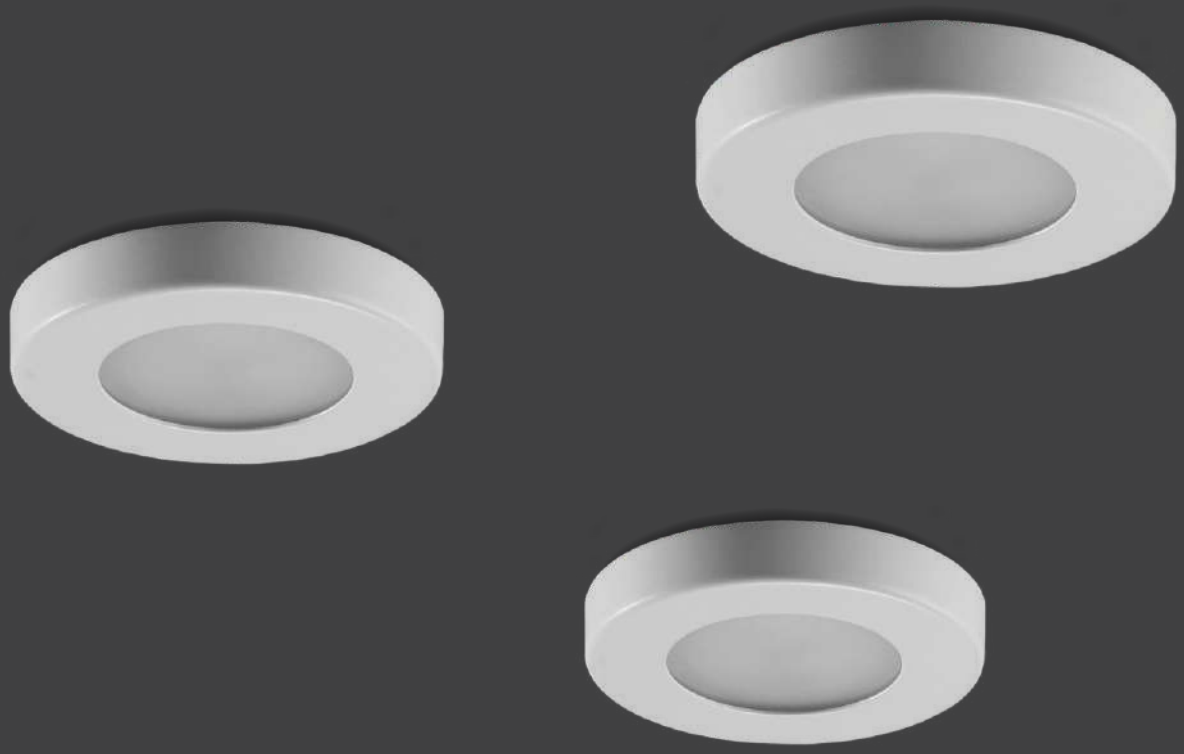

	Wattage (W)	3W
LUMEN OUTPUT	C 6500K	290
	N 4000K	290
	W 3000K	290
SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Power Factor	0.8
	Driver Rating	DOB
DIMENSIONS (in mm)	Diameter X	61
	Height H	9

SYSTEM SPECS	Housing	Aluminium
	LED Make	Edison
	Driver Brand	In-built



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

HALOSCAN

SURFACE SPOTLIGHTS

In-built Driver

	Wattage (W)	5W	7W
LUMEN OUTPUT	C 6500K	495	693
	N 4000K	470	668
	W 3000K	455	653
SYSTEM EFFICIENCY	No. of LEDs	Lens	Lens
	THD (%)	-	-
	Power Factor	0.8	0.8
	Driver Rating	AC COB	AC COB
DIMENSIONS (in mm)	Diameter X	75	95
	Height H	20	24

SYSTEM SPECS	Housing	Aluminium
	LED Make	Edison

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ALLEGRA

LFSS973R

SURFACE CEILING LIGHTS

		Wattage (W)	8W	15W	22W	30W
LUMEN OUTPUT	C	6500K	560	1170	1760	2400
	N	4000K	552	1125	1716	2340
	W	3000K	552	1125	1716	2340
SYSTEM EFFICIENCY		No. of LEDs	SMD	SMD	SMD	SMD
		THD (%)	-	-	-	-
		Power Factor	0.8	0.8	0.8	0.8
		Driver Rating	25V DC 300mA	46V DC 300mA	67V DC 300mA	75-135V DC 300mA
DIMENSIONS (in mm)		Diameter X	120	168	225	300
		Height H	25	25	25	25

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit

BEAM ANGLES

8W, 15W, 22W, 30W

120°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ALLEGRA

LFSS973S

SURFACE CEILING LIGHTS

		Wattage (W)	8W	15W	22W	30W
LUMEN OUTPUT	C	6500K	560	1170	1760	2400
	N	4000K	552	1125	1716	2340
	W	3000K	552	1125	1716	2340
SYSTEM EFFICIENCY		No. of LEDs	SMD	SMD	SMD	SMD
		THD (%)	-	-	-	-
		Power Factor	0.8	0.8	0.8	0.8
		Driver Rating	25V DC 300mA	46V DC 300mA	67V DC 300mA	75-135V DC 300mA
DIMENSIONS (in mm)		Diameter L	120	168	225	300
		W	120	168	225	300
		Height H	25	25	25	25

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	Lafit

BEAM ANGLES

8W, 15W, 22W, 30W

120°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

CAN

LFSS1027 R

SURFACE CEILING LIGHTS

		Wattage (W)	5W	12W	20W	30W
LUMEN OUTPUT	N	4000K	556	1020	1700	2550
	W	3000K	532	960	1600	2400
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1
		THD (%)	20	30-35	20-25	20-25
		Power Factor	0.9	0.85	0.9	0.9
		Driver Rating	13-24V DC 280mA	24-45V DC 300mA	27-43V DC 500mA	27-43V DC 750mA
DIMENSIONS (in mm)		Diameter X	55	74	94	115
		Height H	75	100	113	125

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES



COLOUR OPTIONS	Housing	White	Black		
	Reflector	White	Black	Chrome	Copper

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



CUBE

LFSS1027 S

SURFACE CEILING LIGHTS

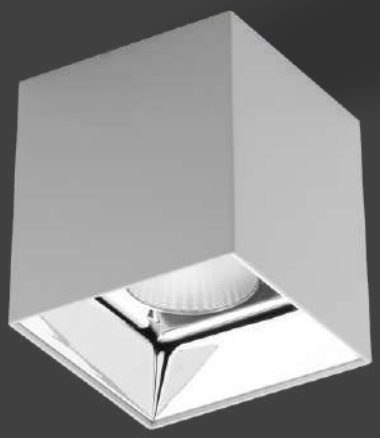









		Wattage (W)	5W	12W	20W	30W
LUMEN OUTPUT	N	4000K	556	1020	1700	2550
	W	3000K	532	960	1600	2400
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1
		THD (%)	20	30-35	20-25	20-25
		Power Factor	0.9	0.85	0.9	0.9
		Driver Rating	13-24V DC 280mA	24-45V DC 300mA	27-43V DC 500mA	27-43V DC 750mA
DIMENSIONS (in mm)		Diameter L	54	73	95	115
		W	54	73	95	115
		Height H	70	95	110	125

SYSTEM SPECS

Housing	Aluminium
LED Make	Bridgelux
Driver Brand	Lafit

BEAM ANGLES

5W, 12W, 20W, 30W

30°

COLOUR OPTIONS

Housing	White	Black			
Reflector	White	Black	Chrome	Copper	



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

FESTO

LFTL899A, B

TRACK LIGHTS

TUNEABLE

DIMMABLE

LFTL899 A

	Wattage (W)	10W	18W	30W
LUMEN OUTPUT	C 6500K	1398	2000	3301
	N 4000K	1358	1941	3207
	W 3000K	1358	1893	3124
SYSTEM EFFICIENCY	No. of LEDs	1	1	1
	THD (%)	-	60	<10
	Power Factor	0.9	>0.85	0.99
	Driver Rating	30V DC 300mA	21-42V DC 400mA	21-43V DC 700mA
DIMENSIONS (in mm)	Diameter X	61	65	82
	Height H	157	145	153

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES



COLOUR OPTIONS: White | Black



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

LAFIT

SKYLINE - 3566

LFOF1108A

HANGING OFFICE LIGHTS

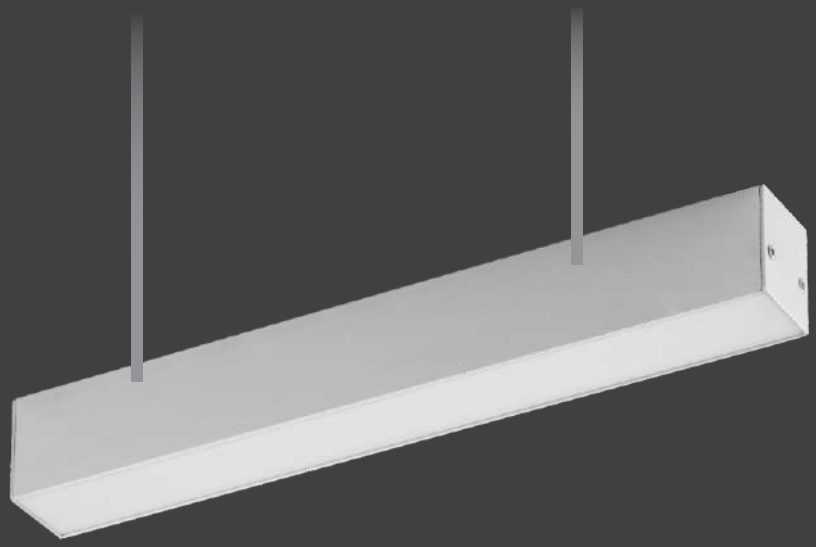

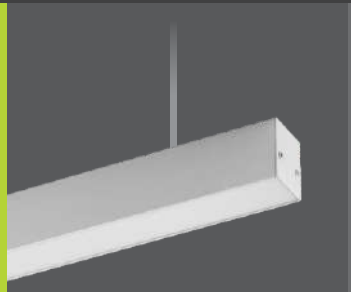

	Wattage (W)		40W	80W
LUMEN OUTPUT	C	6500K	4483	8966
	N	4000K	4287	8574
	W	3000K	4092	8184
SYSTEM EFFICIENCY	No. of LEDs		264	528
	THD (%)		20	20
	Power Factor		0.95	0.95
	Driver Rating		28-40V DC 1000mA	28-40V DC 1000mA x 2Nos.
	Surge		3kV	3kV
DIMENSIONS (in mm)	Size	L	1200	2403
		W	35	35
	Height	H	66	66

SYSTEM SPECS	Housing	Aluminium + PC
	LED Make	Bridgelux
	Driver Brand	Lafit



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SKYLINE - 5575

LFOF1109A

HANGING OFFICE LIGHTS

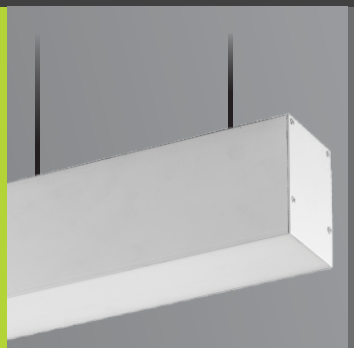

		Wattage (W)	40W	80W
LUMEN OUTPUT	C	6500K	4483	8966
	N	4000K	4287	8574
	W	3000K	4092	8184
SYSTEM EFFICIENCY		No. of LEDs	264	528
		THD (%)	10	10
		Power Factor	0.98	0.98
		Driver Rating	24-36V DC 1000mA	24-36V DC 1000mA x 2Nos.
		Surge	4kV	4kV
DIMENSIONS (in mm)	Size	L	1200	2403
		W	55	55
	Height	H	75	75

SYSTEM SPECS	
Housing	Aluminium + PC
LED Make	Bridgelux
Driver Brand	Fulham



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SKYLINE - 7676

LFOF1114A

HANGING OFFICE LIGHTS

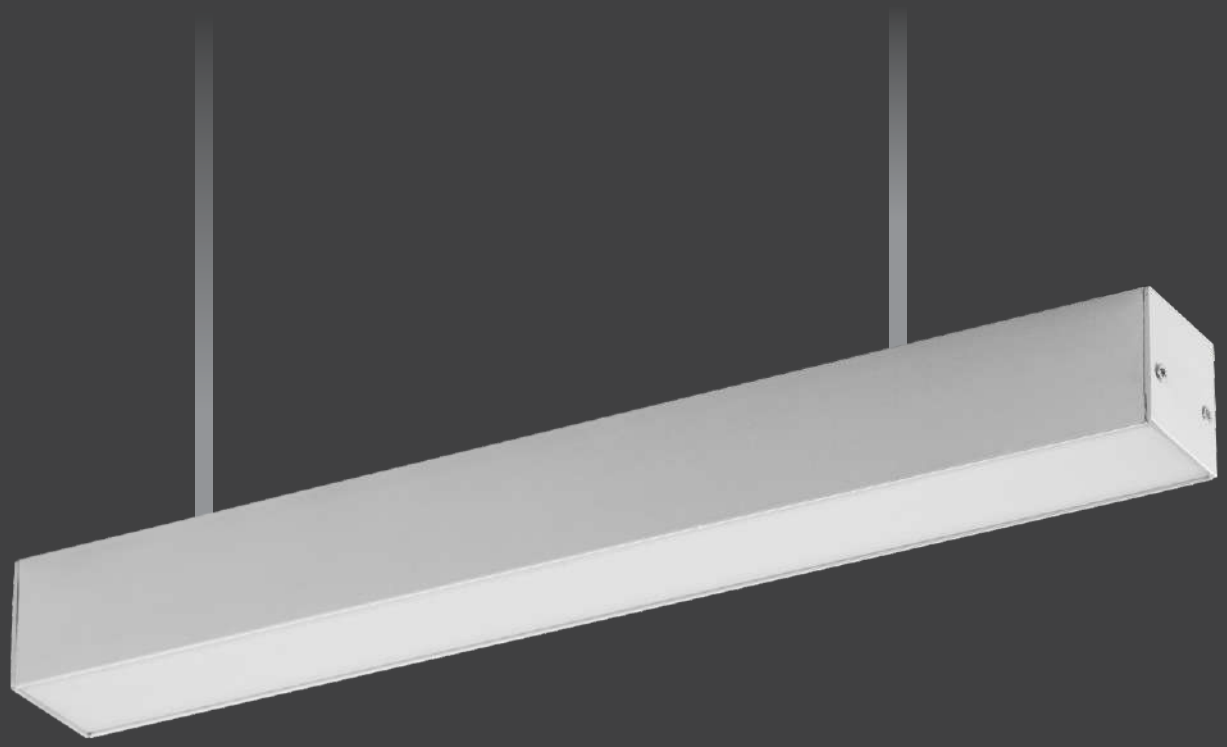

		Wattage (W)	40W	55W	80W	110W
LUMEN OUTPUT	C	6500K	4483	6296	8966	12592
	N	4000K	4287	6019	8574	12038
	W	3000K	4092	5742	8184	11484
SYSTEM EFFICIENCY		No. of LEDs	264	396	528	792
		THD (%)	10	10	10	10
		Power Factor	0.98	0.97	0.98	0.97
		Driver Rating	24-36V DC 1000mA	18-36V DC 700mA x 2Nos.	24-36V DC 1000mA x 2Nos.	18-36V DC 700mA x 4Nos.
		Surge	4kV	4kV	4kV	4kV
DIMENSIONS (in mm)		Size L	1200(4Ft)	1200(4Ft)	2403(8Ft)	2403(8Ft)
		W	76	76	76	76
		Height H	76	76	76	76

SYSTEM SPECS	Housing	Aluminium + PC
	LED Make	Bridgelux
	Driver Brand	Fulham

BEAM ANGLES

40W, 55W , 80W , 110W

120°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

EMPORIUM

LFIF924

SURFACE FIX LENGTH PROFILE

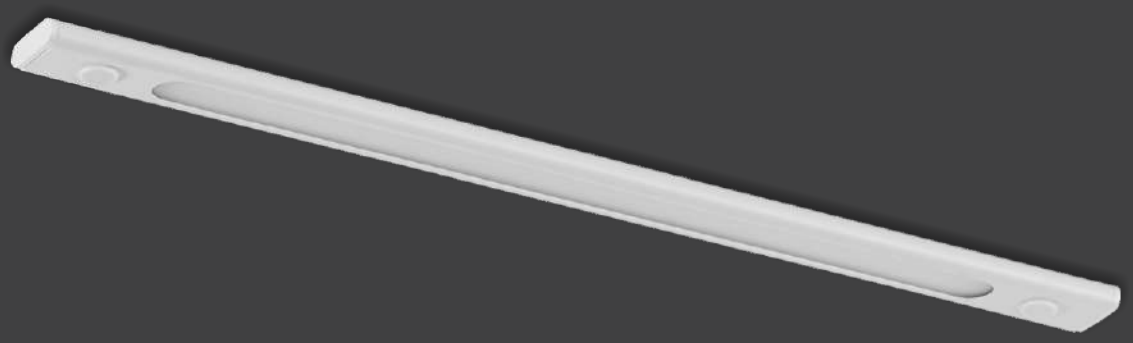

	Wattage (W)	4W	8W	12W	18W
LUMEN OUTPUT	C 6500K	380	740	1140	1710
	N 4000K	380	740	1140	1710
	W 3000K	380	740	1140	1710
SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD	SMD	SMD
	THD (%)	-	-	-	-
	Power Factor	0.8	0.8	0.8	0.8
	Driver Rating	IN-BUILT	IN-BUILT	IN-BUILT	IN-BUILT
DIMENSIONS (in mm)	Size L	327	586	900	1220
	W	23	23	23	23
	Height H	8	8	8	8

SYSTEM SPECS	
Housing	Aluminium
LED Make	Epistar
Driver Brand	DOB

BEAM ANGLES

4W, 8W, 12W, 18W

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SKYLINE

LFPF970

RECESSED FIXED LENGTH PROFILE

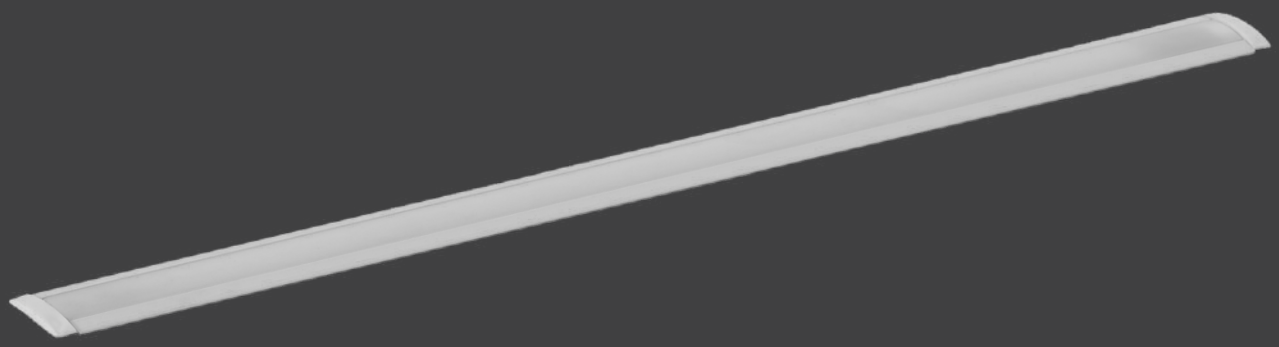

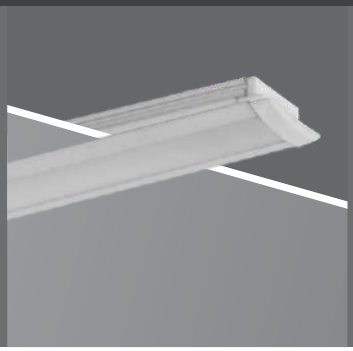

		Wattage (W)	4W	8W
LUMEN OUTPUT	C	6500K	380	740
	N	4000K	380	740
	W	3000K	380	740

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	-	-
	Power Factor	0.9	0.9
	Driver Rating	IN-BUILT	IN-BUILT

DIMENSIONS (in mm)	Size	L	320	595
		W	25	25
	Height	H	8	8

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	DOB

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

RILEY

LFT5768B

INDOOR BATTENS
CENTER WIRE

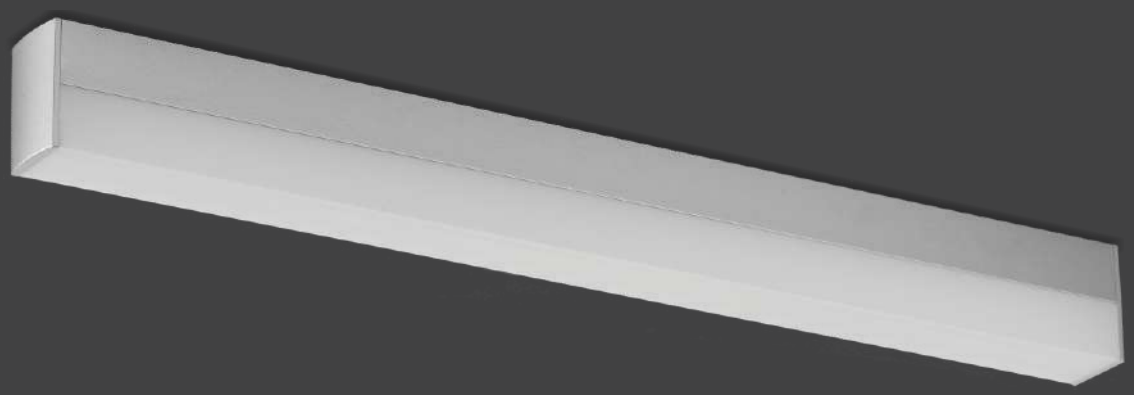



	Wattage (W)	5W	10W	20W
LUMEN OUTPUT	C 6500K	551	1132	2155
	N 4000K	525	1100	2100
	W 3000K	490	1050	2040

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD	SMD
	THD (%)	<20	<20	<20
	Power Factor	>0.9	>0.9	>0.9
	Driver Rating	IN-BUILT	IN-BUILT	IN-BUILT
	Surge	2.5kV	2.5kV	2.5kV

DIMENSIONS (in mm)	Size	L	266	536	1136
		W	23	23	23
	Height	H	37	37	37

SYSTEM SPECS	
Housing	Polycorbonate
LED Make	Epistar
Driver Brand	LAFIT

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

GERICA

LFT5671B

INDOOR T5 BATTEN (LINKABLE)

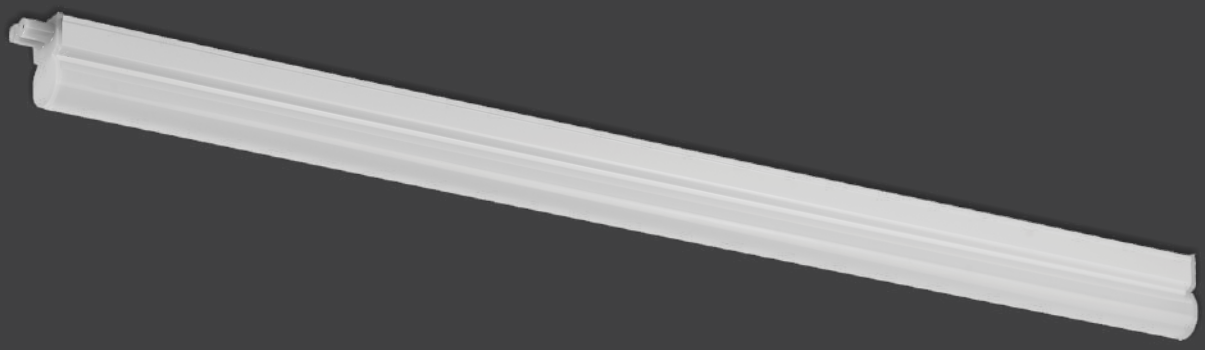



		Wattage (W)	5W	10W	14W	18W
LUMEN OUTPUT	C	6500K	388	873	1222	1746
	N	4000K	380	855	1197	1710
	W	3000K	372	837	1171	1674

SYSTEM EFFICIENCY	No. of LEDs		SMD	SMD	SMD	SMD
	THD (%)		-	-	-	-
	Power Factor		0.8	0.8	0.8	0.8
	Driver Rating		IN-BUILT	IN-BUILT	IN-BUILT	IN-BUILT
DIMENSIONS (in mm)	Size	L	285	565	875	1175
		W	23	23	23	23
	Height	H	33	33	33	33

SYSTEM SPECS	
Housing	Polycarbonate
LED Make	Epistar
Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

FINO

LFOD976

OUTDOOR SURFACE FIXTURE

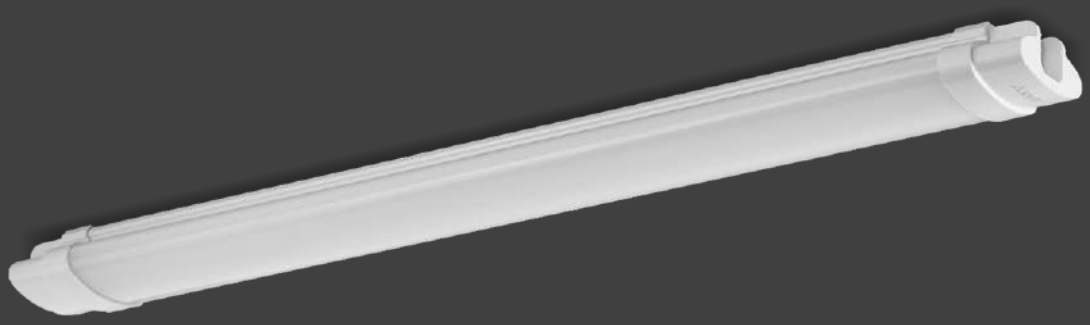

IP65
WATER PROOF

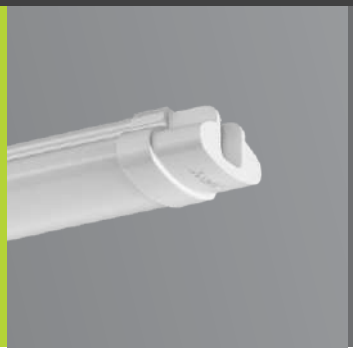

	Wattage (W)		18W	36W
LUMEN OUTPUT	C	6500K	1710	3420
	W	3000K	1675	3350

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	-	-
	Power Factor	0.9	0.9
	Driver Rating	IN-BUILT	IN-BUILT

DIMENSIONS (in mm)	Size	L	600	1200
		W	65	65
	Height	H	37	37

SYSTEM SPECS	Housing	Polycorbonate
	LED Make	Epistar
	Driver Brand	In-built

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-65	240V/ 50Hz

LAFIT

TAB

LFBH1116X

LED BULKHEADS

Wattage (W)		10W
LUMEN OUTPUT	C 6500K	800
	W 3000K	700
SYSTEM EFFICIENCY	No. of LEDs	22S/2P 44
	THD (%)	–
	Power Factor	0.9
	Driver Rating	66VDC/120mA
	Surge	2kV
DIMENSIONS (in mm)	Length L	95
	Width W	65
	Height H	175

SYSTEM SPECS	Housing	Polycorbonate
	LED Make	Bridgelux
	Driver Brand	LAFIT

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-55	240V/ 50Hz

CAP

LFBH1117X

LED BULKHEADS

Wattage (W)		15W
LUMEN OUTPUT	C 6500K	1200
	W 3000K	1050
SYSTEM EFFICIENCY	No. of LEDs	36S/2P 72
	THD (%)	–
	Power Factor	0.9
	Driver Rating	108VDC/120mA
	Surge	2kV
DIMENSIONS (in mm)	Length L	95
	Width W	65
	Height H	210
	Diameter X	25

SYSTEM SPECS	Housing	Polycorbonate
	LED Make	Bridgelux
	Driver Brand	LAFIT

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-55	240V/ 50Hz

GLORIOUS

LFBH1118R

LED BULKHEADS

	Wattage (W)		10W	15W
LUMEN OUTPUT	C	6500K	800	1200
	W	3000K	700	1050
SYSTEM EFFICIENCY		No. of LEDs	22S/2P 44	36S/2P 72
		THD (%)	–	–
		Power Factor	0.9	0.9
		Driver Rating	66VDC/120mA	108VDC/120mA
		Surge	2kV	2kV
DIMENSIONS (in mm)	Dia.	Ø	172	210
		H	58	60
	Cutout	Ø	NA	NA

SYSTEM SPECS	Housing	Polycorbonate
	LED Make	Bridgelux
	Driver Brand	LAFIT

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-55	240V/ 50Hz

CRESECNT

LFBH1119R

LED BULKHEADS

	Wattage (W)		10W	15W
LUMEN OUTPUT	C	6500K	800	1200
	W	3000K	700	1050
SYSTEM EFFICIENCY	No. of LEDs		22S/2P 44	36S/2P 72
	THD (%)		–	–
	Power Factor		0.9	0.9
	Driver Rating		66VDC/120mA	108VDC/120mA
	Surge		2kV	2kV
DIMENSIONS (in mm)	Dia.	Ø	175	210
		H	58	60
	Cutout	Ø	NA	NA

SYSTEM SPECS	Housing	Polycorbonate
	LED Make	Bridgelux
	Driver Brand	LAFIT

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-55	240V/ 50Hz

VIRA
LFUV1115X003UCI

TRAVEL UVC SANITIZING WAND

Thank you for purchasing this Powerful Travel UV Sanitizing Wand. For best results, and for your own safety, please read these instructions prior to using this device for the first time. In addition, please store this guide for future reference

INTRODUCTION

The Travel UV Sanitizing Wand provides effective protection from germs, viruses, bacteria,dust mites and mold throughout your home. Used regularly on surfaces throughout your home to disinfect (in addition to regular cleaning of bedding, floors and other surfaces), it will protect your home without the use of sprays or harsh chemicals.

Features :

Size	10.4” L x 1.6” W x 1.5” H
Weight	0.3 lbs.
UV-C Lamp	3W DC Lamp
UV Wavelength	UV-C (253.7nm)
Power Supply	Alkaline Batteries (4 X AA)

- Naturally eliminates germs that cause colds, infections, asthma and allergic reactions.
- Destroyed over 99.9% of E. coli in laboratory tests.
- Chemical-free.
- Odorless.
- No harmful residue.
- A hypoallergenic way to disinfect kitchen surfaces and utensils, beds, sofas, children’s toys and more.
- Safe and easy to use.
- Silent operation.





CAUTION

WARNING! Do not expose eyes or skin directly to UV-C light. Keep this device out of the reach of children at all times.

UVC DISINFECTION TABLE LAMP

38W UV+Ozone Disinfection lamp Quartz Sterilizer Bulb 230V AC Household Ultraviolet Lamps UVC Germicidal Light Sterilizing

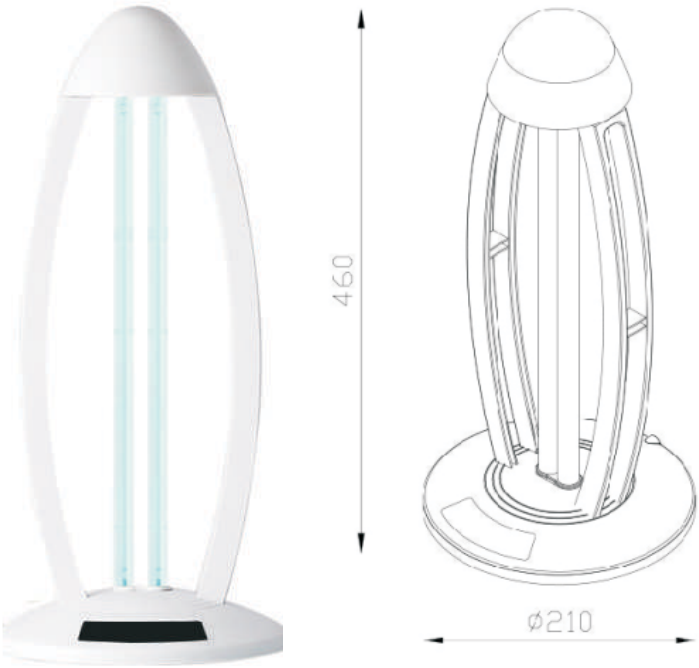

Specifications

Material: ABS + tube quartz
Rated power: 38W
Rated voltage: 230VAC
Rated frequency: 50HZ
Colour: White
Weight: 1100g
Product size: 210 * 110 * 460MM
Life time : >5000 hours
Timing mode: remote timing
Wave length : 185nm
Effective sterilization area: 40 square meters

Features

1. Sterilization, disinfection, and removal of mites.
2. UV + ozone has no dead corner sterilization.
3. Purified air, remote control through the wall, timing control.
4. Suitable for various occasions: home, school, hospital, restaurant.

Application :
In home, school, office, etc.,

Ozone has a strong oxidizing effect, which can effectively kill bacteria. The dispersibility of ozone can just make up for the shortcomings of ultraviolet rays that only spread in a straight line and disinfection. However, after ozone disinfection, windows must be opened to ventilate the ozone before it can enter.

After sterilization, people can enter the room immediately, but the ultraviolet light only spreads in a straight line, and there is a dead angle in disinfection.

When using UV products. Human,animals and plants must leave the scene. After disinfection, Ventilate for about 40 minutes before entering the room !!!

Leave the scene

Leave the scene

Leave the scene

NOMAD

LFFT969

FOOT LIGHT

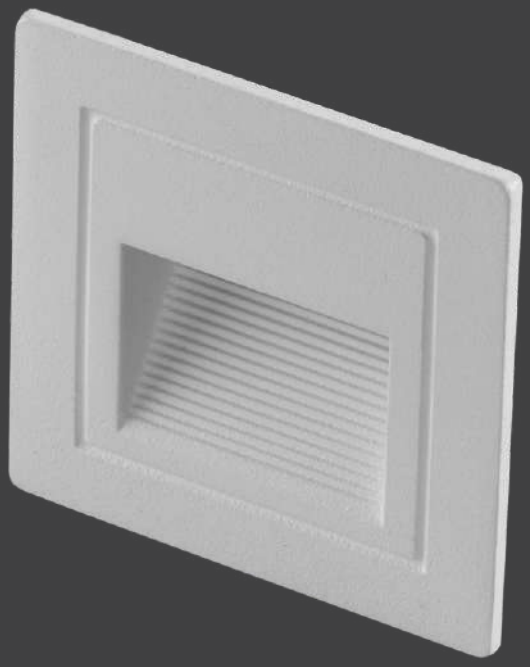

IP65
WATER PROOF

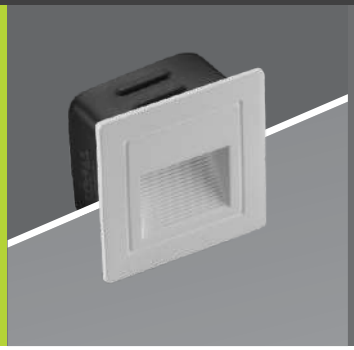

	Wattage (W)	3W
LUMEN OUTPUT	W 3000K	290

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Power Factor	-
	Driver Rating	IN-BUILT

DIMENSIONS (in mm)	Size	L	60
		W	60
	Height	H	31
	Cutout	L	52
		W	52

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-65	240V/ 50Hz

RUSSOM

LFFT529

FOOT LIGHT

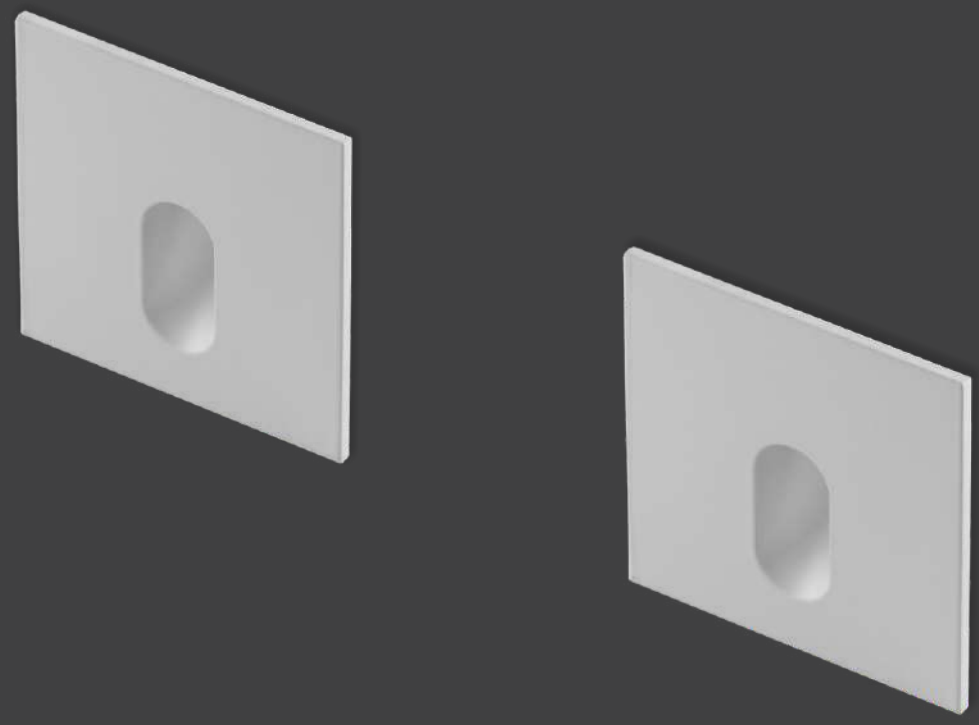

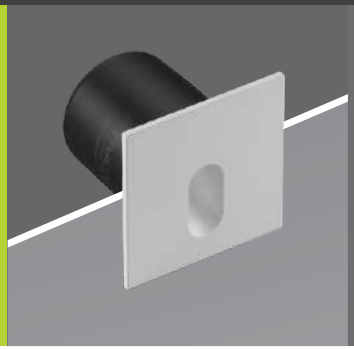

	Wattage (W)	3W
LUMEN OUTPUT	W 6500K	285

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Power Factor	-
	Driver Rating	3-6VDC 600mA

DIMENSIONS (in mm)	Size	L	60
		W	60
	Height	H	53
	Cutout	Ø	42

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Lafit



CRI	TEMP	IP RATING	INPUT
75	0-50°	IP-20	240V/ 50Hz

PANDAROS

LFFT530

FOOT LIGHT

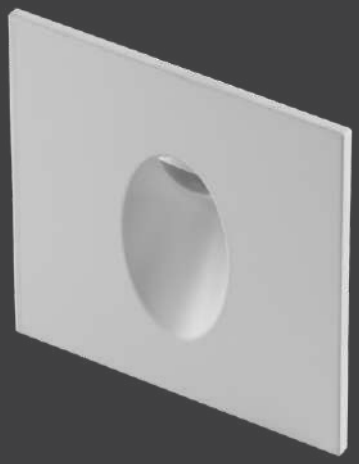

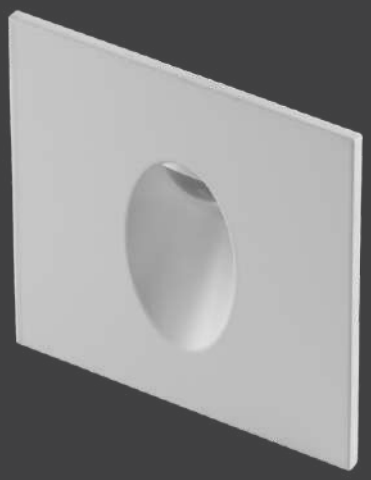

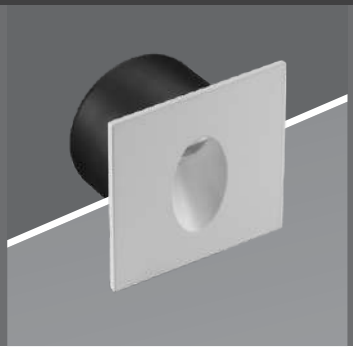

	Wattage (W)	3W
LUMEN OUTPUT	W 6500K	285

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Power Factor	0.8
	Driver Rating	3-6VDC 600mA

DIMENSIONS (in mm)	Size	L	80
		W	80
	Height	H	50
	Cutout	Ø	63

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Lafit



CRI	TEMP	IP RATING	INPUT
75	0-50°	IP-20	240V/ 50Hz

AQUA

LFUW1073

UNDERWATER LIGHT

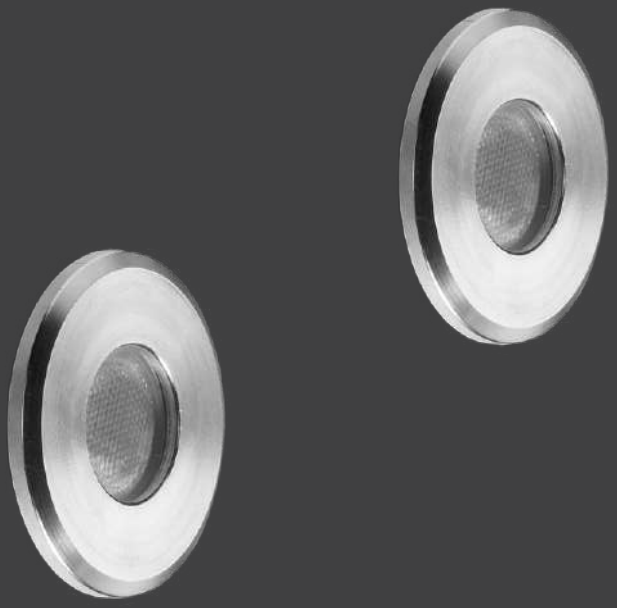

IP68 WATER PROOF

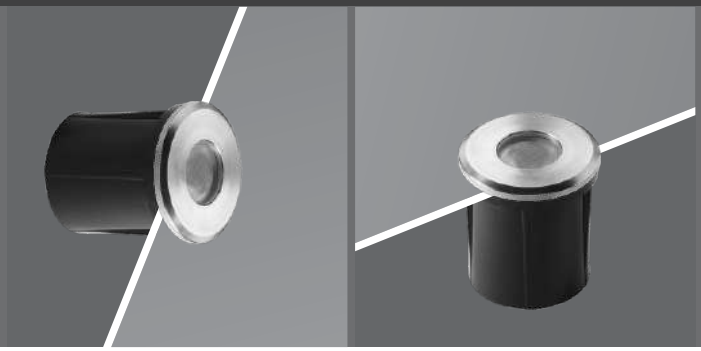

	Wattage (W)		3W
LUMEN OUTPUT	C	6500K	194
	N	4000K	170
	W	3000K	149

SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Power Factor	-
	Driver Rating	3.5VDC (DC - DC) 700mA

DIMENSIONS (in mm)	Diameter	X	55
	Height	H	89
	Cutout	Ø	45

SYSTEM SPECS	Housing	Stainless Steel
	LED Make	Cree
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-68	24VDC

AMCOR

LFUW460

UNDERWATER LIGHT

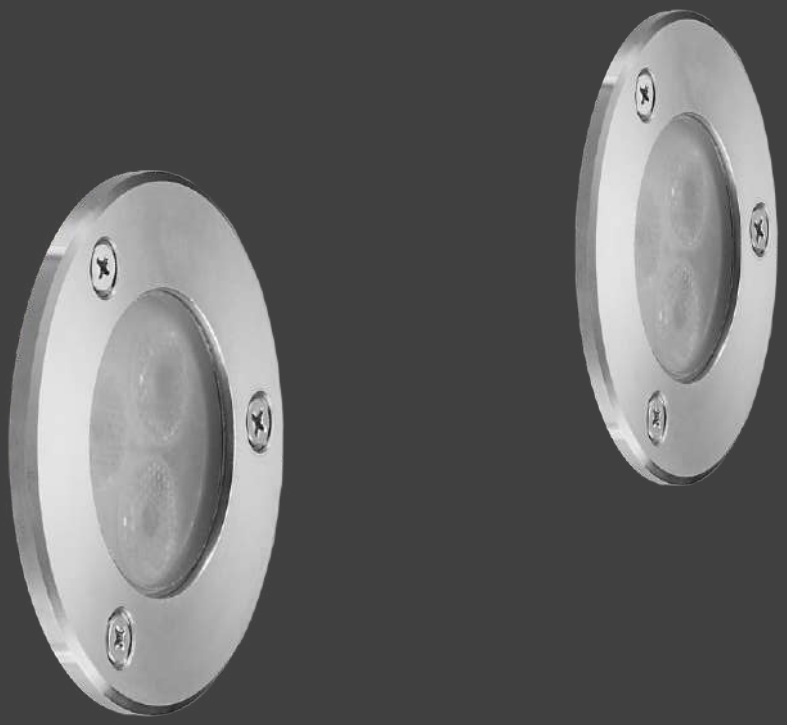

IP68
WATER PROOF

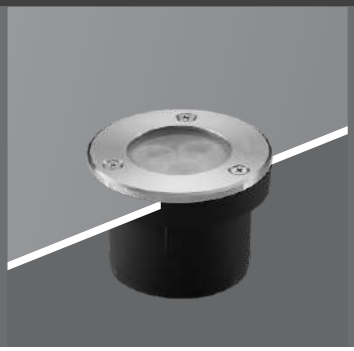

	Wattage (W)		3W	6W
LUMEN OUTPUT	W	3000K	292	584
SYSTEM EFFICIENCY	No. of LEDs		3	3
	THD (%)		-	-
	Power Factor		-	-
	Driver Rating		3-11VDC 350mA	3-11VDC 500mA
DIMENSIONS (in mm)	Diameter	X	83	83
	Height	H	59	59
	Cutout	Ø	64	64

SYSTEM SPECS	Housing	Stainless Steel + Aluminium
	LED Make	Edison
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
75	0-50°	IP-68	240V/ 50Hz

EVITA

LFFL868B

FLOOD LIGHT (SMD)

IP65 WATER PROOF

		Wattage (W)	30W	50W	100W	150W
LUMEN OUTPUT	C	6500K	2991	4928	9605	14780
	N	4000K	2842	4680	9125	14035
	W	3000K	2700	4445	8669	13330
SYSTEM EFFICIENCY		No. of LEDs	SMD	SMD	SMD	SMD
		THD (%)	-	20	20	20
		Power Factor	>0.9	>0.95	>0.95	>0.95
		Driver Rating	24-40VDC 900mA	42VDC 1500mA	42VDC 1500mA x 2	42VDC 1500mA x 3
		Surge	-	4kV	10kV	10kV
DIMENSIONS (in mm)	Size	L	180	210	275	334
		W	157	182	235	293
	Height	H	54	54	54	54

SYSTEM SPECS	
Housing	Aluminium
LED Make	Edison
Driver Brand	Lafit

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-65	240V/ 50Hz

ELVIRA

LFST629C

STREET LIGHT

IP65
WATER PROOF

		Wattage (W)	24W	36W	48W
LUMEN OUTPUT	C	6500K	2484	3726	4968
	W	3000K	2376	3564	4752
SYSTEM EFFICIENCY		No. of LEDs	24	24	24
		THD (%)	≤15	<15	<15
		Power Factor	>0.95	>0.95	>0.95
		Driver Rating	73VDC 300mA	54VDC 600mA	54VDC 850mA
DIMENSIONS (in mm)	Size	L	300	375	385
		W	103	145	145
		H	52	52	60
	Pole Dia	Ø	45	45	45

SYSTEM SPECS	
Housing	Aluminium
LED Make	Osram
Driver Brand	Lafit

BEAM ANGLES

24W, 36W, 48W

90° * 145°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-65	240V/ 50Hz

LAFIT

ALUMAX

LFHB1025A

HIGHBAY LIGHT

IP65
WATER PROOF

	Wattage (W)	80W	100W	120W	150W	180W	200W
LUMEN OUTPUT	C 6500K	8710	10920	13000	16250	19500	21710
SYSTEM EFFICIENCY	No. of LEDs	36	48	56	70	84	96
	THD (%)	10	10	10	10	10	10
	Power Factor	0.95	0.95	0.95	0.95	0.95	0.95
	Driver Rating	Inbuilt	Inbuilt	Inbuilt	Inbuilt	Inbuilt	Inbuilt
	Surge	6+10kV	6+10kV	6+10kV	6+10kV	6+10kV	6+10kV
DIMENSIONS (in mm)	Diameter X	285	285	285	385	385	385
	Height H	120	120	120	127	127	127

SYSTEM SPECS	Housing	Aluminium + Toughened Glass
	LED Make	Philips
	Driver Brand	Lafit

BEAM ANGLES: 80W, 100W, 120W, 150W, 180W , 200W — 60°



CRI	TEMP	IP RATING	INPUT
70	0-50°	IP-65	240V/ 50Hz

LAFIT

SKYLINE - 0709

LFPF678A

RECESSED PROFILE LIGHTS

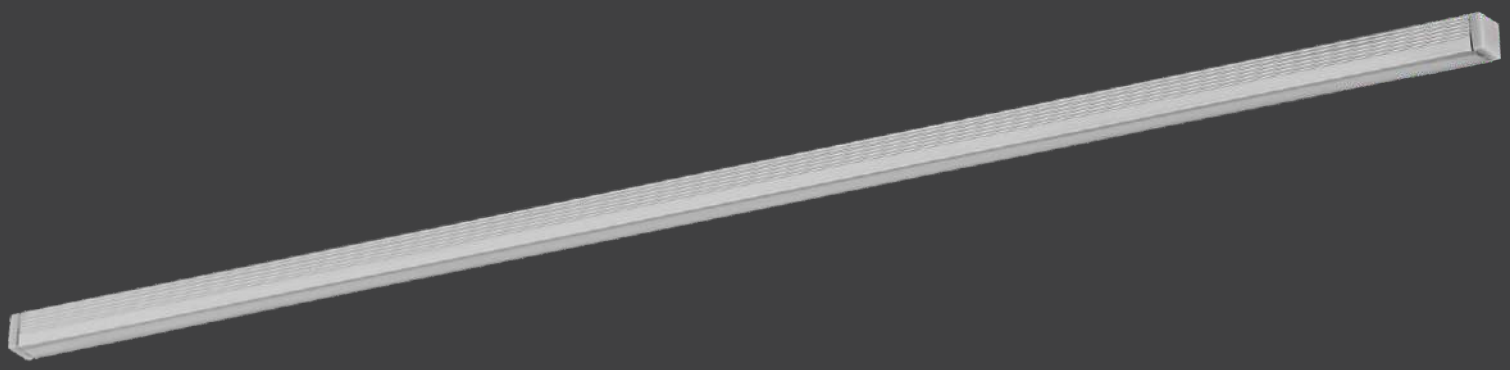

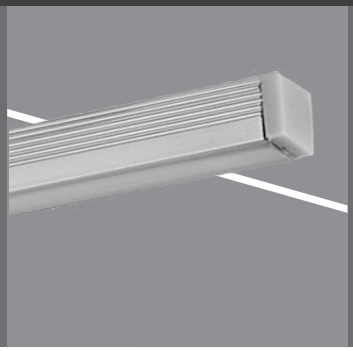

Wattage (W)		4W (per ft)
LUMEN OUTPUT	C 6500K	396 (per ft)
	N 4000K	388 (per ft)
	W 3000K	380 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	07
	Height	H	09
	Cutout	L	Custmise
		W	07

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)

BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 1109

LFPF678B

RECESSED PROFILE LIGHTS

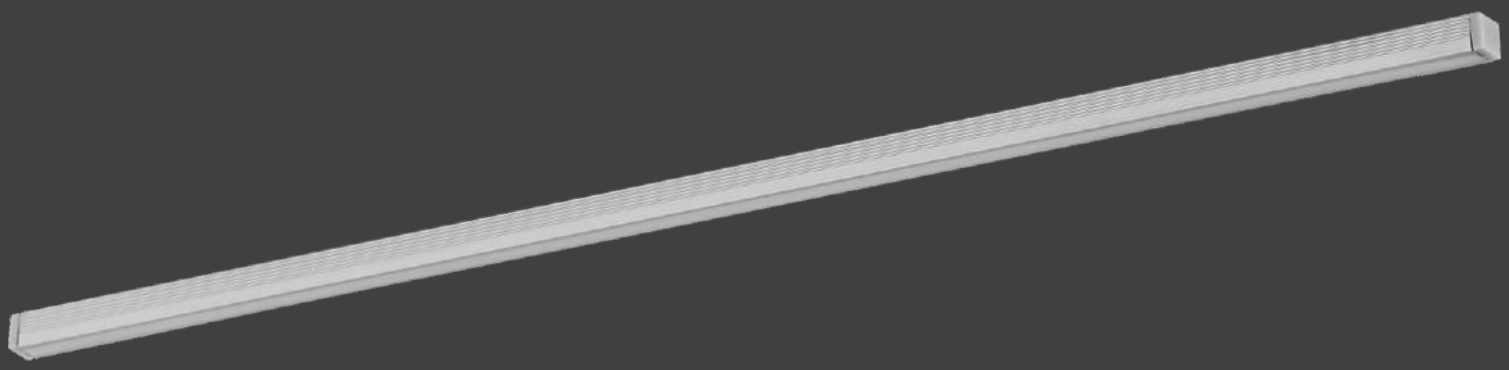

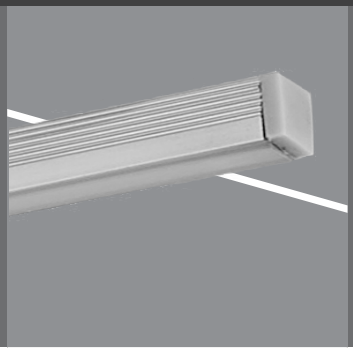

	Wattage (W)		4W (per ft)
LUMEN OUTPUT	C	6500K	396 (per ft)
	N	4000K	388 (per ft)
	W	3000K	380 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	11
	Height	H	09
	Cutout	L	Custmise
		W	7.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 1515

LFPF691A

CORNER SURFACE PROFILE LIGHTS

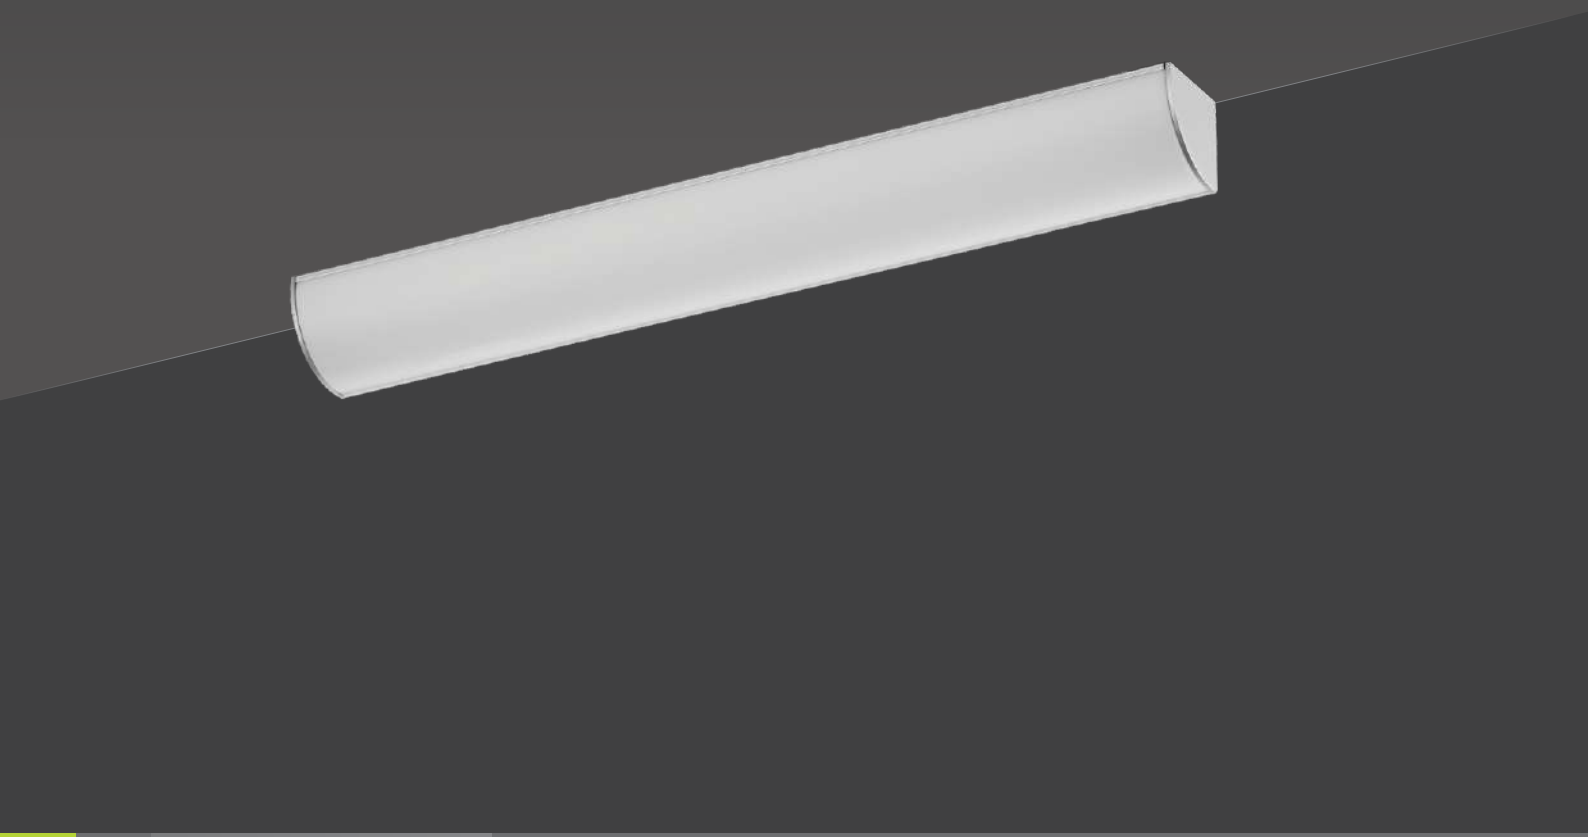

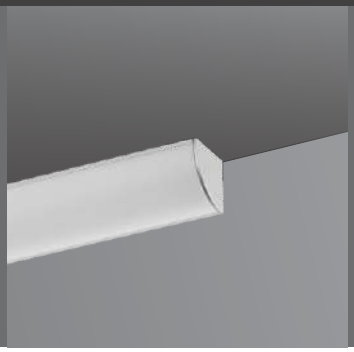

Wattage (W)		4W (per ft)
LUMEN OUTPUT	C 6500K	396 (per ft)
	N 4000K	388 (per ft)
	W 3000K	380 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	15
	Height	H	15

SYSTEM SPECS	Housing	Aluminium
	LED Make	Epistar
	Driver Brand	Meanwell (External)

BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 1707

LFPF939A

SURFACE PROFILE LIGHTS



Wattage (W)		4.5W (per ft)
LUMEN OUTPUT	C 6500K	427 (per ft)
	N 4000K	424 (per ft)
	W 3000K	420 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L W	Custmise 17
	Height	H	7

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)

BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 1714

LFPF941A

SURFACE PROFILE LIGHTS

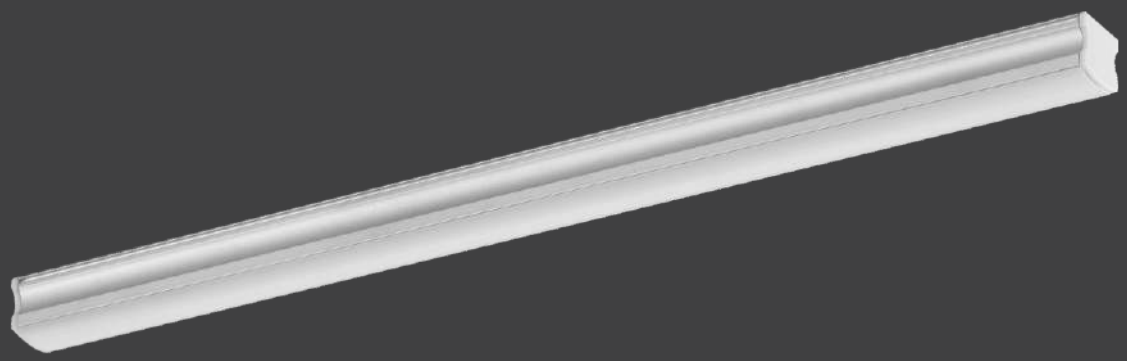

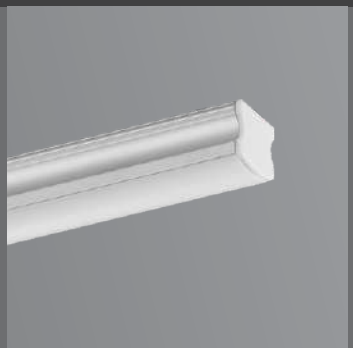

Wattage (W)		4.5W (per ft)
LUMEN OUTPUT	C 6500K	427 (per ft)
	N 4000K	424 (per ft)
	W 3000K	420 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	17
	Height	H	14

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 2407

LFPF939B

RECESSED PROFILE LIGHTS

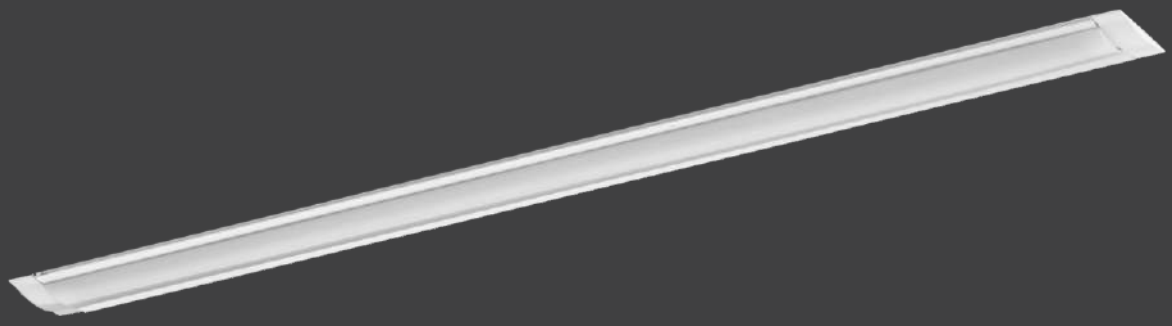

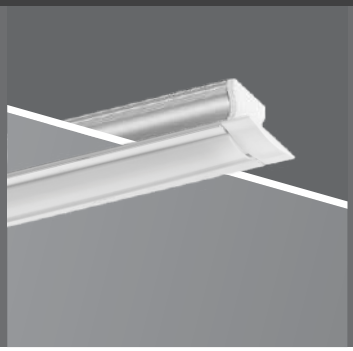

Wattage (W)		4.5W (per ft)
LUMEN OUTPUT	C 6500K	427 (per ft)
	N 4000K	424 (per ft)
	W 3000K	420 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	24
	Height	H	07
	Cutout	L	Custmise
		W	17

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)

BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 2414

LFPF942A

RECESSED PROFILE LIGHTS

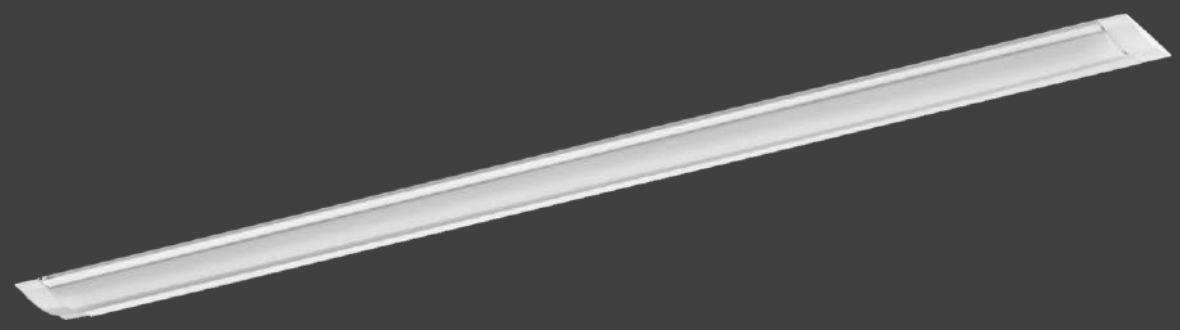

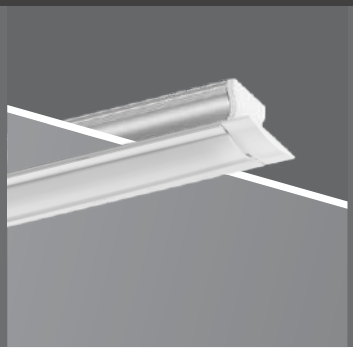

Wattage (W)		4.5W (per ft)
LUMEN OUTPUT	C 6500K	427 (per ft)
	N 4000K	424 (per ft)
	W 3000K	420 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	24
	Height	H	14
	Cutout	L	Custmise
		W	17

SYSTEM SPECS Housing	Aluminium
LED Make	Bridgelux
Driver Brand	Meanwell (External)

BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 2626

LFPF1107X

SURFACE / HANGING PROFILE LIGHTS

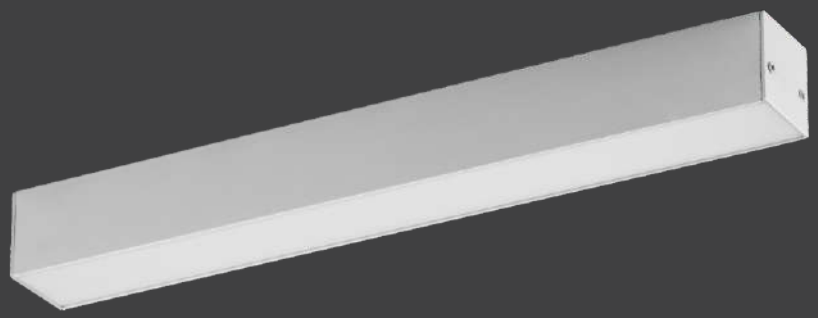



Wattage (W)		4.5W (per ft)
LUMEN OUTPUT	C 6500K	427 (per ft)
	N 4000K	424 (per ft)
	W 3000K	420 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	26
	Height	H	26

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 3535

LFPF690A

SURFACE / HANGING PROFILE LIGHTS

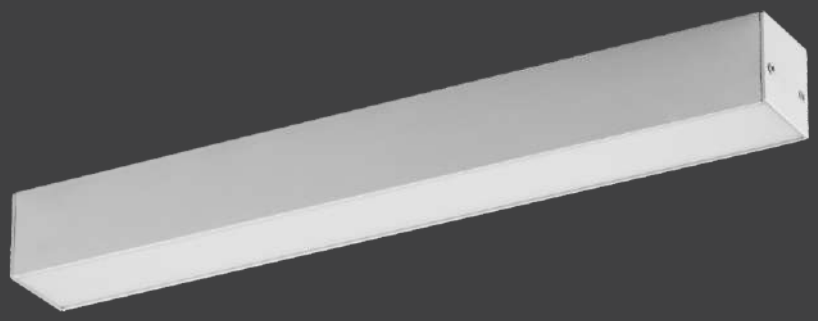

Wattage (W)		9W (per ft)
LUMEN OUTPUT	C 6500K	854 (per ft)
	N 4000K	848 (per ft)
	W 3000K	840 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	35
	Height	H	35

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 3566

LFPF1108X

HANGING PROFILE LIGHTS

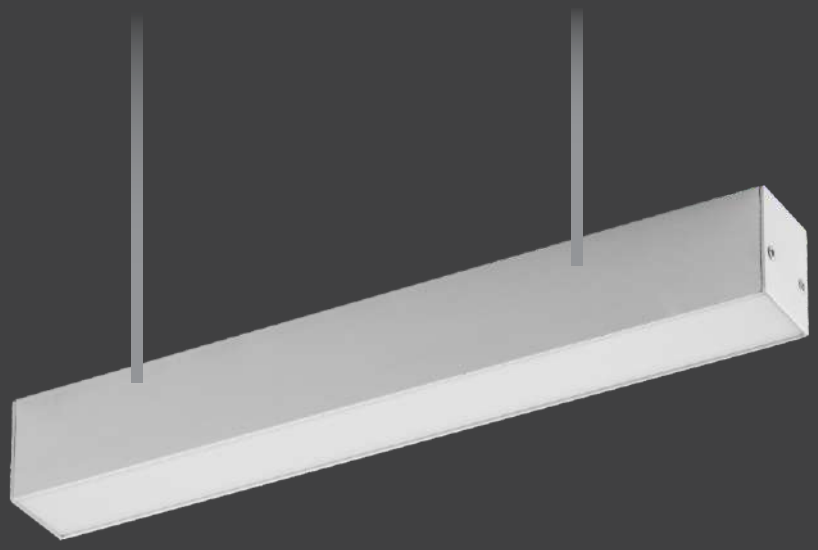

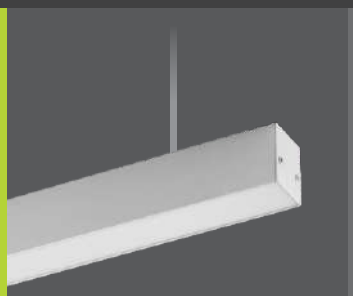

Wattage (W)		9W (per ft)
LUMEN OUTPUT	C 6500K	854 (per ft)
	N 4000K	848 (per ft)
	W 3000K	840 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	35
	Height	H	66

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Osram (In-Built)



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SKYLINE - 5035

LFPF870A

RECESSED PROFILE LIGHTS

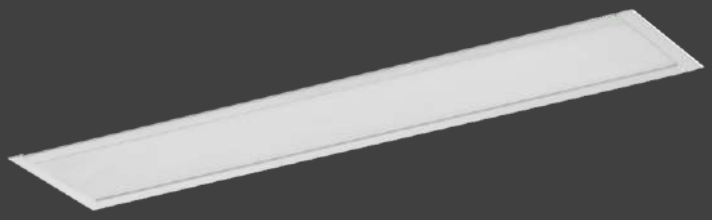

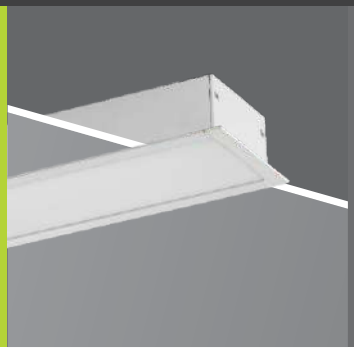

Wattage (W)		9W (per ft)
LUMEN OUTPUT	C 6500K	854 (per ft)
	N 4000K	848 (per ft)
	W 3000K	840 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	50
	Height	H	35
	Cutout	L	Custmise
		W	37

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 5532

LFPF945A

SURFACE / HANGING PROFILE LIGHTS

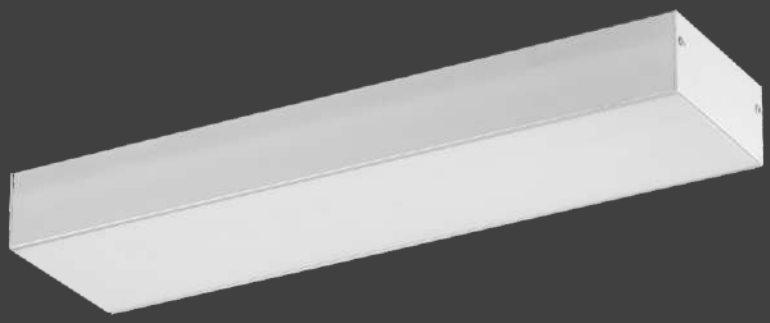

Wattage (W)		9W (per ft)
LUMEN OUTPUT	C 6500K	854 (per ft)
	N 4000K	848 (per ft)
	W 3000K	840 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	55
	Height	H	32

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 5575

LFPF947A

SURFACE / HANGING PROFILE LIGHTS

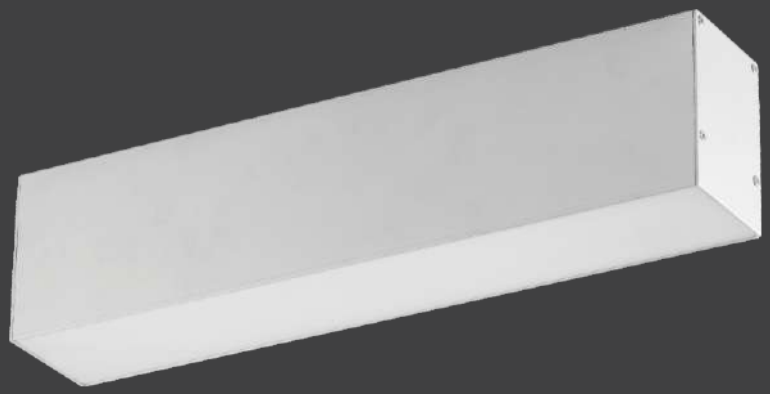



Wattage (W)		9W (per ft)
LUMEN OUTPUT	C 6500K	854 (per ft)
	N 4000K	848 (per ft)
	W 3000K	840 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	55
	Height	H	75

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Osram (In-Built)

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SKYLINE - 7032

LFPF946A

RECESSED PROFILE LIGHTS

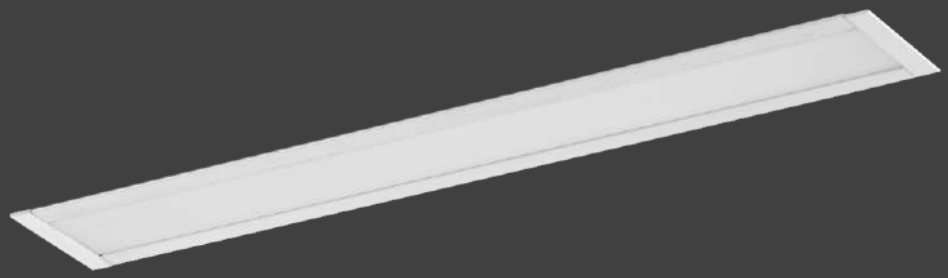

Wattage (W)		9W (per ft)
LUMEN OUTPUT	C 6500K	854 (per ft)
	N 4000K	848 (per ft)
	W 3000K	840 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24VDC

DIMENSIONS (in mm)	Size	L	Custmise
		W	70
	Height	H	32
	Cutout	L	Custmise
		W	57

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)

BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 7635

LFPF949A

SURFACE / HANGING PROFILE LIGHTS

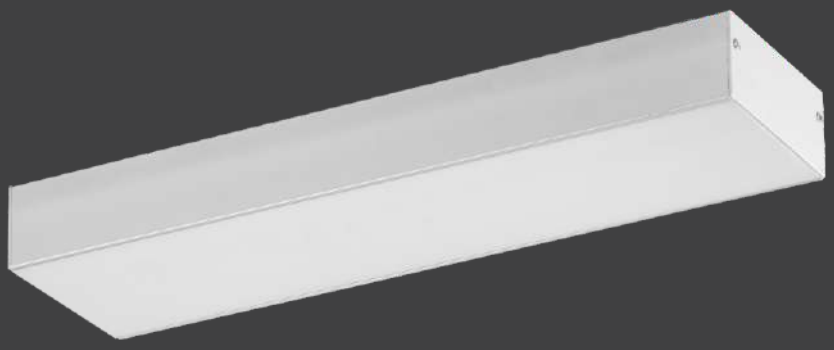

		Wattage (W)	9W (per ft)	13.5W (per ft)
LUMEN OUTPUT	C	6500K	854 (per ft)	1281 (per ft)
	N	4000K	848 (per ft)	1272 (per ft)
	W	3000K	840 (per ft)	1260 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	-	-
	Driver Rating	24VDC	24VDC

DIMENSIONS (in mm)	Size	L	Custmise	Custmise
		W	76	76
	Height	H	35	35

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)



BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 7676

LFPF948A

SURFACE / HANGING PROFILE LIGHTS

		Wattage (W)	9W (per ft)	13.5W (per ft)
LUMEN OUTPUT	C	6500K	854 (per ft)	1281 (per ft)
	N	4000K	848 (per ft)	1272 (per ft)
	W	3000K	840 (per ft)	1260 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	-	-
	Driver Rating	24VDC	24VDC

DIMENSIONS (in mm)	Size	L	Custmise	Custmise
		W	76	76
	Height	H	76	76

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Osram (In-Built)

BEAM ANGLES

9W, 13.5W

120°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

LAFIT

SKYLINE - 9235

LFPF950A

RECESSED PROFILE LIGHTS

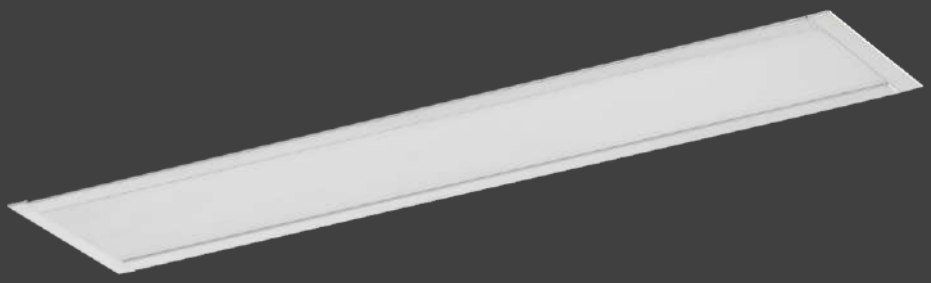

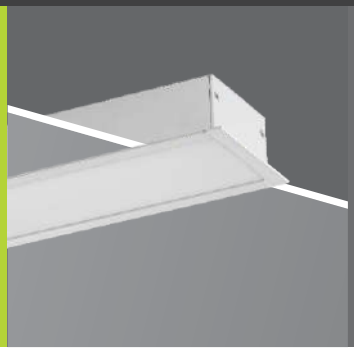

		Wattage (W)	9W (per ft)	13.5W (per ft)
LUMEN OUTPUT	C	6500K	854 (per ft)	1281 (per ft)
	N	4000K	848 (per ft)	1272 (per ft)
	W	3000K	840 (per ft)	1260 (per ft)

SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	-	-
	Driver Rating	24VDC	24VDC

DIMENSIONS (in mm)	Size	L	Custmise	Custmise
		W	92	92
	Height	H	35	35
	Cutout	L	Custmise	Custmise
		W	76	76

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell (External)

BEAM ANGLES

9W, 13.5W

120°

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

SKYLINE - 3566

LFOF1108A

HANGING OFFICE LIGHTS

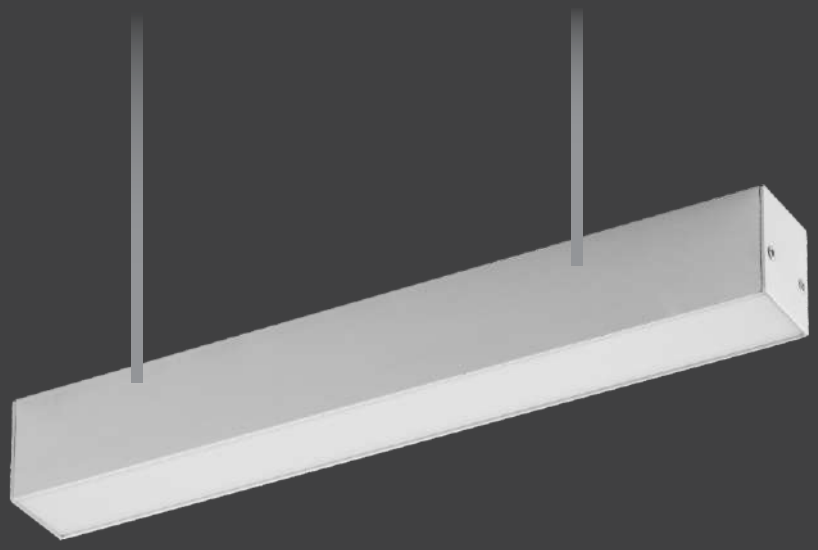

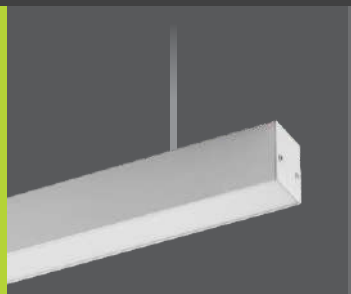

	Wattage (W)		40W	80W
LUMEN OUTPUT	C	6500K	4483	8966
	N	4000K	4287	8574
	W	3000K	4092	8184
SYSTEM EFFICIENCY	No. of LEDs		264	528
	THD (%)		20	20
	Power Factor		0.95	0.95
	Driver Rating		28-40V DC 1000mA	28-40V DC 1000mA x 2Nos.
	Surge		3kV	3kV
DIMENSIONS (in mm)	Size	L	1200	2403
		W	35	35
	Height	H	66	66

SYSTEM SPECS	Housing	Aluminium + PC
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SKYLINE - 5575

LFOF1109A

HANGING OFFICE LIGHTS

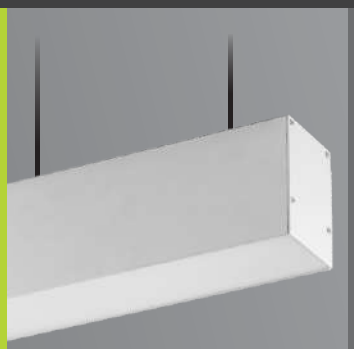

	Wattage (W)		40W	80W
LUMEN OUTPUT	C	6500K	4483	8966
	N	4000K	4287	8574
	W	3000K	4092	8184
SYSTEM EFFICIENCY	No. of LEDs		264	528
	THD (%)		10	10
	Power Factor		0.98	0.98
	Driver Rating		24-36V DC 1000mA	24-36V DC 1000mA x 2Nos.
	Surge		4kV	4kV
DIMENSIONS (in mm)	Size	L	1200	2403
		W	55	55
	Height	H	75	75

SYSTEM SPECS	Housing	Aluminium + PC
	LED Make	Bridgelux
	Driver Brand	Fulham



BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SKYLINE - 7676

LFOF1114A

HANGING OFFICE LIGHTS

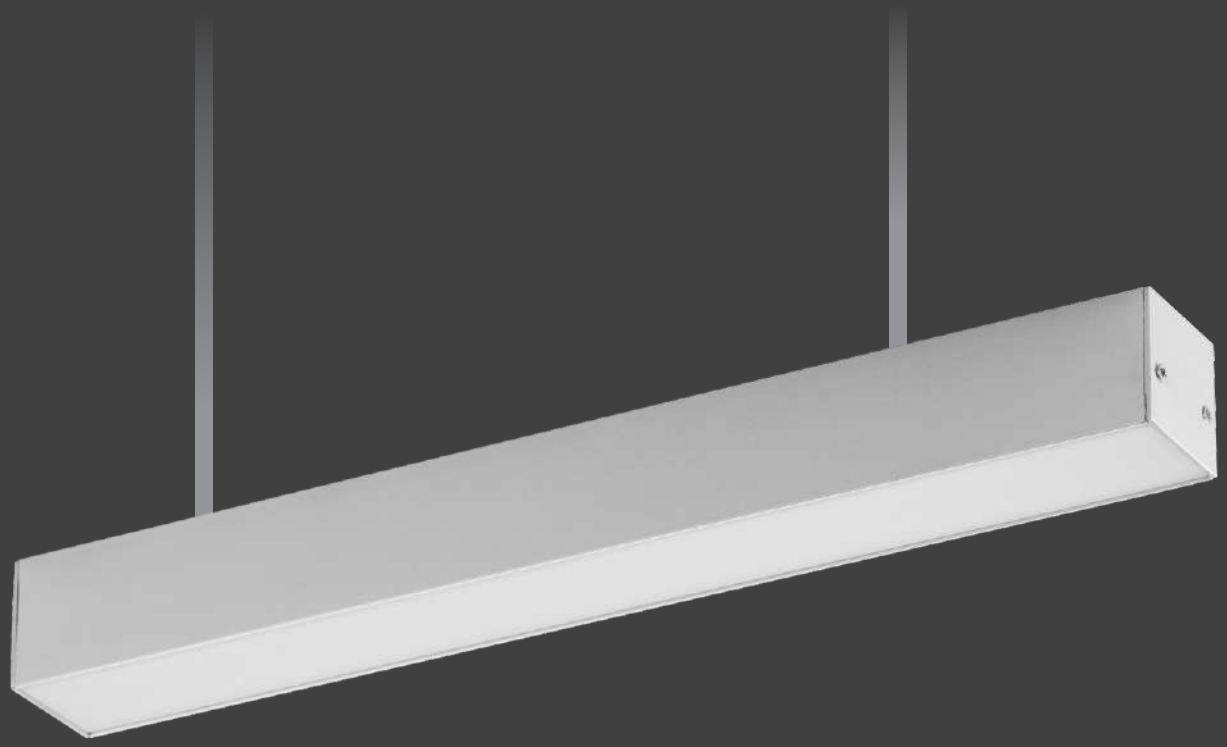

		Wattage (W)	40W	55W	80W	110W
LUMEN OUTPUT	C	6500K	4483	6296	8966	12592
	N	4000K	4287	6019	8574	12038
	W	3000K	4092	5742	8184	11484
SYSTEM EFFICIENCY		No. of LEDs	264	396	528	792
		THD (%)	10	10	10	10
		Power Factor	0.98	0.97	0.98	0.97
		Driver Rating	24-36V DC 1000mA	18-36V DC 700mA x 2Nos.	24-36V DC 1000mA x 2Nos.	18-36V DC 700mA x 4Nos.
		Surge	4kV	4kV	4kV	4kV
DIMENSIONS (in mm)		Size L	1200(4Ft)	1200(4Ft)	2403(8Ft)	2403(8Ft)
		W	76	76	76	76
		Height H	76	76	76	76

SYSTEM SPECS	
Housing	Aluminium + PC
LED Make	Bridgelux
Driver Brand	Fulham

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

STRIP LIGHT

INDOOR / OUTDOOR STRIP LIGHTS

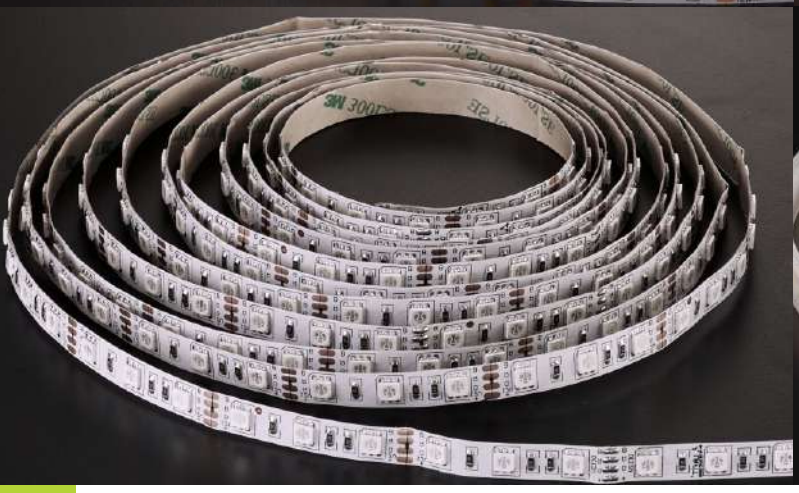

Product Code	Description (per meter)	Colour Temperature	Wattage (per mtr).	Input Voltage	IP Rating	PCB Width (in mm)	LED Make	Lumens Efficacy (per Watt)	Application
2835 LED									
LFFS873X	2835 x 60 LEDs x 0.1W	WW NW WH RED GREEN BLUE AMBER	5W	12VDC	IP-20	8	Epistar	110 lm	Indoor
LFFS1083X	2835 x 120 LEDs	WW NW WH	12W	12VDC	IP-20	5	Epistar	100 lm	Indoor
LFFS267X	2835 x 120 LEDs x 0.1W	WW NW WH BLUE	12W	12VDC	IP-20	8	Epistar	110 lm	Indoor
LFFS1028X	2835 x 168 LEDs	WW NW WH	18W	12VDC	IP-20	10	Epistar	110 lm	Indoor
LFFS1029X	2835 x 240 LEDs	WW NW WH	24W	12VDC	IP-20	10	Epistar	110 lm	Indoor
LFFS1030X	2835 x 240 LEDs (Double Line)	WW NW WH	24W	12VDC	IP-20	10	Epistar	110 lm	Indoor
5050 LED									
LFFS482X	5050 x 60LEDs	WW NW WH BLUE	12W	12VDC	IP-20	10	Epistar	100 lm	Indoor
LFFW486H	5050 x 60 LEDs	WW NW WH BLUE	12W	12VDC	IP-65 Hollow Silicon	12	Epistar	100 lm	Outdoor
LFFW304S	5050 x 60 LEDs	WW NW WH BLUE	12W	12VDC	IP-67 Solid Silicon	12	Epistar	100 lm	Outdoor
TUNABLE 2700K ~ 6500K									
LFFS1071X	2835 x 120 LEDs (12V)	WW WH (TUNEABLE)	12W	12VDC	IP-20	8	Epistar	110 lm	Indoor
LFFS1072X	2835 x 192 LEDs (24V)	WW WH (TUNEABLE)	18W	24VDC	IP-20	8	Epistar	110 lm	Indoor
5050 LED - RGB / RGBW									
LFFS053X	5050 x 30 LEDs	RGB	8W	12VDC	IP-20	10	Epistar	100 lm	Indoor
LFFS060S	5050 x 30 LEDs	RGB	8W	12VDC	IP-67 Solid Silicon	12	Epistar	100 lm	Outdoor
LFFS268X	5050 x 60LEDs	RGB	15W	12VDC	IP-20	10	Epistar	100 lm	Indoor
LFFW259S	5050 x 60 LEDs	RGB	15W	12VDC	IP-67 Solid Silicon	12	Epistar	100 lm	Outdoor
LFFS1070X	5050 x 60LEDs	RGB + WW	9W	12VDC	IP-20	12	Epistar	100 lm	Indoor
ALUMINIUM PCB HARD STRIP									
LFHS1032X	500(L) x 11.5(W) x 1(H) 2835 x 70 LEDs	WW NW WH	15W 24W	24VDC	IP-20	11.5	Bridgelux	95 lm	Indoor

CRI	TEMP	BEAM
80	0-50°	120°

POWER SUPPLY

Non Waterproof Power Supply (Lafit)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSA18012025T	84 X 33 X 27	12VDC	25W	2 Amp
LFPSA18112036T	84 x 33 x 27	12VDC	36W	3 Amp
LFPSA08412050T	151 x 38 x 31	12VDC	50W	4.15 Amp
LFPSA18212060T	151 x 38 x 31	12VDC	60W	5 Amp
LFPSA18312075T	151 x 38 x 31	12VDC	75W	6.25 Amp
LFPSA18412100T	178 x 50 x 41	12VDC	100W	8.33 Amp
LFPSA18512120T	178 x 50 x 41	12VDC	120W	10 Amp
LFPSA08512150T	178 x 50 x 41	12VDC	150W	12.5 Amp
LFPSA22112200T	190 x 82 x 53	12VDC	200W	16.66 Amp
LFPSA22012240T	190 x 82 x 53	12VDC	240W	20 Amp

Non Waterproof Power Supply (Lafit)
LED Driver for LED Strips

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSBG0102512T	115 X 52 X 36	12VDC	25W	2 Amp
LFPSBG0205012T	155 x 62 x 45	12VDC	50W	4 Amp
LFPSBG0307212T	140 x 76 x 45	12VDC	72W	6 Amp
LFPSBG0410012T	170 x 75 x 45	12VDC	100W	8 Amp

Non Dimmable Constant Voltage Power Supply (Meanwell)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSMW0835012T	99 x 82 x 30	12VDC	35W	3 Amp
LFPSMW0805012T	99 x 82 x 30	12VDC	50W	4.16 Amp
LFPSMW0907512T	99 x 97 x 30	12VDC	75W	5 Amp
LFPSMW0910012T	129 x 97 x 30	12VDC	100W	8.33 Amp
LFPSMW1015012T	159 x 97 x 30	12VDC	150W	12.5 Amp
LFPSMW1120012T	215 x 115 x 30	12VDC	200W	16.66 Amp

2 in 1 Triac + Analog Dimmable (Lafit)
Non Waterproof Power Supply 12VDC

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSBE0106012T	195 X 49 X 30	12VDC	60W	5 Amp
LFPSBE0210012T	232 x 49 x 30	12VDC	100W	8.33 Amp
LFPSBE0315012T	286 x 49 x 30	12VDC	150W	12.5 Amp
LFPSBE0420012T	286 x 49 x 30	12VDC	200W	16.66 Amp

Constant Voltage Waterproof Power Supply (Lafit)
LED Driver for LED Strips (3 Yr Warranty)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSBG0102512T	115 X 52 X 36	12VDC	25W	2 Amp
LFPSBG0205012T	155 x 65 x 42	12VDC	50W	4.16 Amp
LFPSBG0307212T	140 x 76 x 45	12VDC	72W	6 Amp
LFPSBG0410012T	170 x 75 x 45	12VDC	100W	8.33 Amp

Dali Dimmable Power Supply (Meanwell)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFDDM01606012T	180 x 63 x 36	12VDC	60W	5 Amp
LFDDM01812012T	219 x 63 x 36	12VDC	120W	10 Amp

POWER SUPPLY

Non Dimmable Constant Voltage Power Supply (Meanwell)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSMW0103524T	99 x 82 x 30	24VDC	35W	1.45 Amp
LFPSMW0505024T	99 x 82 x 30	24VDC	50W	2 Amp
LFPSMW0207524T	99 x 97 x 30	24VDC	75W	3 Amp
LFPSMW0310024T	129 x 97 x 30	24VDC	100W	4 Amp
LFPSMW0615024T	159 x 97 x 30	24VDC	150W	6.25 Amp
LFPSMW0420024T	215 x 115 x 30	24VDC	200W	8.33 Amp

Non Dimmable Constant Voltage Power Supply (Osram)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSOS0102424T	130 x 41 x 31	24VDC	24W	1 Amp
LFPSOS0205024T	190 x 46 x 32	24VDC	50W	2 Amp

Analog Dimmable Constant Voltage Power Supply (Meanwell)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFADM00104024T	150 x 53 x 35	24VDC	40W	1.67 Amp
LFADM00206024T	150 x 53 x 35	24VDC	60W	2.5 Amp
LFADM00307524T	180 x 63 x 36	24VDC	75W	3.15 Amp
LFADM00410024T	199 x 63 x 36	24VDC	100W	4 Amp
LFADM00515024T	219 x 63 x 36	24VDC	150W	6.25 Amp
LFADM00620024T	244 x 71 x 38	24VDC	200W	8.4 Amp
LFADM00724024T	244 x 71 x 38	24VDC	240W	10 Amp

Constant Voltage Waterproof Power Supply (Lafit)
LED Driver for LED Strips

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFWPSBG0902524T	115 X 52 X 36	24VDC	25W	1 Amp
LFWPSBG1007224T	155 x 65 x 42	24VDC	72W	3 Amp
LFWPSMW1110024T	140 x 76 x 45	24VDC	100W	4.16 Amp
LFWPSMW1215024T	170 x 75 x 45	24VDC	150W	6.25 Amp

Triac Dimmable Constant Voltage Power Supply

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFPSTD0703624T	175 x 44 x 30	24VDC	36W	1.5 Amp
LFPSTD0807524T	204 x 62 x 34	24VDC	75W	3.15 Amp
LFPSTD0915024T	273 x 57 x 37	24VDC	150W	6.25 Amp

Dali Dimmable Power Supply (Meanwell)

Product Code	Size L x W x H (mm)	VDC	Wattage	Current
LFDDM01707524T	180 x 63 x 36	24VDC	75W	3.15 Amp
LFDDM01915024T	219 x 63 x 36	24VDC	150W	6.25 Amp

CONTROLLERS

Remote

Wall Panels

Controllers

Product Code	Discription	Size L x W x H (m	VDC	Wattage	Current
LFXC264XXX096I	Dimmer 1CH - Single color remote	128 X 64 X 24	12VDC / 24VDC	96W / 192W	8 Amp
LFXC056XXXCWI	RF Tuneable 2.4G color temp. controller with remote	120 X 62 X 24	12VDC / 24VDC	144W / 288W	8 Amp (per chanel)
LFXC088XXX048I	RF RGB 3CH controller with remote	128 X 64 X 24	12VDC / 24VDC	144W / 288W	4 Amp (per chanel)
LFXC089XXX144I	RGB 3CH amplifier	105 X 65 X 25	12VDC / 24VDC	144W / 288W	4 Amp (per chanel)
LFXC055XXXRWI	RF RGBW 4CH controller with remote	103 X 70 X 43	12VDC / 24VDC	192W / 384W	4 Amp (per chanel)
LFXC057XXX384I	RGBW 4CH amplifier	147 X 70 X 34	12VDC / 24VDC	192W / 384W	4 Amp (per chanel)
LFTG1224010CWT	RF 2.4G & CCT adjustable CV controller	120 x 42 x 28	12VDC / 24VDC	120W / 240W	10 Amp

Touch panels & remote

Product Code	Discription	Size L x W x H (mm)
LFXC054XXXXCWT	RF 2.4G & remote controller (Tuneable + Dimmable)	145 X 48 X 19
LFXC058XXXXCWT	RF 2.4G wall panel controller (Wall panel)	86 X 86 X 15
LFXC059XXXXCWT	RF 2.4G wall panel scene mode controller (Wall panel)	86 X 86 X 15

Quik SERIES

LAFIT®
#BeTheLight

LAFIT LIGHTING PVT LTD
225, Adhyaru Industrial Estate, New Sun Mill Compound,
Sitaram Jadhav Marg, Lower Parel, Mumbai (MH) 400013 - INDIA

Customer Care : customercare@lafitlighting.com
/+91 8879665865
Enquiry : contact@lafitlighting.com
/+91 8879665864

FOLLOW US ON

www.lafitlighting.com