

FIREWIRE ESD CLAMP WITH LIVE-INSERTION DETECTION CIRCUIT


Check for Samples: [TPD4S1394](#)

FEATURES

- IEEE1394 Live Insertion Protection
- Exceeds ESD protection to IEC61000-4- 2 (Level 4)
 - ± 15 -kV Human-Body Model (HBM)
 - ± 6 -kV IEC 61000-4-2 Contact Discharge
- 4-Channel Matching ESD Clamps for High-Speed Differential Lines
- Flow-Through, Single-in-Line Pin Mapping Simplifies Board Layout
- Available in an 8-Pin X2SON (DQL) package

APPLICATIONS

- IEEE 1394 Live Insertion Protection

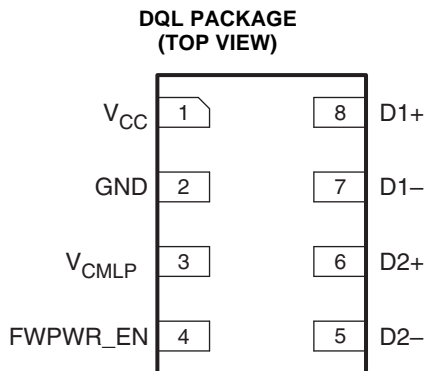

DESCRIPTION

The TPD4S1394 provides robust system level ESD solution for the IEEE.1394 port along with a live insertion detection mechanism for high-speed lines interfacing a low-voltage, ESD sensitive core chipset. This device protects and monitors up to two differential input pairs. The optimized line capacitance allows to protect the data lines with data rate in excess of 1.6 GHz without degrading signal integrity.

The TPD4S1394 incorporates a live insertion circuit whose output state changes when improper voltage levels are present on the input data lines. The FWPWR_EN signal controls an external FireWire port power switch. During the live insertion event if there is a floating GND or a high level signal at the D+, D– pins, the internal comparator will detect the changes and pull the FWPWR_EN signal to low state. When FWPWR_EN is driven low, there is an internal delay mechanism preventing it from being driven to the high state regardless of the inputs to the comparator.

Additionally, the TPD4S1394 performs ESD protection on the four inputs pins: D1+, D1–, D2+, and D2–. The TPD4S1394 conforms to the IEC61000-4-2 (Level 4) ESD protection and ± 15 kV HBM ESD protection. The TPD4S1394 is characterized for operation over ambient air temperature of -40°C to 85°C .

A 0.1 μF decoupling capacitor is required at VCC (pin1)

ORDERING INFORMATION


T _A	PACKAGE ⁽¹⁾ (2)		NOMINAL DIMENSIONS (mm)	ORDERABLE PART NUMBER	TOP-SIDE MARKING
-40°C to 85°C	SON – DQL	Reel of 3000	W = 1.4, L = 2.0, H = 0.4, Pitch = 0.5	TPD4S1394DQLR	5JR

(1) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

(2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

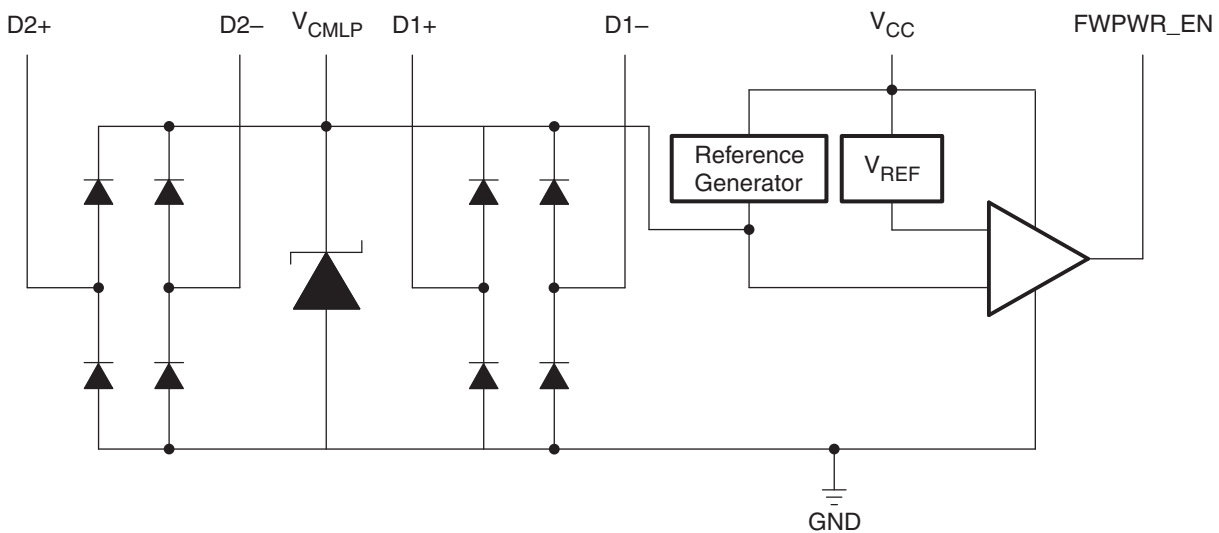FUNCTIONAL BLOCK DIAGRAM**TERMINAL FUNCTIONS**

TERMINAL		TYPE	DESCRIPTION
PIN NO.	NAME		
1	V _{CC}	Power	Power supply
2	GND	GND	Ground
3	V _{CLMP}	O	Comparator trip reference
4	FWPWR_EN	O	Control output
5, 6, 7, 8	D2+, D2-, D1+, D1-	I	High-speed ESD clamp inputs

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _{CC}	Supply voltage range		−0.5	4.6	V
V _{IO}	IO voltage range at D+, D−, V _{CLMP}		0	4	V
FWPWR_EN	Switch output		−0.5	4.6	V
T _{stg}	Storage temperature range		−65	150	°C
T _A	Operating free-air temperature range		−40	85	°C
IEC 61000-4-2 Contact Discharge		D+, D− pins	±6		kV
HBM ESD		D+, D− pins	±15		kV

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

PARAMETER		MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage	3.0		3.6	V

ELECTRICAL CHARACTERISTICS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{dx}	Voltage at D1+, D1-, D2+, and D2- to trip the FWPWR_EN from high to low		2.9	3.4	4.0	V
	Voltage to trip the FWPWR_EN from low to high		2.7	3.2	3.8	
V_{CLMP}	Value on pin	No connect		2.45		V
t_{trip}	Time for FWPWR_EN to go low	Loading on FWPWR_EN = 50 pF	0.5	2	5	μs
t_{reset}	Time delay for the FWPWR_EN to go high after trip condition is met	FWPWR_EN = V_{CC}	300	450	600	ms
V_{BR}	Breakdown voltage at V_{CLAMP}	$I_L = 1$ mA		4.2		V
V_D	Diode forward voltage for lower clamp	$I_D = 8$ mA lower clamp diode	-0.6	-0.8	-0.95	V
FWPWR_EN	Switch output			V_{CC}		V
R_{DYN}	Dynamic resistance (for in and out clamp) of the D+, D-	$I = 1$ A		1		Ω
C_{IO}	IO Capacitance of D+, D-	$V_{IO} = 2.5$ V		1.5	2	pF
I_{CC}	Current Consumption	$V_{CC} = 3.3$ V, FWPWR_EN = high		130	200	μA

(1) A 0.1-μF decoupling capacitor is required at V_{CC} (pin 1).

TYPICAL CHARACTERISTICS

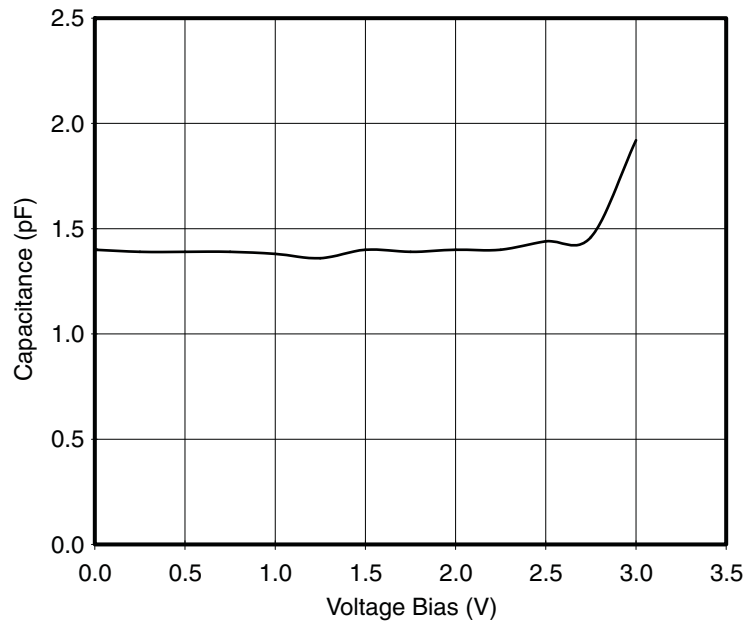


Figure 1. IO Capacitance vs IO Voltage (D+, D- Pins)

TYPICAL CHARACTERISTICS (continued)

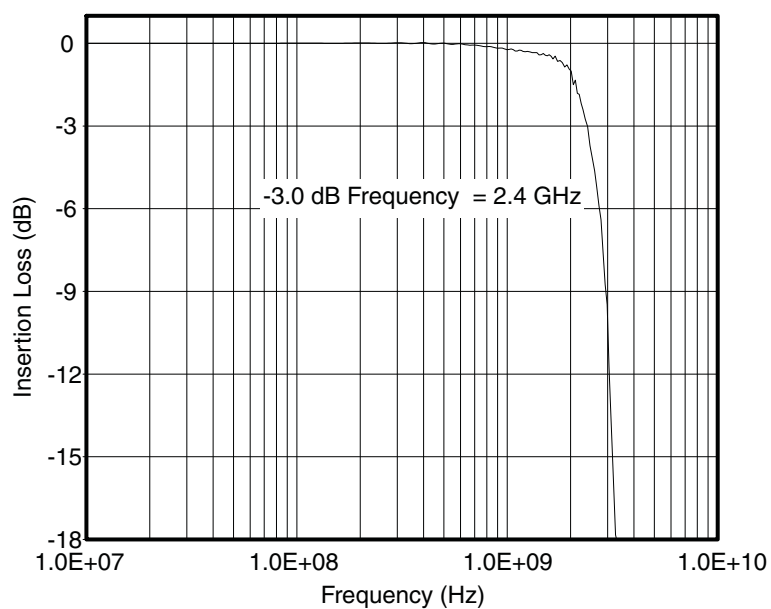


Figure 2. Insertion Loss (S21) for D+, D- Pins

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
TPD4S1394DQLR	ACTIVE	X2SON	DQL	8	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DQL (R-PX2SON-N8)

PLASTIC SMALL OUTLINE NO-LEAD

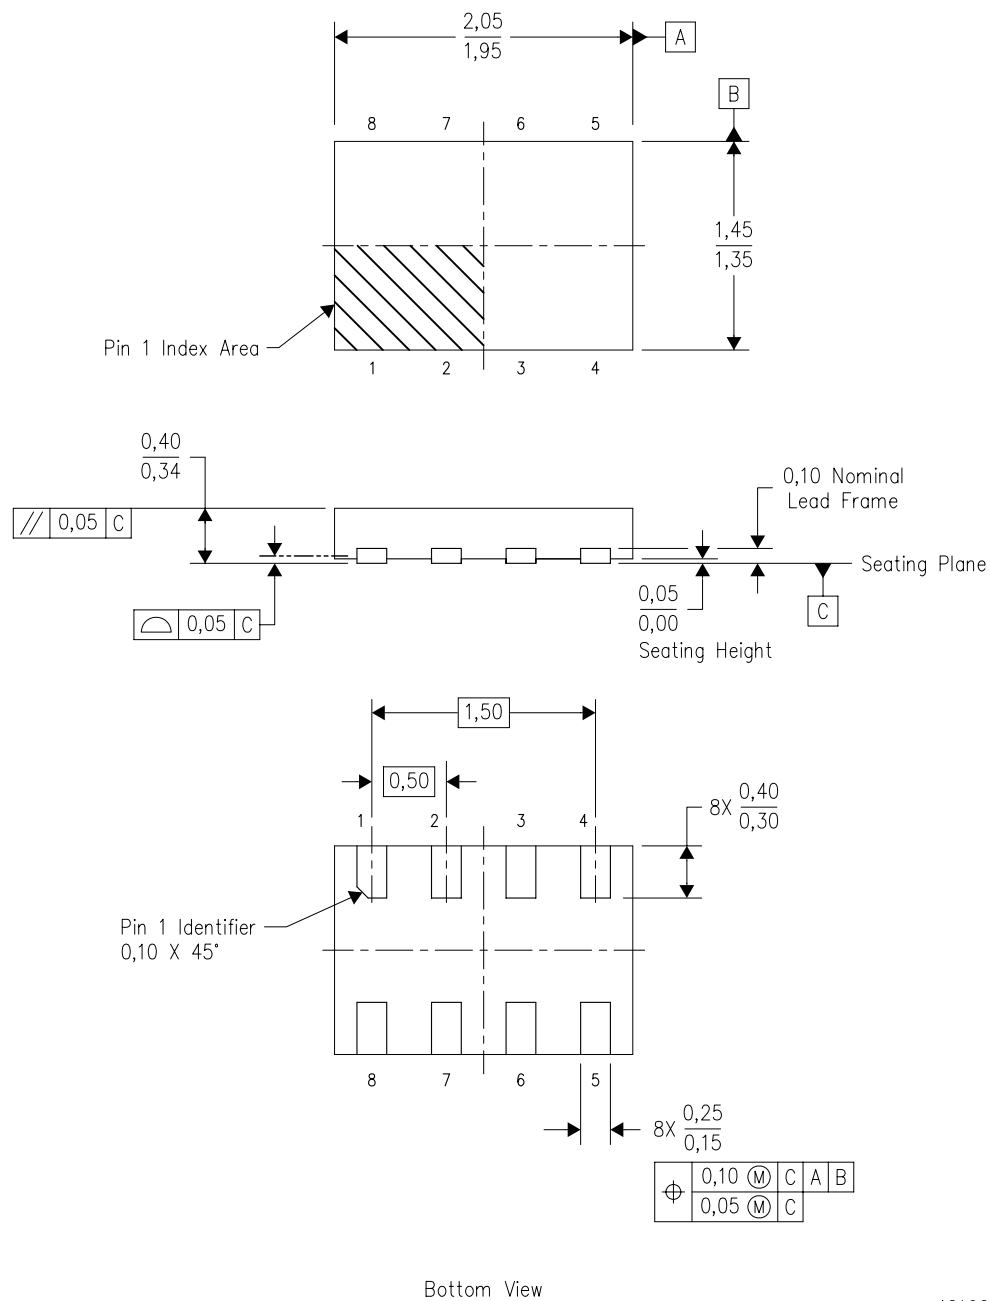


4210271/A 06/09


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. SON (Small Outline No-Lead) package configuration.

DQL (R-PX2SON-N8)

Example Board Layout

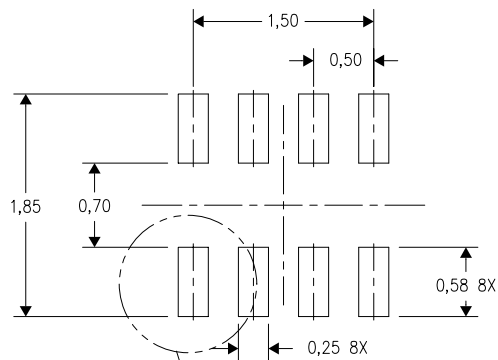

Example Stencil Design
(Note E)

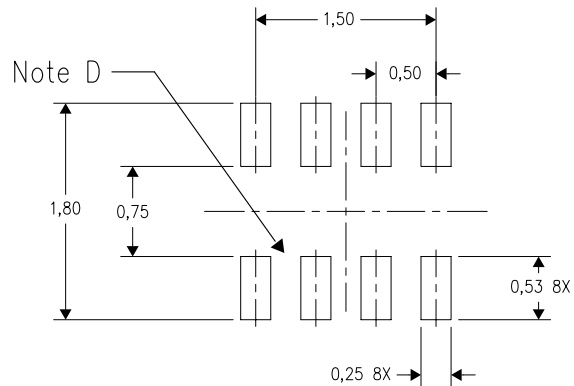

4210300/A 06/09

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-7351 is recommended for alternate designs.
 - D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.
 - E. Maximum stencil thickness 0,127 mm (5 mils). All linear dimensions are in millimeters.
 - F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - G. Side aperture dimensions over-print land for acceptable area ratio > 0.66. Customer may reduce side aperture dimensions if stencil manufacturing process allows for sufficient release at smaller opening.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications
DSP	dsp.ti.com	Computers and Peripherals	www.ti.com/computers
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps
Interface	interface.ti.com	Energy	www.ti.com/energy
Logic	logic.ti.com	Industrial	www.ti.com/industrial
Power Mgmt	power.ti.com	Medical	www.ti.com/medical
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless-apps