```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.0.1

Pinging 192.168.0.1 with 32 bytes of data:

Reply from 192.168.0.1: bytes=32 time=10ms TTL=128
Reply from 192.168.0.1: bytes=32 time=15ms TTL=128
Reply from 192.168.0.1: bytes=32 time=16ms TTL=128
Reply from 192.168.0.1: bytes=32 time=15ms TTL=128

Ping statistics for 192.168.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 10ms, Maximum = 16ms, Average = 14ms

C:\>
```
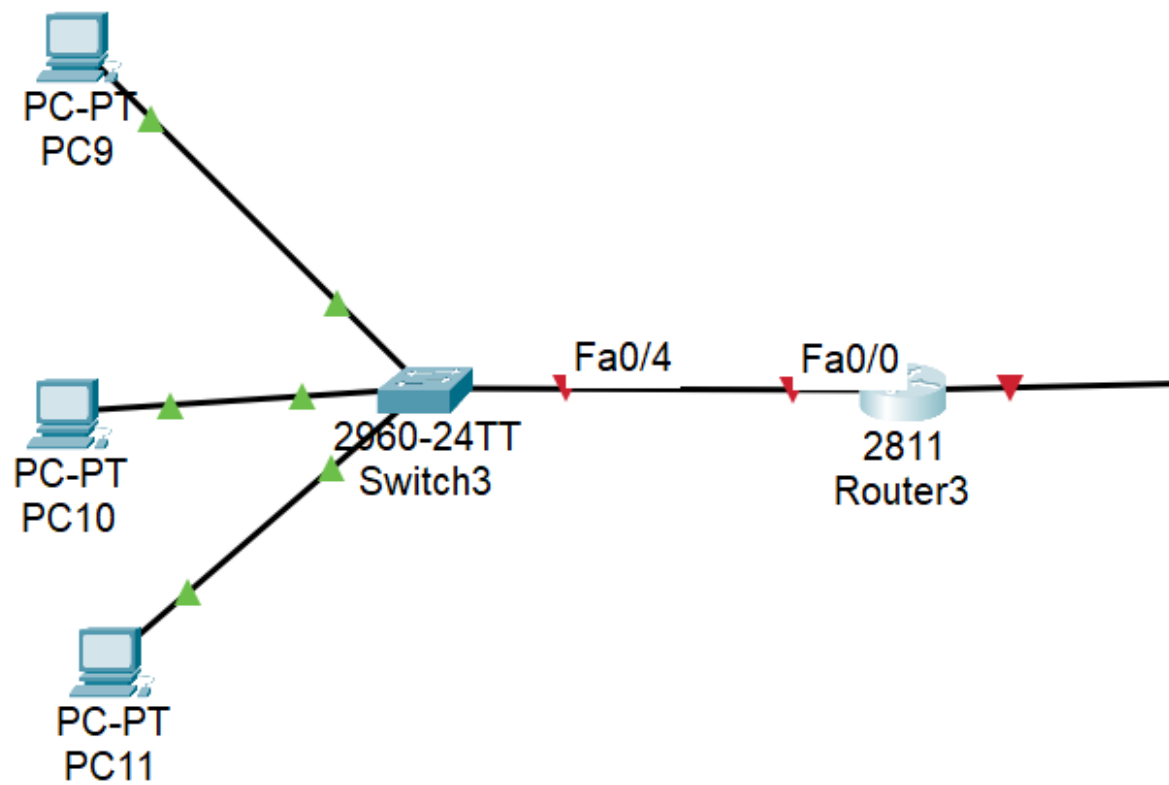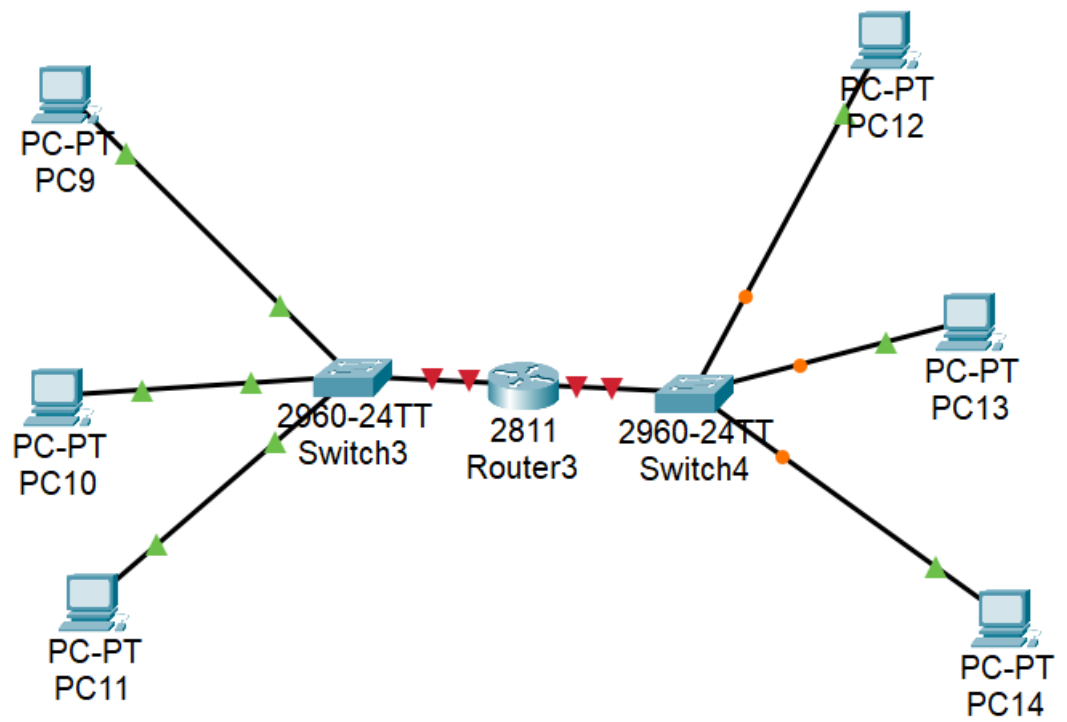
```
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Не работает

PC-PT
PC9

PC-PT
PC12

PC-PT
PC10

2960-24TT
Switch3

2811
Router3

2960-24TT
Switch4

PC-PT
PC13

PC-PT
PC11

PC-PT
PC14

PC-PT
PC9

PC-PT
PC10

2960-24TT
Switch3

Fa0/4

Fa0/0

2811
Router3

PC-PT
PC11

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.0

Pinging 192.168.0.0 with 32 bytes of data:

Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time=11ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.254: bytes=32 time=1ms TTL=255
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.254: bytes=32 time<1ms TTL=255
Reply from 192.168.0.3: bytes=32 time=1ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.254: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.0.0:
    Packets: Sent = 4, Received = 11, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 11ms, Average = 1ms

C:\>
```

работает