
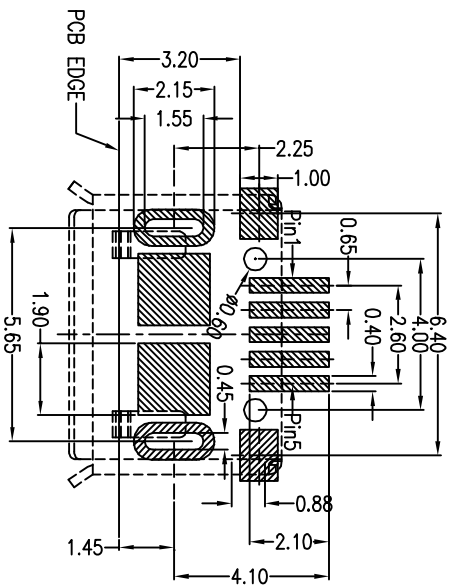
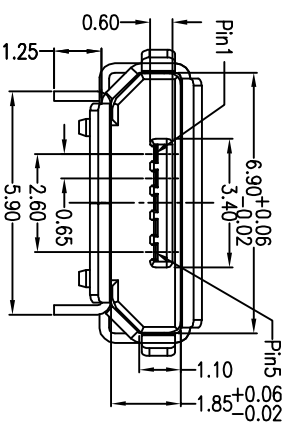

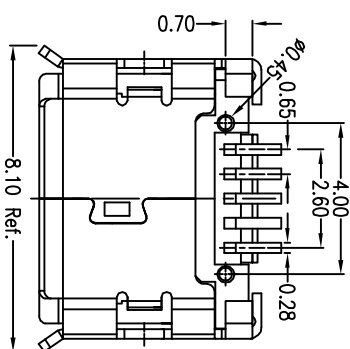

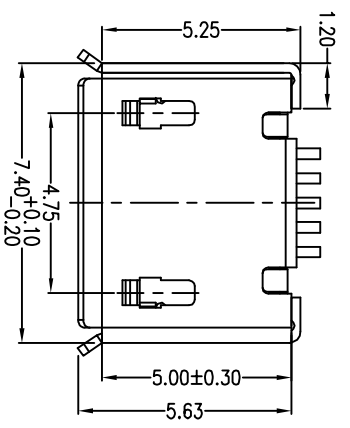


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE

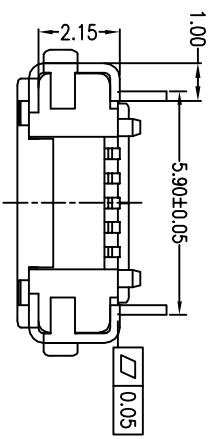

- Note:
1. Material:
- 1.1 Housing: High temperature thermoplastic with g.f, UL94V-0
 - 1.2 Contact: copper alloy, t=0.20mm
 - 1.3 Shell: copper alloy, t=0.25mm
2. Specification:
- 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 50 mW Max.
 - 2.4 Insulation resistance: 100 MW Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
 - 2.7 Temperature range: -30°C~80°C

RECOMMENDED PCB LAYOUT

A 01 S B X X X X X X X 1-236

- ① 产品代号 A: 产品
- ② 产品系列 01: micro usb 5s B
- ③ 产品类别 S: 母座
- ④ 产品类型 B: B TYPE
- ⑤ 外壳材料 1: 0280R-H 5: SPC
- ⑥ 外壳电镀 0: 素材 1: 1100W 2: 280100W 3: 311400W 4: 4400W
- ⑦ 端子材质 4: 0510101-01 2: 0280R-H
- ⑧ 端子电镀 0: 素材 1: 280100W 2: 280100W 3: 311400W 4: 4400W
- ⑨ 主体材质 1: 1LP
- ⑩ 主体颜色 B: 黑色 W: 白色
- ⑪ 包装方式 1: 1000个/包 2: 500个/包 3: 250个/包 4: 125个/包
- ⑫ 下板类型 1: dlp (插板)
- ⑬ 细节流水 280100W 5s B Type Smt有焊脚(插板) 5.0脚长, 25有柱脚加0.75

PART NO:	A01SBXXXXXX1-236	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED		DR:	夏友红
.x	0.25	CHK:	
.xx	0.20	APP:	
.xxx	0.15	SCALE:	5:1
Ang.	2°	DATE:	2012.09.11
		REV:	A

