28-Lead Thin Shrink Small Outline Package (ST) - 4.4 mm Body [TSSOP] With 5.5x3.0 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

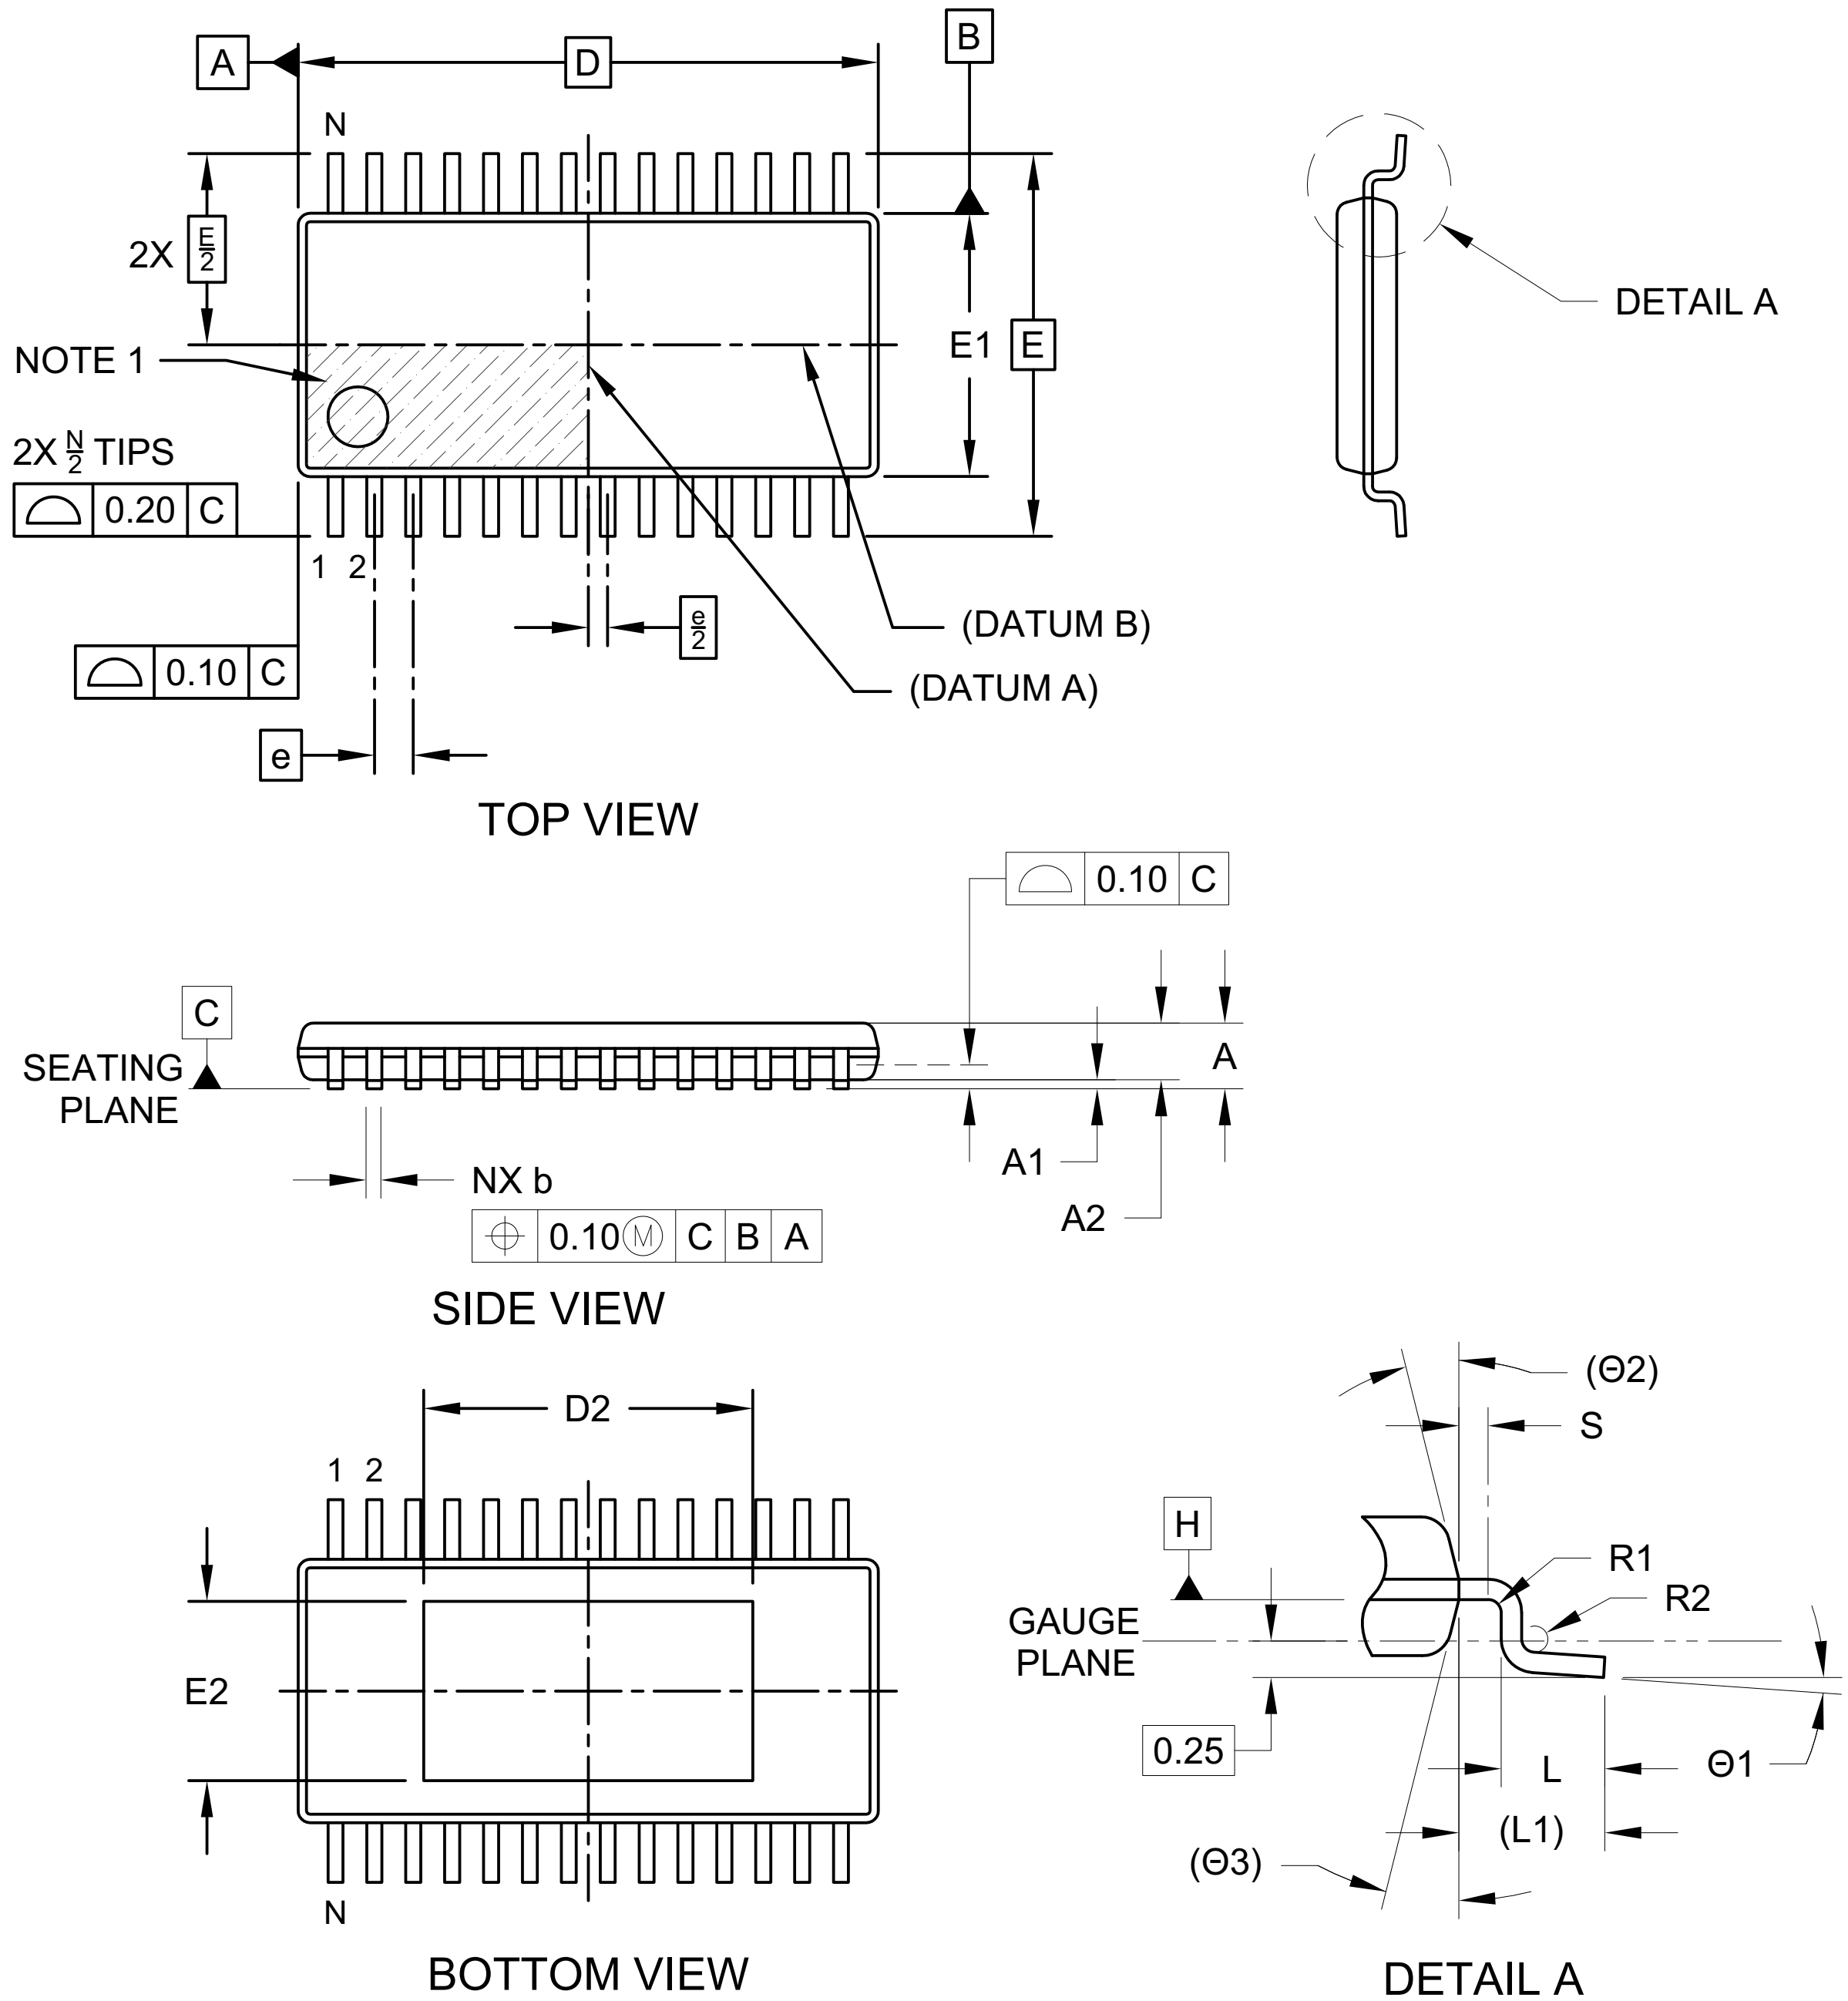

Microchip Technology Drawing C04-055A Sheet 1 of 2

28-Lead Thin Shrink Small Outline Package (ST) - 4.4 mm Body [TSSOP] With 5.5x3.0 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

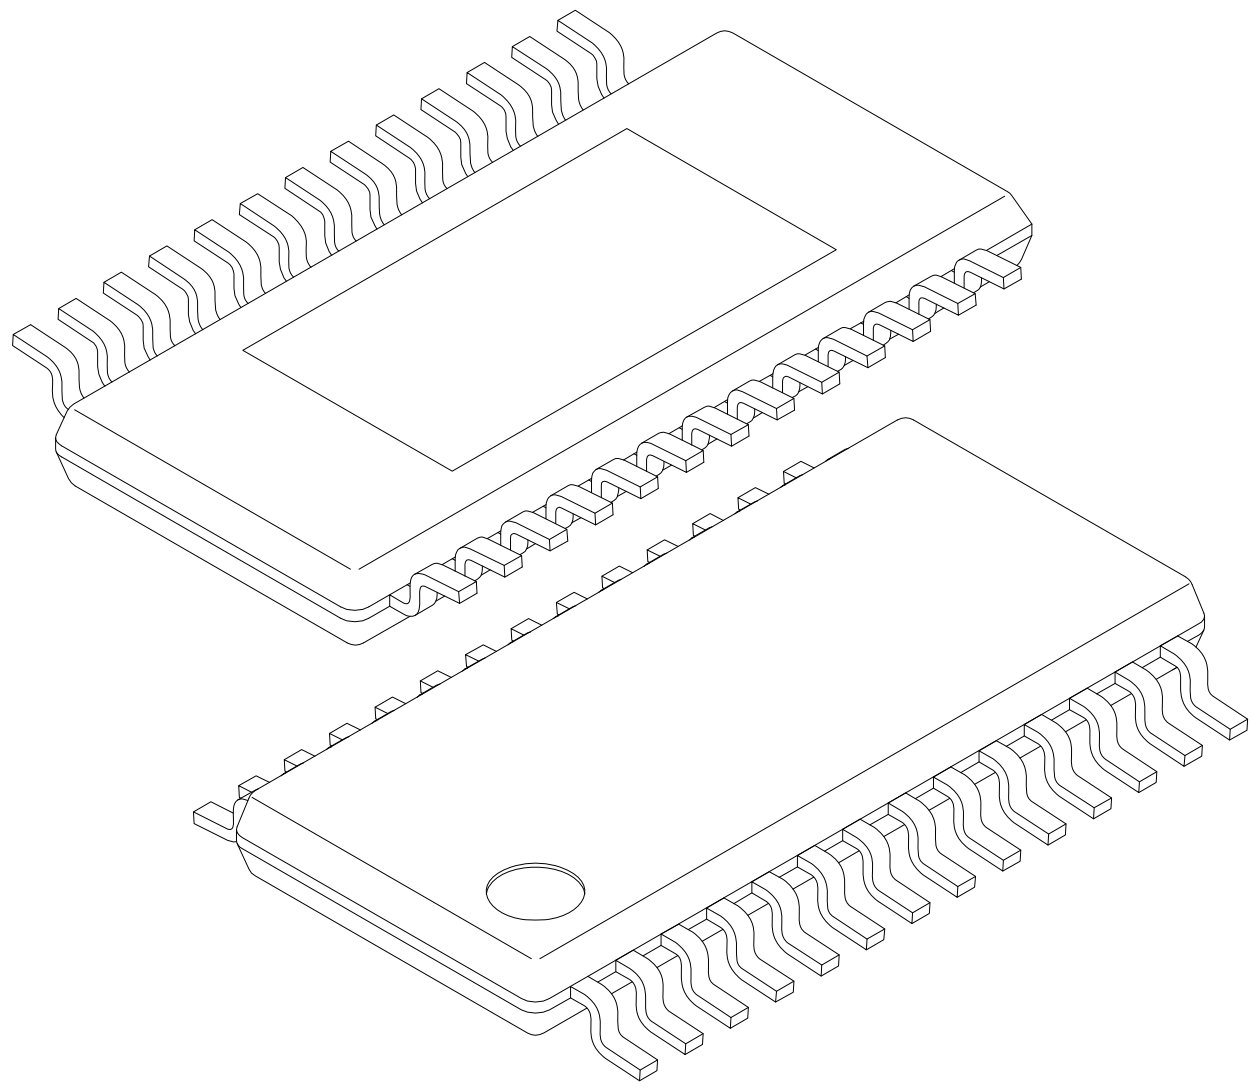

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		28	
Pitch	e		0.65 BSC	
Overall Height	A	-	-	1.10
Standoff	A1	0.05	-	0.15
Terminal Thickness	A2	0.85	0.90	0.95
Overall Length	D		9.70 BSC	
Exposed Pad Length	D2	5.40	5.50	5.60
Overall Width	E		6.40 BSC	
Molded Package Width	E1	4.30	4.40	4.50
Exposed Pad Width	E2	2.90	3.00	3.10
Terminal Width	b	0.19	-	0.30
Terminal Length	L	0.50	0.60	0.70
Terminal Shoulder	S	0.20	-	-
Terminal Bend Radius	R1	0.09	-	-
Terminal Bend Radius	R2	0.09	-	-
Terminal Foot Angle	Θ1	0°	-	8°
Mold Draft Angle	Θ2		14° REF	
Mold Draft Angle	Θ3		14° REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-055A Sheet 2 of 2

28-Lead Thin Shrink Small Outline Package (ST) - 4.4 mm Body [TSSOP] With 5.5x3.0 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

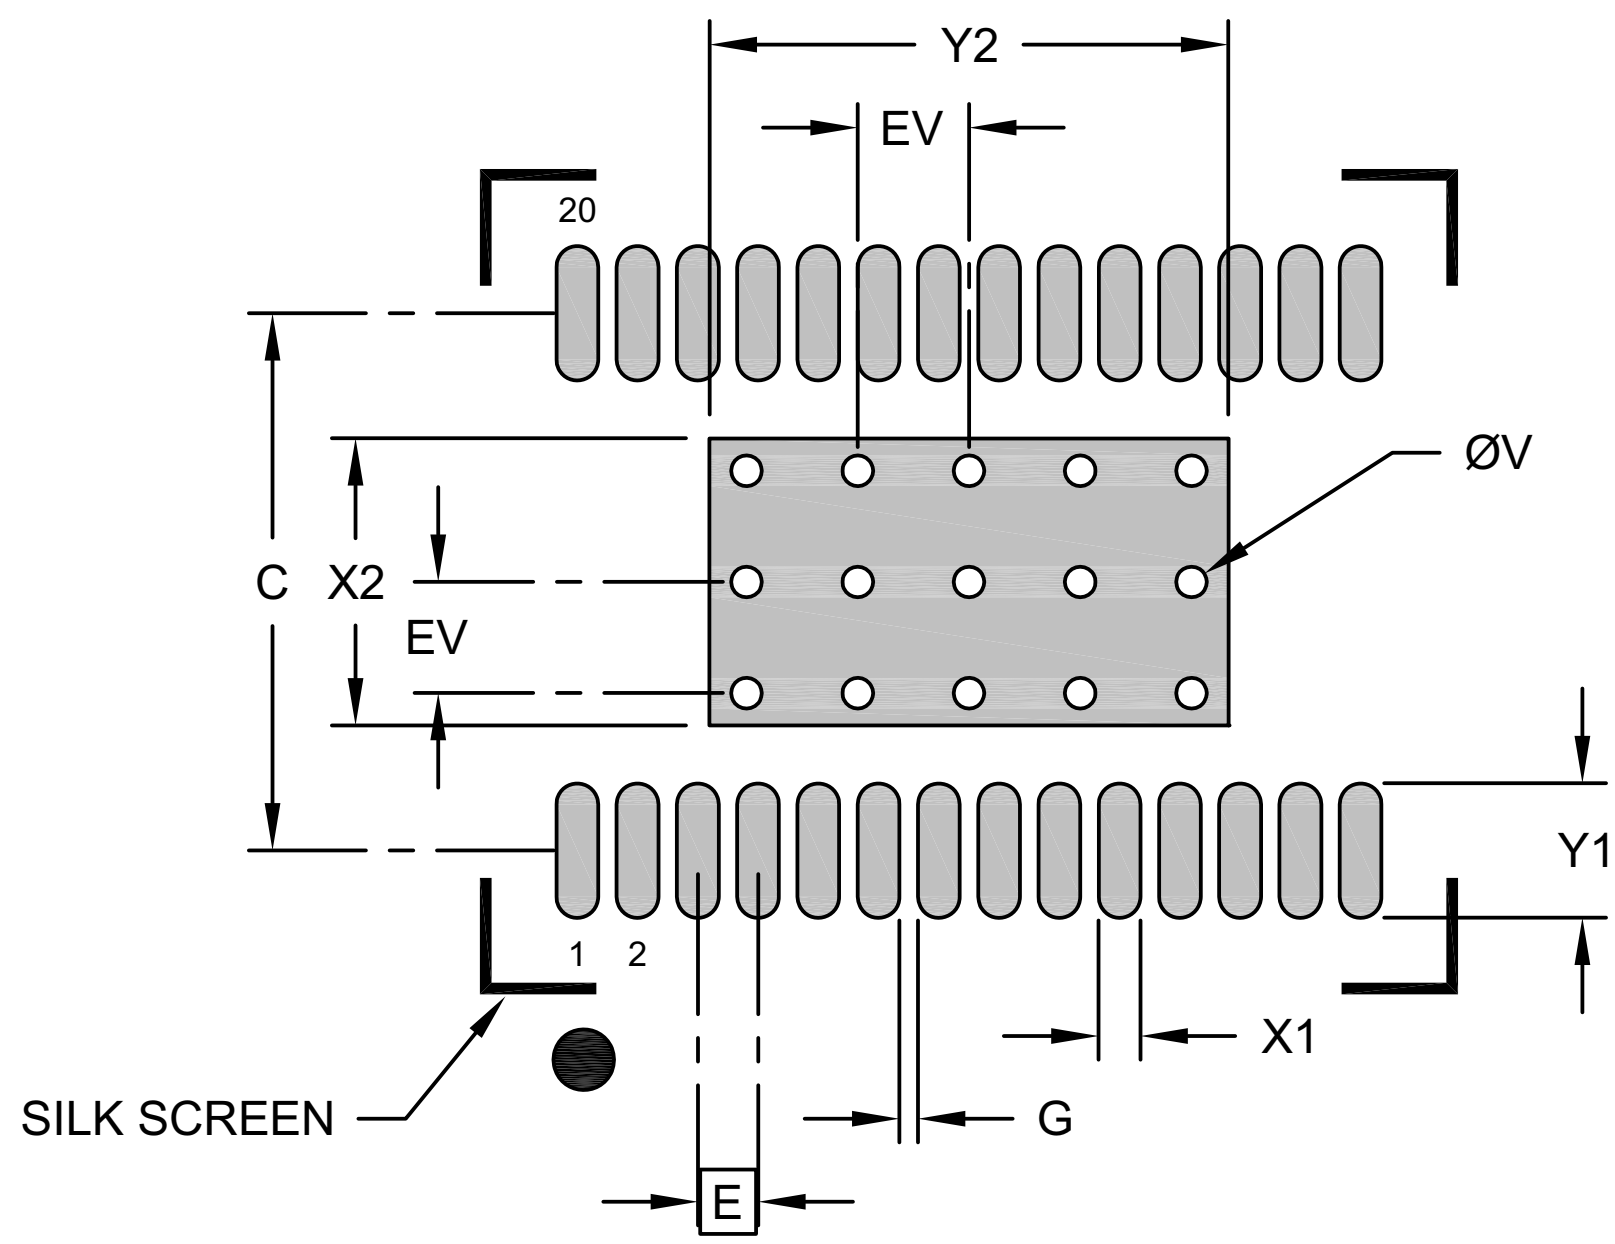

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Center Pad Width	X2			3.10
Center Pad Length	Y2			5.60
Contact Pad Spacing	C		5.80	
Contact Pad Width (X28)	X1			0.45
Contact Pad Length (X28)	Y1			1.45
Contact Pad to Pad (X26)	G1	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2055A