




# SPRING & BUTTON CONTACTS

**MATERIAL:** Plate: .020 (.51) Steel, Nickel Plate **Spring:** Spring Steel, Nickel Plate **Operating Temperature:** -50°F to 185°F (-45°C to 85°C)


"AA" - "CR2" - "A" - "17500" - "18350" - "18650"

(+) POSITIVE BUTTON




**CAT. NO. 5224**

(-) NEGATIVE SPRING




**CAT. NO. 5202**

(-) NEGATIVE SPRING




**CAT. NO. 5222**

(+) POSITIVE BUTTON




**CAT. NO. 5221**

DUAL CONTACT ("AA" ONLY)

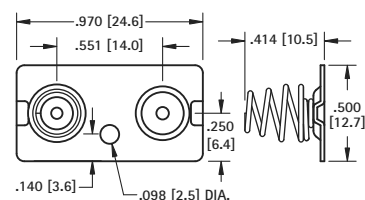


**CAT. NO. 5212** Left or Right

(-) NEGATIVE SPRING WITH TAB




**CAT. NO. 5201**

(+) POSITIVE BUTTON WITH TAB



**CAT. NO. 5223**


DUAL CONTACT ("AA" ONLY)

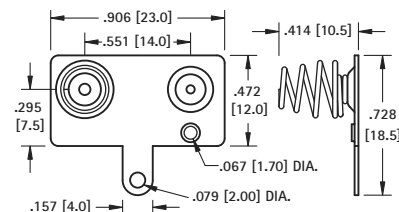

**CAT. NO. 5210** Left


**CAT. NO. 5211** Right (Shown)

(-) NEGATIVE SPRING WITH TAB/LANCE




**CAT. NO. 5220**

(+) POSITIVE BUTTON WITH TAB/LANCE



**CAT. NO. 5219**

DUAL CONTACT WITH TAB ("AA" ONLY)

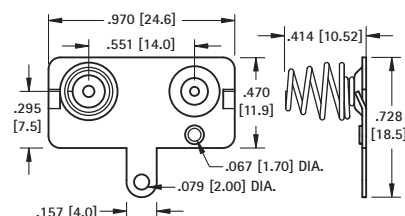

**CAT. NO. 5218** Left

**CAT. NO. 5217** Right (Shown)

BATTERY CONTACTS FOR MOLDED CASES