





Underwriters Laboratories, Inc.
Recognized Component Program —
UL File Number E201546




UL file number E201546 has been assigned to Keystone Electronics' "Quick-Fit" terminals (Refer to pages 64-68) indicating recognition by Underwriters Laboratories Inc. that they are in compliance with their component program.

Underwriters Laboratories Inc. component program assures that "Quick-Fit" terminals meet the dimensional and performance requirements of the National Electrical Manufacturers Association specification number NEMA2-1982-(1988) and UL310.

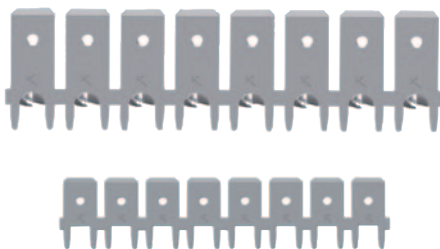

Operating Temperature: -50°F to 185°F (-45°C to 85°C)
• Supplied in continuous reel for automated pick and place insertion

.250 (6.4) TAB




CAT. NO.	MATERIAL	MTG. HOLES
1287-R	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

Tape & Reel Spec's: 12,500 per 15 inch reel

.250 (6.4) TAB

STURDI-MOUNT




CAT. NO.	MATERIAL	MTG. HOLES
1287-STR	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

Tape & Reel Spec's: 15,000 per 24 inch reel

.250 (6.4) TAB


STURDI-MOUNT

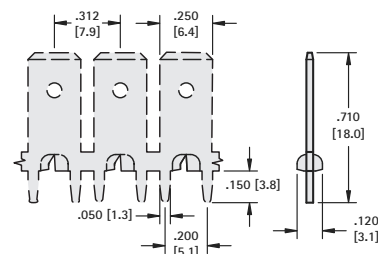

CAT. NO.	MATERIAL	MTG. HOLES
1289-STR	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

Tape & Reel Spec's: 15,000 per 24 inch reel

PIN-IN-PASTE (PIP) QUICK-FIT MALE TABS

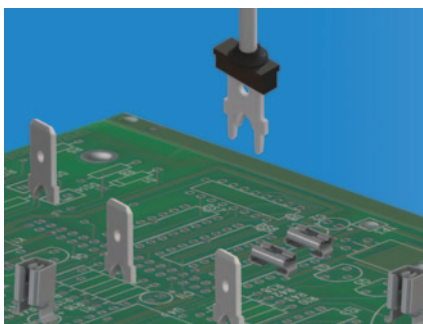


SUPPLIED ON TAPE AND REEL


.250 (6.4) TAB

STURDI-MOUNT

- Designed for automated assembly processing
- Supplied on tape and reel for automated assembly. Pick-up cap added to reeled parts to accommodate vacuum pick and place assembly
- Reflow solder compatible. Plastic pick-up cap will survive reflow temperatures




Mounting Detail



CAT. NO.	MATERIAL	MTG. HOLES
1287-ST-PPTR	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

Tape & Reel Spec's: 250 per 13 inch reel

SMT .250 (6.4) QUICK-FIT TERMINALS

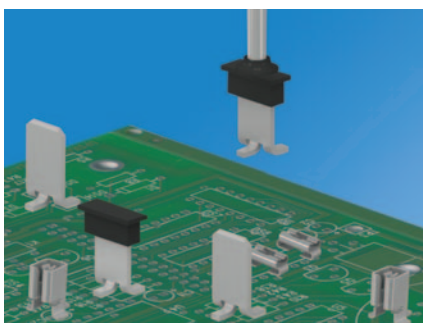

AVAILABLE ON TAPE AND REEL


.250 (6.4) TAB

VERTICAL - MALE

- Designed for automated assembly processing
- Available on tape and reel for automated assembly. Pick-up cap added to reeled parts to accommodate vacuum pick and place assembly
- Reflow solder compatible. Plastic pick-up cap will survive reflow temperatures
- Not UL Listed
- Cat. No. 4928 supplied without cap

CAT. NO.	ON TAPE & REEL	MATERIAL
4928	4928TR	.032 (.81) Brass, Tin Plate

Tape & Reel Spec's: 16mm wide, 12mm pitch, 13 inch reel (750 pieces per reel)



Cat. No. 4928



Cat. No. 4928TR

Mounting Detail

