
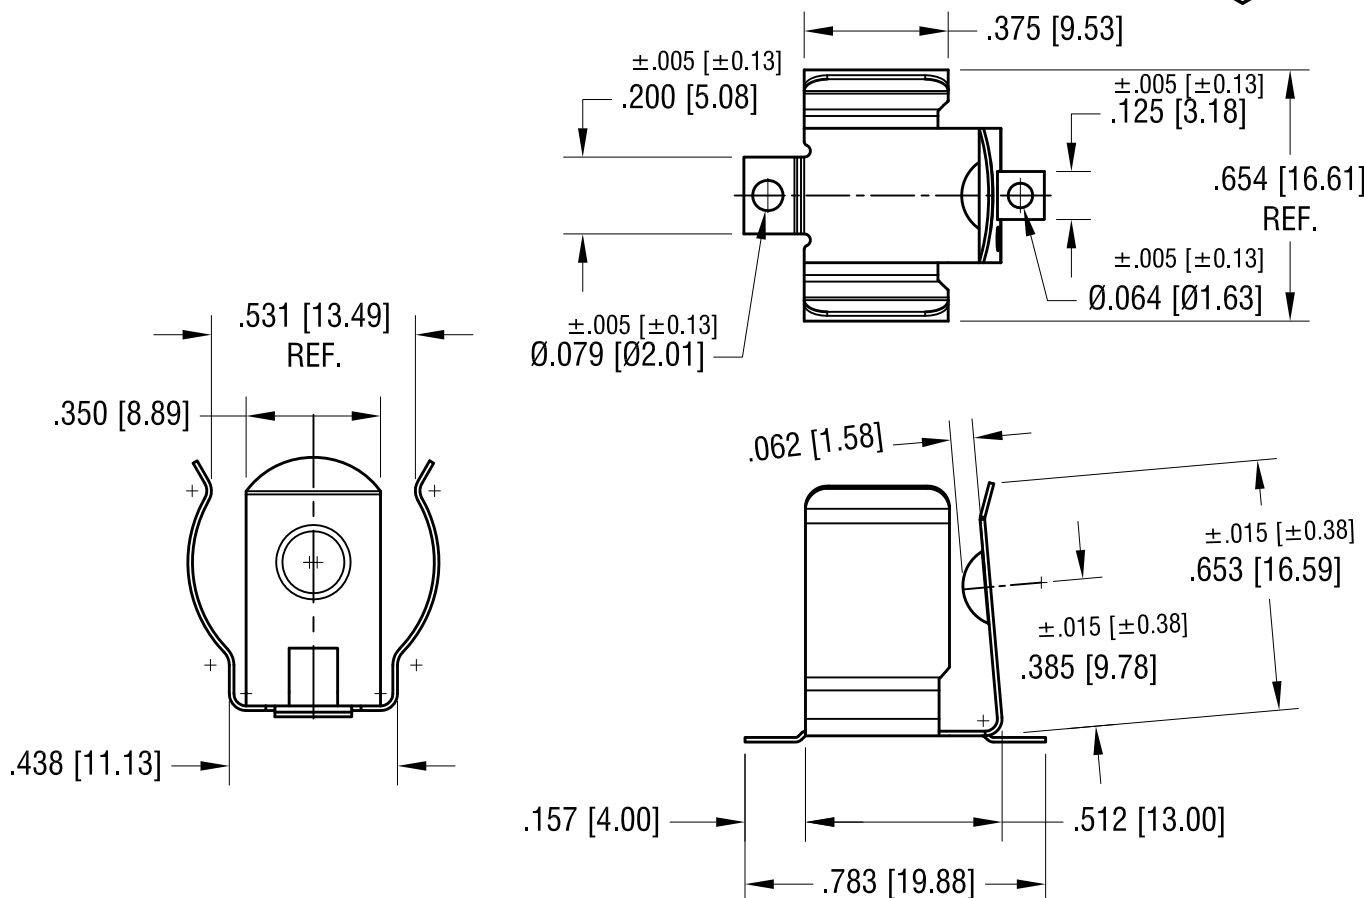


BATTERY	'L'
CR123A	.144 [3.66] MAX.
18350	.197 [5.00] MAX.
18650 ★	1.58 [40.20] MAX.
17500	0.99 [25.20] MAX.

★ FOR BATTERIES WITH
BUILT-IN CIRCUIT PROTECTION
(67mm LONG)

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE



NOTE:

1. HEAT TREAT TO SPRING TEMPER

PCB PROTECTION CIRCUITS ARE REQUIRED
WHEN USED WITH LITHIUM-ION BATTERIES

			KEYSTONE ELECTRONICS CORP. www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500		
9.14.23	MTG. SOLDER CONTACTS REMOVED CHANGE AS PER PCN 23-025	C	PART NAME 16mm - 19mm SM BATTERY CLIP		
8.15.22	B1 WAS .060, ADD RELIEF B2 CHANGE AS PER ECN 22-141	B	MATERIAL .012 [0.30] TH'K ANNEALED SPRING STEEL		
6.14.21	REMOVE HOLE FOR WIRE CHANGE AS PER ECN 21-053	A	FINISH TIN NICKEL PLATE	DRN BY NT	DATE 1.17.18
				APP'D RH	SCALE 2X
			TOLERANCES DECIMAL ± .010 [± 0.25] ANGULAR ± 2° UNLESS OTHERWISE SPECIFIED	CODE C	DWG NO. 254
DATE	DESCRIPTION	REV.			