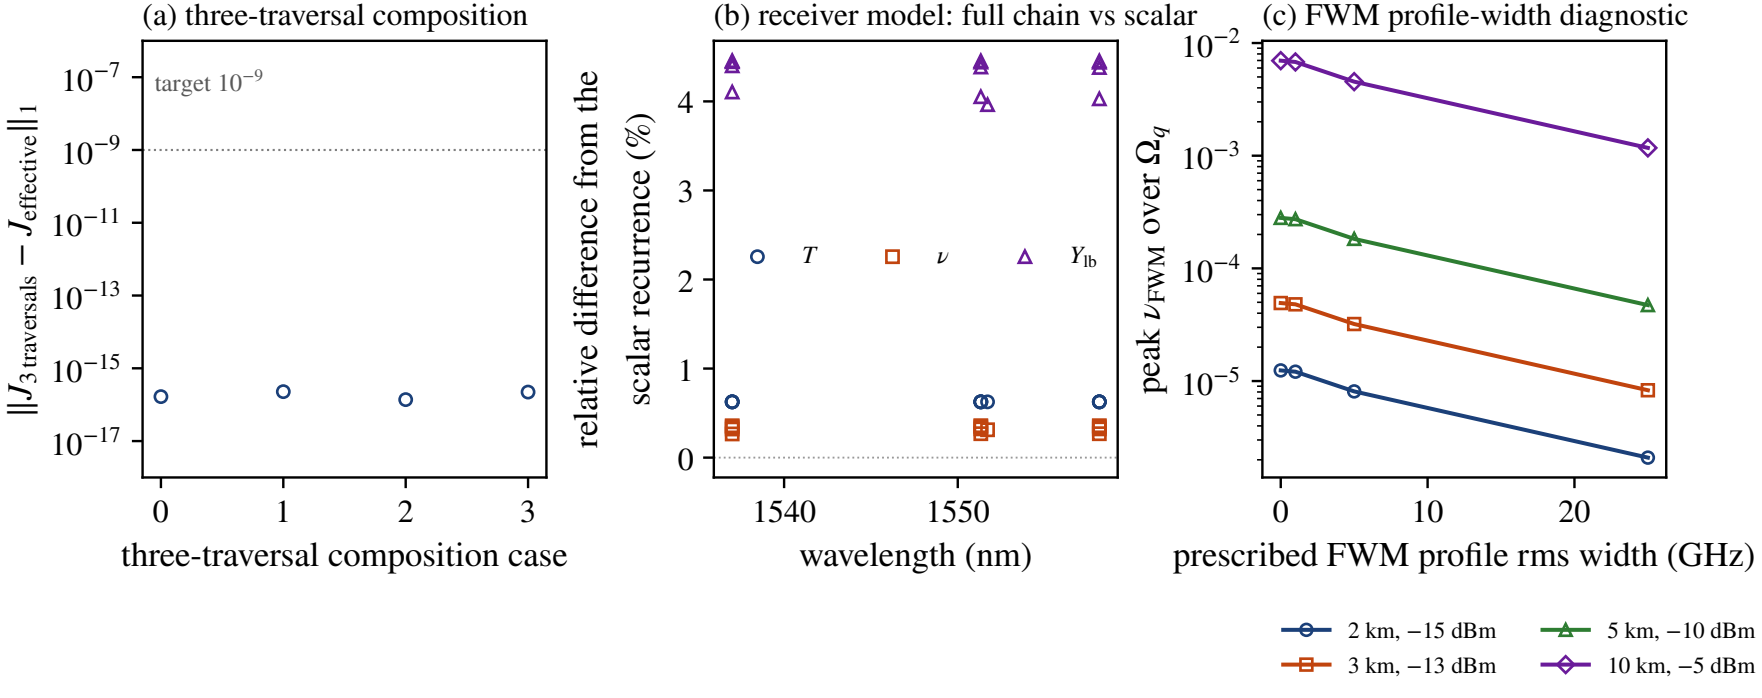
(a) three-traversal composition
target 10^{-9}
$\|J_{3\,\text{traversals}} - J_{\text{effective}}\|_1$
three-traversal composition case
(b) receiver model: full chain vs scalar
relative difference from the scalar recurrence (%)
T
ν
Y_{lb}
wavelength (nm)
(c) FWM profile-width diagnostic
peak ν_{FWM} over Ω_q
prescribed FWM profile rms width (GHz)
2 km, −15 dBm
3 km, −13 dBm
5 km, −10 dBm
10 km, −5 dBm