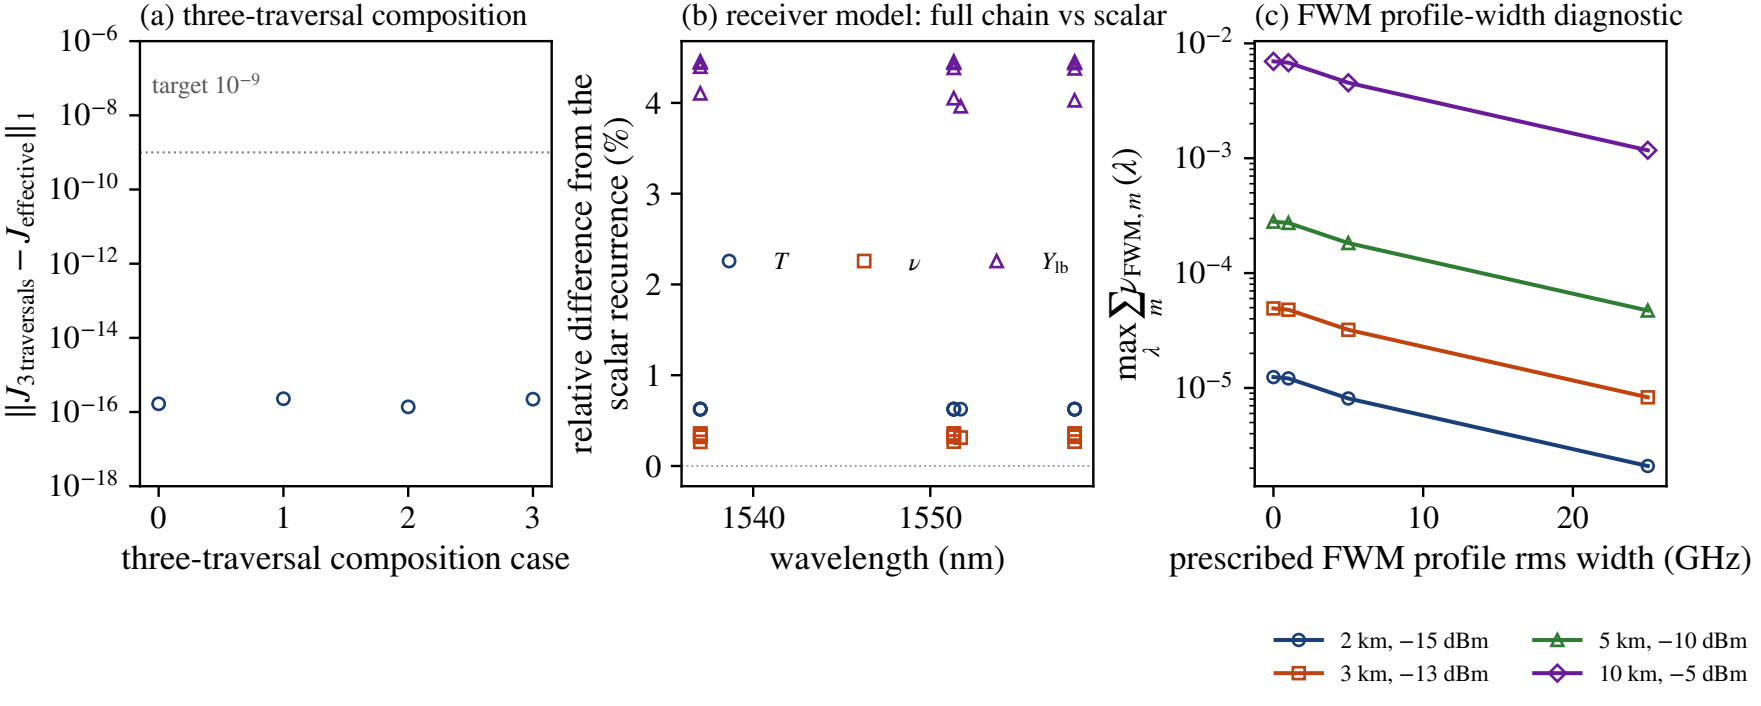
(a) three-traversal composition
target $10^{-9}$
$\|J_{3\,\text{traversals}} - J_{\text{effective}}\|_1$
three-traversal composition case
(b) receiver model: full chain vs scalar
relative difference from the scalar recurrence (%)
$T$
$\nu$
$Y_{\text{lb}}$
wavelength (nm)
(c) FWM profile-width diagnostic
$\max_{\lambda} \sum_{m} \gamma_{\text{FWM},m}(\lambda)$
prescribed FWM profile rms width (GHz)
2 km, −15 dBm
3 km, −13 dBm
5 km, −10 dBm
10 km, −5 dBm