



RoHS Compliant

| NO | Item Name | Q'ty | Material | Finish |
|---|---|---|---|---|
| 1 | Pin | 4 | Copper Alloy: Brass | Gold over Nickel plating |
| 2 | Housing | 1 | High Temp. Plastics Black | ——— |
| 3 | Magnet | 2 | NdFeB | Nickel plating |
| 4 | | | | |
| 5 | | | | |

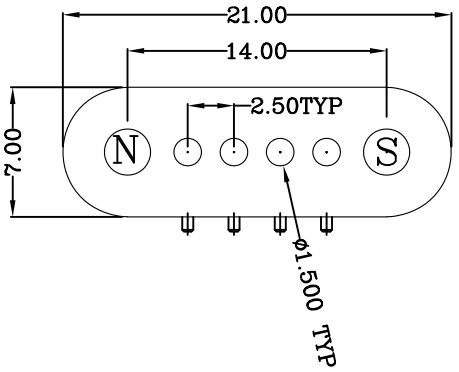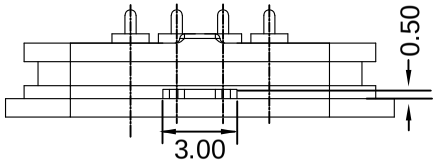


Recommended PCB Layout
(Component Side. Tol. ±0.05)

Notes:
1 No deformation,contaimination allowed
2 Electrical
  2.1 Current rating: 2.0A, peak 3A
  2.2 Voltage rating: 36VDC Max.
  2.3 Insulation Resistance: 500Mohm Min. @500VDC
  2.4 Dielectric Withstanding Voltage: 500VAC 1 minute
3 Environmental
  3.1 Operating and Storage temperature: −30℃~+65℃
4 RoHS Compliant

| REV. | ECN NO./CHANGE DESCRIPTION | DATE |
|---|---|---|
| X1 | Proposal | 2018.10.25 |

GENERAL TOLERANCES ( Unless Specified )
.0 ± 0.15 | .00 ± 0.10
.000 ± 0.03 | Angle ± 2°

THIS DRAWING IS CONFIDENTIAL AND COPYRIGHT PROPERTY OF ANLINKED. NO FURTHER DISCLOSED PERMISSED TO OTHER COMPANY BY YOU WITHOUT ANLINKED WRITTEN AUTHORIZATION!

SIZE: A4 | UNIT: mm

SHENZHEN YIWEI TECHNOLOGY CO.,LTD
An ISO9001:2015 Certified Company

CUSTOMER DWG

TITLE: Magnet Pad Connector 4Pin 2.5Pitch Right Angle

DRAWN: Ivan 2018.10.25
CHK'D: SH 2018.10.25
APP'D: Ben 2018.10.25

PART NO. MG04254FRA1S1N

| SCALE | SHEET | REV. |
|---|---|---|
| 1:1 | 1/1 | X1 |