

Analysis of Pressure Drop in Packed Beds Using the Ergun Equation

Nirnoy Barma

Jadavpur University, Department of Chemical Engineering

December, 2025

Abstract

Packed bed reactors are widely used in chemical engineering processes, and understanding the pressure drop across such beds is critical for design and operation. In this project, the pressure drop in a packed bed of spherical particles was calculated using the Ergun equation. Different parameters, such as particle diameter, bed porosity, and fluid velocity, were analyzed to observe their effect on the pressure drop. The results demonstrate the dependence of pressure drop on both viscous and inertial contributions, providing insights into optimal design considerations for packed beds.

Introduction

Packed beds are commonly employed in chemical reactors, adsorption columns, and filtration systems. The pressure drop across the bed affects energy consumption, flow distribution, and overall performance. The Ergun equation, which combines viscous and inertial effects, is a standard tool for predicting pressure drop in packed beds of uniform spherical particles. The objective of this work is to calculate and analyze the pressure drop in a packed bed for different operating conditions and discuss the implications for reactor design.

Methodology

The pressure drop ΔP across a packed bed of length L and cross-sectional area A is given by the Ergun equation:

$$\frac{\Delta P}{L} = \frac{150\mu(1-\epsilon)^2}{d_p^2\epsilon^3}v + \frac{1.75\rho(1-\epsilon)}{d_p\epsilon^3}v^2 \quad (1)$$

where:

- μ is the fluid viscosity (Pa·s),
- ρ is the fluid density (kg/m³),
- v is the superficial velocity of the fluid (m/s),

- d_p is the particle diameter (m),
- ϵ is the bed porosity.

For the analysis:

- The fluid was assumed to be incompressible and Newtonian.
- Spherical particles of uniform diameter were considered.
- Pressure drop was calculated for varying fluid velocities and particle diameters.

Results

The pressure drop was computed for particle diameters ranging from 3 mm to 8 mm and superficial velocities from 0.01 m/s to 2 m/s. It was observed that:

- Pressure drop increases with increasing fluid velocity due to higher viscous and inertial contributions.
- Smaller particle diameters lead to higher pressure drops, consistent with the inverse-square dependence in the viscous term and inverse dependence in the inertial term.
- Bed porosity significantly affects the pressure drop, with denser packing (lower ϵ) resulting in larger pressure losses.

Discussion

The Ergun equation effectively captures the combined influence of viscous and inertial effects in a packed bed. For low velocities, the viscous term dominates, while at higher velocities, the inertial term becomes more significant. These trends have direct implications for reactor design:

- Optimizing particle size and bed porosity is essential to minimize pressure drop while maintaining desired mass transfer characteristics.
- Understanding the velocity dependence helps in selecting appropriate pump capacities for industrial applications.

The work demonstrates that even with a relatively simple theoretical approach, significant insights can be gained regarding packed bed behavior, which is valuable for both academic understanding and practical design considerations.

Conclusion

This project analyzed the pressure drop in packed beds using the Ergun equation. The calculations show that fluid velocity, particle diameter, and bed porosity are critical parameters affecting pressure drop. These results can guide the design and operation of packed bed reactors, highlighting the importance of combining theory with practical considerations in chemical engineering.

graphicx

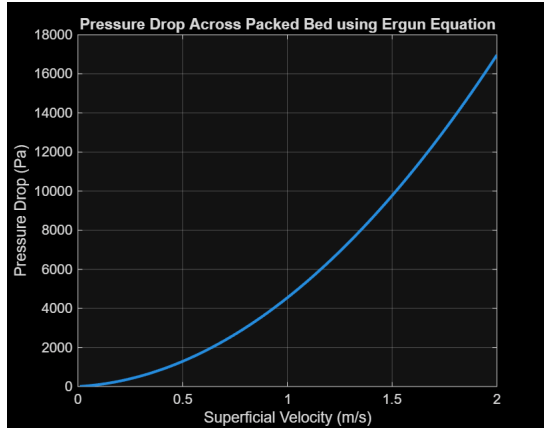


Figure 1: Pressure drop vs Superficial Velocity

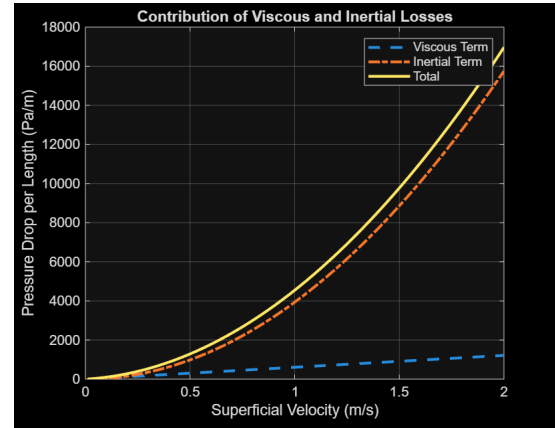


Figure 2: Contribution of Viscous and Inertial Losses

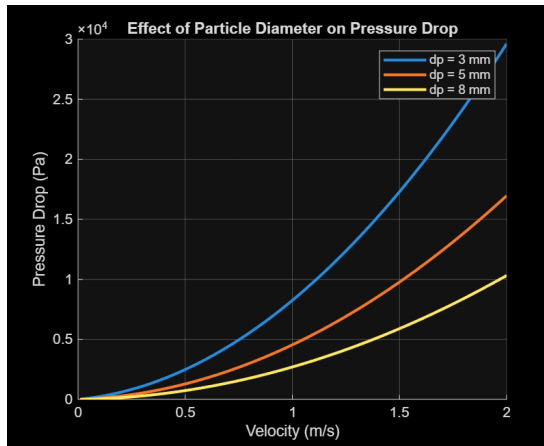


Figure 3: Effect of Particle Diameter

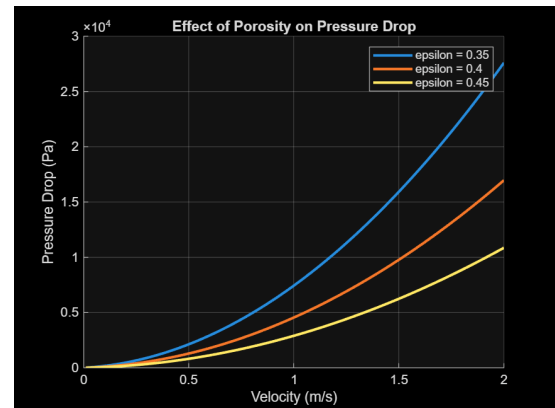


Figure 4: Effect of Porosity