

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE	22/09/21	PVV
2	REFER REV02 SCHEMATIC	25/12/21	KEDILAYA
3	REFER REV03 SCHEMATIC	22/02/22	KEDILAYA
4	REFER REV04 SCHEMATIC	31/03/22	KEDILAYA

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RoHS COMPLIANT CERTIFICATION OR MATERIAL DECLARATION REQUIRED.
2. MATERIAL:

A. IS410 OR EQUIVALENT. MATERIAL MUST CONFORM TO UL94V-0.

B. USE HTE COPPER, AS SPECIFIED IN THE CROSS SECTION DIAGRAM.

C. OVERALL METAL TO METAL THICKNESS AS SPECIFIED IN THE CROSS SECTION.
3. DRILLING:

A. DIAMETERS IN DRILL TABLE ARE FINISHED HOLE SIZES +/- .003 tol.

UNLESS OTHERWISE SPECIFIED IN DRILL TABLE.

B. TEARDROP ALLOWED ON ENTRY OF VIA ON EVERY TRACE LAYER.
4. PLATING:

COPPER PLATING IN THRU-HOLES .001 min.
5. MARKING:

A. SILKSCREEN IN WHITE NON-CONDUCTIVE EPOXY INK ON PRIMARY SIDE OF THE BOARD OR BOTH SIDES IF APPLICABLE.

B. FABRICATOR TO PLACE DATE CODE, LOGO AND RoHS COMPILANT SYMBOL IN SILKSCREEN ON SECONDARY SIDE.
6. FINAL FABRICATION:

A. SOLDRMASK PRIMARY AND SECONDARY SIDE OF BOARD USING LIQUID PHOTOIMAGABLE MASK MATERIAL OVER BARE COPPER. PER IPC-SM-840. MASK ARTWORKS PROVIDED ARE 1:1. SOLDERMASK COLOR *BLUE**
7. FINISH:

A. SHALL BE ELECTROLESS NIKEL & IMMERSION GOLD(ENIG).

B. NICKEL THICKNESS: 100-200 MICROINCHES.



C. GOLD THICKNESS: 3-10 MICROINCHES.
8. BOARDS SHALL BE PURCHASED FROM UL RECOGNIZED VENDORS ONLY. FLAMABILITY RATING (94-V0).
9. MANUFACTURE BOARD TO BE IN ACCORDANCE WITH PERFORMANCE STANDARD IPC-6011/6012 CLASS 2 BOARD TO BE INSPECTED PER IPC-600-A CLASS 2.
10. MAXIMUM WARP OR TWIST SHALL NOT EXCEED .007 in/in.
11. TESTING:


A. FABRICATOR TO ADD TEST STRUCTURES OR CUPONS AS NEEDED.


B. T-LINE IMPEDENCE TO BE TESTED OR GUARANTEE WITHIN 10% IF SPECIFIED IN THE CROSS SECTION. TOLERANCE TO BE +/-10% UNLESS OTHERWISE SPECIFIED.
12. FOLLOW VIA FILLING METHOD AS PER BELOW NOTES:

A. COMMON FOR ALL VIAS:


I. VIA WALL THICKNESS MIN 35um COPPER
13. CARE MUST BE TAKEN TO AVOID OVER ETCHING OF COPPER ON PADS.

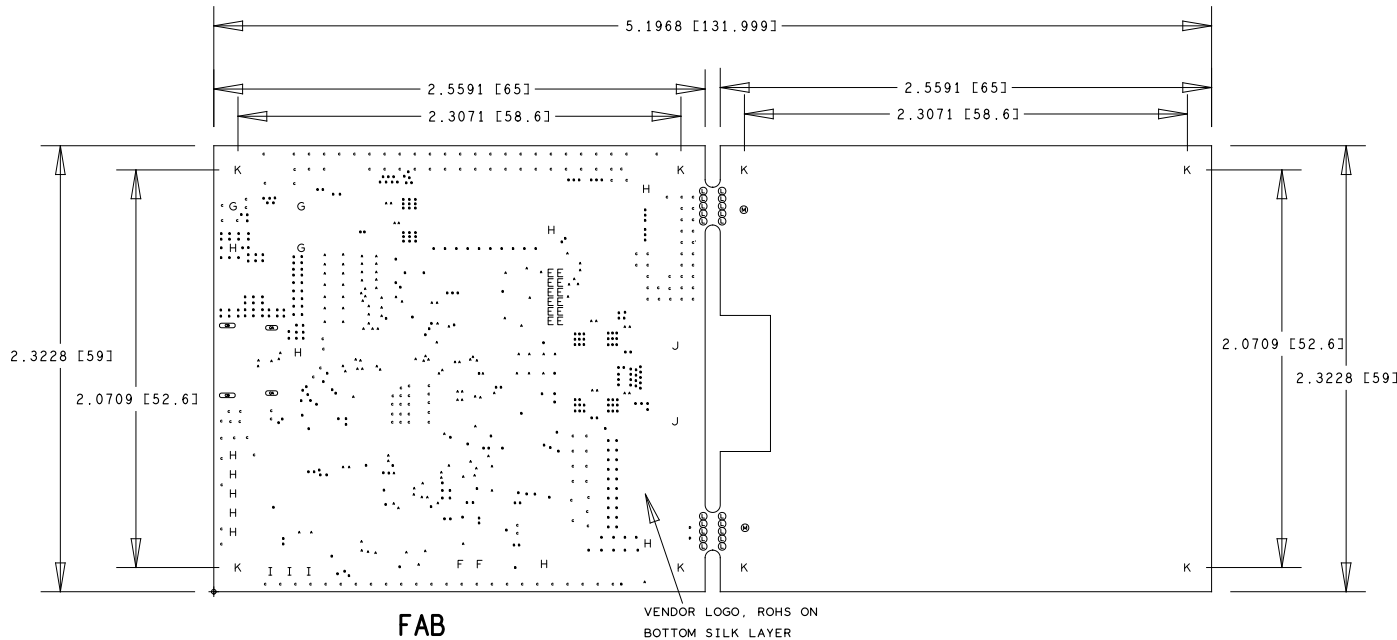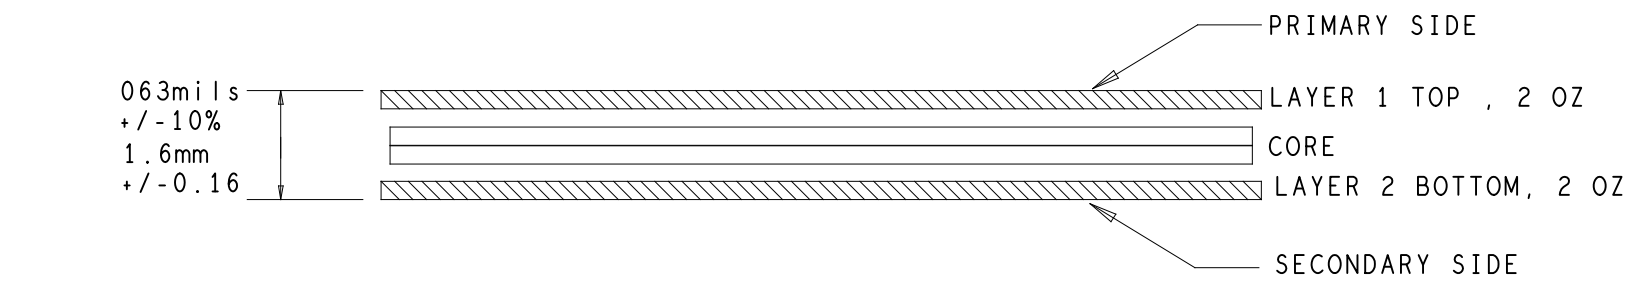


UNLESS OTHERWISE SPECIFIED		SIGNATURES	DATE	 CYPRESS SEMICONDUCTOR AN INFINEON TECHNOLOGIES COMPANY SAN JOSE, CA 95134 FABRICATION DRAWING REF_WLC_TX15W_C1 MP A11 15W POWER TRANSMITTER			
DIMENSIONS ARE IN INCHES		DRAWN : HUSA	31/03/22				
TOLERANCES ON: 2 PL DECIMALS +/- .010 3 PL DECIMALS +/- .005		CHECKED : KEDILAYA	31/03/22				
THIRD ANGLE PROJECTIONS 		ENGRG : KEDILAYA	31/03/22				
CYPRESS PROPRIETARY		ISSUED		SIZE: C FSCM NO: DWG NO: 610-60628-01 REV: 04 SCALE: 1/1 SHEET: 1 OF 1			
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS CYPRESS SEMICONDUCTOR PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY CYPRESS.							

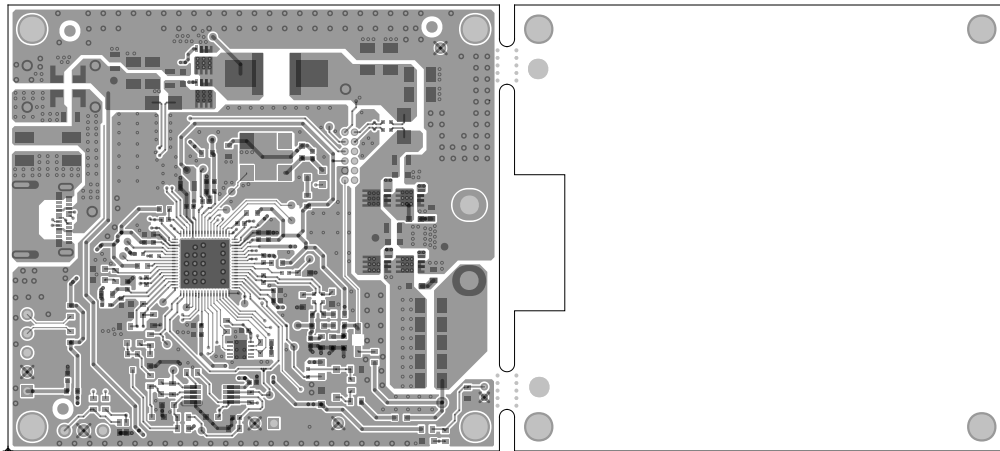


600-60628-01 REV04 PRIMARY SIDE

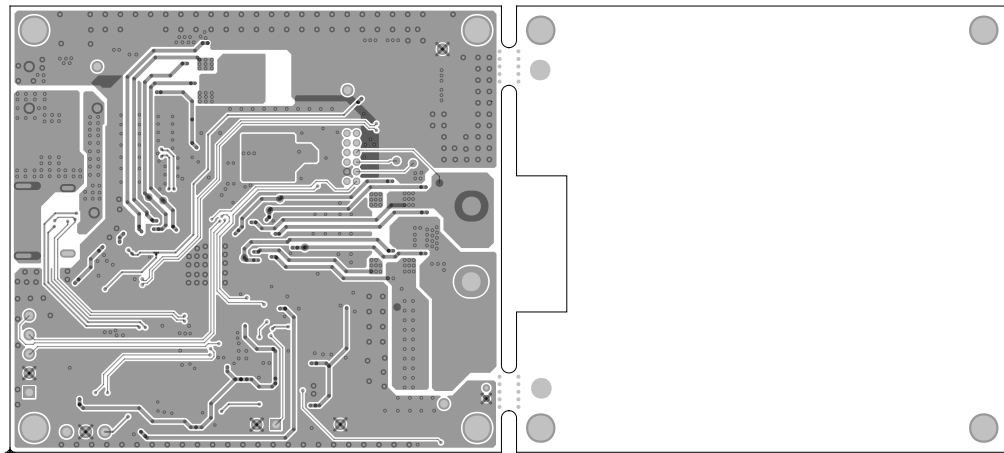


000-00058-01 REV04 SECONDARY SIDE

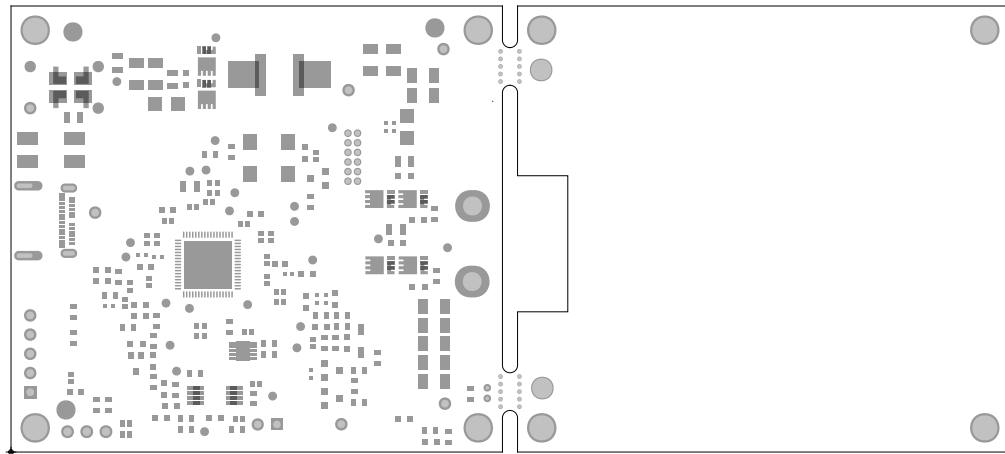


600-60628-01 REV04 PRIMARY SOLDERMASK

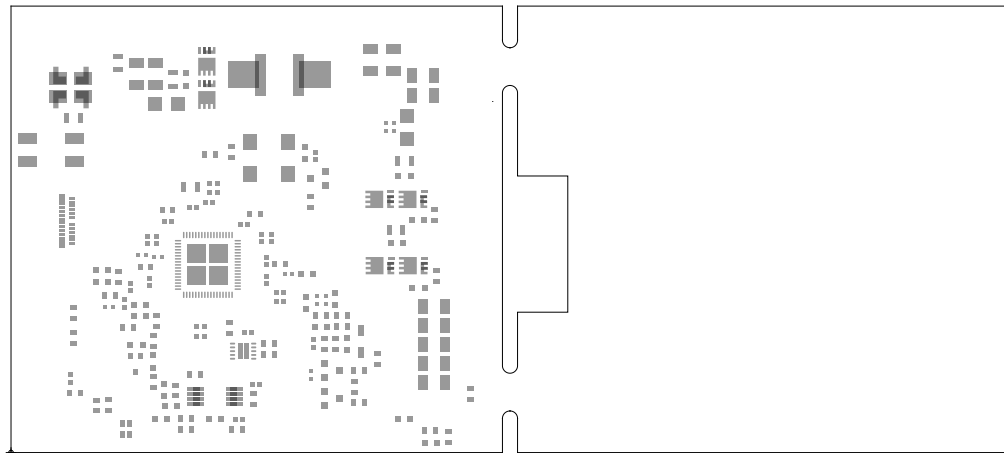

600-60628-01 REV04 PRIMARY SOLDERPASTE

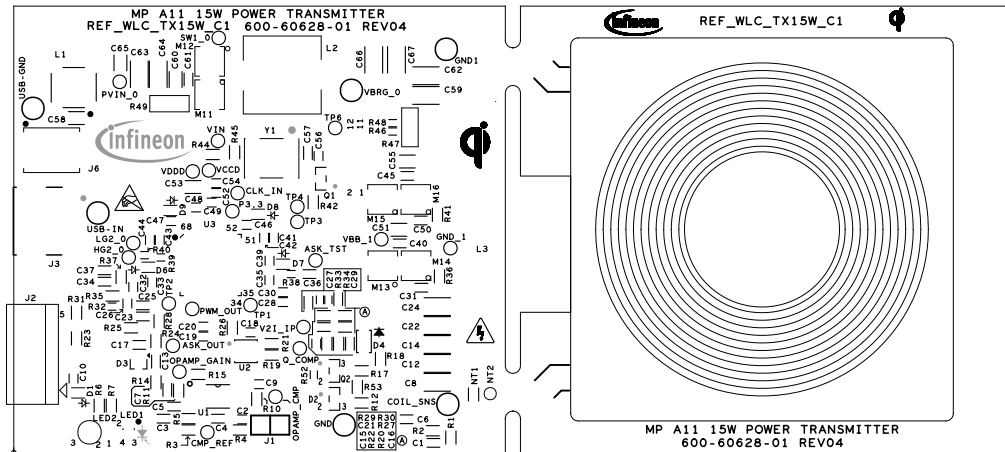


600-60628-01 REV04 PRIMARY SILKSCREEN

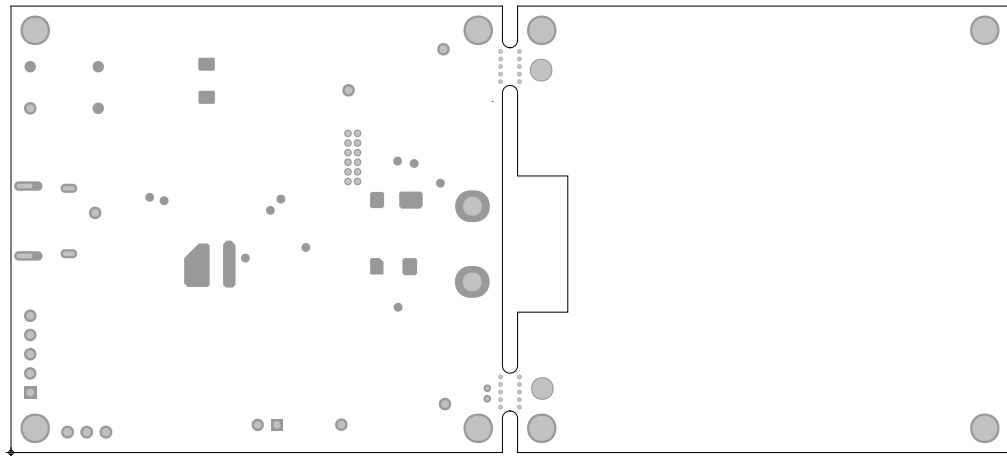

600-60658-01 REV04 SECONDARY SOLDER MASK

ART FILM - SSP

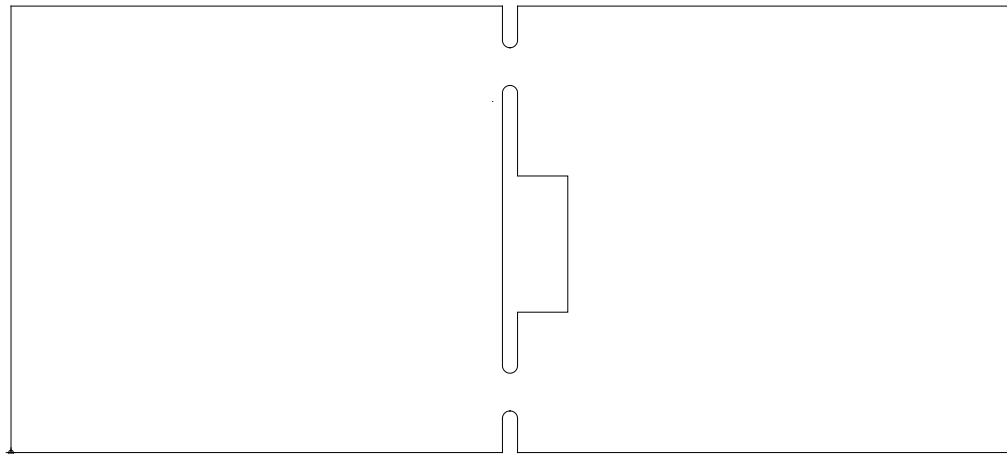

600-60658-01 REV04 SECONDARY SOLDERPASTE

ART FILM - SSP

000-00058-01 REV04 SECONDARY SILKSCREEN

