



UUM

Universiti Utara Malaysia

STTH3113 SENSOR-BASED SYSTEM (A)

SEMESTER 6 (A242)

Title:
Midterm Assignment

Prepared For:
Ahmad Hanis Bin Mohd Shabli

Prepared By:

Name	Matric Number
KHAIRUN NISAA BINTI DAWI CAHYONO	295071

Submission Date: 30th May 2025

YouTube Link: https://youtu.be/a_BGRbrELPE?si=3ErBUqz3IJOigFI4


GitHub Link: [nisaadawi/Midterm_STTHK3113_A242](https://github.com/nisaadawi/Midterm_STTHK3113_A242)

Arduino folder: [Midterm_STTHK3113_A242/DHT11_HTTP at main · nisaadawi/Midterm_STTHK3113_A242](https://github.com/nisaadawi/Midterm_STTHK3113_A242/tree/main/Midterm_STTHK3113_A242/DHT11_HTTP)

Backend folder: [Midterm_STTHK3113_A242/backend at main · nisaadawi/Midterm_STTHK3113_A242](https://github.com/nisaadawi/Midterm_STTHK3113_A242/tree/main/Midterm_STTHK3113_A242/backend)

Mobile App folder: [Midterm_STTHK3113_A242/flutter_dht11_apps at main · nisaadawi/Midterm_STTHK3113_A242](https://github.com/nisaadawi/Midterm_STTHK3113_A242/tree/main/Midterm_STTHK3113_A242/flutter_dht11_apps)


1. System Architecture Diagram

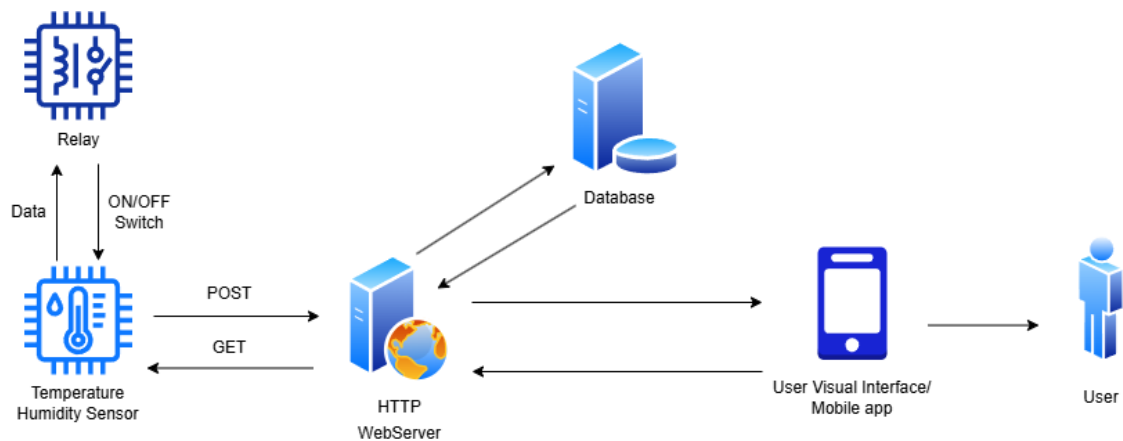

1. Temperature Humidity Sensor (DHT11)
 - Measure environmental data
 - Example output: Temp: 28°C, Humidity: 75%
2. Webserver (PHP)
 - Receive sensor data from HTTP request
 - Store data in Database
3. Database (PHPMyAdmin)
 - Stores: sensor reading, thresholds values and timestamp
4. User Visual:
 - Dashboard for mobile app for monitoring

2. Setup Step

1. Sensor Setup

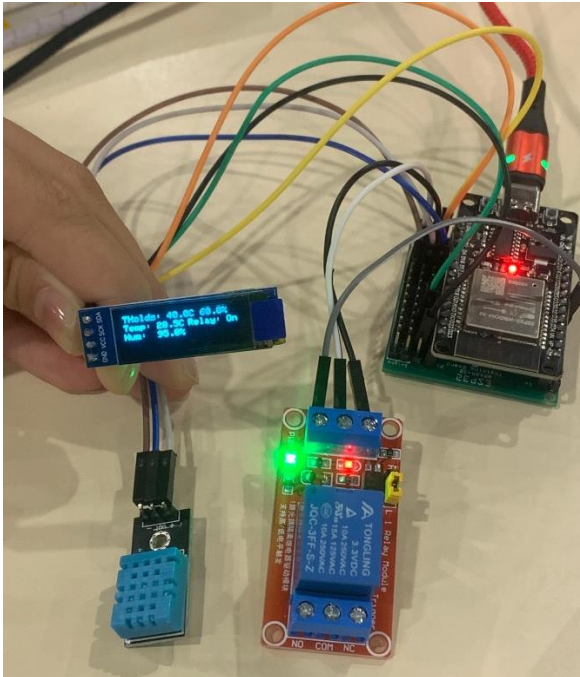

ESP32

- Main Controller

DHT 11

- +VE to 3V3
- OUT to GPIO 4
- -VE to GND

Relay

- DC+ to 3V3
- DC- to GND
- IN to GPIO 25


OLED

- VCC to 3V3
- GND to GND
- SCK to GPIO 22
- SDA to GPIO 21

Arduino

- Code the program

2. Web App

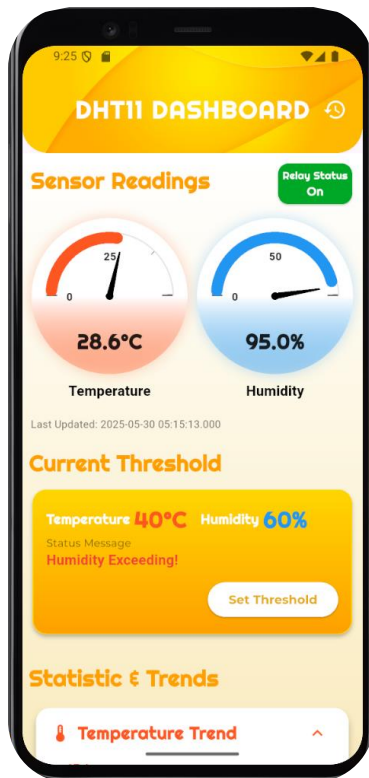

1. Use Flutter as UI
 - Main.dart
 - Myconfig.dart
 - Splash_screen.dart
 - Homepage.dart
 - dht_history_screen.dart
2. PHP as backend
 - Dbconfig.php
 - Dht11_backend.php
 - Fetch.php
 - Fetch_threshold.php
 - Update_threshold.php

3. Screenshots

Backend

I created 1 database with 2 table. 1 is table tbl_dht11 that used to save all the temperature and humidity value collected by the sensor every 10 seconds. While, the 2nd table threshold_controller which functions to save the value off temperature and humidity thresholds. User are also allowed to change/set new threshold

Server: localhost:3306 » Database: humancmt_nd_dht11

Structure SQL Search Query Export Import Operations Routines Events Triggers Desi

Filters

Containing the word:

Table	Action	Rows	Type	Collation	Size	Overhead
<input type="checkbox"/> tbl_dht11		415	InnoDB	latin1_swedish_ci	48.0 KiB	-
<input type="checkbox"/> threshold_controller		1	InnoDB	latin1_swedish_ci	16.0 KiB	-
2 tables		Sum	416	InnoDB	latin1_swedish_ci	64.0 KiB

☐ Check all With selected:

Server: localhost:3306 » Database: humancmt_nd_dht11 » Table: tbl_dht11

		data_id	device_id	temperature	humidity	relay_status	message	timestamp
<input type="checkbox"/>		560	103	29.1	95	On		2025-05-29 23:21:23
<input type="checkbox"/>		561	103	29.1	95	On		2025-05-29 23:21:34
<input type="checkbox"/>		562	103	29.2	95	On		2025-05-29 23:21:43
<input type="checkbox"/>		563	103	29.2	95	On		2025-05-29 23:21:53
<input type="checkbox"/>		564	103	29.1	95	On		2025-05-29 23:22:02
<input type="checkbox"/>		565	103	29.1	95	On		2025-05-29 23:22:12
<input type="checkbox"/>		566	103	29	95	On		2025-05-29 23:22:23
<input type="checkbox"/>		567	103	29	95	On		2025-05-29 23:22:34
<input type="checkbox"/>		568	103	28.9	95	On		2025-05-29 23:22:45
<input type="checkbox"/>		569	103	28.9	95	On		2025-05-29 23:22:53
<input type="checkbox"/>		570	103	28.8	95	On		2025-05-29 23:23:02
<input type="checkbox"/>		571	103	28.8	95	On		2025-05-29 23:23:19
<input type="checkbox"/>		572	103	28.7	95	On		2025-05-29 23:23:22
<input type="checkbox"/>		573	103	28.7	95	On		2025-05-29 23:23:32
<input type="checkbox"/>		574	103	28.7	95	On		2025-05-29 23:23:42
<input type="checkbox"/>		575	103	28.7	95	On		2025-05-29 23:23:53
<input type="checkbox"/>		576	103	28.7	95	On		2025-05-29 23:24:02
<input type="checkbox"/>		577	103	29.9	95	On		2025-05-29 23:24:12
<input type="checkbox"/>		578	103	30.6	95	On		2025-05-29 23:24:22
<input type="checkbox"/>		579	103	31.7	95	On		2025-05-29 23:24:35
<input type="checkbox"/>		580	103	32.9	91	On		2025-05-29 23:24:43
<input type="checkbox"/>		581	103	34	85	On		2025-05-29 23:24:54
<input type="checkbox"/>		582	103	34.9	79	On		2025-05-29 23:25:03
<input type="checkbox"/>		583	103	36	76	On		2025-05-29 23:25:12

Figure. Table tbl_dht11

Server: localhost:3306 » Database: humancmt_nd_dht11 » Table: treshold_controller

Showing rows 0 - 0 (1 total, Query took 0.0004 seconds.)

```
SELECT * FROM `treshold_controller`
```

Profiling [Edit inline] [Edit] [Explain SQL] [Create PHP code] [Refresh]

Show all | Number of rows: 25 | Filter rows: Search this table

Extra options

	id	temp_treshold	hum_treshold	date_updated
<input type="checkbox"/> Edit <input type="checkbox"/> Copy <input type="checkbox"/> Delete	1	41	65	2025-05-29 17:35:25

Figure. Table threshold_controller

Relay

Relay function to on/off the circuit. The relay in my project is off and close based on condition that triggers them. For example, if the temperature and humidity read by the sensor is greater than the threshold, it will show message that the value has exceed the threshold and the relay will on. To indicates that the relay is on, a red light appears. While if the temp and hum in normal condition, the relay will off and there is no red light. To make it easier for user, the web app has display the relay status on the top right of the screen.

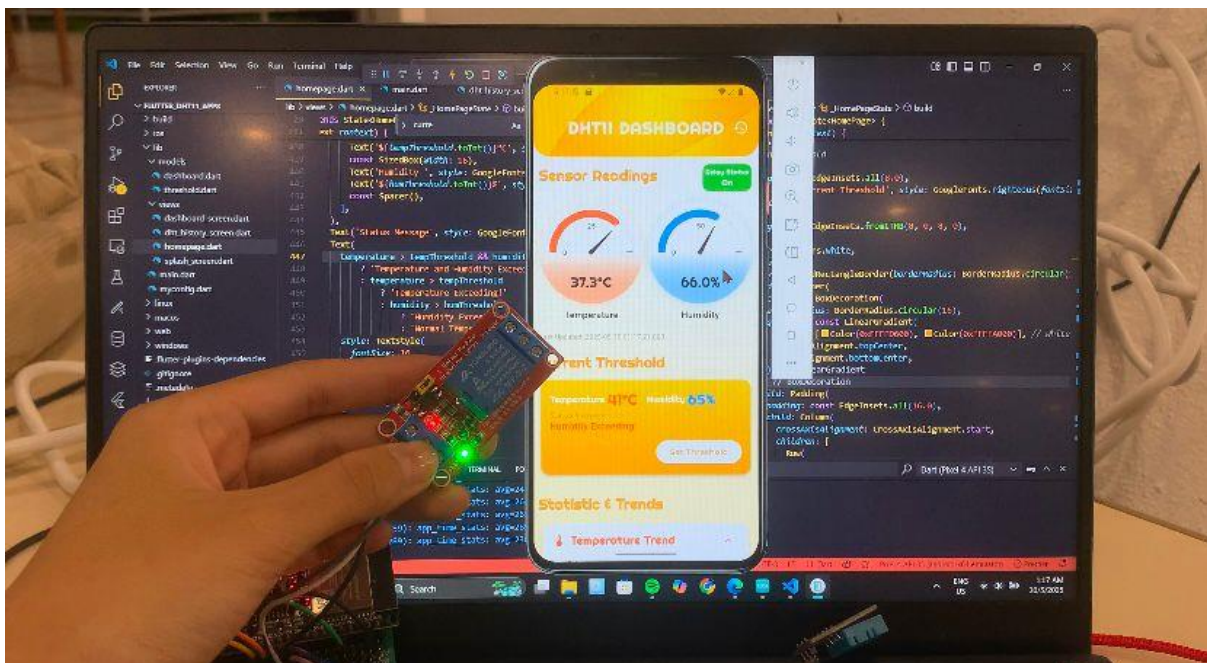


Figure. Relay was on and red light appear

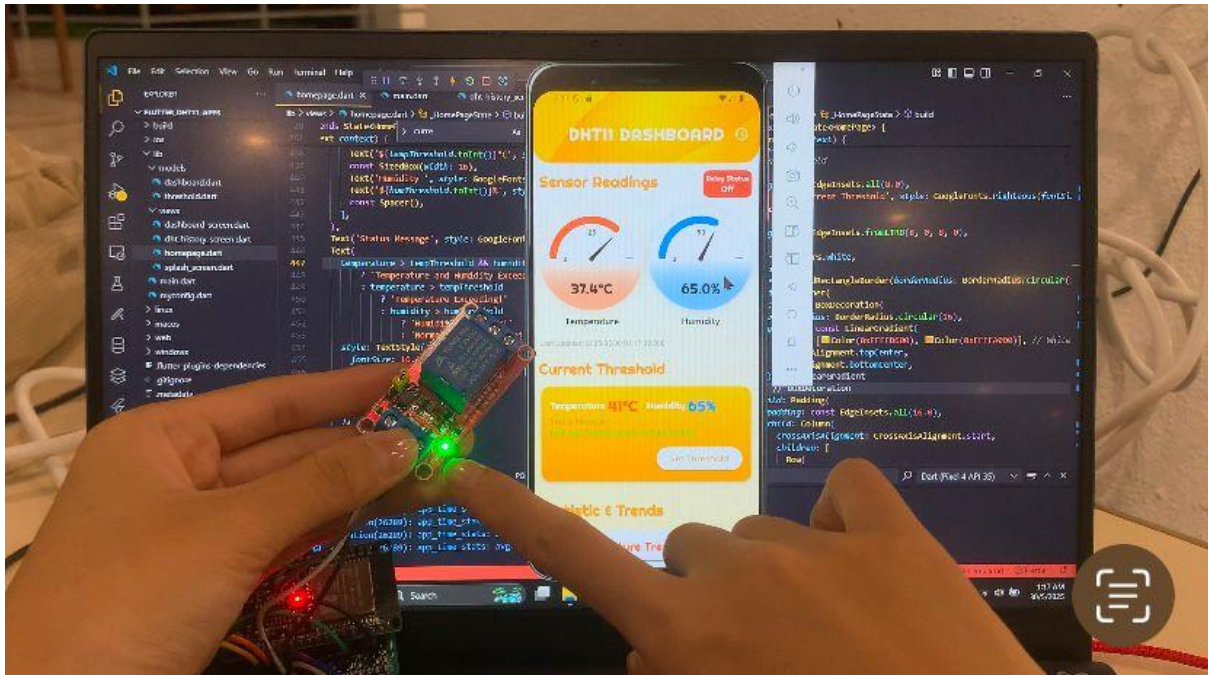


Figure: Relay is off and there are no red light

Application



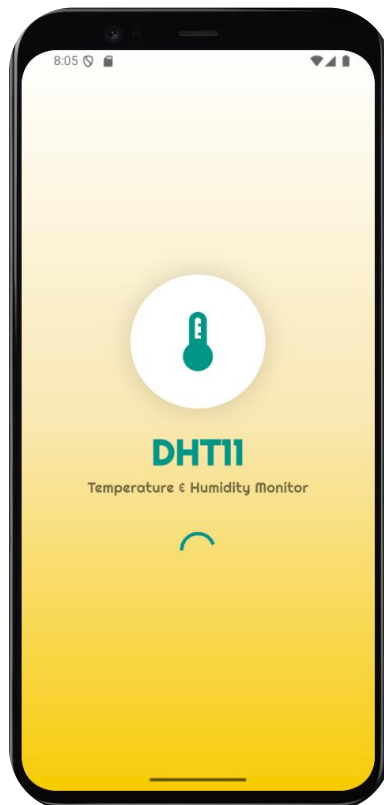



Figure. Splash screen of the system

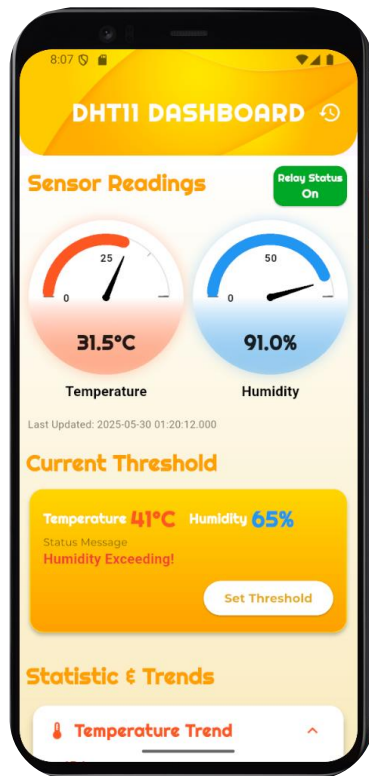

(a.)

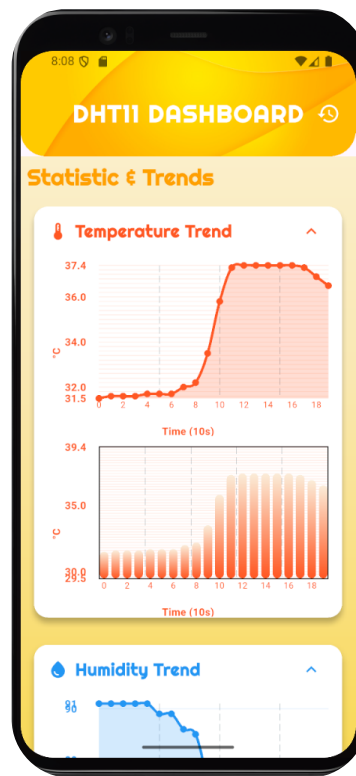

(b.)

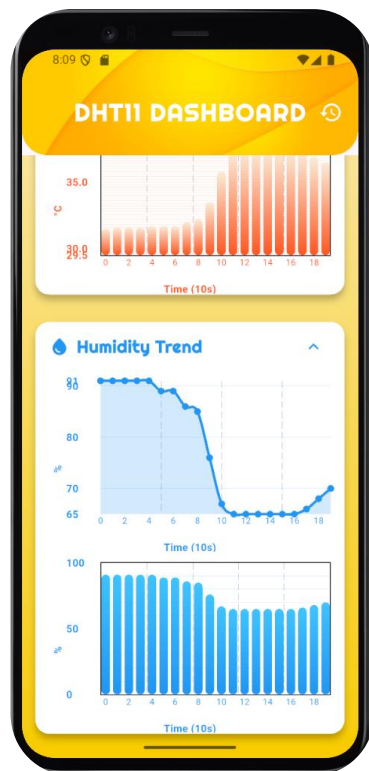

(c.)



(d.)

Figure. The content of the system

Figure a. shows meter that represent the data input form the sensor. It is responsive to evrytime changes and update every 10 second. The display of data also precise and accurate. Other than that is the 'Current treshold' card/section. It contains the current threshold value and messages that can alarm the user if the temprature and humidity readings are too high or low. Figure b. and c. shows the statistical and trends graphs for both temperature and humidity. The graphs are line graph and bar graph. These type of graph was selected because it was easier to understand by the user and user can see the trends more visible. In graph d, the details of every data is shown if you hover the cursor around the data and click it. A bubble message will pop up and show details of the input data including the value and date timestamp.

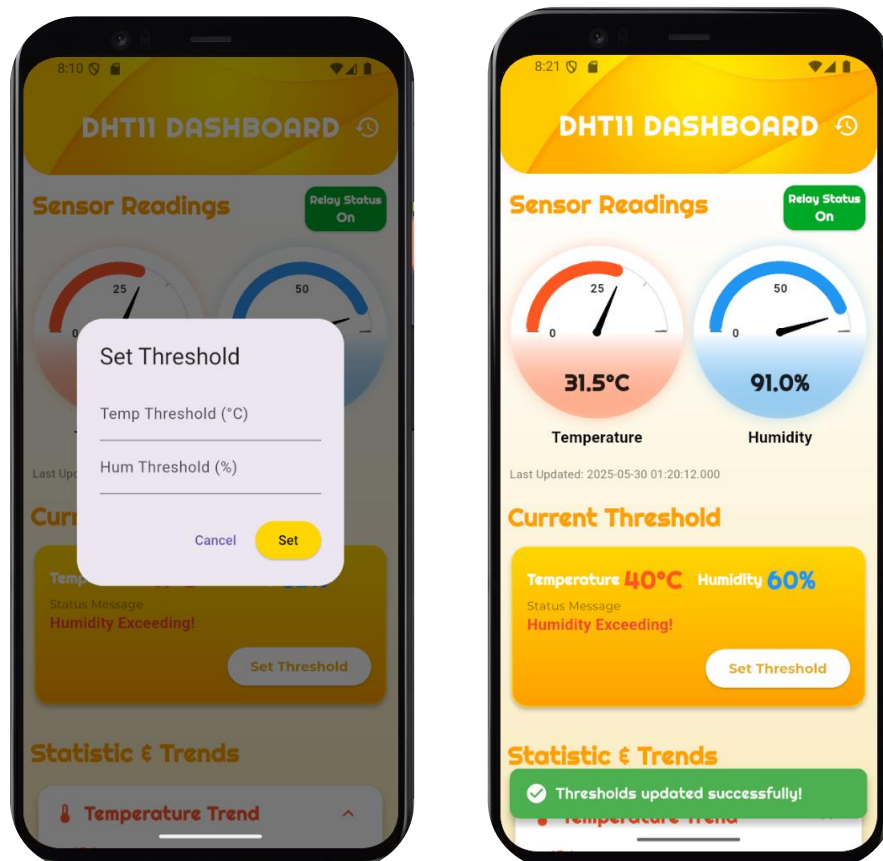


Figure. User set new treshold value

After user complete setting the new threshold, a succes meassge appear to indicates that the data has been saved and update in the database.

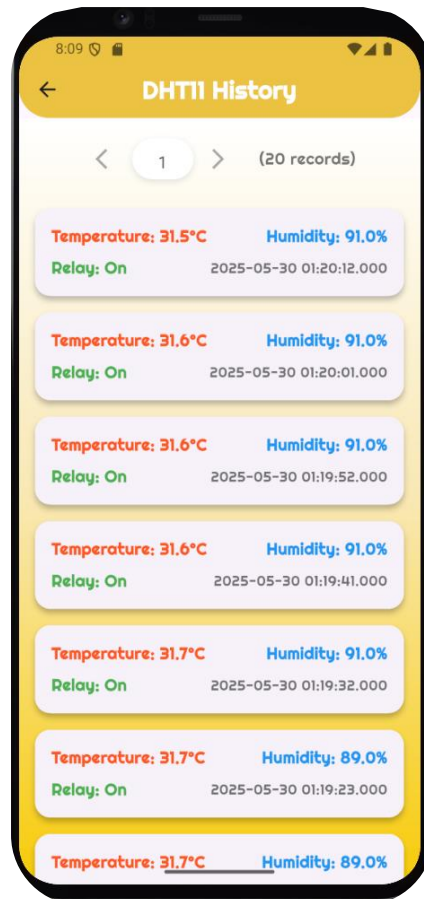


Figure. System shows the History data

4. Challenges and improvement

The Flutter environment setup was one huge hurdle, especially Gradle issues that snatched two hours away from actual development. The build process went on to fail while outputting cryptic errors-with the issue resolved through online forum consultation and a series of hit-or-miss attempts to solve it. It involves updating Gradle, cleaning the cache, and repeat until it just went away.

The improvement I would like to do is to improve accessibility of the UI to adopt a more prominent font, intuitive icons and color-coded alerts to appeal to all users across age groups. Other than that is to make a color palette or color coordinated theme. Color is a powerful way to convey urgency, but it should never be the only indicator. Maybe use standardized colors for alerts, green for success, yellow/orange for warnings, red for errors, and blue for informational messages.