



(a) Reference clock, 270 MHz

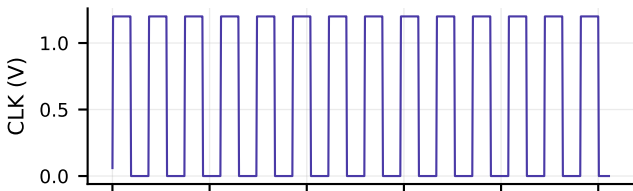

(b) Johnson-counter outputs (0/120/240°)

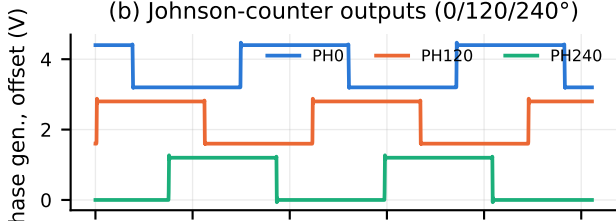

(c) Driver outputs at the switch gates

