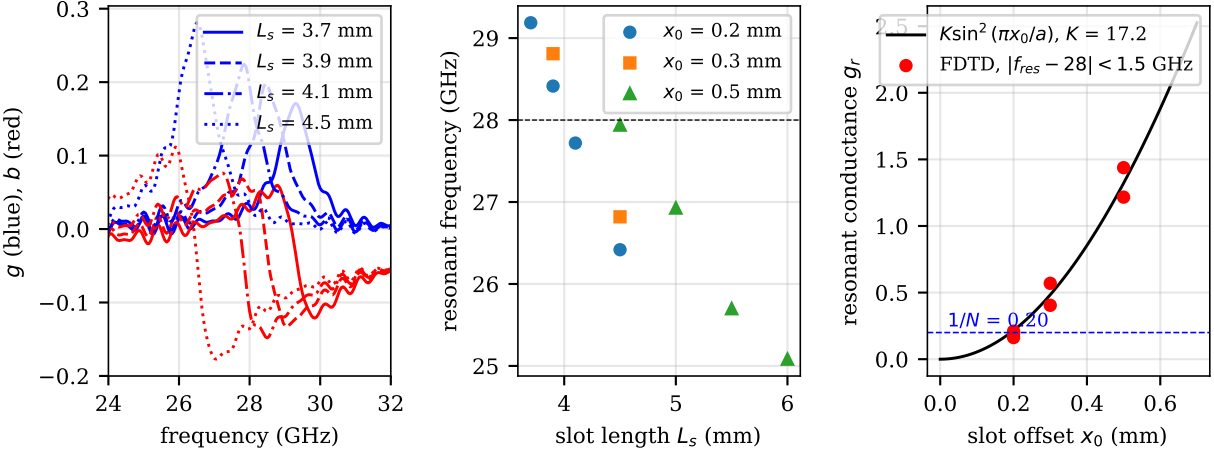
(a) slot admittance, x_0 = 0.2 mm
L_s = 3.7 mm
L_s = 3.9 mm
L_s = 4.1 mm
L_s = 4.5 mm
g (blue), b (red)
frequency (GHz)
(b) resonance vs. length
x_0 = 0.2 mm
x_0 = 0.3 mm
x_0 = 0.5 mm
resonant frequency (GHz)
slot length L_s (mm)
(c) offset law
$K\sin^2(\pi x_0/a)$, K = 17.2
FDTD, $|f_{res} - 28|$ < 1.5 GHz
1/N = 0.20
resonant conductance g_r
slot offset x_0 (mm)