Ex:11 (b) 24/9

Simulate RIP using Cisco Packet Tracer

AIM:

To Simulate and configure RIP using Cisco packet Tracer.

Initial Ip configuration

Pc0 is connected to Router0 using the 10.0.0.0/8 network, and Pc1 connected to Router2 using the 20.0.0.0/8 network. The three routers are interconnected using serial links with /30 subnet masks.

Ip Address configuration:

Ip address are assigned to all Pcs and routers Interfaces according to given Ip table. The router Interfaces are enabled using the no shutdown command. For serial interfaces, clock rate 64000 and bandwidth 64 are configured at the DCE side.

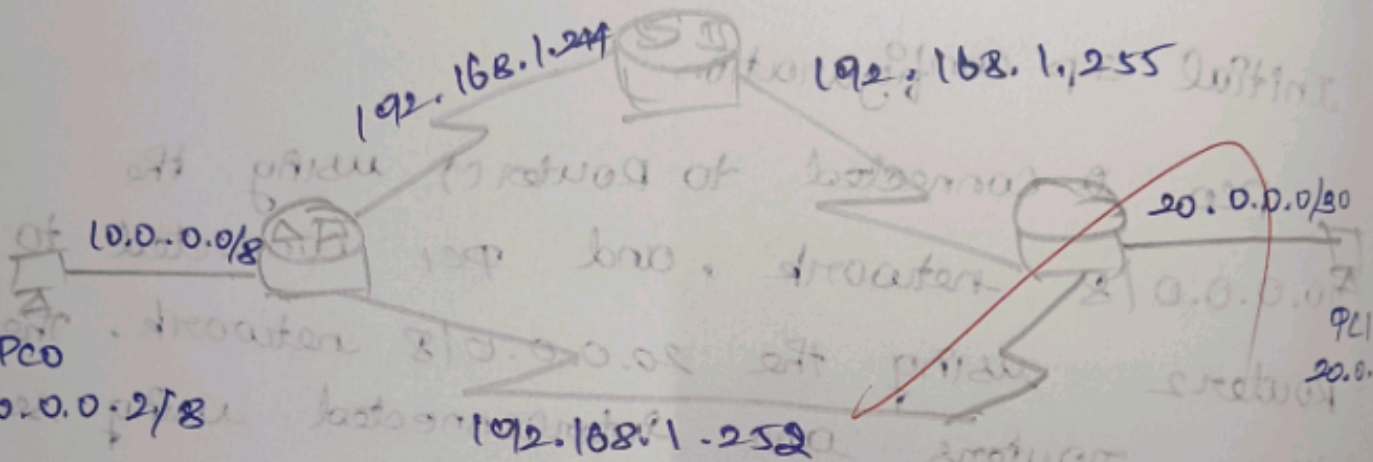
Router (config)# Interface serial 0/0/0

Router (config)# ip address 192.168.1.249 255.255.255.252

Router (config-if)# clock rate 64000

Router (config-if)# bandwidth 64

Router (config-if)# no shutdown


192.168.1.244
192.168.1.255
10.0.0.0/8
20.0.0.0/30
PC0
10.0.0.2/8
PC1
20.0.0
192.168.1.252

Configure RIP

RIP is enabled on each router using the router rip command. The directly connected networks are advertised using the network command.

Router 1:

```
Router1 (config) # router rip
Router1 (config-router) # network 192.168.1.244
Router1 (config-router) # network 192.168.1.248
```

Router 2:

```
Router2 (config) # router rip
Router2 (config-router) # network 20.0.0.0
Router2 (config-router) # network 192.168.1.252
Router2 (config-router) # network 192.168.1.244
```

Result:

BULU 14/10/24

RIP was successfully configured in CISCO packet tracer, verified using ping and tracert.