

Rack - 4

Key Point to be Noted.

Point no. 1

With respect to SW2_P Configuration the interface are different so while configuring take care of that

g1/0/1 - Eth1/0

g1/0/2 - Eth1/1

g1/0/4 - Eth2/0

g1/0/5 - Eth2/1

Point no. 2

With respect to ASA3 and ASA4 Configuration the interface are different so while configuring take care of that

g0/0 - eth0

g0/1- eth1

g0/2 - eth2 (Cluster Link)


Management0/0 - eth5

Point no. 2

How to Open the NGIPS in Rack 4.

- Login into the Eveng with URL <http://150.1.7.20> or you will find this Eveng Url in the Bookmark of the firefox in RDP Machine.
- Username is **admin** and Password is **eve** to login the Eveng.

Once you logged in the Top right side you will find a device named Firepower in between SW1 and R13 that is your Ngips. Click that.

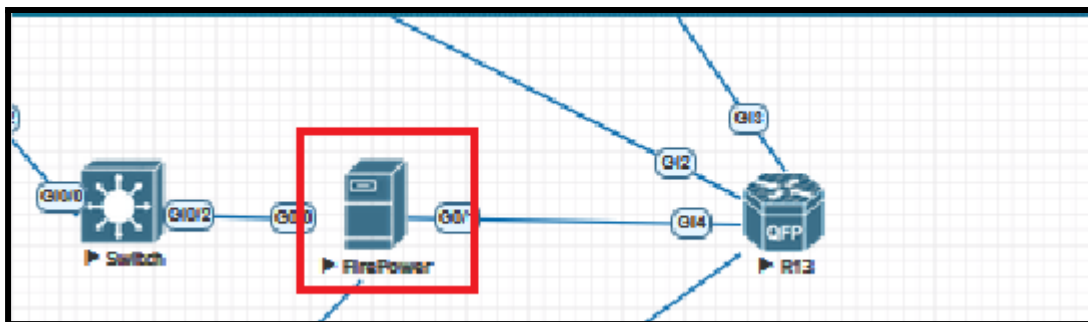


Once you are logged in, look at the bottom-left corner of the Firepower interface. You


Point no. 3

To take access to your FTD1 and FTD2 Console. Take a ssh from Your Management Pc from Putty.

For FTD1 :- Take ssh to 161.1.7.16 and login with admin and Cisc0123_.

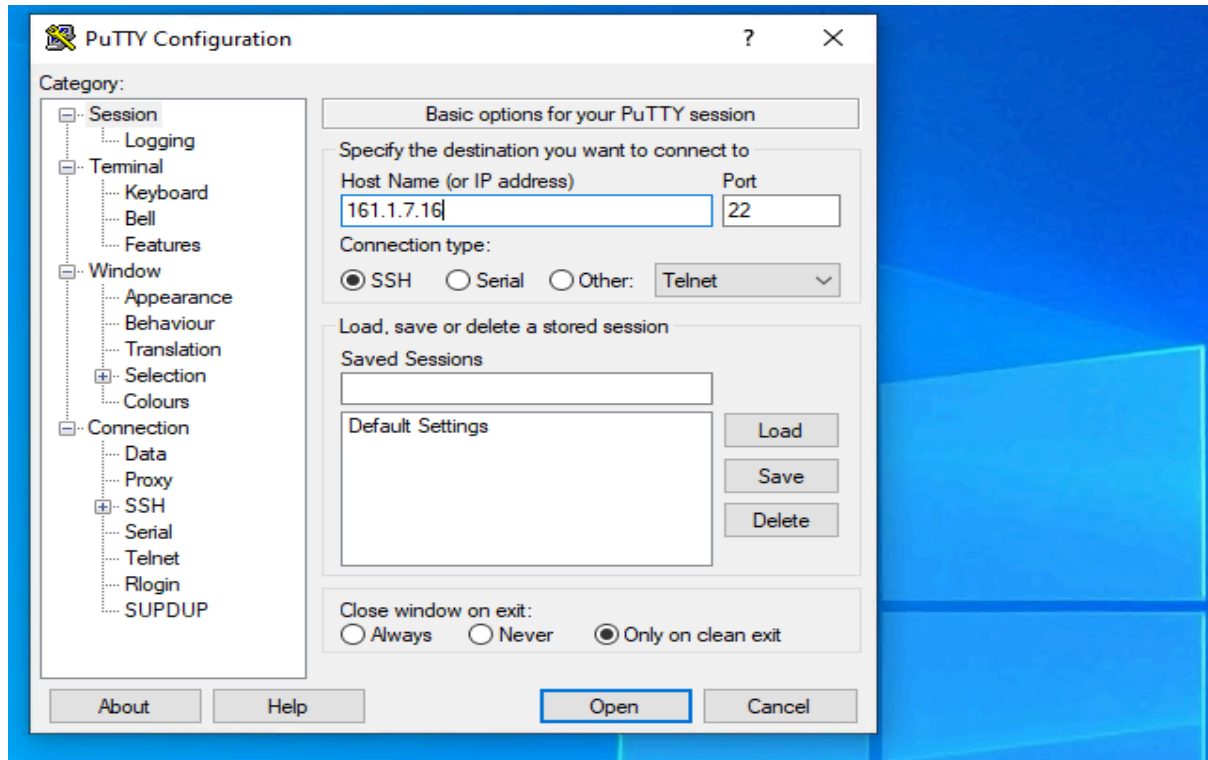

For FTD2:- Take ssh to 161.1.7.18 and login with admin and Cisc0123_.

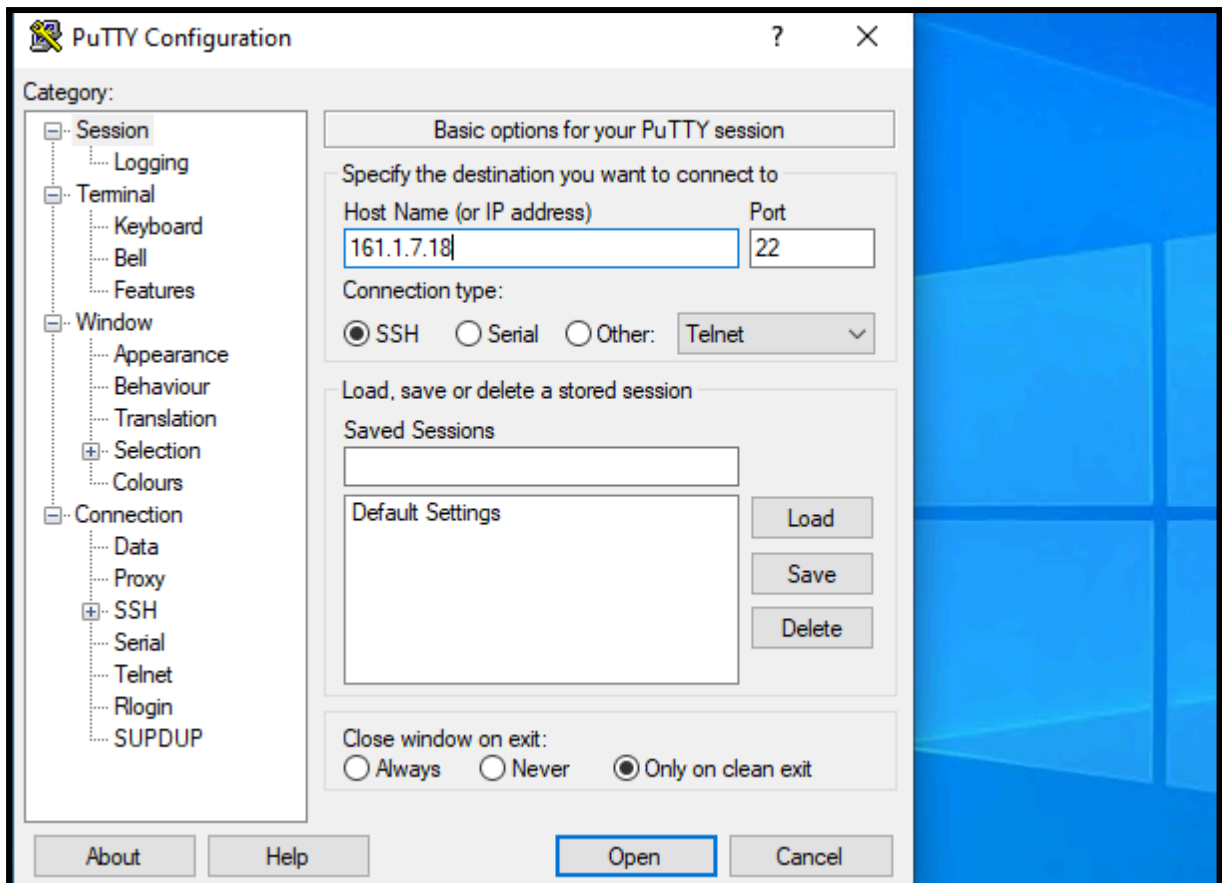


Point number no 4.


With Respect to WSA Use either management pc firefox or RDP machine firefox to access. If it is not accessible from either the machine firefox. Follow the steps below.

Open the Firefox on either machine that is management pc or rdp machine.

Type about:config

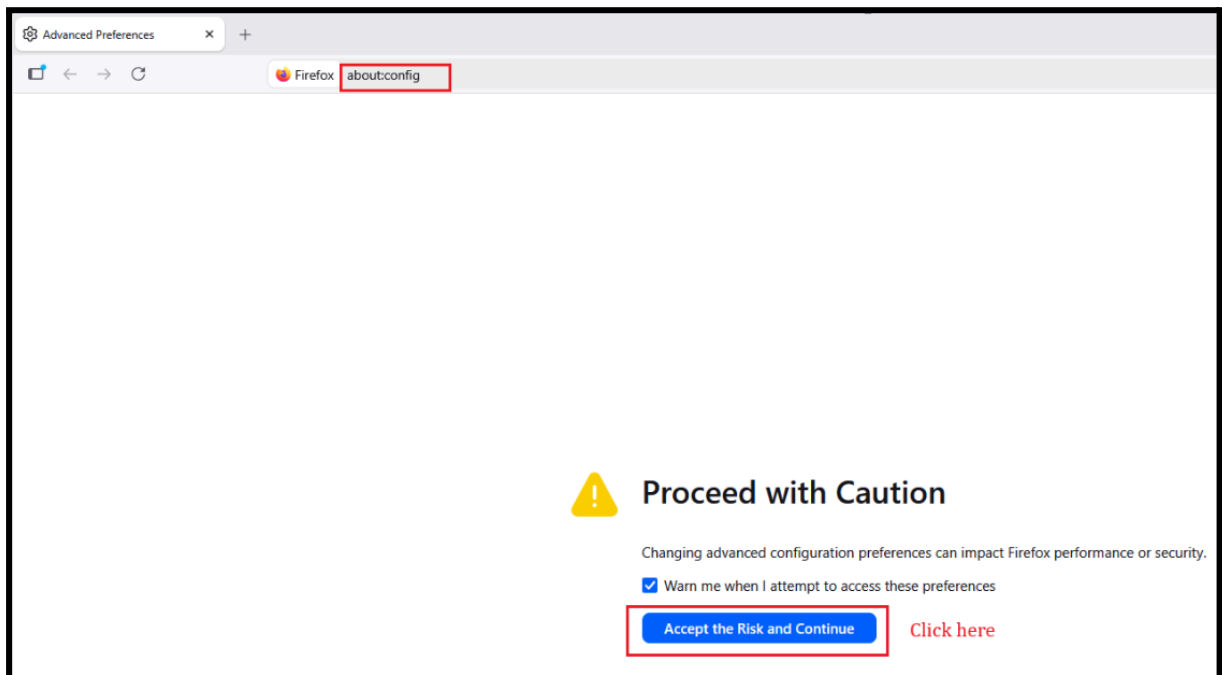

Then, search for `tls` and scroll down until you find the option `security.tls.version.enable-deprecated`. Its value will be set to `false` by default. Change the value to `true`, as shown in the figure below. Once this is done, the WSA should be accessible.

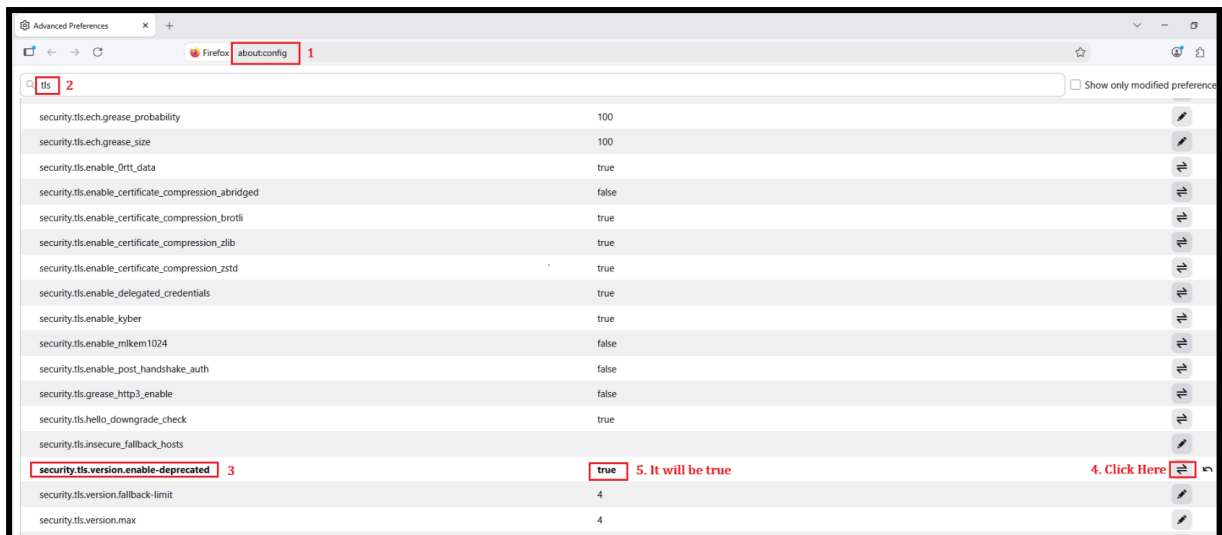

Point number no 5.

When you are integrating the WSA with AD if you face the issue with respect to the Clock Skew.

Open the WSA CLI from Secure CRT.

Step 1:- Type ntpconfig and press enter

Step 2:- Type Delete and press enter

Step 3:- Type 1 and press enter

Step 4:- Press enter and You will be in wsa.cisco.com as wsa hostname

Step 5:- Type commit

Again You need to add the NTP server

Step 1:- Type ntpconfig and press enter

Step 2:- Type New and press enter

Step 3:- Type 150.1.7.200 and press enter

Step 4:- Press enter and You will be in wsa.cisco.com as wsa hostname

Step 5:- Type commit

The above setting is shown in the picture below.

To delete the NTP in WSA.

```
wsa.cisco.com> ntpconfig
Currently configured NTP servers:
1. 150.1.7.200

Choose the operation you want to perform:
- NEW - Add a server.
- DELETE - Remove a server.
[]> DELETE
Enter the number of the NTP server you wish to remove.
[]> 1
Currently configured NTP servers:
No servers currently configured.

Choose the operation you want to perform:
- NEW - Add a server.
[]> press enter
wsa.cisco.com> commit
Please enter some comments describing your changes:
[]>
Changes committed: Wed Sep 09 09:35:03 2026 GMT
wsa.cisco.com>
```

To add the NTP in WSA.

```
wsa.cisco.com> ntpconfig
Currently configured NTP servers:
No servers currently configured.

Choose the operation you want to perform:
- NEW - Add a server.
[]> NEW
Please enter the fully qualified hostname or IP address of your NTP server.
[]> 150.1.7.200
Currently configured NTP servers:
1. 150.1.7.200

Choose the operation you want to perform:
- NEW - Add a server.
- DELETE - Remove a server.
[]> press enter
wsa.cisco.com> commit
Please enter some comments describing your changes:
[]>
Changes committed: Wed Sep 09 09:37:03 2026 GMT
wsa.cisco.com> █
```

Point number no 6.

How to verify the 4.5 that is Tacacs task.

- Use normal putty to take the ssh to 150.1.7.231 which will be there in management pc or in RDP machine.

