

Medium Galleria Area Light

Bronze Decorative Luminaires

400W HPS, 400W MH

PRODUCT OVERVIEW



Features:

A...Housing

Formed aluminum housing with stamped reveal has interior-welded seams for structural integrity. Standard color is bronze. NEMA twistlock photocontrol. ANSI wattage/source label.

B···Ballast

Ballast is hard-mounted to housing interior for cooler operation.

C.-Reflector

Spun and stamped anodized aluminum reflector in vertical lamp

D...Door

Formed aluminum door has heavyduty hinges, captive retaining screws and is finished in polyester powder coat.

E...Lens

Convex tempered glass lens

$\textbf{F}\cdots \textbf{Mounting}$


Arm mounting. Retrofit tenon adapter available.


Applications:

- City Streets
- Residential Neighborhoods
- Parks
- Campuses
- Commercial Development

Entergy Part Number:

Entergy #	Cooper #	Description			
16070	GMA40MKWARU0152	400w MH, CWA, MT/120v, Type AR			
16072	GMA40SCWARU0016	400w HPS, CWA, MT/120v, Type AR			

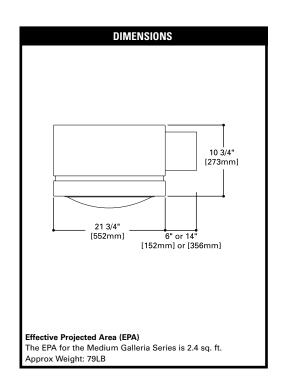

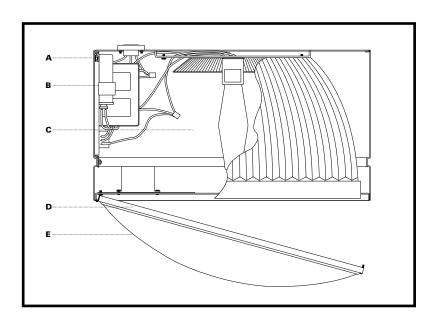






Medium Galleria Area Light

Bronze Decorative Luminaires

PHOTOMETRIC INFORMATION

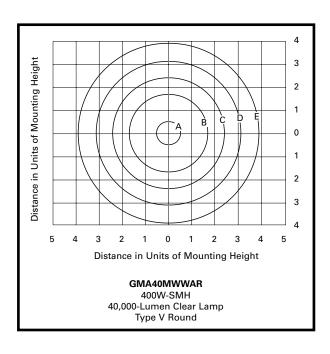

Footcandle Table:

Select mounting height and read across for footcandle values of each isofootcandle line. Distance in units of mounting height.

Mounting	Footcandle Values for Isofootcandle Lines					
Height GMA	Α	В	С	D	E	
20'	4.50	2.25	1.12	0.56	0.23	
25'	2.83	1.14	0.72	0.36	0.14	
30'	2.00	1.00	0.50	0.25	0.10	
35'	1.47	0.73	0.37	0.18	0.07	
40'	1.12	0.56	0.28	0.18	0.06	

