



### Applications:

Roadways  
Residential streets  
Storage areas  
Parking lots  
Campuses  
Parks

### Features:

Wildlife shield cast into the housing (not a separate piece) on the two-bolt unit and is easily adjustable for 1-1/4" to 2" (32mm to 51mm) mast arms.

All electrical components warranted by American Electric Lighting's 6-year guarantee.

Suitable for ambient temperature ranges from:  
-30°C to 25°C MH & MV / -40°C to 25°C HPS

Complies with ANSI: C136.2, C136.10, C136.14, C136.15, C136.17

### Entergy Part Number:

#### 004796

U-1150137 (AEL) 250W, HPS, CWA, 480V, Type III, Drop Glass

#### 004797

U-1150138 (AEL) 250W, HPS, CWA, Multi-tap wired 120V, Type III, Drop Glass, Painted Bronze

#### 004802

U-1150139 (AEL) 250W, HPS, CWA, Multi-tap wired 120V, Type III, Drop Glass

#### 004805

U-1150140 (AEL) 150W, HPS, CWA, 480V, Type III, Drop Acrylic

#### 004813

U-1150143 (AEL) 175W, MV, CWA, Multi-tap wired 120V, Type III, Drop Glass\*

#### 005694

U-1150142 (AEL) 100W, HPS, Reactor NPF, 120V, Type III, Drop Acrylic

#### 005695

U-1150141 (AEL) 150W, HPS, Reactor NPF, 120V, Type III, Drop Acrylic

#### 005710


U-1150144 (AEL) 250W, MH, CWA, Multi-tap wired 120V, Type III, Drop Glass

#### 026263

U-1150145 (AEL) 250W, HPS, CWA, Multi-tap wired 120V, Type III, Drop Glass\*

Each product is painted gray (unless otherwise noted), includes ANSI plug-in starter, no wire nuts, voltage caution label mounted below NEMA label. Comes standard with 2-bolt internal 1-1/4" setting mounting option, terminal block and photocontrol receptacle.

### DIMENSIONS

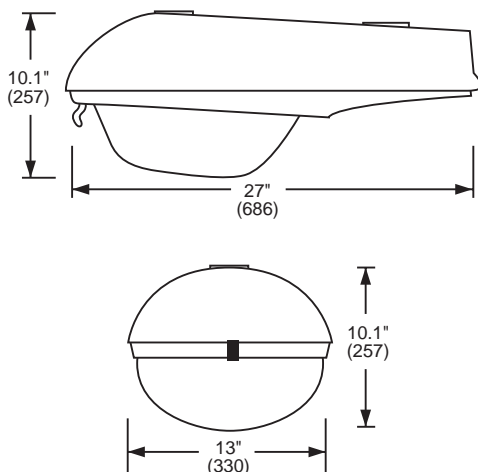


Effective Projected Area (EPA)  
The EPA for the Horizontal Luminaire Series 115 is 0.9 sq. ft.  
Approx Weight: 19 LB

# Cobrahead


## Roadway Lighting Luminaires

### PHOTOMETRIC INFORMATION


50-150W HPS TYPE III DROP ACRYLIC

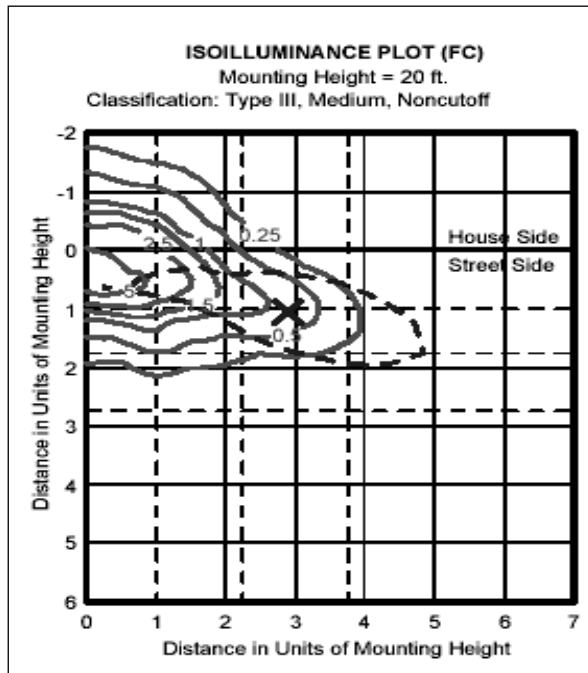

50-150W HPS TYPE III DROP ACRYLIC

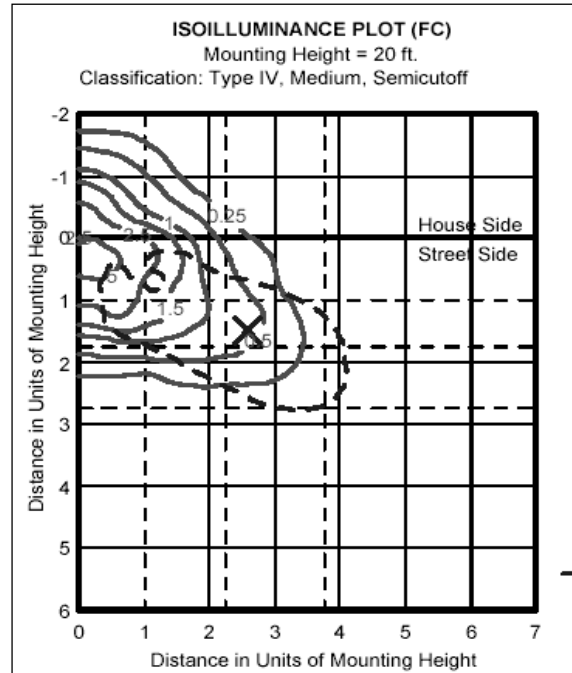

175W MV TYPE III DROP GLASS

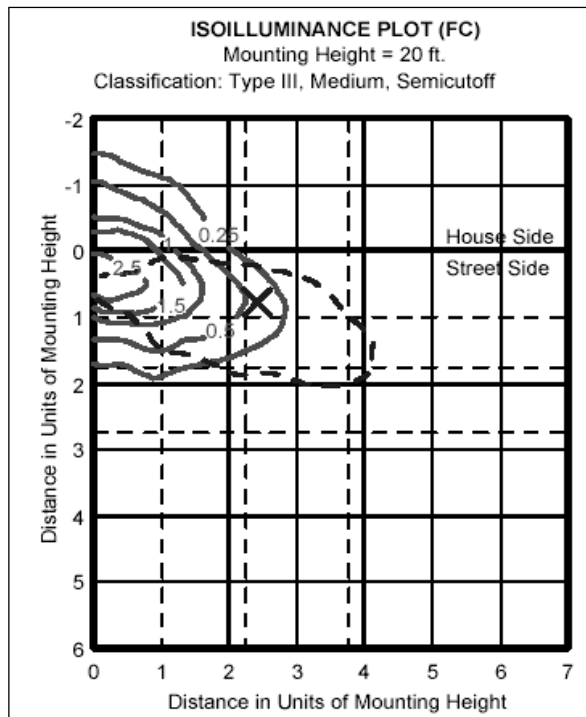

250W HPS TYPE III DROP GLASS

